

# LABORATORY TEST REPORT

## RADIO PERFORMANCE MEASUREMENTS

for the

TBDH5G Base Station Transceiver

Tested in accordance with:

FCC 47 CFR Parts 22 and 90

Report Revision: 1  
Issue Date: 18 September 2019

PREPARED BY: A. Schinkelshoek

  
Test Technician

CHECKED & APPROVED BY: M. C. James

  
Laboratory Technical Manager



FCC REGISTRATION: 838288

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager

TELTEST Laboratories (A Division of Tait International Ltd)  
PO Box 1645, 558 Wairakei Road, Christchurch, New Zealand.

Telephone: 64 3 358 3399  
FAX: 64 3 359 4632

TABLE OF CONTENTS

REVISION.....3  
INTRODUCTION .....4  
STATEMENT OF COMPLIANCE.....5  
MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS .....6  
    TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS .....7  
TEST EQUIPMENT LIST .....16  
ANNEX A – TEST SETUP DETAILS .....17

## REVISION

<b>Date</b>	<b>Revision</b>	<b>Comments</b>
18 September 2019	1	Initial test report

## INTRODUCTION

Type approval testing of the TBDH5G, 40-Watt, BASE STATION transceiver in order to demonstrate compliance with FCC 47 Parts 22 & 90 when using APCO P25 phase 1 modulation. This radio has previously been tested with analogue, FFSK and DMR modulations. The original report for this is Teltest 3743.

Type Approval Testing of the TBDH5G  
Frequency range 400 → 470 MHz

in accordance with:

FCC 47 CFR Parts 22 and 90

### REPORT PREPARED FOR

Tait International Ltd  
245 Wooldridge Road  
Harewood  
Christchurch 8051  
New Zealand

### DESCRIPTION OF SAMPLE

Manufacturer Tait International Limited  
Equipment: Base Station Transceiver  
Type: TBDH5G  
Product Code: TB7310-H5B0-0000-00AE-10  
Serial Number(s): 18295486  
Frequency range 400 → 470 MHz  
Transmit Power 40 W

Modulation		Channel Spacing	Speech Channels	Symbol Rate (symbols/sec)	Data Rate (bps)
APCO P25 Phase 1	C4FM (TIA 102)	12.5 kHz	1	4800	9600

### HARDWARE & SOFTWARE

Quantity: 1

Module	Product Code	Serial Number	Firmware Version	Hardware Version
Reciter	T01-01403-SAAA	18295500	p25-trunk.20190607T162306	1.01
Power Amplifier	T01-01405-SAAA	18295501	n/a	0.01
Front Panel	T01-01410-AAAA	4682949	0.01.00.master.20180703T105202.0001	0.01

### TEST CONDITIONS

All testing was performed on 13 → 16 September 2019, and under the following conditions:

Ambient temperature: 15°C → 30°C  
Relative Humidity: 20% → 75%  
Standard Test Voltage 13.8 V<sub>DC</sub>

## STATEMENT OF COMPLIANCE

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch, New Zealand, declare under our sole responsibility that the product:

Equipment: Base Station Transceiver  
Type: TBDH5G  
Product Code: TB7310-H5B0-0000-00AE-10  
Serial Number(s): 18295486  
Quantity: 1

to which this declaration relates, is in conformity with the following standards:

FCC 47 CFR Parts 22 and 90

**Signature:** 

M. C. James  
Laboratory Technical Manager

**Date:** 2 October 2019

## MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS

### MODULATION TYPES:

F1E	P25 phase 1 Digital Voice	9600 bps
F1D	P25 phase 1 Digital Data	9600 bps

CHANNEL SPACING: 12.5 kHz

### EMISSION DESIGNATORS:

	12.5 kHz
Digital Voice P25 phase 1	8K10F1E
Digital Data P25 phase 1	8K10F1D

### CALCULATIONS

Equation:  $B_n = 2M + 2Dk$

(M is highest modulating frequency; D is peak allowable deviation; k is a constant of 1 for FM)

### APCO P25 Phase 1:

#### Digital Voice / Data (C4FM - 4 level frequency shift keying)

Digital Voice/data transmissions use a 4 level frequency shift keying modulation scheme.

The necessary bandwidth has been measured using the 99% energy rule, and in accordance with FCC KDB 971168 D01.

#### Digital Voice 12.5 kHz Bandwidth P25 phase 1

99% bandwidth  
= 8.1 kHz

Emission Designator  
**8K10F1E**

F1E represents a digital FM voice transmission

#### Digital Data 12.5 kHz Bandwidth P25 phase 1

99% bandwidth  
= 8.1 kHz

Emission Designator  
**8K10F1D**

F1D represents an digital FM data transmission

## TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS

SPECIFICATION: FCC 47 CFR 2.1049 (c)

GUIDE: TIA/EIA-603D 2.2.11 (Analogue)  
TIA-102.CAAA-C 2.2.5 (Digital)

### MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment Set up.
2. For Data measurements: The EUT was modulated with an internally generated pseudo random bit sequence at the appropriate Baud rates.
3. The Occupied Bandwidth was measured on the Spectrum Analyzer, with bandwidth settings as noted on the recorded plots.

### MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.

MEASUREMENT UNCERTAINTY 95%  $\pm 0.65\text{dB}$

LIMIT CLAUSE: FCC 47 CFR 90.210

### EMISSION MASKS

Emission Mask D 12.5 kHz Channel Spacing Digital Voice/data


### DATA SPEED

Digital Voice/Data 12.5 kHz Channel Spacing 9600 bps


### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY:

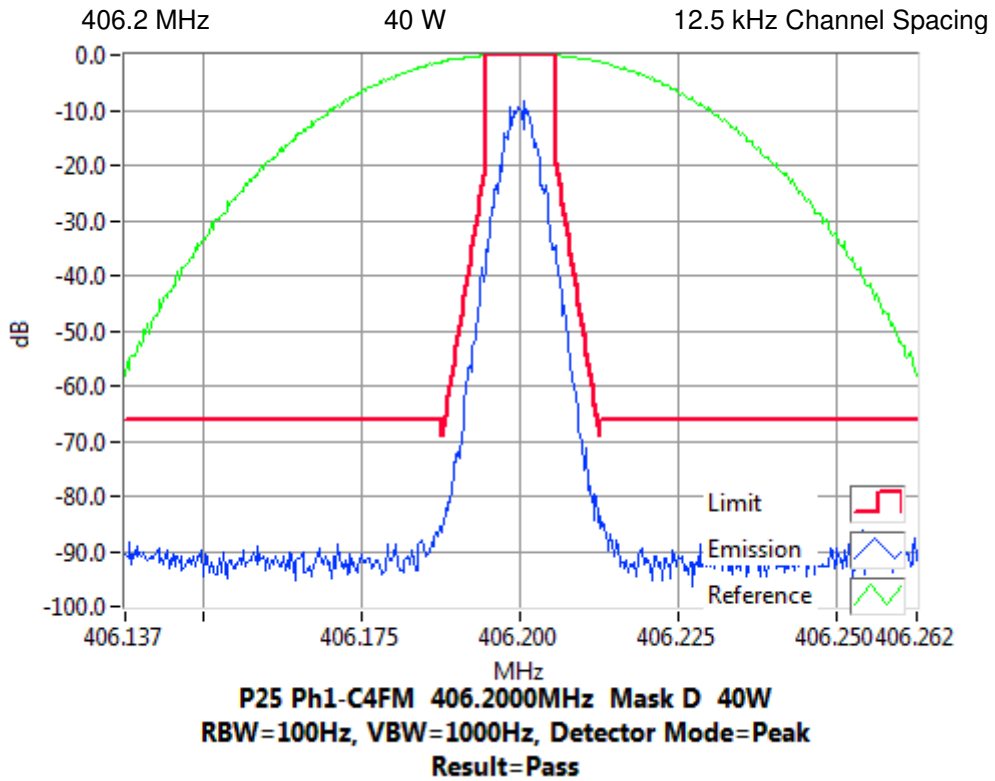

Tx FREQUENCY:

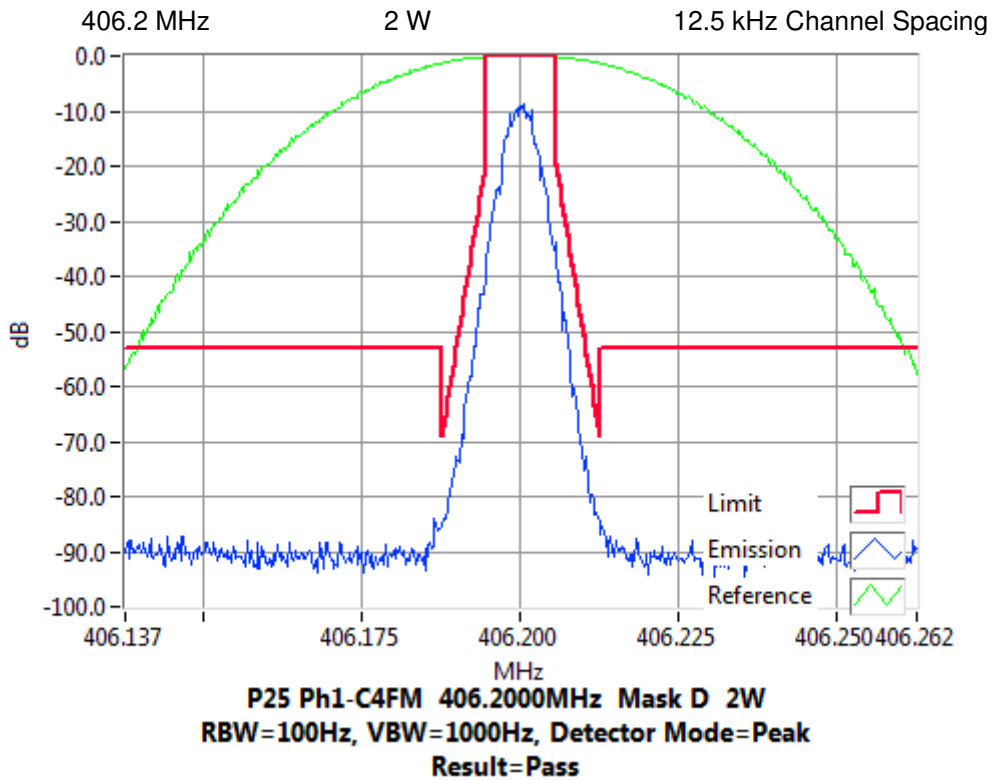





### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY: 418.05 MHz 40 W 12.5 kHz Channel Spacing

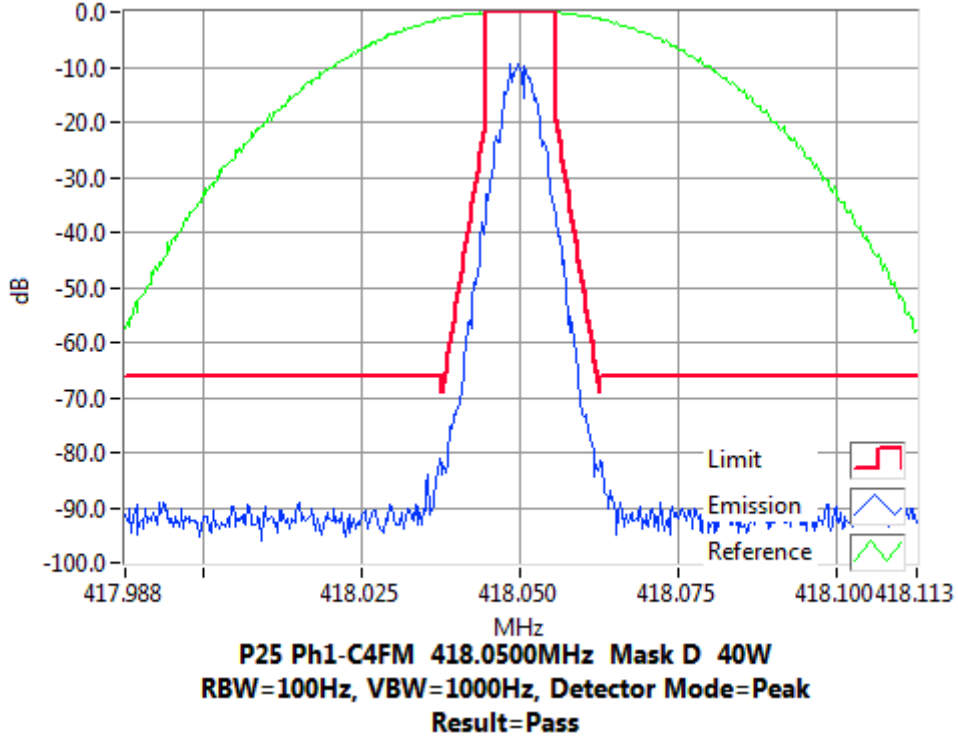


Tx FREQUENCY: 418.05 MHz 2 W 12.5 kHz Channel Spacing

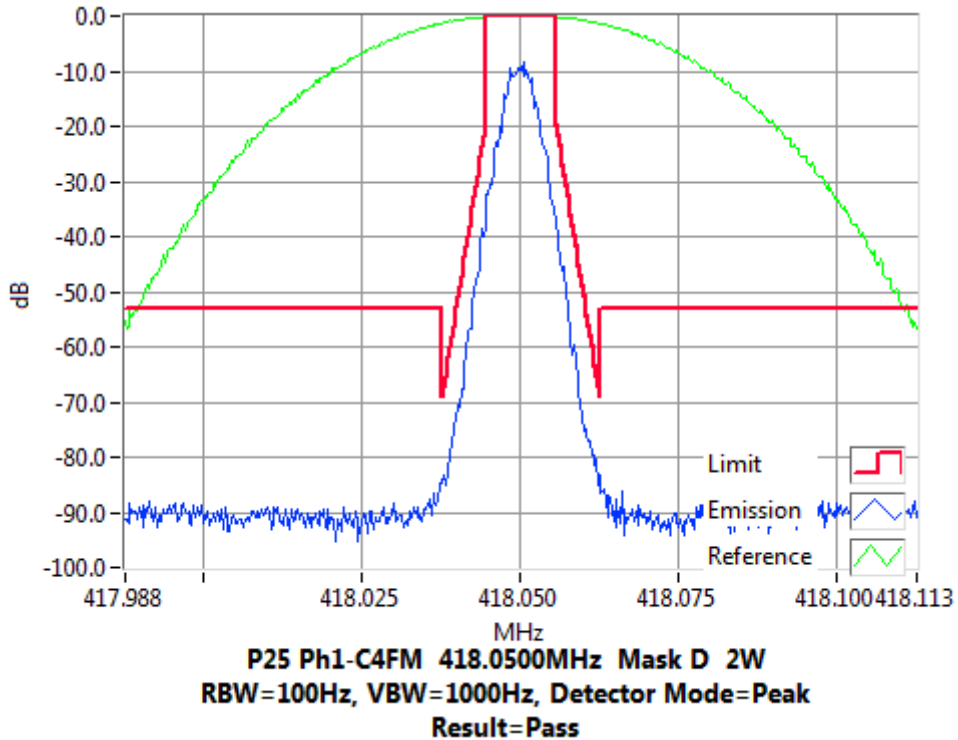


### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY:

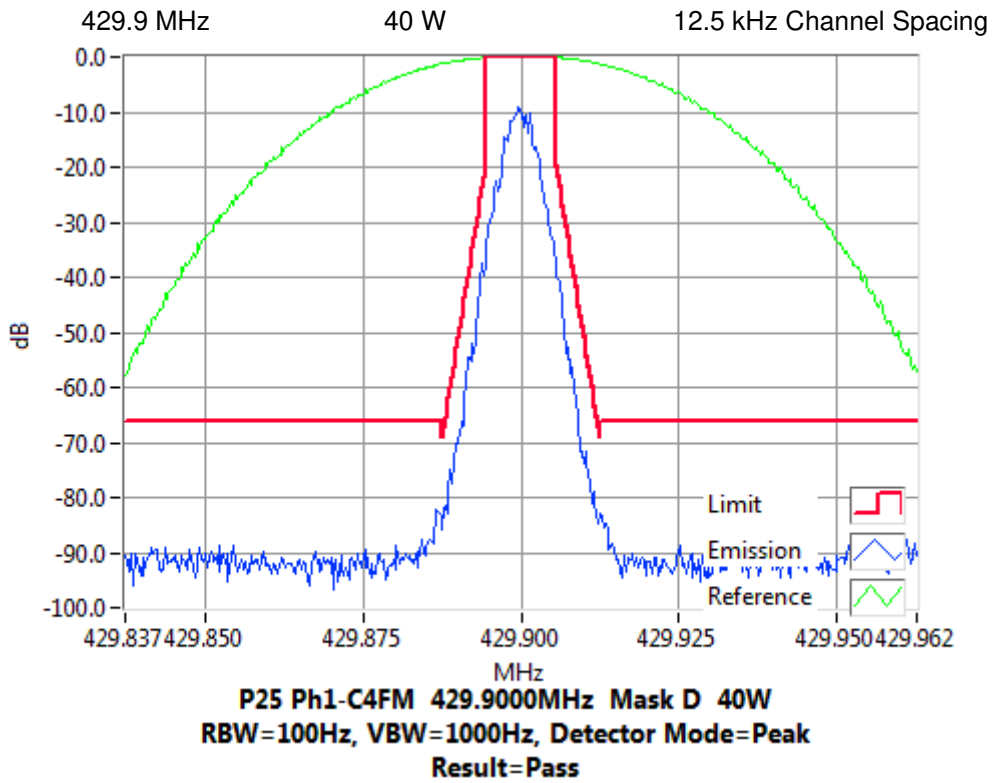


Tx FREQUENCY:

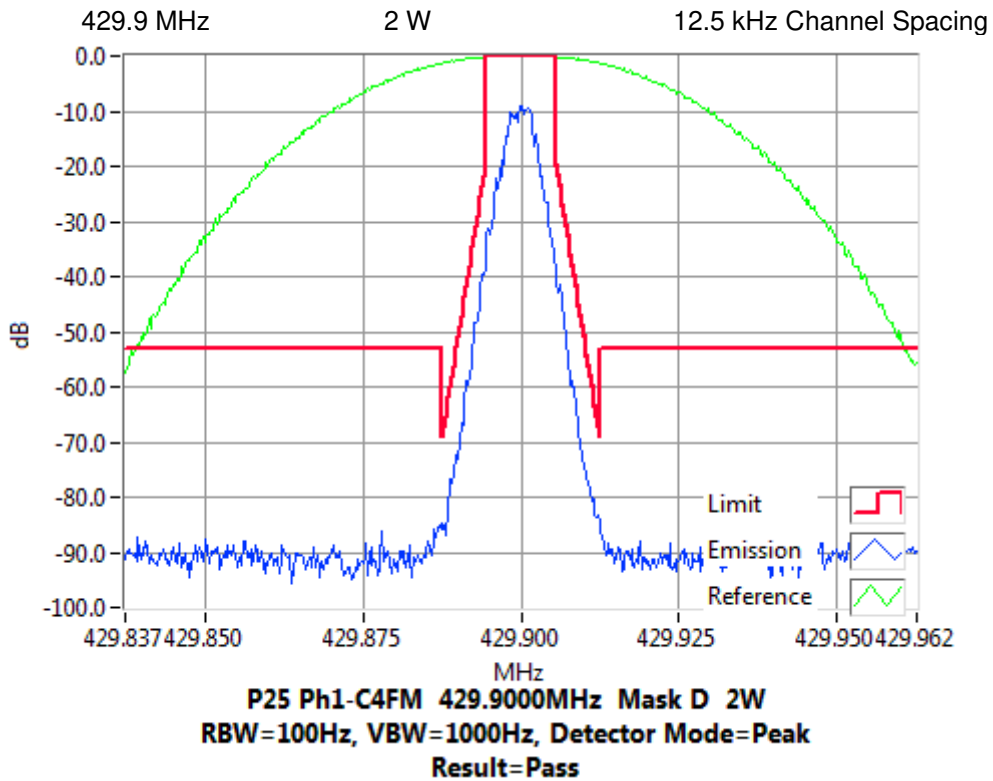


### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY:

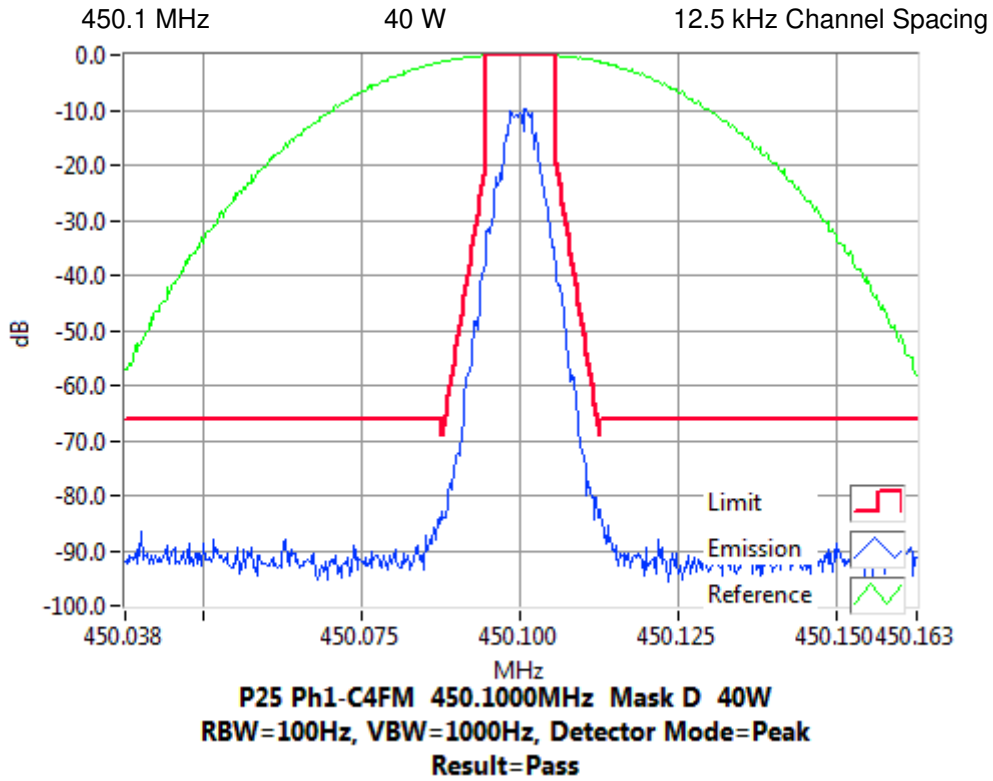


Tx FREQUENCY:

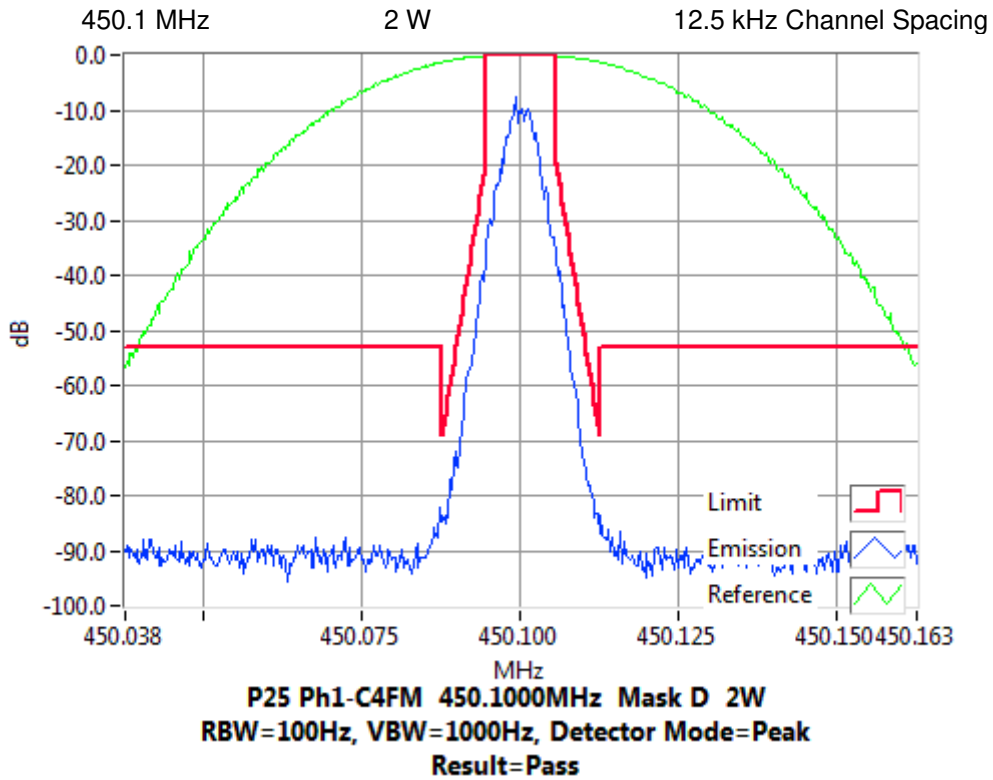


### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY:

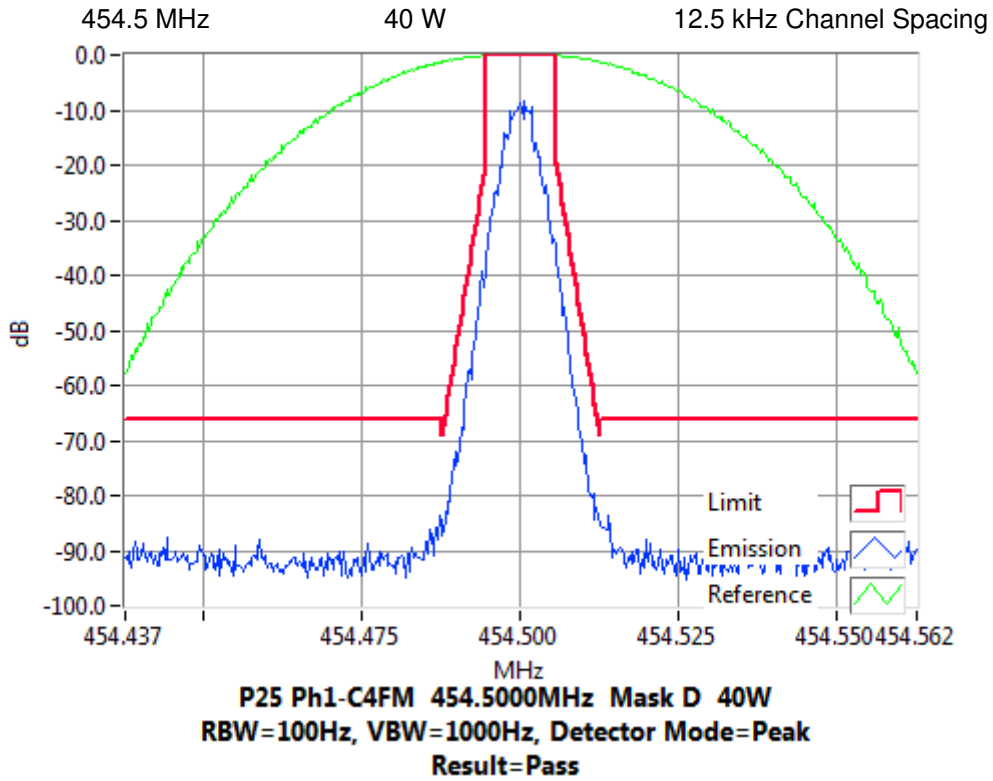


Tx FREQUENCY:

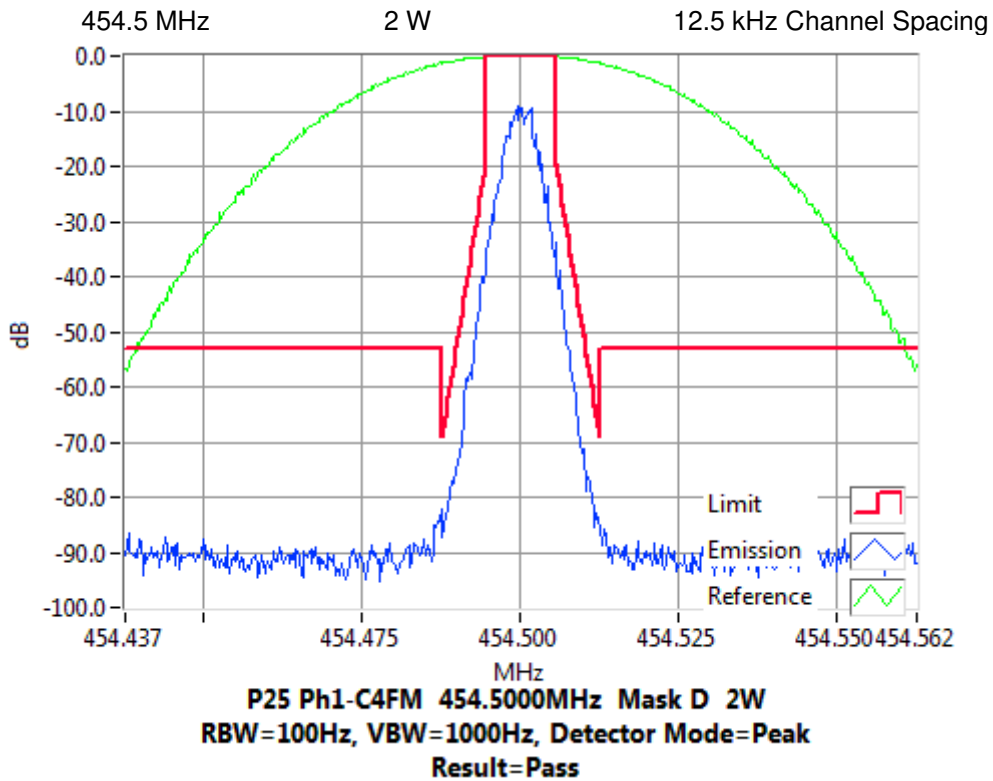


### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY:

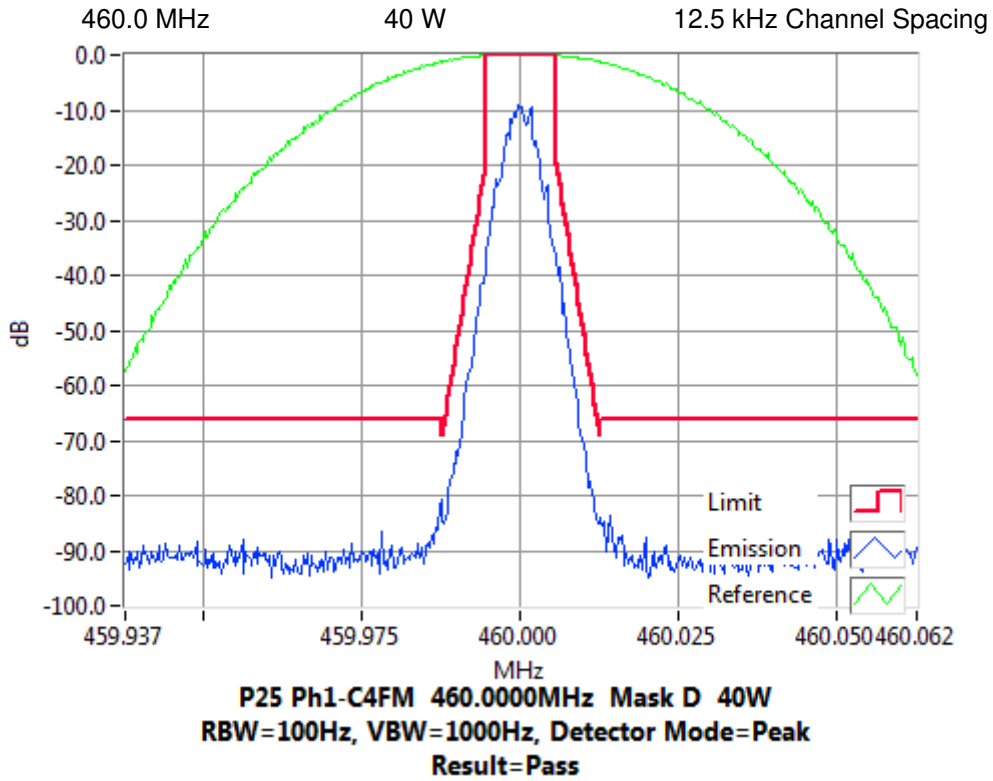


Tx FREQUENCY:

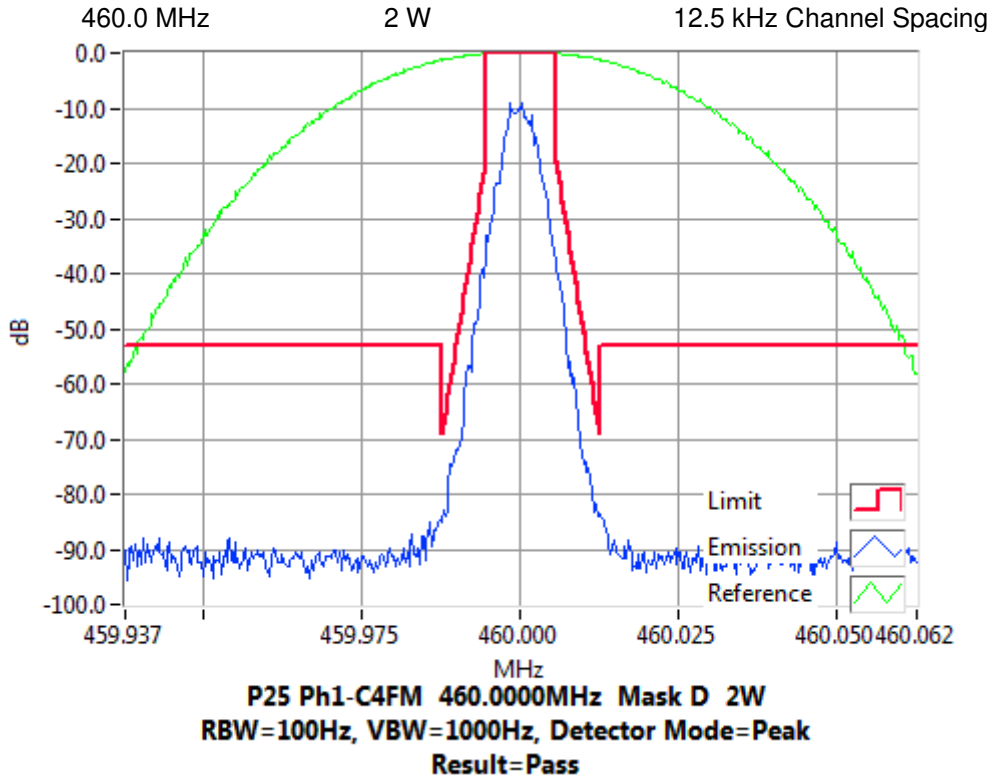


### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY:

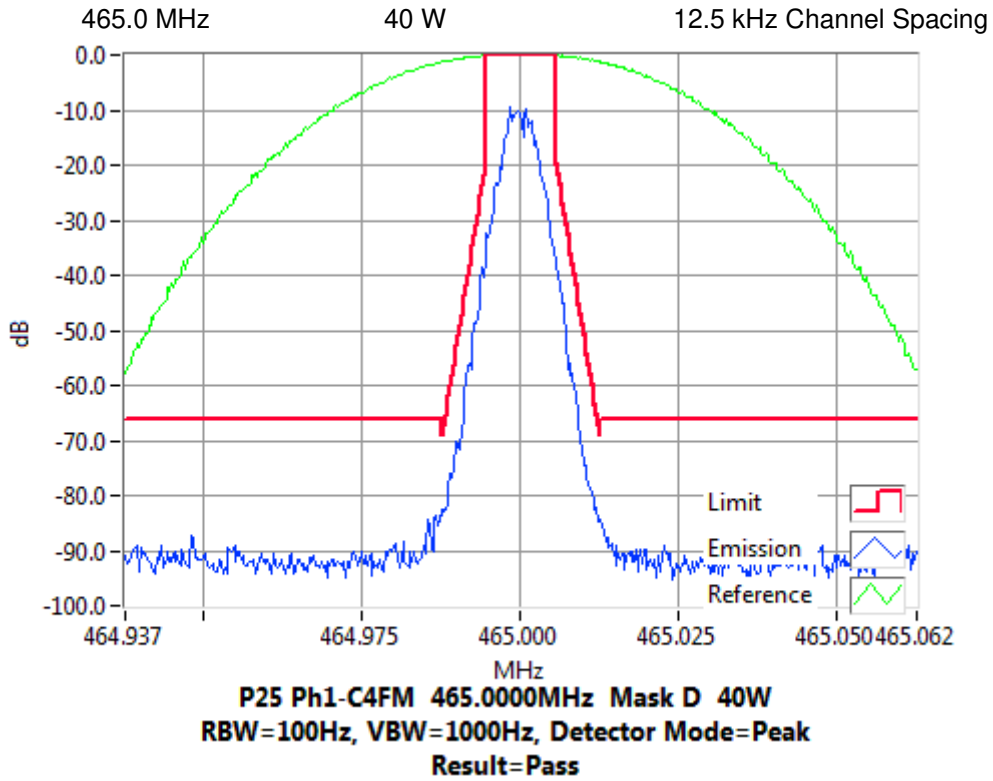


Tx FREQUENCY:

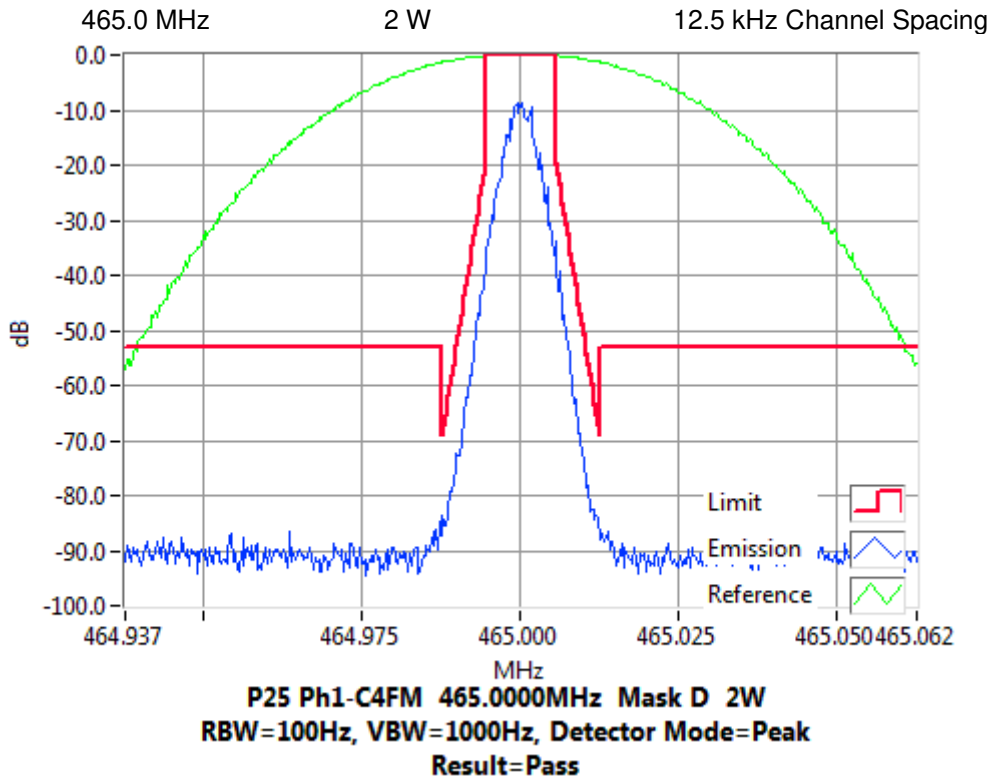


### Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY:

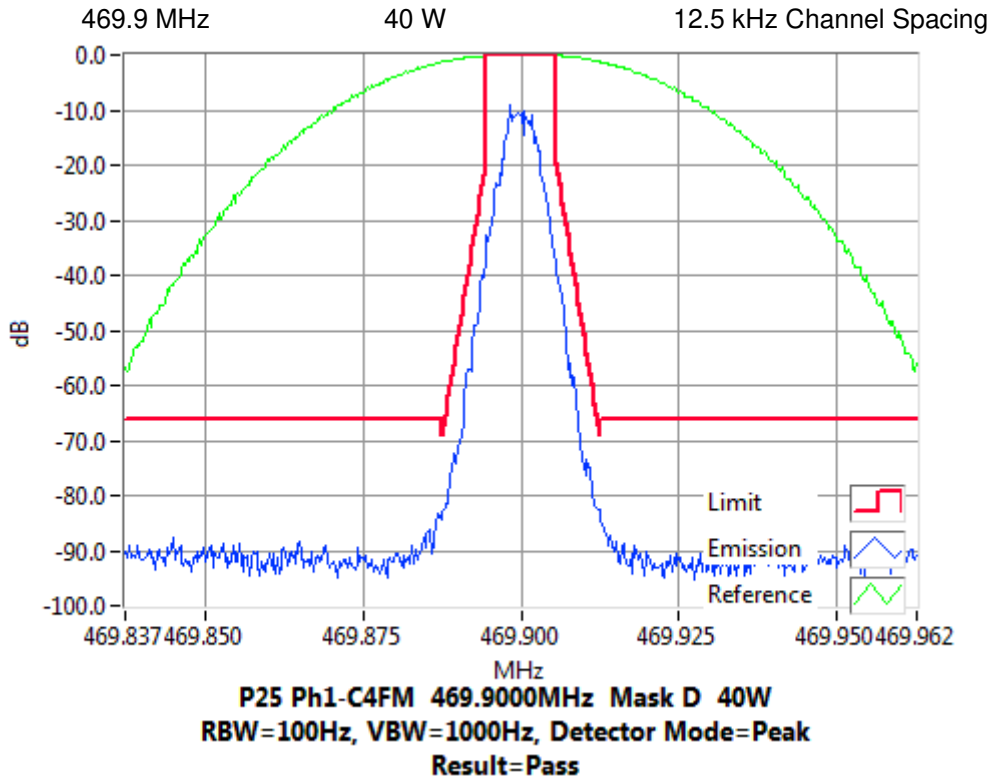

Tx FREQUENCY:

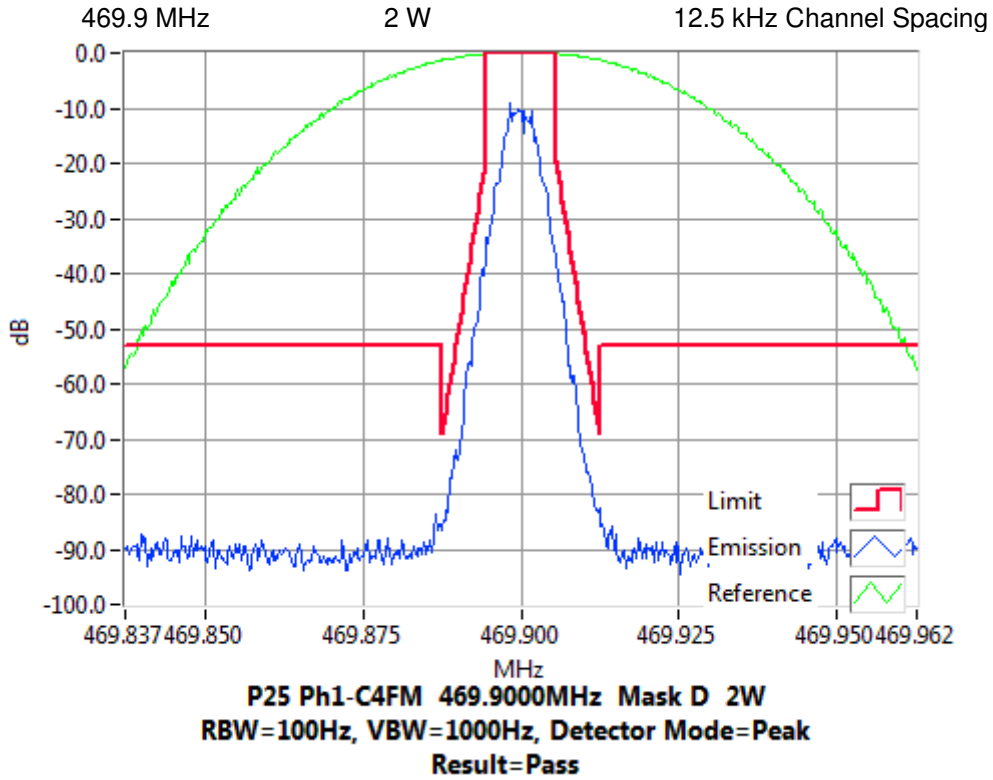

## TEST EQUIPMENT LIST

Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack6	E4849	17-Oct-19
Coax Cable	2.5m Blue	Suhner	Sucoflex 104A	33449/4PEA	E4997	19-Oct-19
Power Supply	TREVA2 60V/25A	Agilent	N5767A	US09F4901H	E4656	7-Oct-19
RF Attenuator	33dB 350W	Weinschel	67-30-33 & BW-N3W5+	CK9178	E5023	15-Jul-20
Spectrum Analyser	13.2GHz	Agilent	E4445A	MY42510072	E4139	19-Jul-20
Spectrum Analyser	26.5GHz	Agilent	PXA N9030A	MY49432161	E4907	27-Oct-20
Testware	Sideband Spectrum	-	February 2017	-	-	-

\* NOTE: Items without calibration dates are calibrated immediately before use, or set using calibrated instruments.



## ANNEX A – TEST SETUP DETAILS

All other testing is performed using the Teltest Radio **EVA**luation system (TREVA), which is configured as shown below. The Spectrum Analyser is connected to the EUT via the attenuator network for Conducted Emissions testing, and Occupied Bandwidth.

