



**M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85224-1571  
www.goodnet.com/~mflom, (602) 926-3100, FAX: 926-3598

---

Sub-part  
2.983 (f):

EQUIPMENT IDENTIFICATION

FCC ID: CASTEL0007

NAMEPLATE DRAWING

ATTACHED, EXHIBIT 1.

LOCATION

AS PER LABEL DRAWING(S)

DATE OF REPORT

July 24, 1998

SUPERVISED BY:  
MF:glk

  
MORTON FLOM, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

CASTEL0007

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
2.983	List of General Information Required	2
<b>EXCITER:</b>		
2.985(a)	Carrier Output Power	6
2.991	Unwanted Emissions (Transmitter Conducted)	8
2.993(a)	Field Strength of Spurious Radiation	11
2.989(c)	Occupied Bandwidth	14
90.214	Transient Frequency Behavior	16
2.987(a)	Audio Low Pass Filter (Voice Input)	19
2.987(a)	Audio Frequency Response	22
2.987(b)	Modulation Limiting	24
2.995(a)	Frequency Stability (Temperature Variation)	26
2.995(d)	Frequency Stability (Voltage Variation)	29
<b>AMPLIFIER:</b>		
2.985(a)	Carrier Output Power	31
2.991	Unwanted Emissions (Transmitter Conducted)	33
2.993(a)	Field Strength of Spurious Radiation	36
2.989(c)	Occupied Bandwidth	39
90.214	Transient Frequency Behavior	41
2.987(a)	Audio Low Pass Filter (Voice Input)	44
2.987(a)	Audio Frequency Response	47
2.987(b)	Modulation Limiting	49
2.995(a)	Frequency Stability (Temperature Variation)	51
2.995(d)	Frequency Stability (Voltage Variation)	54
2.202(g)	Necessary Bandwidth and Emission Bandwidth	55

LIST OF GENERAL INFORMATION REQUIRED FOR TYPE ACCEPTANCE

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

22, 74, 90

Sub-part

2.983(a): NAME AND ADDRESS OF APPLICANT:

Tait Electronics Ltd.  
558 Wairakei Rd.  
Burnside, Christchurch 5, NEW ZEALAND

VENDOR:

Tait Electronics, Ltd.  
P.O. Box 1646  
Christchurch 1, NEW ZEALAND

2.983(b): FCC ID: CASTEL0007

MODEL NO: T837-16-0000, S/N 982260,  
(CASTEL0006/7) EXCITER  
T839-10-0000, S/N 979949,  
(CASTEL0007) AMPLIFIER

2.983(c): QUANTITY PRODUCTION PLANNED.

2.983(d): TECHNICAL DESCRIPTION: SEE ATTACHED EXHIBITS

(1): TYPE OF EMISSION: 11K0F3E, 16K0F3E

(2): FREQUENCY RANGE, MHz: 136 to 156

(3): POWER RATING, Watts: 20, 100  
SWITCHABLE x ADJUSTABLE     N/A    

(4): MAXIMUM POWER RATING, Watts: 300

2.983(d)

(5):

VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual  
COLLECTOR VOLTAGE, Vdc = per manual  
SUPPLY VOLTAGE, Vdc = 120

(6):

FUNCTION OF ACTIVE CIRCUIT DEVICES:

PLEASE SEE ATTACHED EXHIBITS

(7):

CIRCUIT DIAGRAM:

PLEASE SEE ATTACHED EXHIBITS

(8):

MANUAL:

PLEASE SEE ATTACHED EXHIBITS

(9):

TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(10):

DESCRIPTION OF CIRCUITRY & DEVICES PROVIDED FOR DETERMINING AND STABILIZING FREQUENCY:

PLEASE SEE ATTACHED EXHIBITS

(11):

DESCRIPTION OF CIRCUITS OR DEVICES EMPLOYED FOR

- (a) SUPPRESSION OF SPURIOUS RADIATION,
- (b) LIMITING MODULATION,
- (c) LIMITING POWER:

PLEASE SEE ATTACHED EXHIBITS

(12):

DIGITAL MODULATION DESCRIPTION:

ATTACHED EXHIBITS  
N/A

x

2.983(e): TEST AND MEASUREMENT DATA:

FOLLOWS

2.983(f): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

2.983(g): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

Sub-part  
2.983(e):

TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.981, 2.983, 2.985, 2.987, 2.989, 2.991, 2.993, 2.995, 2.997, 2.999 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 101 - Fixed Microwave Services

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

ROOM TEMPERATURE	= 25±5°C
ROOM HUMIDITY	= 20-50%
D.C. SUPPLY VOLTAGE, Vdc	= N/A
A.C. SUPPLY VOLTAGE, Vac	= 120
A.C. SUPPLY FREQUENCY, Hz	= 60

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO.

6.

CASTEL0007

NAME OF TEST:

Carrier Output Power (Conducted)

SPECIFICATION:

FCC: 47 CFR 2.985(a)  
IC: RSS-119, Section 6.2

GUIDE:

TIA/EIA-603, Paragraph 2.2.1

TEST CONDITIONS:

Standard Temperature and Humidity (S. T. & H.)

TEST EQUIPMENT:

As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

MEASUREMENT RESULTS

---

NOMINAL, MHz

R. F. POWER OUTPUT, WATTS

---

144


0.6

SUPERVISED BY:

  
MORTON FLOM, P. Eng.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT  
 TEST 2: FREQUENCY STABILITY

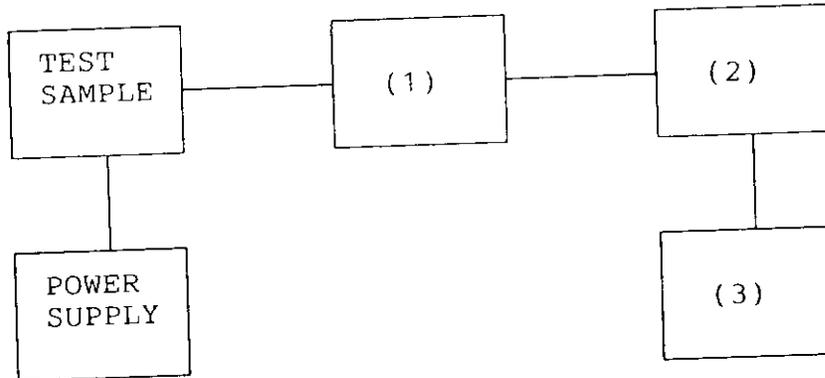

(1) COAXIAL ATTENUATOR

NARDA 766-10	---
SIERRA 661A-30	<u>x</u>
BIRD 8329 (30 dB)	---
_____	---

(2) POWER METERS

HP 435A	---
HP 436A	<u>x</u>
HP 8901A POWER MODE	<u>x</u>
_____	---

(3) FREQUENCY COUNTER

HP 5383A	---
HP 5334B	<u>x</u>
HP 8901A FREQUENCY MODE	<u>x</u>
_____	---

PAGE NO. 8.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: FCC: 47 CFR 2.991  
IC: RSS-119, Section 6.3

GUIDE: TIA/EIA-603, Paragraph 2.2.13

TEST CONDITIONS: S. T. & H.

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE


FREQUENCY OF CARRIER, MHz	= 144
SPECTRUM SEARCHED, GHz	= 0 to $10 \times F_c$
MAXIMUM RESPONSE, Hz	= 2510
ALL OTHER EMISSIONS	= $\geq 20$ dB BELOW LIMIT
LIMIT, dBc: $-(43 + 10 \text{ LOG } P_0)$	= -40.8 (0.6 Watts)

*M. F. Flom*  
MORTON FLOM, P. Eng.

SUPERVISED BY:

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

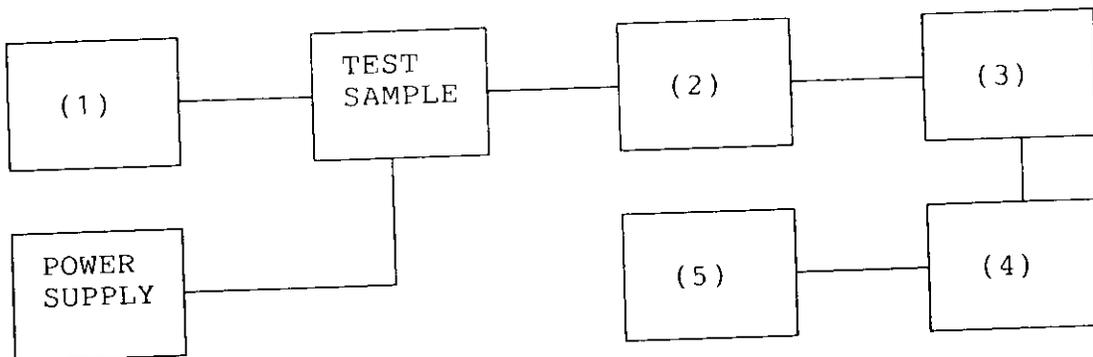

- |       |                                   |     |
|-------|-----------------------------------|-----|
| (1)   | <u>AUDIO OSCILLATOR/GENERATOR</u> |     |
|       | HP 204D                           | --- |
|       | HP 8903A                          | --- |
|       | HP 3312A                          | x   |
|       |                                   | x   |
| <hr/> |                                   |     |
| (2)   | <u>COAXIAL ATTENUATOR</u>         |     |
|       | NARDA 766-10                      | --- |
|       | SIERRA 661A-30                    | x   |
|       | BIRD 8329 (30 dB)                 | x   |
|       |                                   | --- |
| <hr/> |                                   |     |
| (3)   | <u>FILTERS; NOTCH, HP, LP, BP</u> |     |
|       | CIRQTEL FHT                       | --- |
|       | EAGLE TNF-1                       | x   |
|       | PHELPS DODGE PD-495-8             | --- |
|       |                                   | --- |
| <hr/> |                                   |     |
| (4)   | <u>SPECTRUM ANALYZER</u>          |     |
|       | HP 8566B                          | x   |
|       | HP 8563E                          | --- |
|       |                                   | --- |
| <hr/> |                                   |     |
| (5)   | <u>SCOPE</u>                      |     |
|       | HP 1741A                          | --- |
|       | HP 181T                           | --- |
|       | TEK 935                           | --- |
|       | HP 54502A                         | --- |
|       |                                   | --- |
| <hr/> |                                   |     |

PAGE NO.

10.1.

G87G005

TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)

POWER: LOW

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	LEVEL, $\mu$ W
144.000	287.902	-31.9	-74.9	1
144.000	432.419	-32.6	-75.6	1
144.000	576.157	-31.8	-74.8	1
144.000	720.141	-31.4	-74.4	1
144.000	863.847	-31.3	-74.3	1
144.000	1007.591	-32.6	-75.6	1
144.000	1151.782	-31.9	-74.9	1
144.000	1295.711	-31.1	-74.1	1
144.000	1439.602	-31.2	-74.2	1
144.000	1584.147	-31.1	-74.1	1
144.000	1728.299	-32.0	-75.0	1
144.000	1871.736	-31.5	-74.5	1
144.000	2015.586	-30.9	-73.9	1
144.000	2160.127	-31.4	-74.4	1

PAGE NO.

10.2.

G87G004

TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)

POWER: HIGH

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	LEVEL, $\mu$ W
	288.109	-33.1	-83.1	0
144.000	432.016	-31.6	-81.6	1
144.000	576.128	-32.5	-82.5	1
144.000	720.266	-32.0	-82.0	1
144.000	863.625	-32.8	-82.8	1
144.000	1007.582	-33.0	-83.0	1
144.000	1152.354	-32.4	-82.4	1
144.000	1295.988	-32.7	-82.7	1
144.000	1439.626	-32.6	-82.6	1
144.000	1583.924	-31.6	-81.6	1
144.000	1728.344	-31.2	-81.2	1
144.000	1872.205	-31.7	-81.7	1
144.000	2015.741	-30.7	-80.7	1
144.000	2160.285	-31.1	-81.1	1

PAGE NO. 11.1.  
NAME OF TEST: Field Strength of Spurious Radiation  
SPECIFICATION: FCC: 47 CFR 2.993(a)  
IC: N/A  
GUIDE: TIA/EIA-603, Section 2.2.12  
TEST CONDITIONS: S. T. & H.  
TEST EQUIPMENT: AS PER ATTACHED PAGE

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. The test sample was connected to an R.F. Wattmeter and a 50 ohm dummy load, and adjusted to its rated output.  
  
In order to obtain the maximum response at each spurious frequency, the turntable was rotated. Also, the Search Antennas were raised and lowered vertically, and all cables were oriented. Excess power lead was coiled near the power supply.
4. A signal generator, connected with a non-radiating cable to a vertically polarized half-wave antenna (for each frequency involved) was substituted for the transmitter. The Search Antenna was raised and lowered to obtain maximum indicated.
5. The signal generator output was adjusted until a signal level indication equal to that from the transmitter was obtained.
6. Steps 4 and 5 were repeated, using a horizontally polarized half-wave antenna. The higher of the two observations was noted.

PAGE NO. 11.2.  
NAME OF TEST: Field Strength of Spurious Radiation  
SPECIFICATION: FCC: 47 CFR 2.993(a)  
 IC: N/A

MEASUREMENT PROCEDURE (CONT.)

7. Power into the half-wave antenna was calculated from the characteristic impedance of the line, and the voltage output from the signal generator.

8. The level of each spurious radiation with reference to the transmitter power in dB, was calculated from:

$$\text{SPURIOUS LEVEL, dB} = 10 \text{ LOG} \left( \frac{\text{Calculated Spurious Power [from para. 7]}}{\text{Tx Power (Wattmeter)}} \right)$$

9. The worst case for all channels is shown.

10. Measurement summary:

FREQUENCY OF CARRIER, MHz	= 144
SPECTRUM SEARCHED, GHz	= 0 to 10 × F <sub>C</sub>
ALL OTHER EMISSIONS	= ≥ 20 dB BELOW LIMIT
LIMIT, dBc	= -40.8 (0.6 Watts)

11. Measurement results:

ATTACHED FOR WORST CASE



PAGE NO.

13.

CASTEL0007

TRANSMITTER SPURIOUS EMISSIONS (RADIATED FIELD STRENGTH)

ALL OTHER EMISSIONS =  $\geq$  20 dB BELOW LIMIT

EMISSION, MHz/HARMONIC	SPURIOUS LEVEL BELOW	
	Lo	Hi
2nd to 10th	<-70	<-80

SUPERVISED BY:

  
MORTON FLOM, P. Eng.

PAGE NO.

14.

CASTEL0007

NAME OF TEST:

Emission Masks (Occupied Bandwidth)

SPECIFICATION:

FCC: 47 CFR 2.989(c)(1)  
IC: RSS-119, Section 6.4

GUIDE:

TIA/EIA-603, Paragraph 2.2.11

TEST CONDITIONS:

S. T. & H.

TEST EQUIPMENT:

As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE 15.1.


SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
1998-JUL-16, 08:28, THR

POWER: HIGH  
MODULATION: NONE

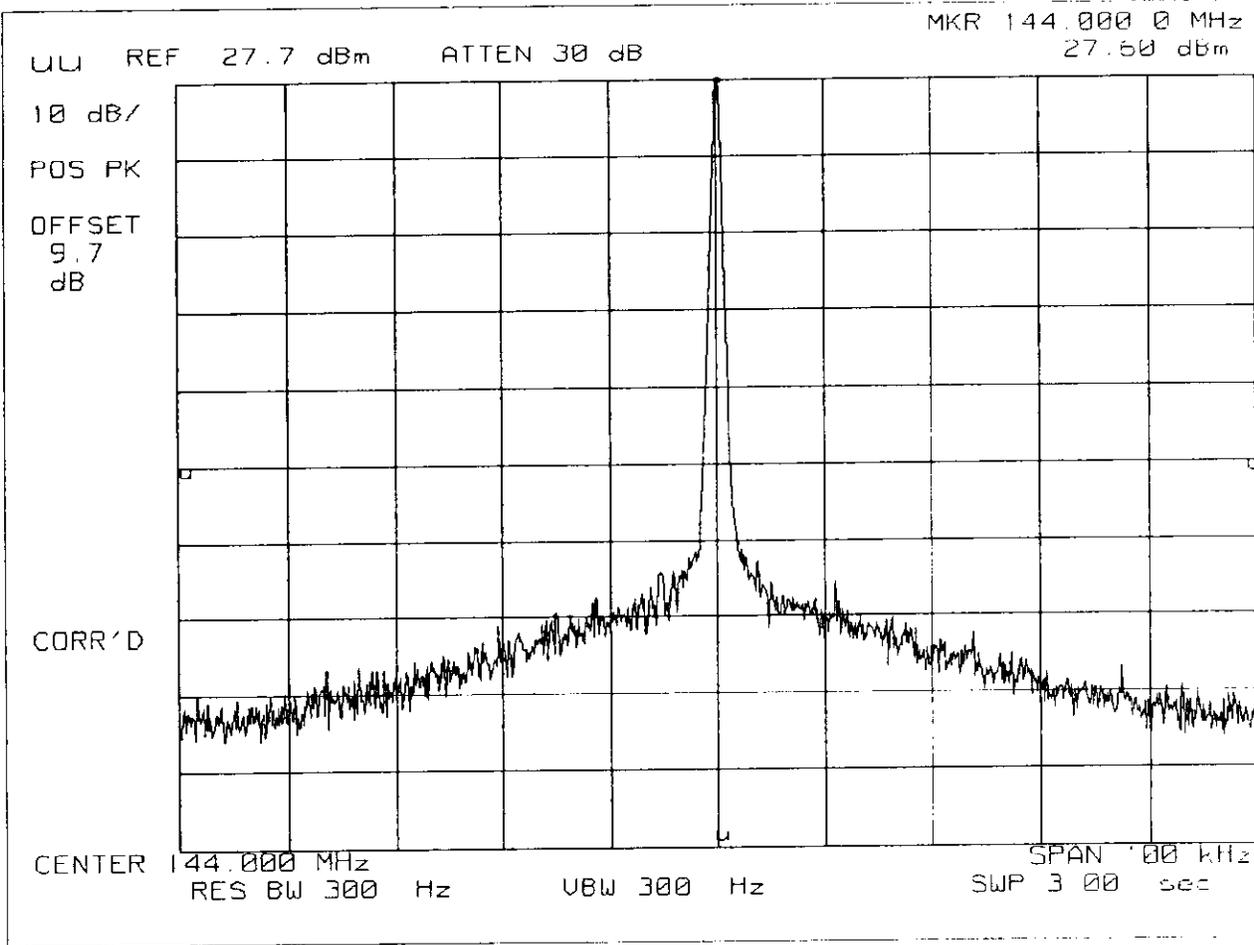

SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
1998-JUL-16, 08:42, THR


POWER: HIGH  
MODULATION: VOICE: 2500 Hz SINE WAVE  
MASK: D, VHF/UHF 12.5kHz BW

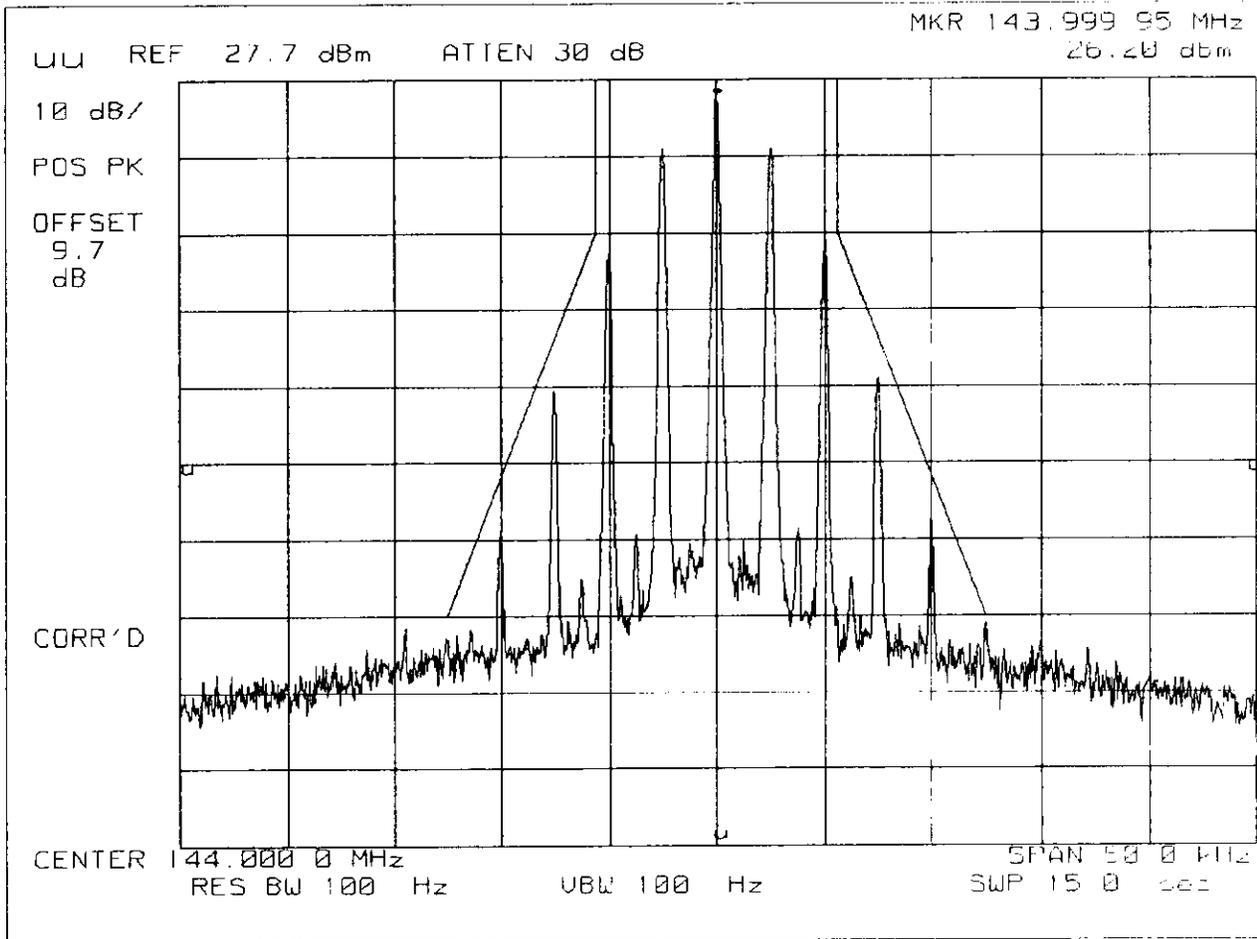

PAGE 15.3.

SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
1998-JUL-16, 08:36, THR

POWER: HIGH  
MODULATION: VOICE: 2500 Hz SINE WAVE  
MASK: B, VHF/UHF 25kHz, w/LPF

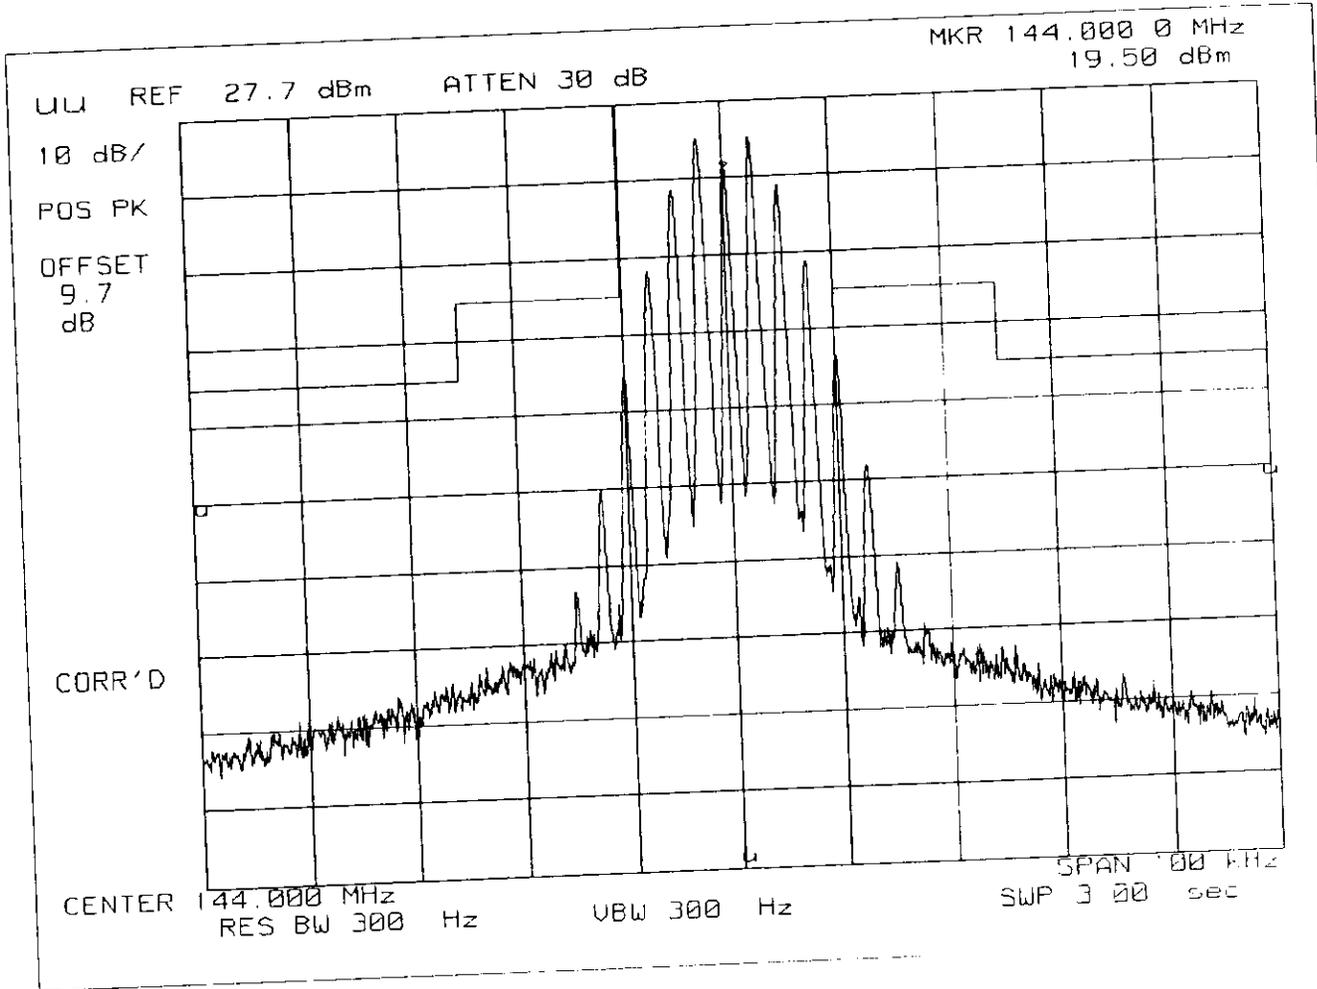

PAGE NO. 16.

NAME OF TEST: Transient Frequency Behavior

SPECIFICATION: FCC: 47 CFR 90.214  
IC: RSS-119, Section 6.5

GUIDE: TIA/EIA-603, Paragraph 2.2.19

TEST CONDITIONS: S. T. & H.

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
2. The transmitter was turned on.
3. Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
4. The transmitter was turned off.
5. An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
6. The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
7. The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
8. The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.


LEVELS MEASURED:

<u>step f</u> , dBm	= -11.3
<u>step h</u> , dBm	= -31.9
<u>step l</u> , dBm	= 18.7

SUPERVISED BY:

*M. F. Eng.*  
MORTON FLOM, P. Eng.


TRANSIENT FREQUENCY BEHAVIOR

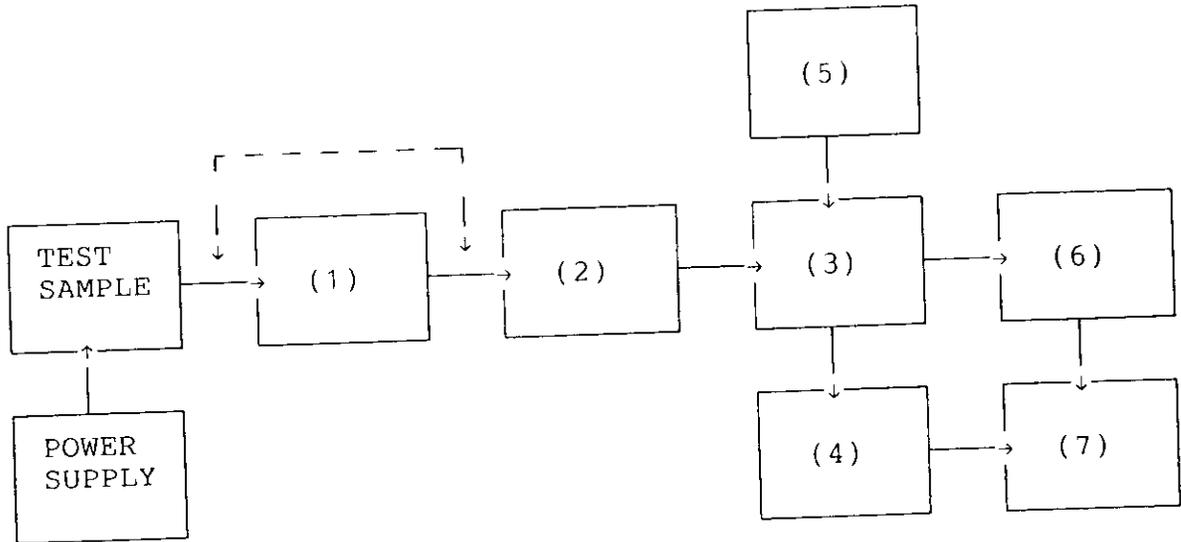

- (1) ATTENUATOR  
 (NOTE: Removed after 1st step)  
 30 dB   x
  
- (2) ATTENUATOR  
 30 dB       
 20 dB   x    
 10 dB       
 KAY VARIABLE
  
- (3) COMBINER  
 4 x 25 Ω COMBINER   x
  
- (4) CRYSTAL DETECTOR  
 HP 8470B   x
  
- (5) RF SIGNAL GENERATOR  
 HP 8656A       
 HP 8920A   x
  
- (6) MODULATION ANALYZER  
 HP 8901A   x
  
- (7) SCOPE  
 HP 54502A   x

PAGE 18.1.  
OSCILLOSCOPE PRESENTATION  
TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
1998-JUL-16, 09:48, THR

MODULATION: Ref Gen=12.5 kHz Deviation  
REMARK: CARRIER ON TIME

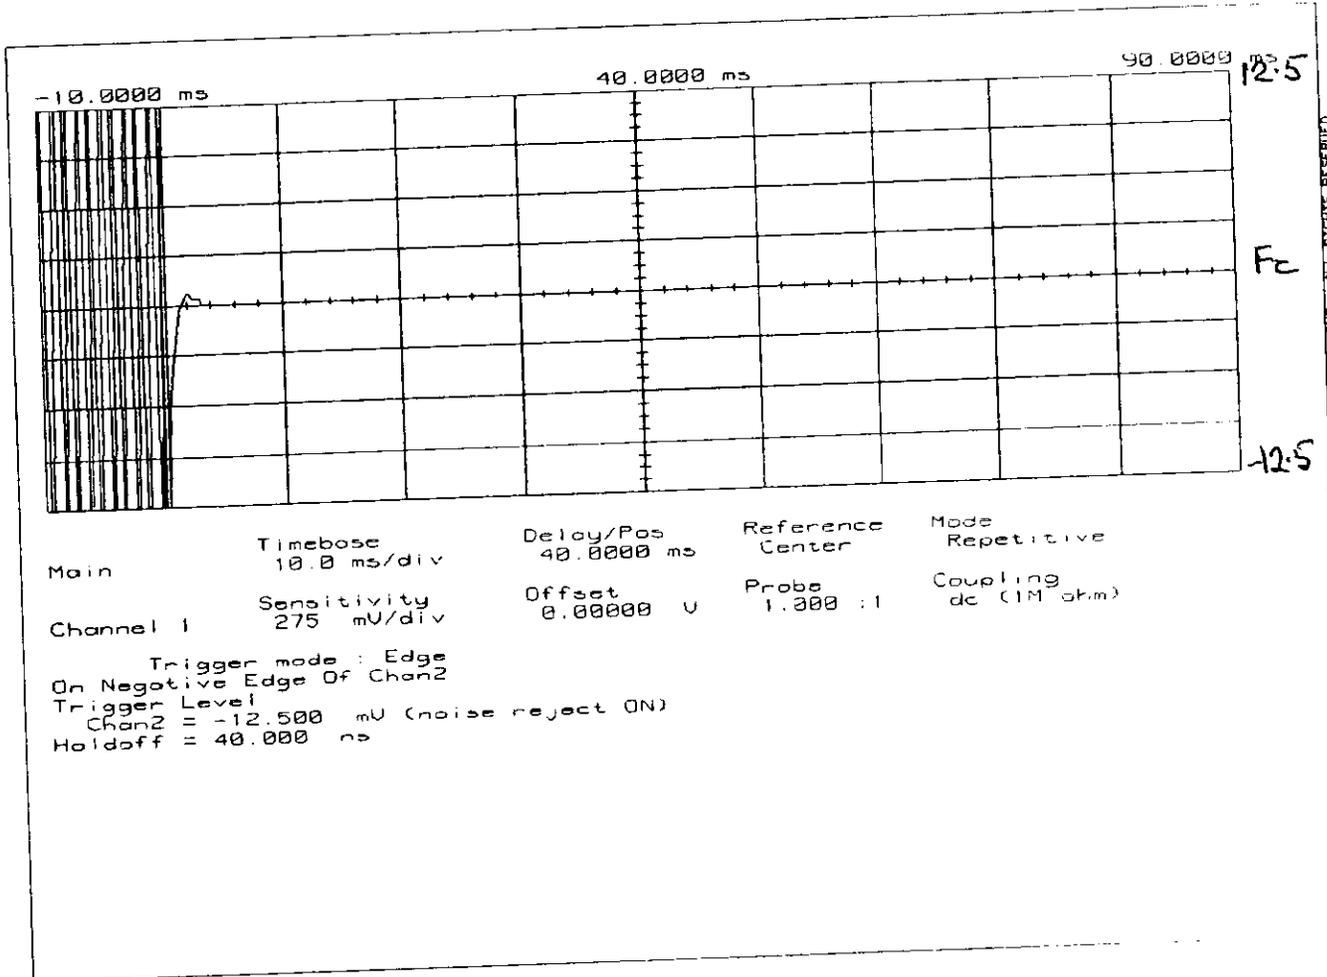

Main	Timebase 10.0 ms/div	Delay/Pos 40.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc (1M ohm)

Trigger mode : Edge  
 On Negative Edge Of Chan2  
 Trigger Level  
 Chan2 = -12.500 mV (noise reject ON)  
 Holdoff = 40.000 ns

LOCKTRAC, 3861889 PL COPYRIGHT © 1988 BY TAI TAIT ASSOCIATES, INC. ALL RIGHTS RESERVED


PAGE 18.2.

OSCILLOSCOPE PRESENTATION

TAIT ELECTRONICS, T837-16-0000 (EXCITER)

1998-JUL-16, 09:51, THR

MODULATION: Ref Gen=12.5kHz Deviation  
 REMARK: CARRIER OFF TIME

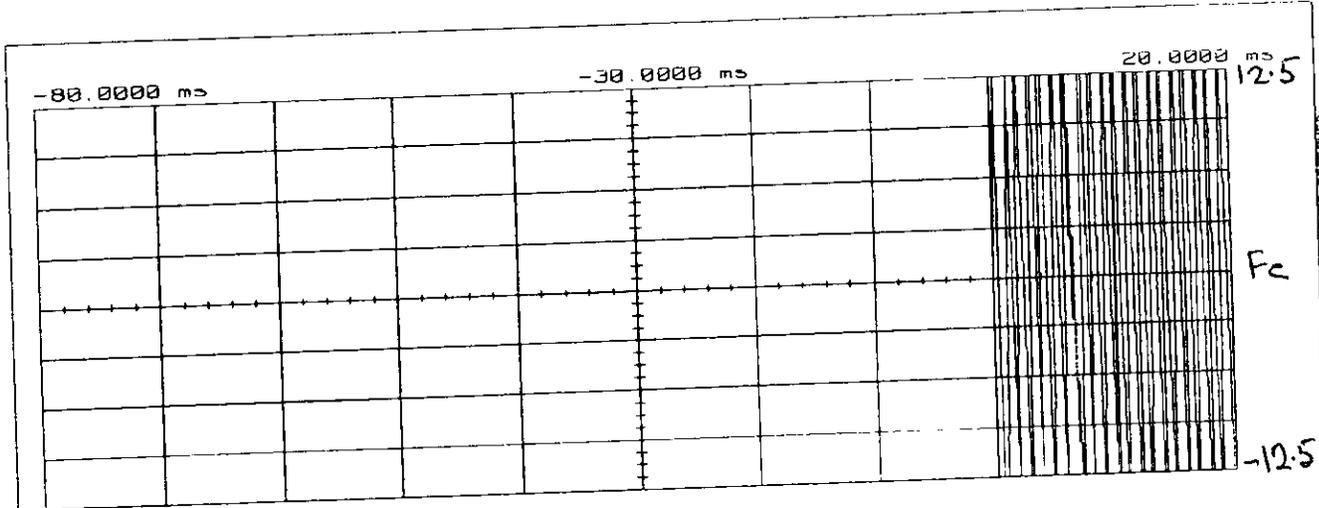


Main	Timebase 10.0 ms/div	Delay/Pos -30.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.0000 V	Probe 1.000 :1	Coupling dc (1M ohm)

Trigger mode : Edge  
 On Positive Edge Of Chan2  
 Trigger Level  
 Chan2 = -587.500 mV (noise reject ON)  
 Holdoff = 40.000 ns

© 1998 BY H. FLOR & ASSOCIATES, INC. ALL RIGHTS RESERVED

PAGE 18.3.  
OSCILLOSCOPE PRESENTATION  
TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
1998-JUL-16, 09:45, THR


MODULATION: Ref Gen=25 kHz Deviation  
REMARK: CARRIER ON TIME

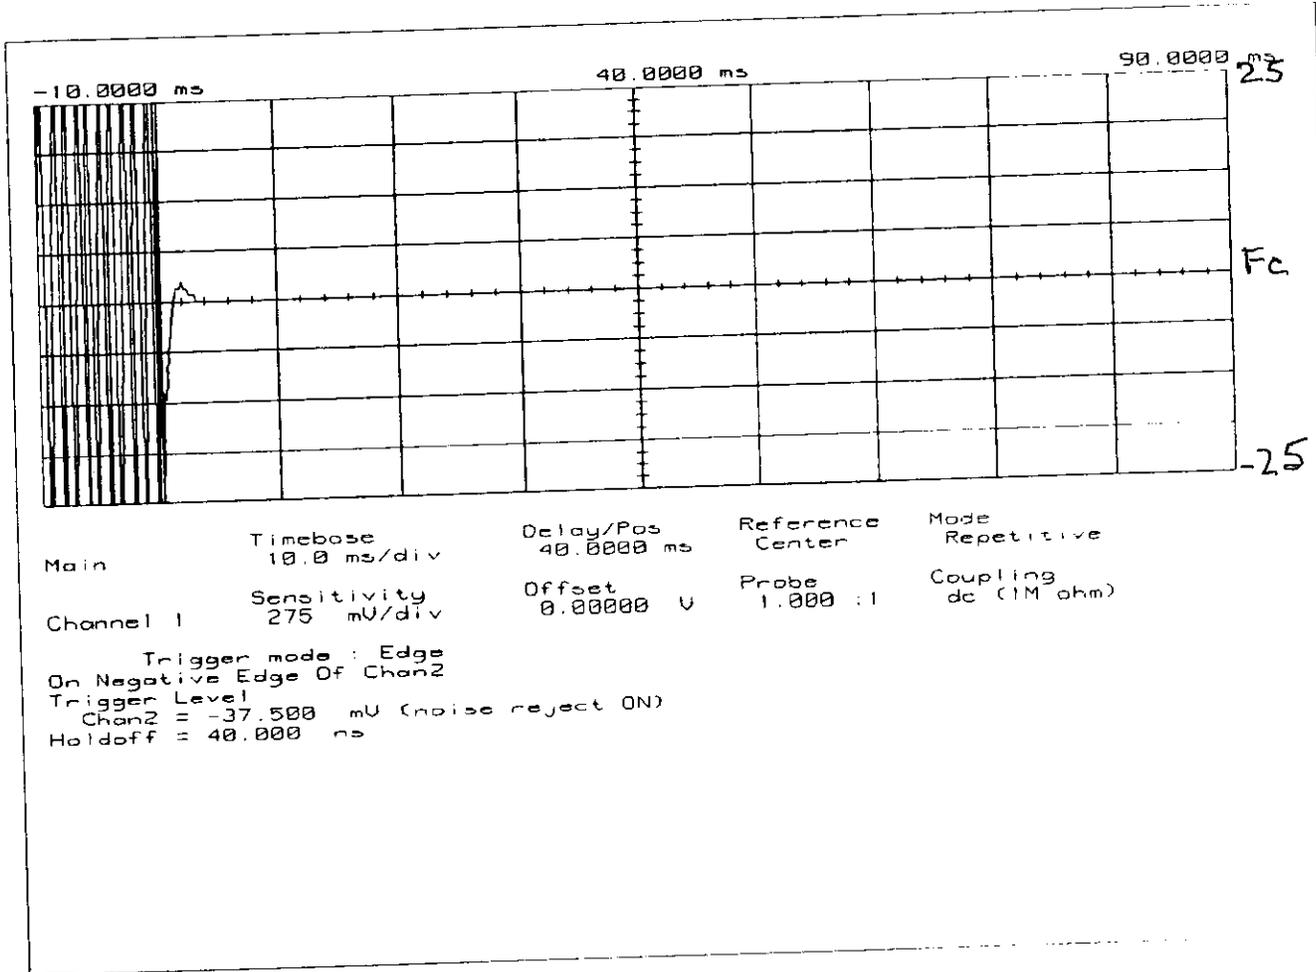

ILLUSTRATIONS 780616837 PLOTTER TO 1998 BY W. FLOP ASSOCIATES, INC. ALL RIGHTS RESERVED

PAGE 18.4.  
 OSCILLOSCOPE PRESENTATION  
 TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
 1998-JUL-16, 09:47, THR

MODULATION: Ref Gen=25 kHz Deviation  
 REMARK: CARRIER OFF TIME

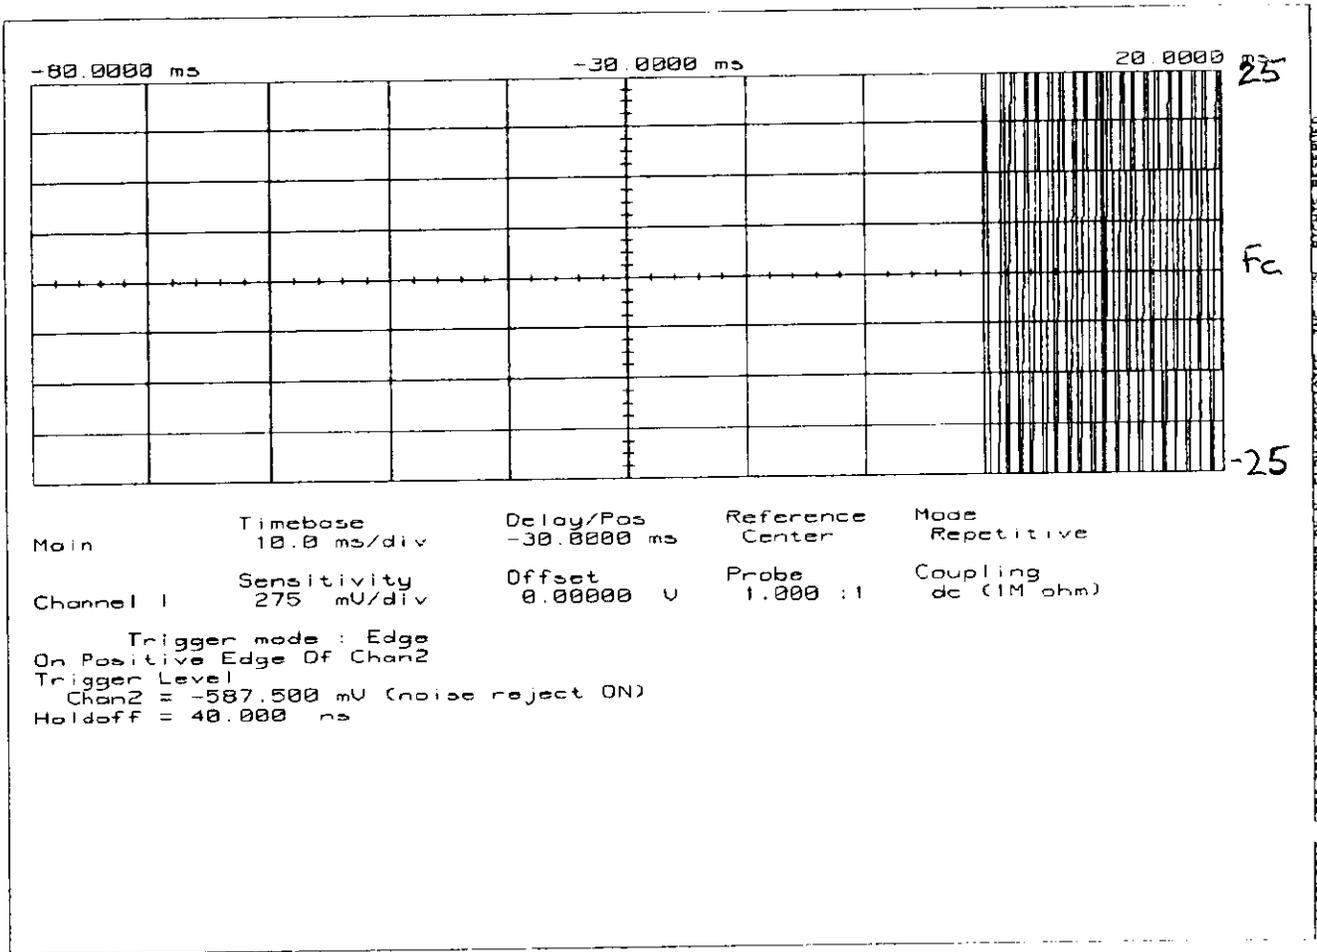

PAGE NO.

19.

CASTEL0007

NAME OF TEST:

Audio Low Pass Filter (Voice Input)

SPECIFICATION:

FCC: 47 CFR 2.987(a)  
IC: RSS-119, Section 6.6

GUIDE:

TIA/EIA-603, Paragraph 2.2.15

TEST CONDITIONS:

S. T. & H.

TEST EQUIPMENT:


As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. MODULATION CAPABILITY/DISTORTION
- TEST B. AUDIO FREQUENCY RESPONSE
- TEST C. HUM AND NOISE LEVEL
- TEST D. RESPONSE OF LOW PASS FILTER
- TEST E. MODULATION LIMITING

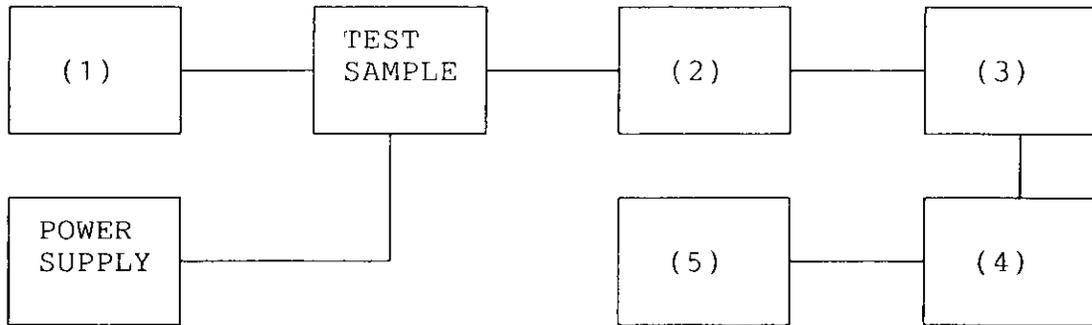

(1) AUDIO OSCILLATOR/GENERATOR

HP 204D	---
HP 8903A	---
HP 3312A	<u>x</u>
_____	<u>x</u>

(2) COAXIAL ATTENUATOR

NARDA 766-10	---
SIERRA 661A-30	<u>x</u>
BIRD 8329 (30 dB)	---
_____	---

(3) MODULATION ANALYZER

HP 8901A	<u>x</u>
_____	---


(4) AUDIO ANALYZER

HP 8903A	<u>x</u>
_____	---

(5) SCOPE

HP 1741A	---
HP 181T	---
TEK 935	---
_____	---

FREQUENCY RESPONSE OF AUDIO LOW PASS FILTER  
TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
16 JUL 1998, 07:35

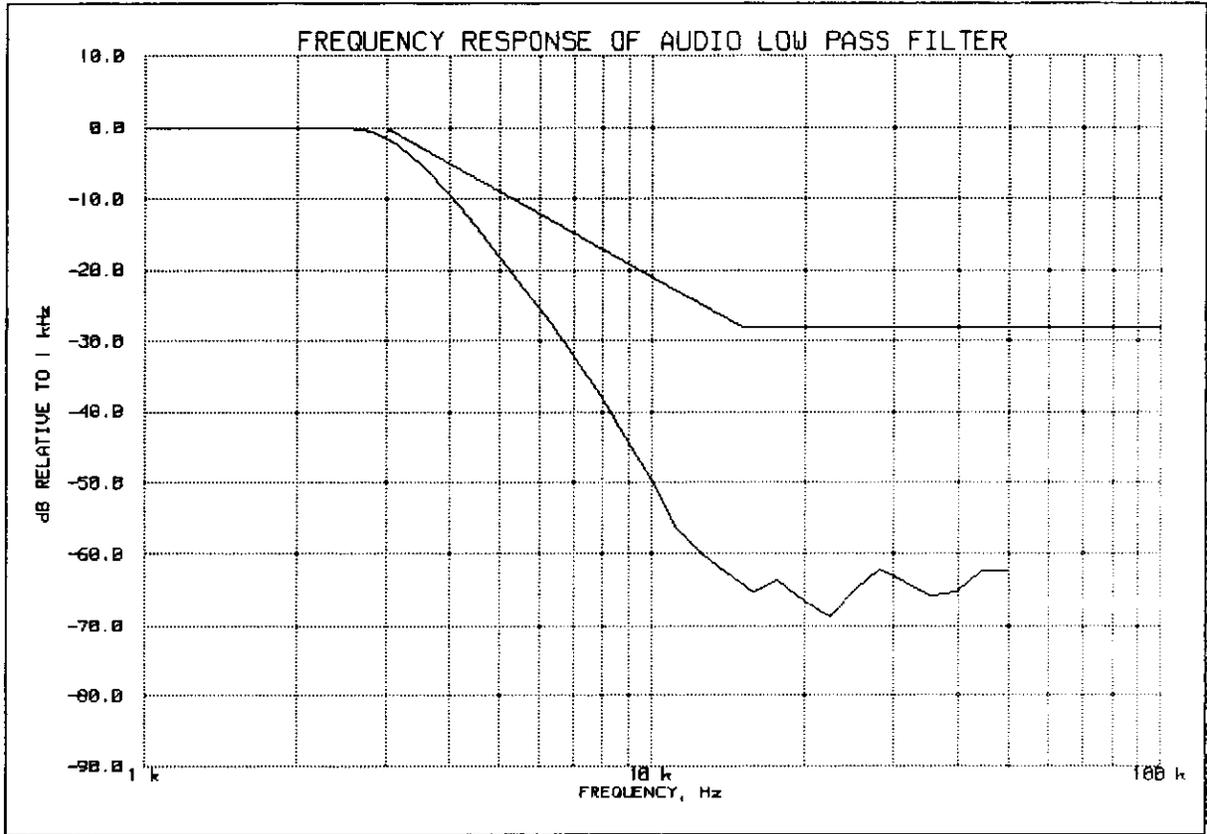

PEAK AUDIO FREQUENCY, Hz: 2510

*M. Flom P. Eng.*

SUPERVISED BY:

MORTON FLOM, P. Eng.

PAGE NO.

22.

CASTEL0007

NAME OF TEST:

Audio Frequency Response

SPECIFICATION:

FCC: 47 CFR 2.987(a)  
IC: N/A

GUIDE:

TIA/EIA-603, Section 2.2.6

TEST CONDITIONS:

S. T. & H.


TEST EQUIPMENT:

As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER AUDIO FREQUENCY RESPONSE  
 TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
 16 JUL 1998, 07:32

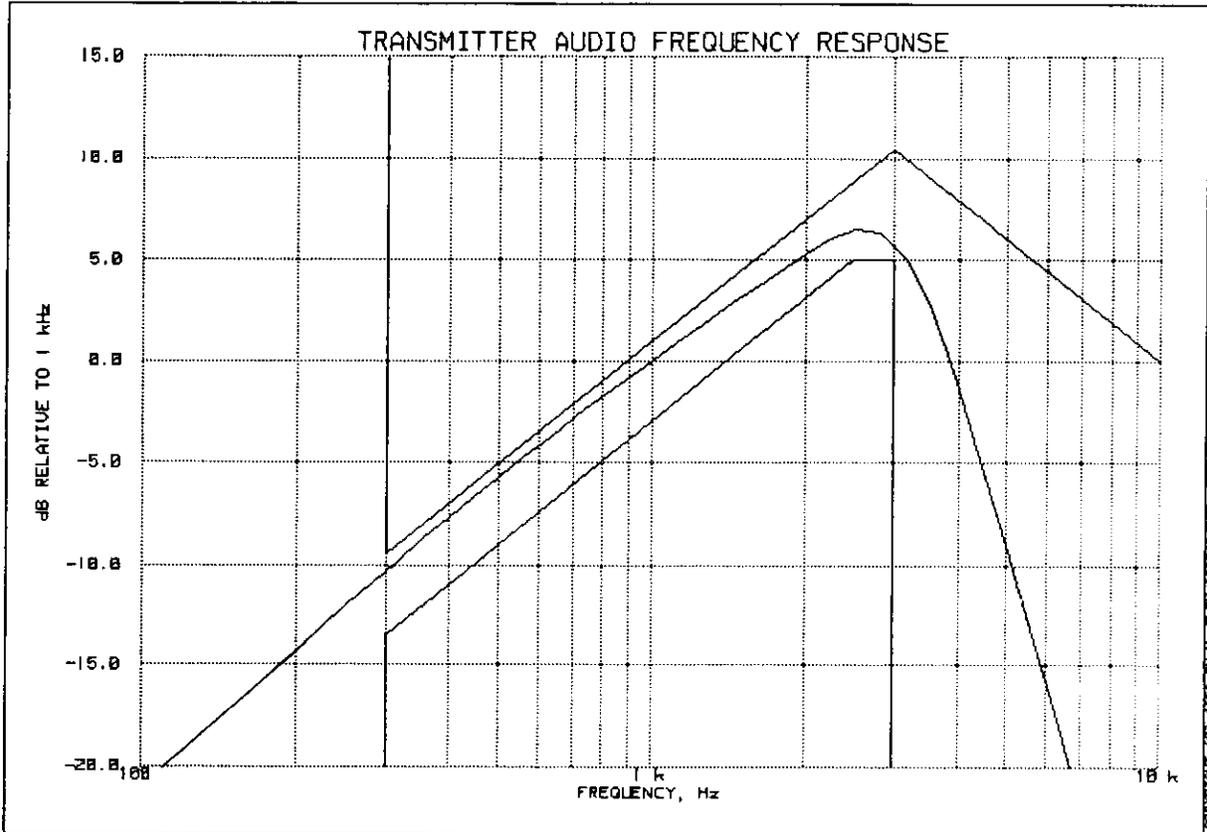

COPYRIGHT (C) 1966 BY M. FLOM ASSOCIATES, INC. ALL RIGHTS RESERVED.

PEAK AUDIO FREQUENCY, Hz: 2510

TABLE VALUES:

FREQUENCY, Hz	LEVEL, dB	FREQUENCY, Hz	LEVEL, dB	FREQUENCY, Hz	LEVEL, dB
300	-10.3	30000	-29.5		
20000	-29.5	50000	-29.4		

*Morton Flom P. Eng.*

SUPERVISED BY:

MORTON FLOM, P. Eng.

PAGE NO. 24.

NAME OF TEST: Modulation Limiting

SPECIFICATION: IC: RSS-119, Section 6.6  
FCC: 47 CFR 2.987(b)


GUIDE: TIA/EIA-603, Paragraph 2.2.3

TEST CONDITIONS: S. T. & H.

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation ( $\pm 1.5$  kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

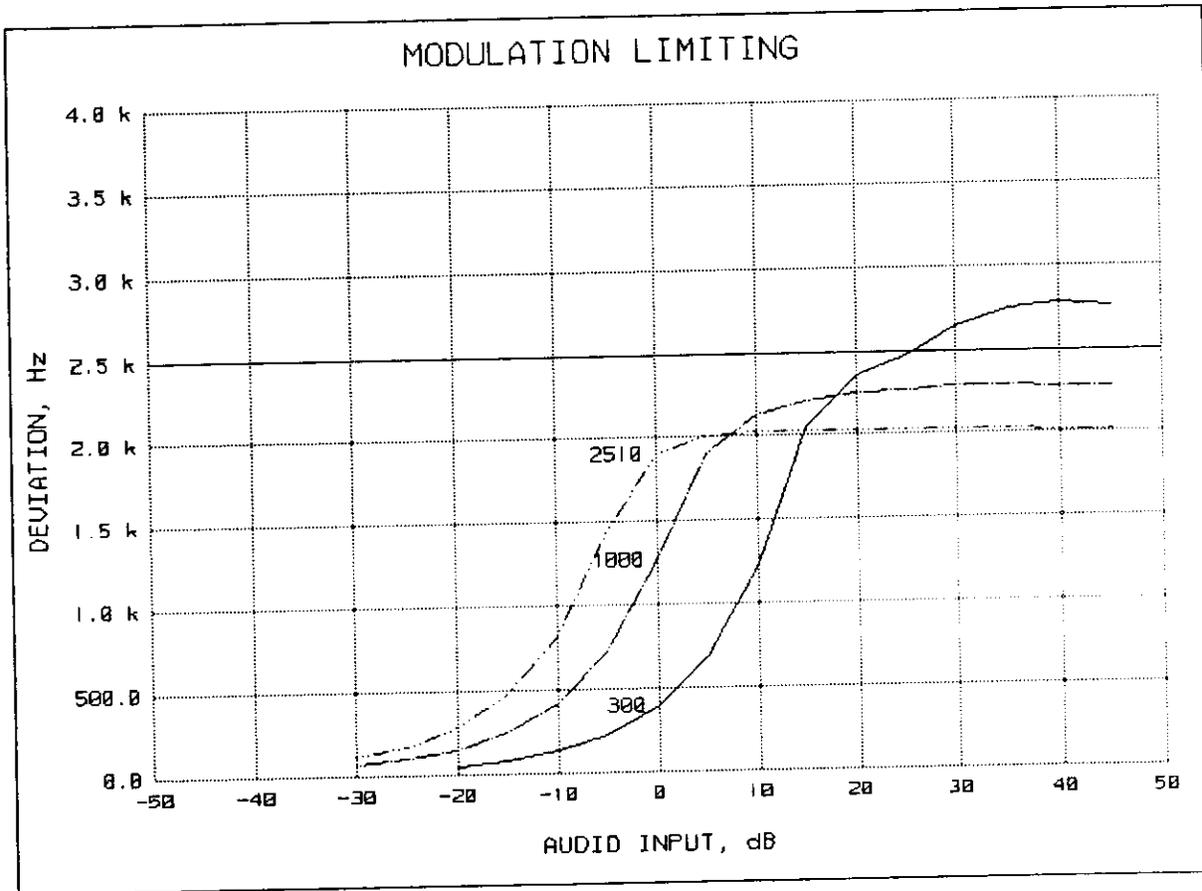


REFERENCE DEVIATION, kHz = 1.25  
 REFERENCE MODULATION, Hz = 1000  
 PEAKS = POSITIVE  
 AUDIO AMPLITUDE, mV = 33.43

*Morton Flom P. Eng.*

SUPERVISED BY:

MORTON FLOM, P. Eng.

PAGE 25.2.  
 MODULATION LIMITING  
 TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
 1998-JUL-16, 07:43

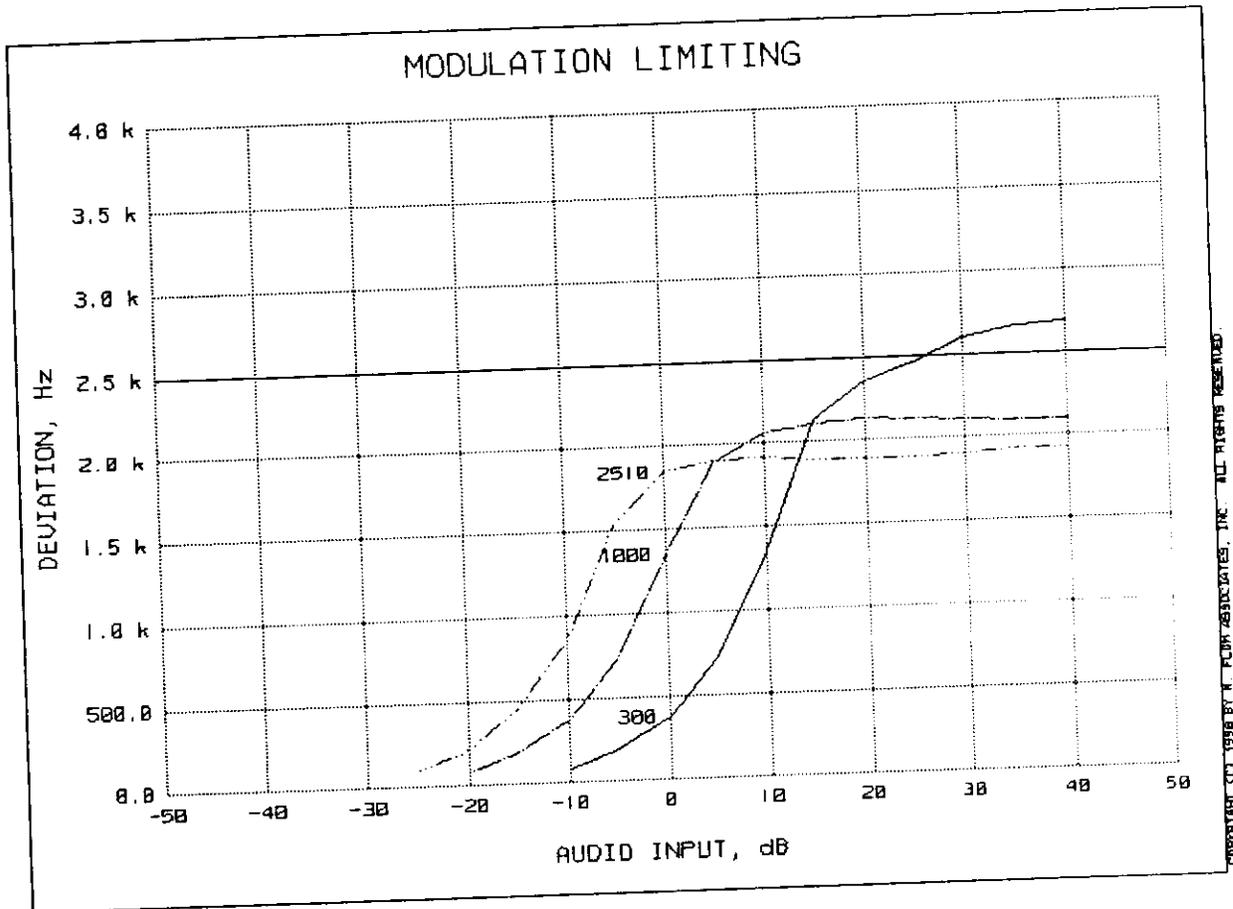

COPYRIGHT © 1998 BY T. F. P. ASSOCIATES, INC. ALL RIGHTS RESERVED.


REFERENCE DEVIATION, kHz = 1.25  
 REFERENCE MODULATION, Hz = 1000  
 PEAKS = NEGATIVE  
 AUDIO AMPLITUDE, mV = 38.38

*Morton F. Eng.*

MORTON FLOM, P. Eng.

SUPERVISED BY:

MODULATION LIMITING  
TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
1998-JUL-16, 07:39

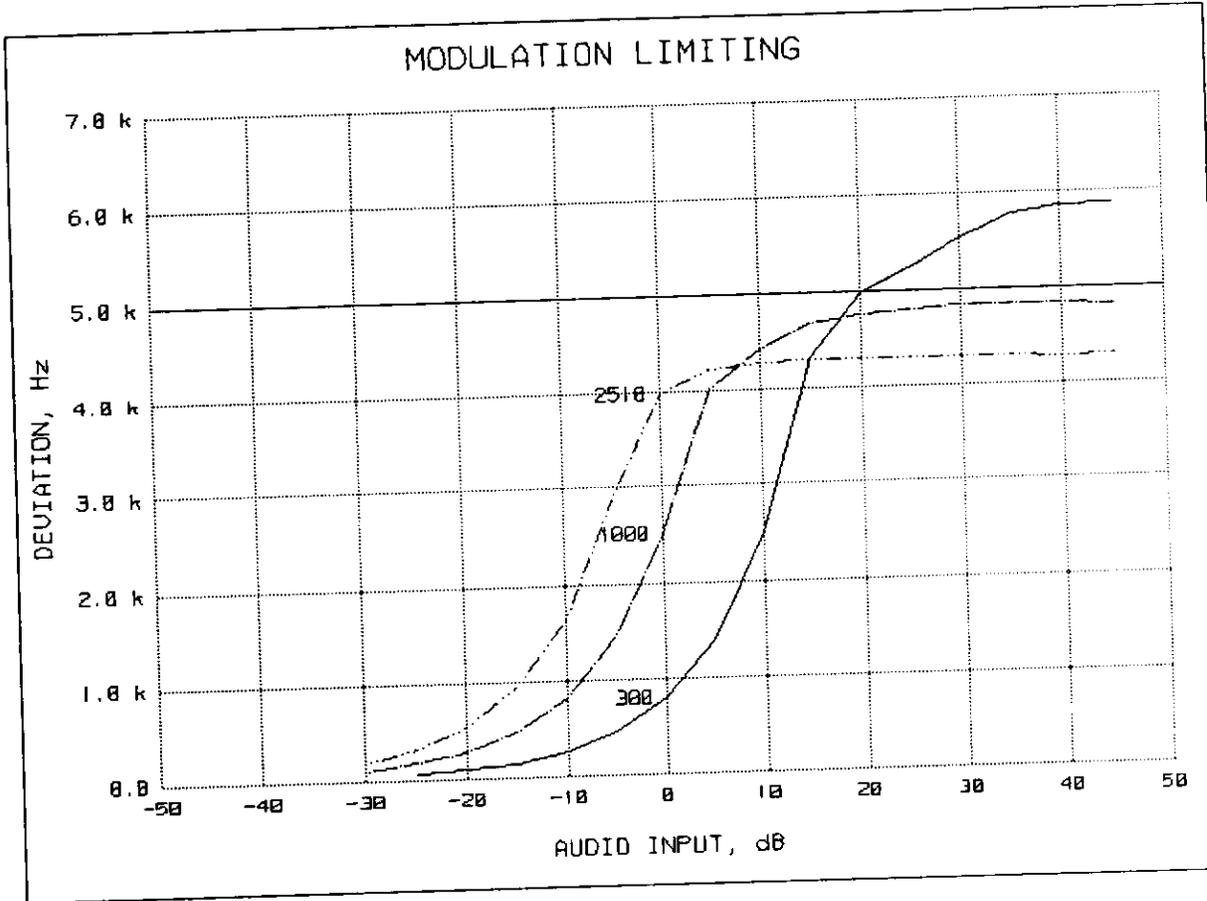

COPYRIGHT © 1986 BY M. FLOM ASSOCIATES, INC. ALL RIGHTS RESERVED.


REFERENCE DEVIATION, kHz = 2.5  
REFERENCE MODULATION, Hz = 1000  
PEAKS = POSITIVE  
AUDIO AMPLITUDE, mV = 31.19

*Morton Flom P. Eng.*

MORTON FLOM, P. Eng.

SUPERVISED BY:

PAGE 25.4.  
 MODULATION LIMITING  
 TAIT ELECTRONICS, T837-16-0000 (EXCITER)  
 1998-JUL-16, 07:39

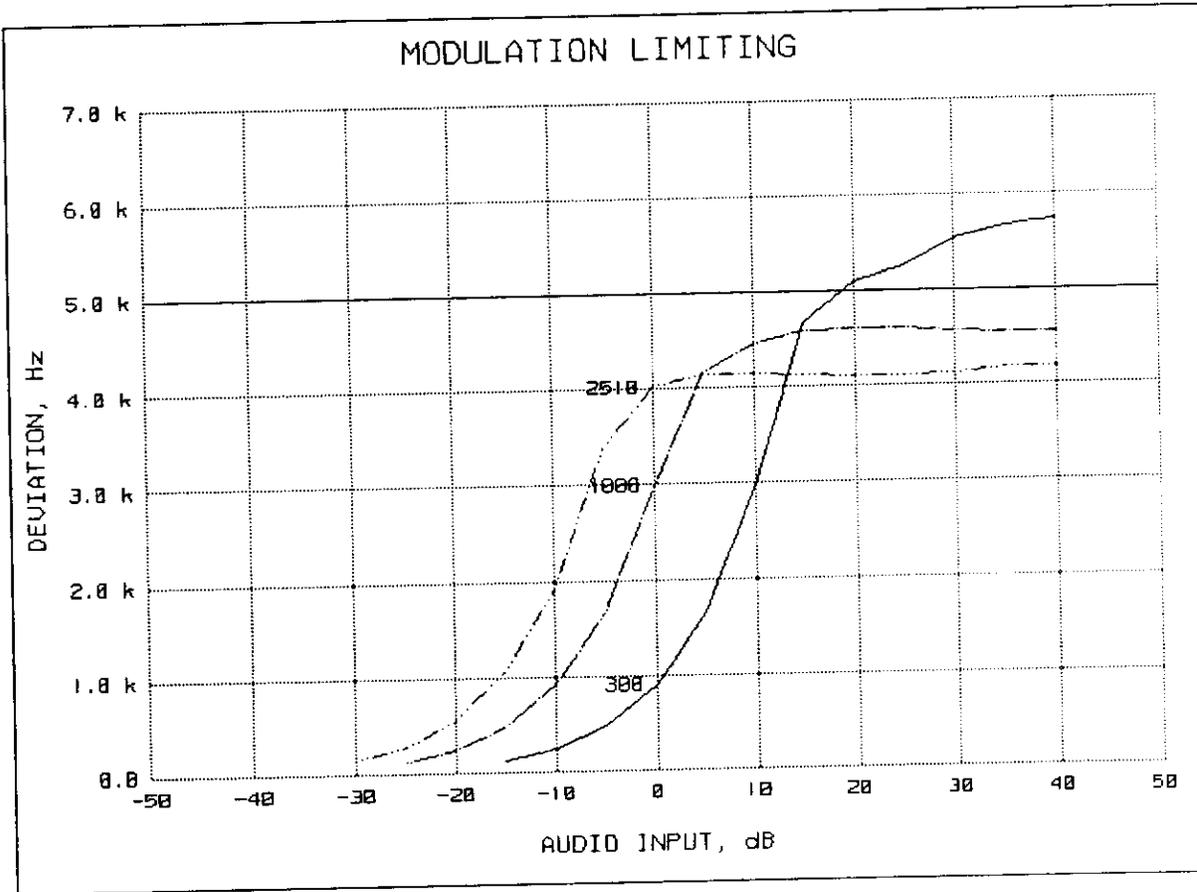

REFERENCE DEVIATION, kHz = 2.5  
 REFERENCE MODULATION, Hz = 1000  
 PEAKS = NEGATIVE  
 AUDIO AMPLITUDE, mV = 38.38

SUPERVISED BY:

*M. Flom P. Eng.*

MORTON FLOM, P. Eng.

PAGE NO.

26.

CASTEL0007

NAME OF TEST:

Frequency Stability (Temperature Variation)

SPECIFICATION:

FCC: 47 CFR 2.995(a)(1)  
IC: RSS-119, Section 7.0

GUIDE:

TIA/EIA-602, Section 2.2.2

TEST CONDITIONS:

As indicated

TEST EQUIPMENT:


As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to  $-30^{\circ}\text{C}$  and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY  
 TEST B. CARRIER FREQUENCY STABILITY  
 TEST C. OPERATIONAL PERFORMANCE STABILITY  
 TEST D. HUMIDITY  
 TEST E. VIBRATION  
 TEST F. ENVIRONMENTAL TEMPERATURE  
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION  
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

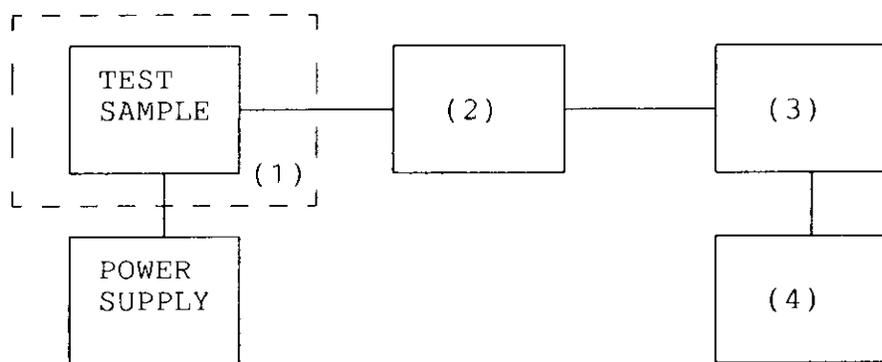(1) TEMPERATURE, HUMIDITY, VIBRATION

TENNEY TEMPERATURE CHAMBER	<u>  x  </u>
WEBER HUMIDITY CHAMBER	<u>      </u>
L.A.B. RVH 18-100	<u>      </u>

(2) COAXIAL ATTENUATOR


NARDA 766-10	<u>      </u>
SIERRA 661A-30	<u>  x  </u>
BIRD 8329 (30 dB)	<u>  x  </u>

(3) R.F. POWER

HP 435A POWER METER	<u>      </u>
HP 436A POWER METER	<u>  x  </u>
HP 8901A POWER METER	<u>  x  </u>

(4) FREQUENCY COUNTER

HP 5383A	<u>      </u>
HP 5334B	<u>  x  </u>
HP 8901A	<u>  x  </u>

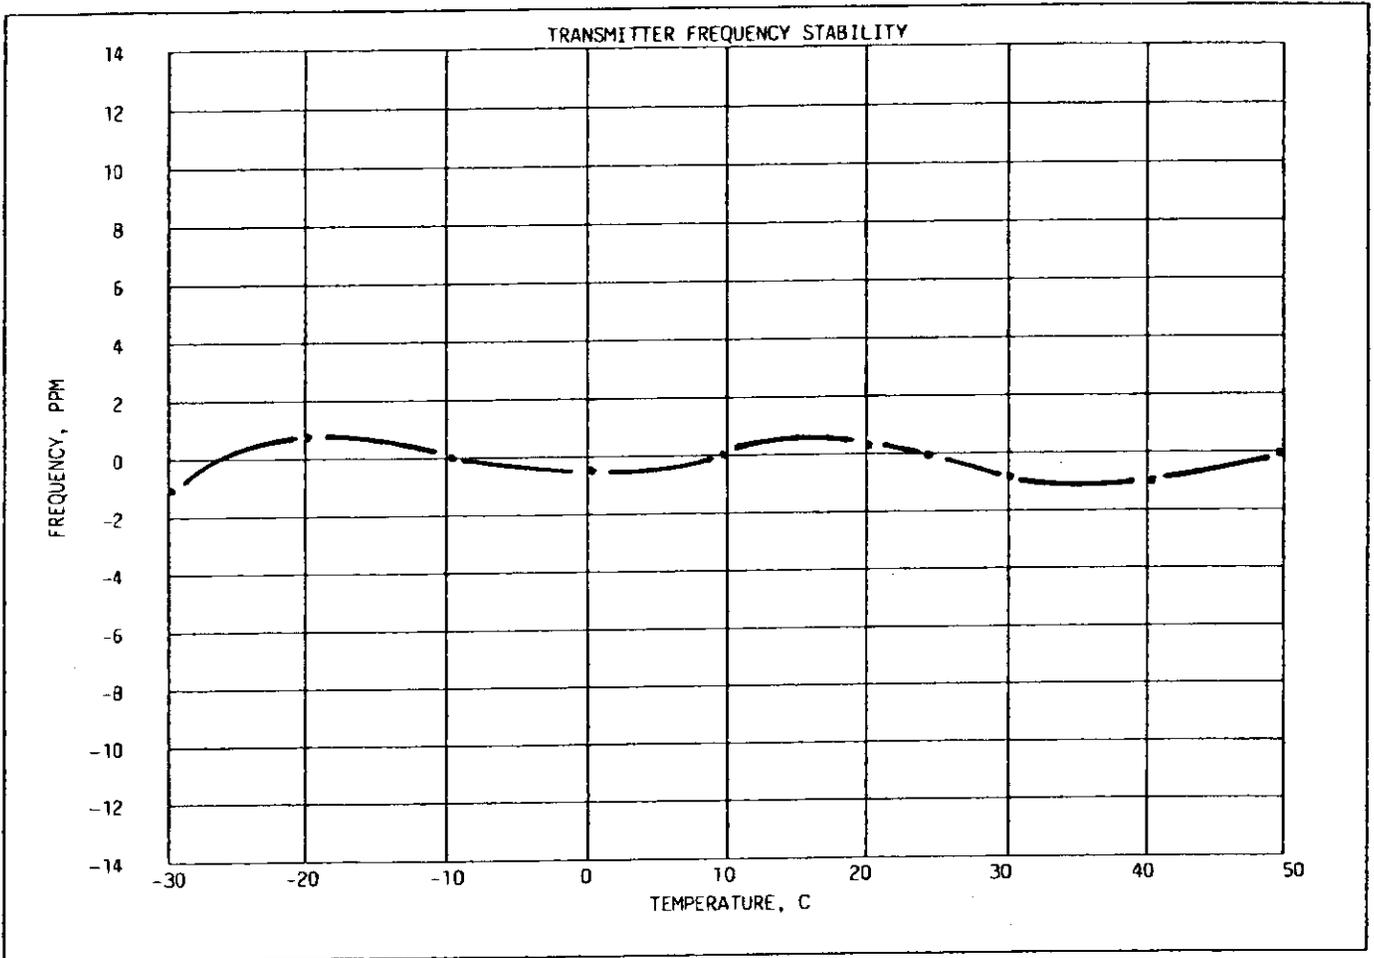

FREQUENCY OF CARRIER, MHz = 144

LIMIT, ppm =  $\pm 2.5$

LIMIT, Hz = 360

*Morton Flom P. Eng.*

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

29.

CASTEL0007

NAME OF TEST:

Frequency Stability (Voltage Variation)

SPECIFICATION:

FCC: 47 CFR 2.995 (b)(1)  
IC: RSS-119, Section 7.0

GUIDE:

TIA/EIA-602, Section 2.2.2

TEST CONDITIONS:

As indicated

TEST EQUIPMENT:

As per attached page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

MEASUREMENT RESULTS

LIMIT, ppm = 2.5  
LIMIT, Hz = 360

<u>STV, %</u>	<u>Vdc</u>	<u>CHANGE IN FREQUENCY, Hz</u>	
85	102	144.000000	0
100	120	144.000000	0
115	138	144.999990	-10

SUPERVISED BY:

  
MORTON FLOM, P. Eng.

PAGE 30.

FCC ID: CASTEL0007

MODEL: T839-10-0000

POWER AMPLIFIER DATA

PAGE NO.

31.

CASTEL0007

NAME OF TEST:

Carrier Output Power (Conducted)

SPECIFICATION:

FCC: 47 CFR 2.985(a)  
IC: RSS-119, Section 6.2

GUIDE:

TIA/EIA-603, Paragraph 2.2.1

TEST CONDITIONS:

Standard Temperature and Humidity (S. T. & H.)

TEST EQUIPMENT:

As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

MEASUREMENT RESULTS


<u>NOMINAL, MHz</u>	<u>R.F. POWER OUTPUT, WATTS</u>	
144	20	100

SUPERVISED BY:

  
MORTON FLOM, P. Eng.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT  
 TEST 2: FREQUENCY STABILITY

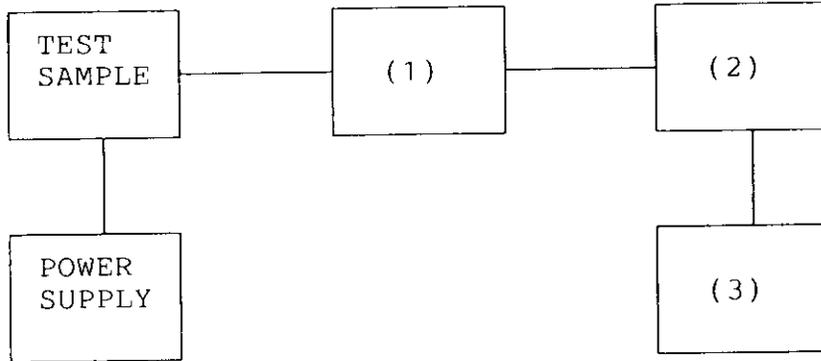

(1) COAXIAL ATTENUATOR

NARDA 766-10	---
SIERRA 661A-30	<u>x</u>
BIRD 8329 (30 dB)	---
_____	---

(2) POWER METERS

HP 435A	---
HP 436A	<u>x</u>
HP 8901A POWER MODE	<u>x</u>
_____	---

(3) FREQUENCY COUNTER

HP 5383A	---
HP 5334B	<u>x</u>
HP 8901A FREQUENCY MODE	<u>x</u>
_____	---

PAGE NO. 33

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: FCC: 47 CFR 2.991  
IC: RSS-119, Section 6.3

GUIDE: TIA/EIA-603, Paragraph 2.2.13

TEST CONDITIONS: S. T. & H.

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 144

SPECTRUM SEARCHED, GHz = 0 to  $10 \times F_C$

MAXIMUM RESPONSE, Hz = 2820

ALL OTHER EMISSIONS =  $\geq 20$  dB BELOW LIMIT


LIMIT, dBc:  $-(43 + 10 \text{ LOG } P_0)$  = -56 (20 Watts)  
-63 (100 Watts)

SUPERVISED BY:

*M. Thom P. Eng.*  
MORTON FLOM, P. Eng.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

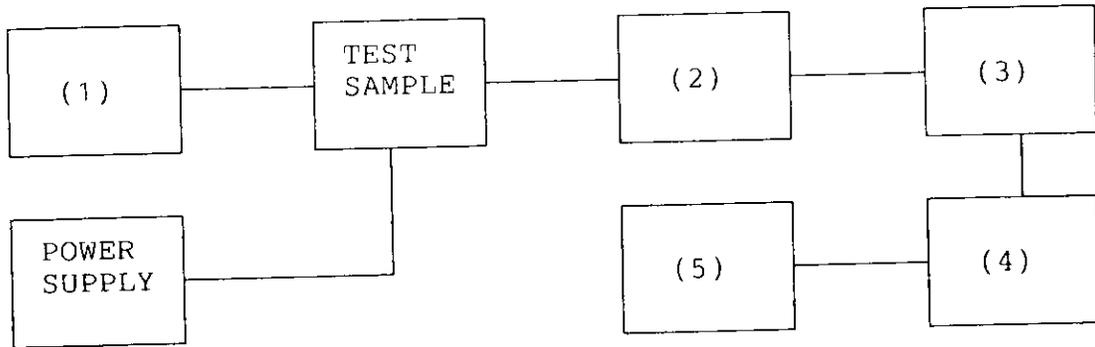

- (1) AUDIO OSCILLATOR/GENERATOR
  - HP 204D ---
  - HP 8903A ---
  - HP 3312A x
  - x
  
- (2) COAXIAL ATTENUATOR
  - NARDA 766-10 ---
  - SIERRA 661A-30 x
  - BIRD 8329 (30 dB) x
  
- (3) FILTERS; NOTCH, HP, LP, BP
  - CIRQTEL FHT ---
  - EAGLE TNF-1 x
  - PHELPS DODGE PD-495-8 ---
  
- (4) SPECTRUM ANALYZER
  - HP 8566B x
  - HP 8563E ---
  
- (5) SCOPE
  - HP 1741A ---
  - HP 181T ---
  - TEK 935 ---
  - HP 54502A ---

PAGE NO.  
G87G005

35.1.

CASTEL0007

TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED) (AMPS)  
POWER: LOW

---

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	LEVEL, $\mu$ W
144.000	287.902	-31.9	-74.9	1
144.000	432.419	-32.6	-75.6	1
144.000	576.157	-31.8	-74.8	1
144.000	720.141	-31.4	-74.4	1
144.000	863.847	-31.3	-74.3	1
144.000	1007.591	-32.6	-75.6	1
144.000	1151.782	-31.9	-74.9	1
144.000	1295.711	-31.1	-74.1	1
144.000	1439.602	-31.2	-74.2	1
144.000	1584.147	-31.1	-74.1	1
144.000	1728.299	-32.0	-75.0	1
144.000	1871.736	-31.5	-74.5	1
144.000	2015.586	-30.9	-73.9	1
144.000	2160.127	-31.4	-74.4	1

---

PAGE NO.  
G87G004

35.2.

CASTELO007

TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED) (AMPS)  
POWER: HIGH

---

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	LEVEL, $\mu$ W
144.000	288.109	-33.1	-83.1	0
144.000	432.016	-31.6	-81.6	1
144.000	576.128	-32.5	-82.5	1
144.000	720.266	-32.0	-82.0	1
144.000	863.625	-32.8	-82.8	1
144.000	1007.582	-33.0	-83.0	1
144.000	1152.354	-32.4	-82.4	1
144.000	1295.988	-32.7	-82.7	1
144.000	1439.626	-32.6	-82.6	1
144.000	1583.924	-31.6	-81.6	1
144.000	1728.344	-31.2	-81.2	1
144.000	1872.205	-31.7	-81.7	1
144.000	2015.741	-30.7	-80.7	1
144.000	2160.285	-31.1	-81.1	1

PAGE NO.

36.1.

CASTEL0007

NAME OF TEST:

Field Strength of Spurious Radiation

SPECIFICATION:

FCC: 47 CFR 2.993(a)

IC: N/A

GUIDE:

TIA/EIA-603, Section 2.2.12

TEST CONDITIONS:

S. T. & H.

TEST EQUIPMENT:

AS PER ATTACHED PAGE

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. The test sample was connected to an R.F. Wattmeter and a 50 ohm dummy load, and adjusted to its rated output.  
  
In order to obtain the maximum response at each spurious frequency, the turntable was rotated. Also, the Search Antennas were raised and lowered vertically, and all cables were oriented. Excess power lead was coiled near the power supply.
4. A signal generator, connected with a non-radiating cable to a vertically polarized half-wave antenna (for each frequency involved) was substituted for the transmitter. The Search Antenna was raised and lowered to obtain maximum indicated.
5. The signal generator output was adjusted until a signal level indication equal to that from the transmitter was obtained.
6. Steps 4 and 5 were repeated, using a horizontally polarized half-wave antenna. The higher of the two observations was noted.

PAGE NO.

36.2.

CASTEL0007

NAME OF TEST:

Field Strength of Spurious Radiation

SPECIFICATION:

FCC: 47 CFR 2.993(a)  
IC: N/A

MEASUREMENT PROCEDURE (CONT.)

7. Power into the half-wave antenna was calculated from the characteristic impedance of the line, and the voltage output from the signal generator.

8. The level of each spurious radiation with reference to the transmitter power in dB, was calculated from:

$$\text{SPURIOUS LEVEL, dB} = 10 \text{ LOG} \left( \frac{\text{Calculated Spurious Power} \text{ [from para. 7]}}{\text{Tx Power (Wattmeter)}} \right)$$


9. The worst case for all channels is shown.

10. Measurement summary:

FREQUENCY OF CARRIER, MHz	= 144
SPECTRUM SEARCHED, GHz	= 0 to $10 \times F_C$
ALL OTHER EMISSIONS	= $\geq 20$ dB BELOW LIMIT
LIMIT, dBc	= -63 (100 Watts) -56 (20 Watts)

11. Measurement results:

ATTACHED FOR WORST CASE

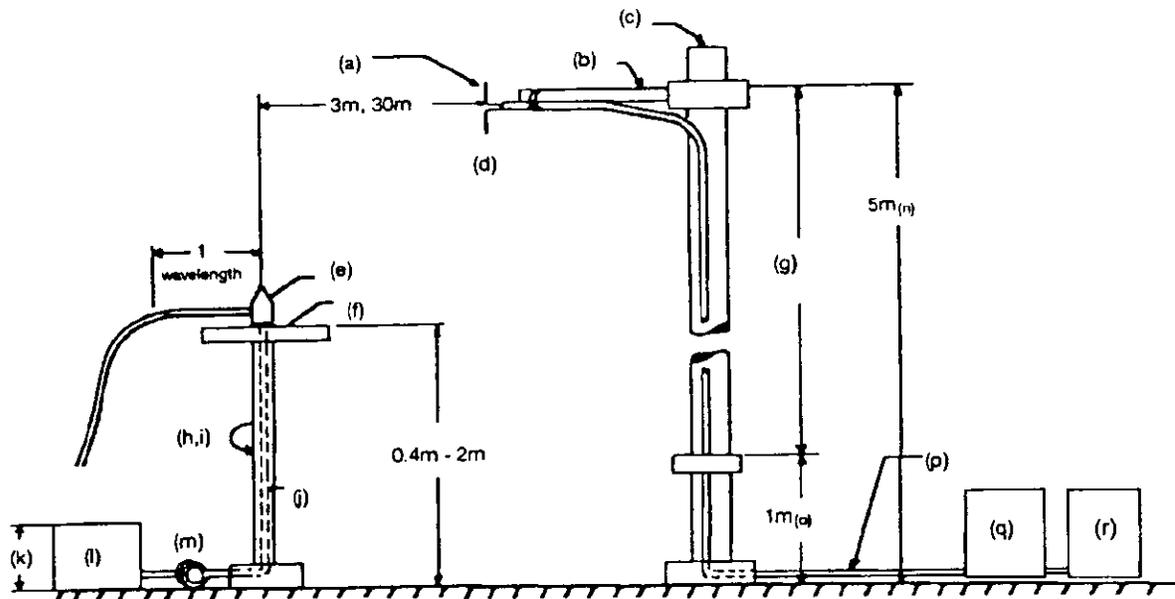RADIATED TEST SETUP

## NOTES:

- (a) Search Antenna - Rotatable on boom.
- (b) Non-metallic boom.
- (c) Non-metallic mast.
- (d) Adjustable horizontally.
- (e) Equipment Under Test.
- (f) Turntable.
- (g) Boom adjustable in height.
- (h) External control cables routed horizontally at least one wavelength.
- (i) Rotatable.
- (j) Cables routed through hollow turntable center.
- (k) 30 cm or less.
- (l) External power source.
- (m) 10 cm diameter coil of excess cable.
- (n) 25 cm (V), 1 m-7 m (V, H).
- (o) 25 cm from bottom end of 'V', 1 m normally.
- (p) Calibrated Cable at least 10 m in length.
- (q) Amplifier (optional).
- (r) Spectrum Analyzer.

TRANSMITTER SPURIOUS EMISSIONS (RADIATED FIELD STRENGTH)

ALL OTHER EMISSIONS =  $\geq$  20 dB BELOW LIMIT

EMISSION, MHz/HARMONIC	SPURIOUS LEVEL BELOW	
	Lo	Hi
2nd to 10th	<-70	<-80

SUPERVISED BY:

*Morton Flom P. Eng.*  
MORTON FLOM, P. Eng.

PAGE NO.

39.

CASTEL0007

NAME OF TEST:

Emission Masks (Occupied Bandwidth)

SPECIFICATION:

FCC: 47 CFR 2.989(c)(1)  
IC: RSS-119, Section 6.4

GUIDE:

TIA/EIA-603, Paragraph 2.2.11

TEST CONDITIONS:

S. T. & H.


TEST EQUIPMENT:

As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

POWER: LOW  
MODULATION: NONE

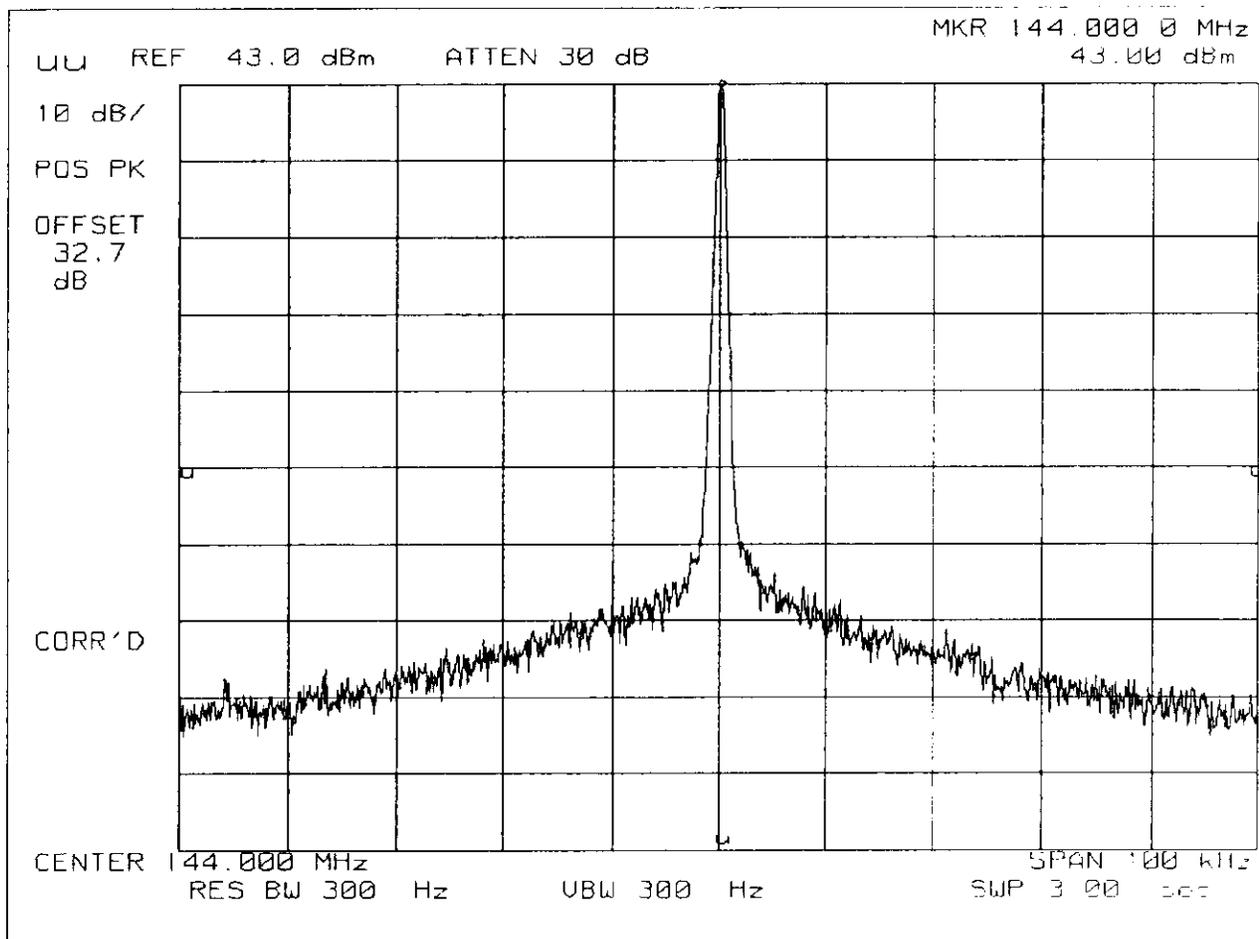

SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T839-10-0000 (POWER AMP)  
1998-JUL-16, 11:52, THR


POWER: LOW  
MODULATION: VOICE: 2500 Hz SINE WAVE  
MASK: D, VHF/UHF 12.5kHz BW

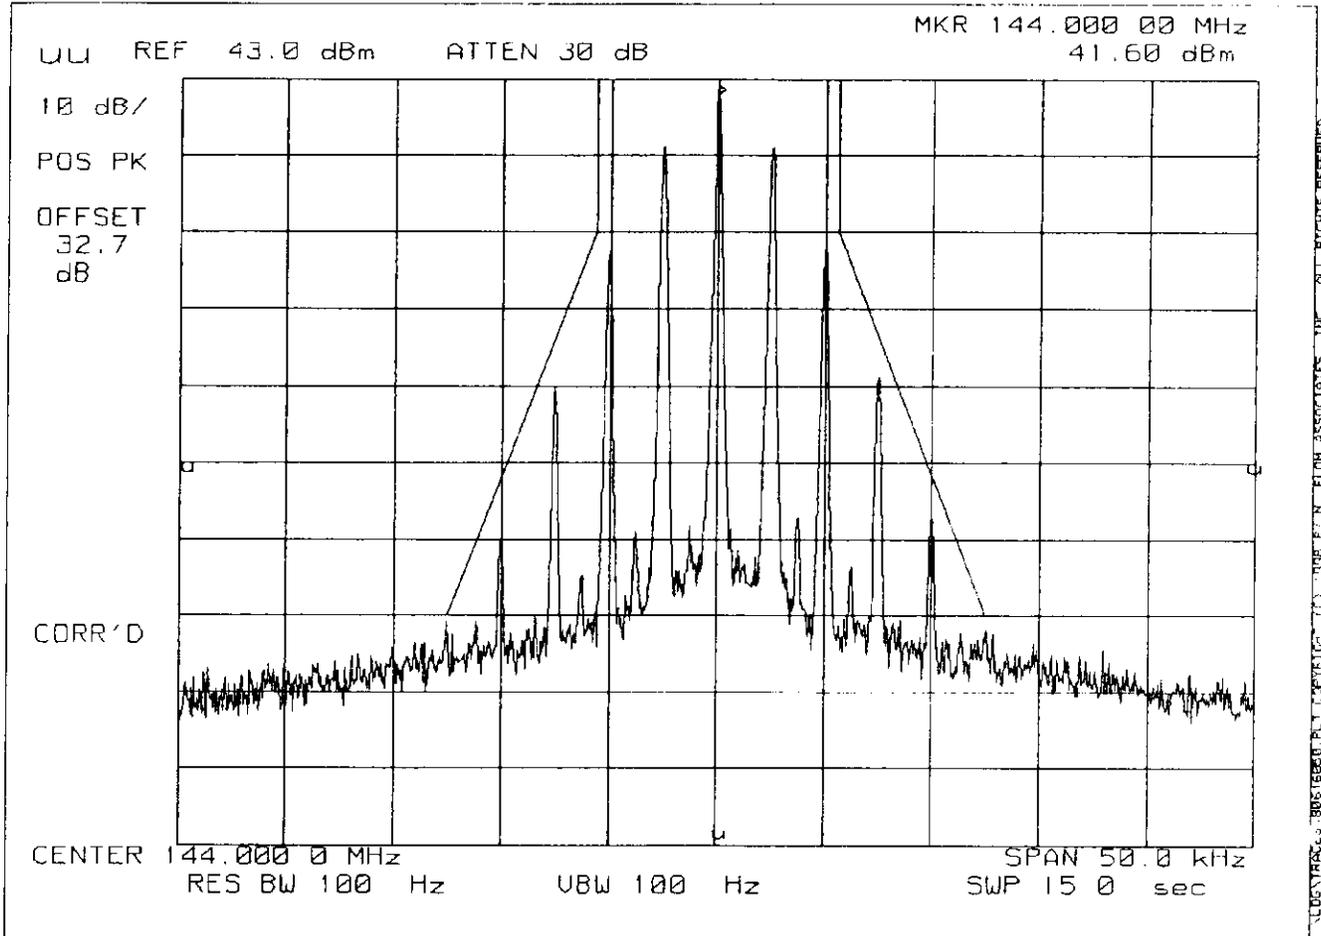

PAGE 40.3.  
SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T839-10-0000 (POWER AMP)  
1998-JUL-16, 11:40, THR


CASTEL0007

POWER: LOW  
MODULATION: VOICE: 2500 Hz SINE WAVE  
MASK: B, VHF/UHF 25kHz, w/LPF

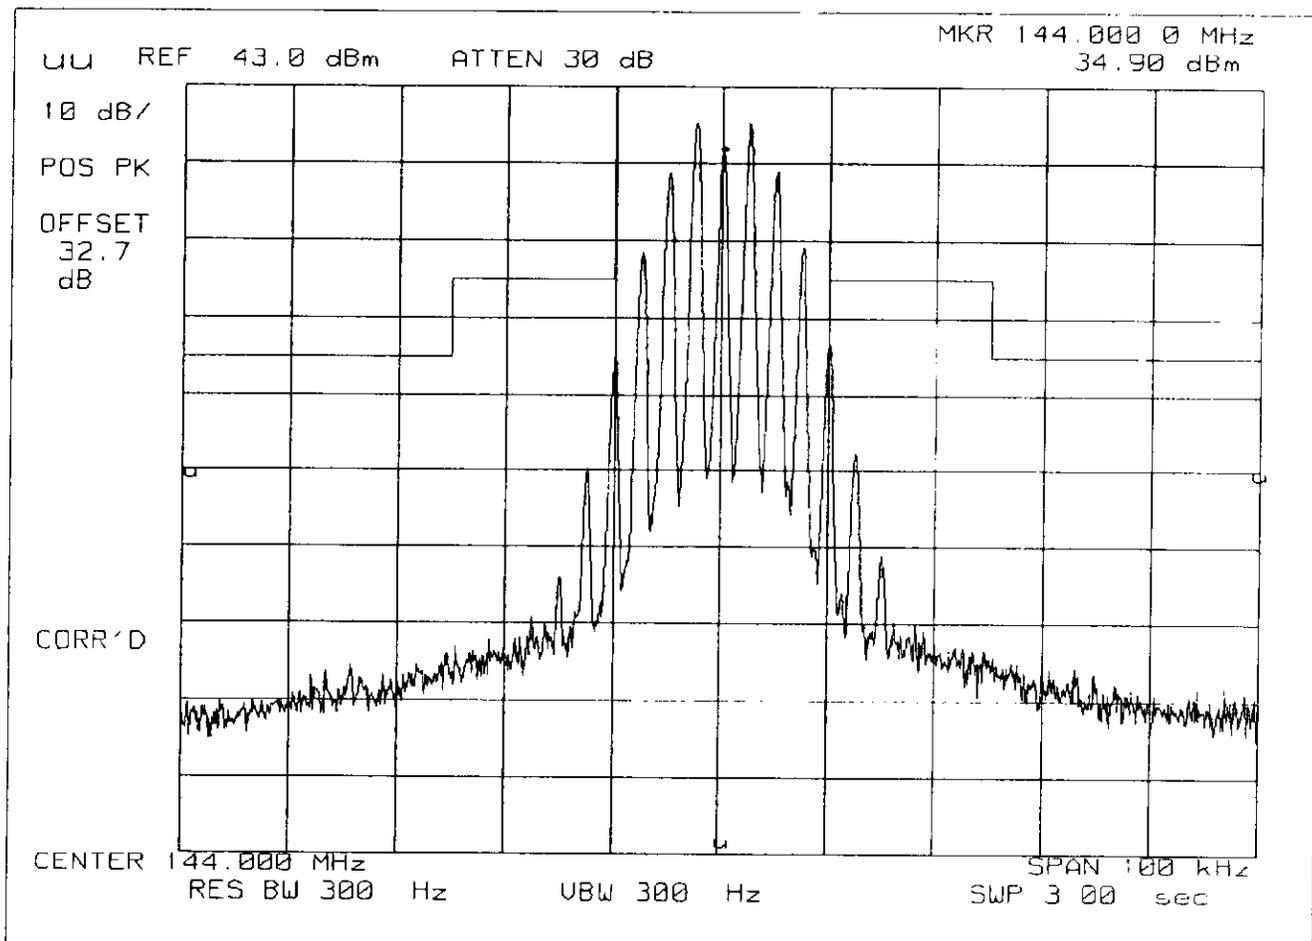


PAGE 40.4.  
SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T839-10-0000 (POWER AMP)  
1998-JUL-16, 11:34, THR

POWER: HIGH  
MODULATION: NONE

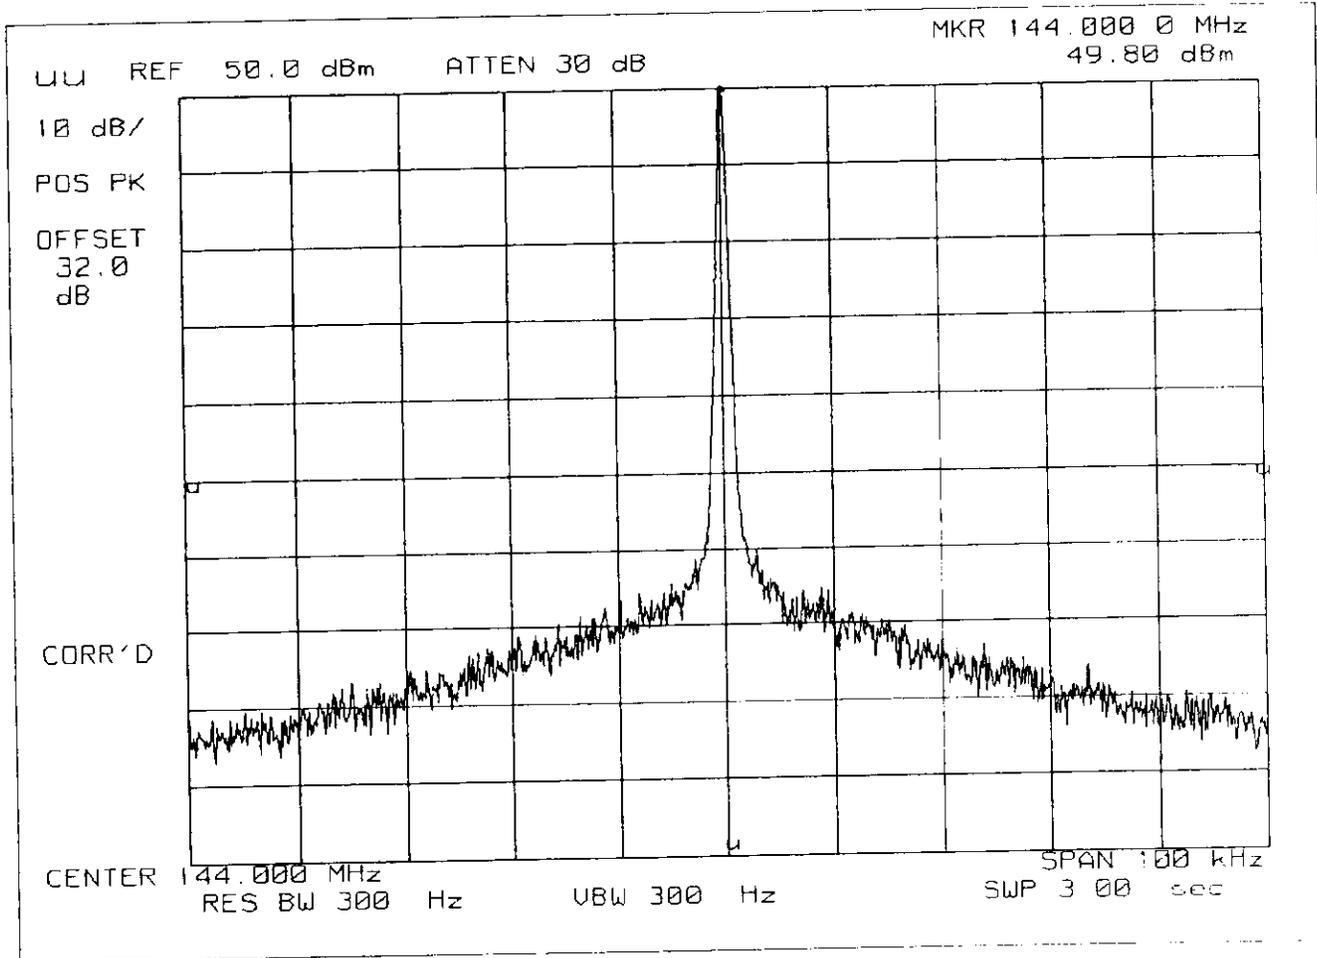

SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T839-10-0000 (POWER AMP)  
1998-JUL-16, 11:50, THR


POWER: HIGH  
MODULATION: VOICE: 2500 Hz SINE WAVE  
MASK: D, VHF/UHF 12.5kHz BW

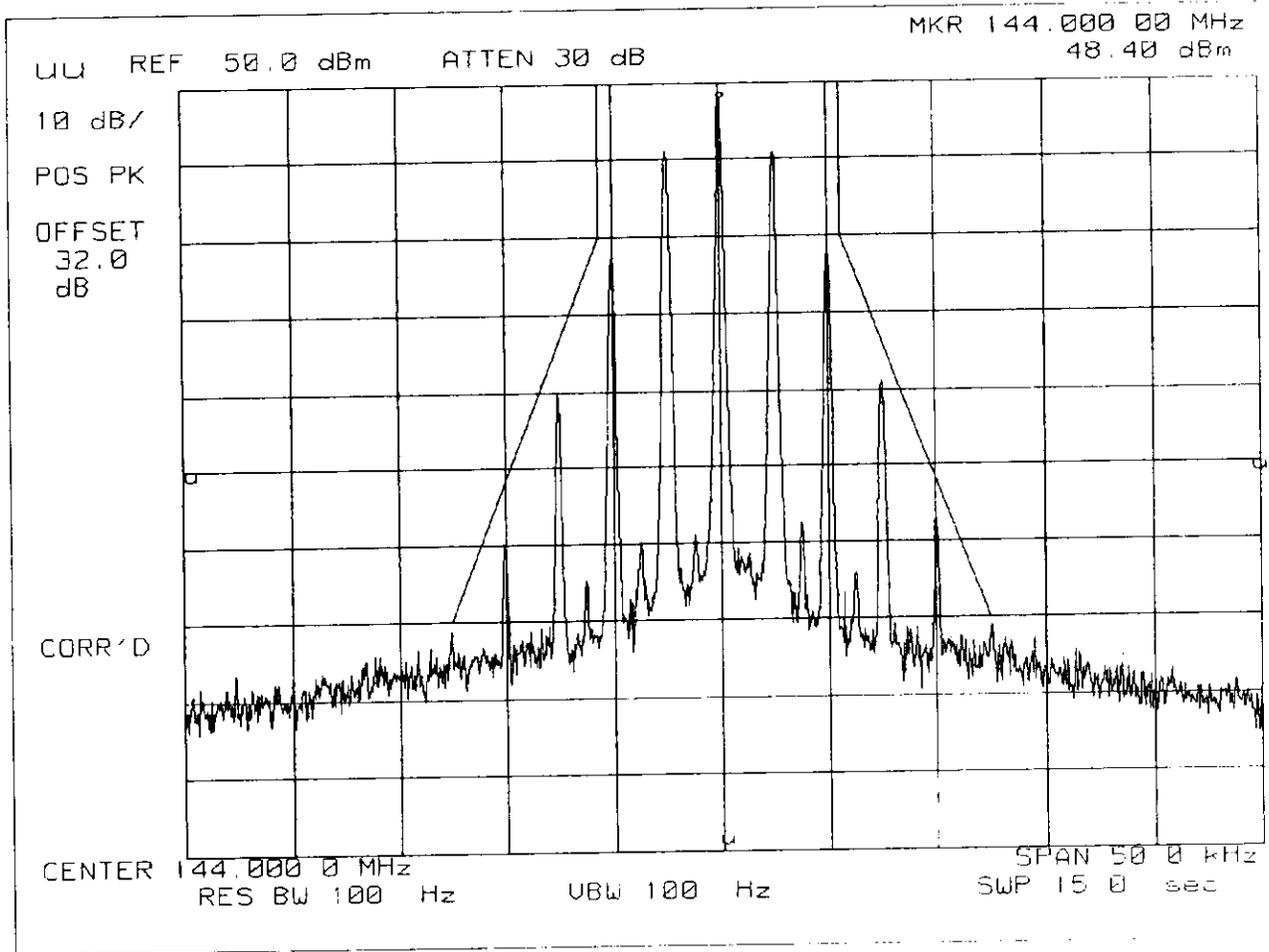

© 1998 TAIT ELECTRONICS, INC. ALL RIGHTS RESERVED

PAGE 40.6.  
SPECTRUM ANALYZER PRESENTATION  
TAIT ELECTRONICS, T839-10-0000 (POWER AMP)  
1998-JUL-16, 11:39, THR

POWER: HIGH  
MODULATION: VOICE: 2500 Hz SINE WAVE  
MASK: B, VHF/UHF 25kHz, w/LPF

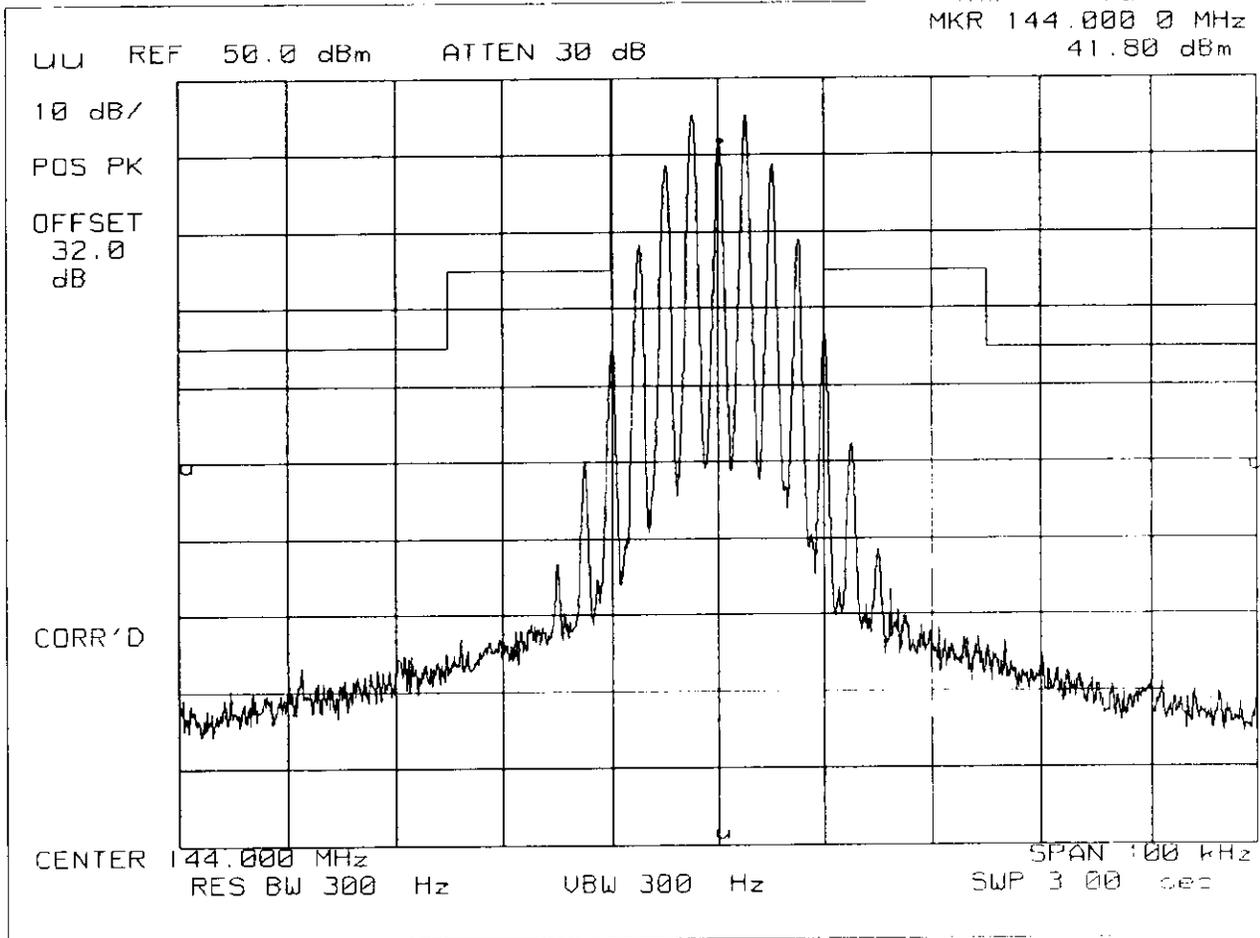

PAGE NO.

41.

CASTEL0007

NAME OF TEST:

Transient Frequency Behavior

SPECIFICATION:

FCC: 47 CFR 90.214  
IC: RSS-119, Section 6.5

GUIDE:

TIA/EIA-603, Paragraph 2.2.19

TEST CONDITIONS:

S. T. & H.

TEST EQUIPMENT:

As per attached page

MEASUREMENT PROCEDURE

1. The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
2. The transmitter was turned on.
3. Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
4. The transmitter was turned off.
5. An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
6. The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
7. The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
8. The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.


LEVELS MEASURED:

<u>step f</u> , dBm	= -11.4
<u>step h</u> , dBm	= -31.6
<u>step l</u> , dBm	= 18.8

SUPERVISED BY:

  
MORTON FLOM, P. Eng.

TRANSIENT FREQUENCY BEHAVIOR

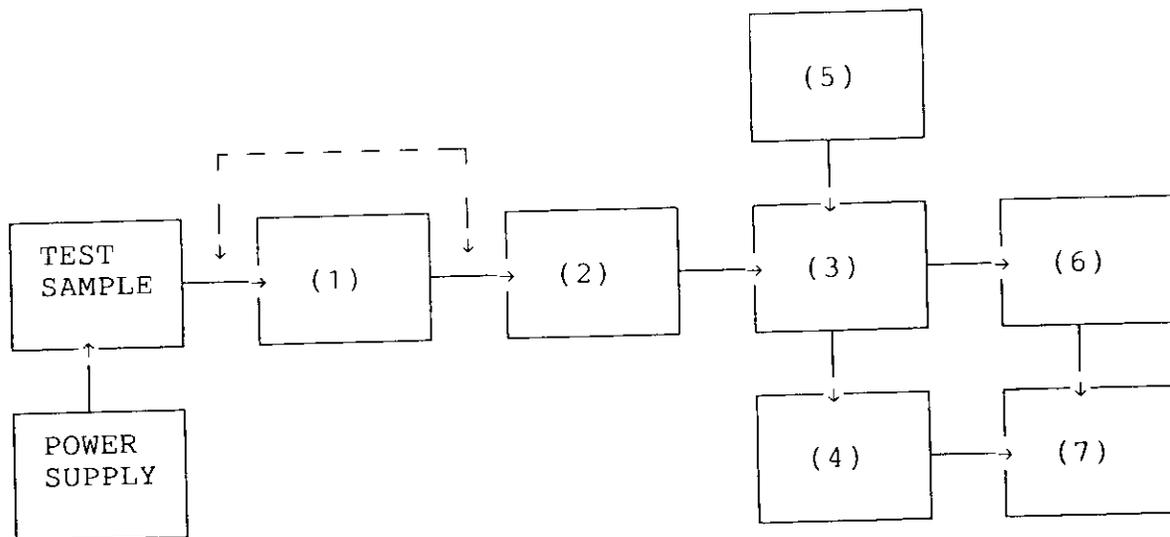


- (1) ATTENUATOR  
 (NOTE: Removed after 1st step)  
 30 dB   x
  
- (2) ATTENUATOR  
 30 dB         
 20 dB   x    
 10 dB         
 KAY VARIABLE
  
- (3) COMBINER  
 4 x 25 Ω COMBINER   x
  
- (4) CRYSTAL DETECTOR  
 HP 8470B   x
  
- (5) RF SIGNAL GENERATOR  
 HP 8656A         
 HP 8920A   x
  
- (6) MODULATION ANALYZER  
 HP 8901A   x
  
- (7) SCOPE  
 HP 54502A   x

PAGE 43.1.  
 OSCILLOSCOPE PRESENTATION  
 TAIT ELECTRONICS, T839-10-0000 (POWER AMP)  
 1998-JUL-16, 10:17, THR

CASTEL0007


MODULATION: Ref Gen=12.5 kHz Deviation  
 REMARK: CARRIER ON TIME

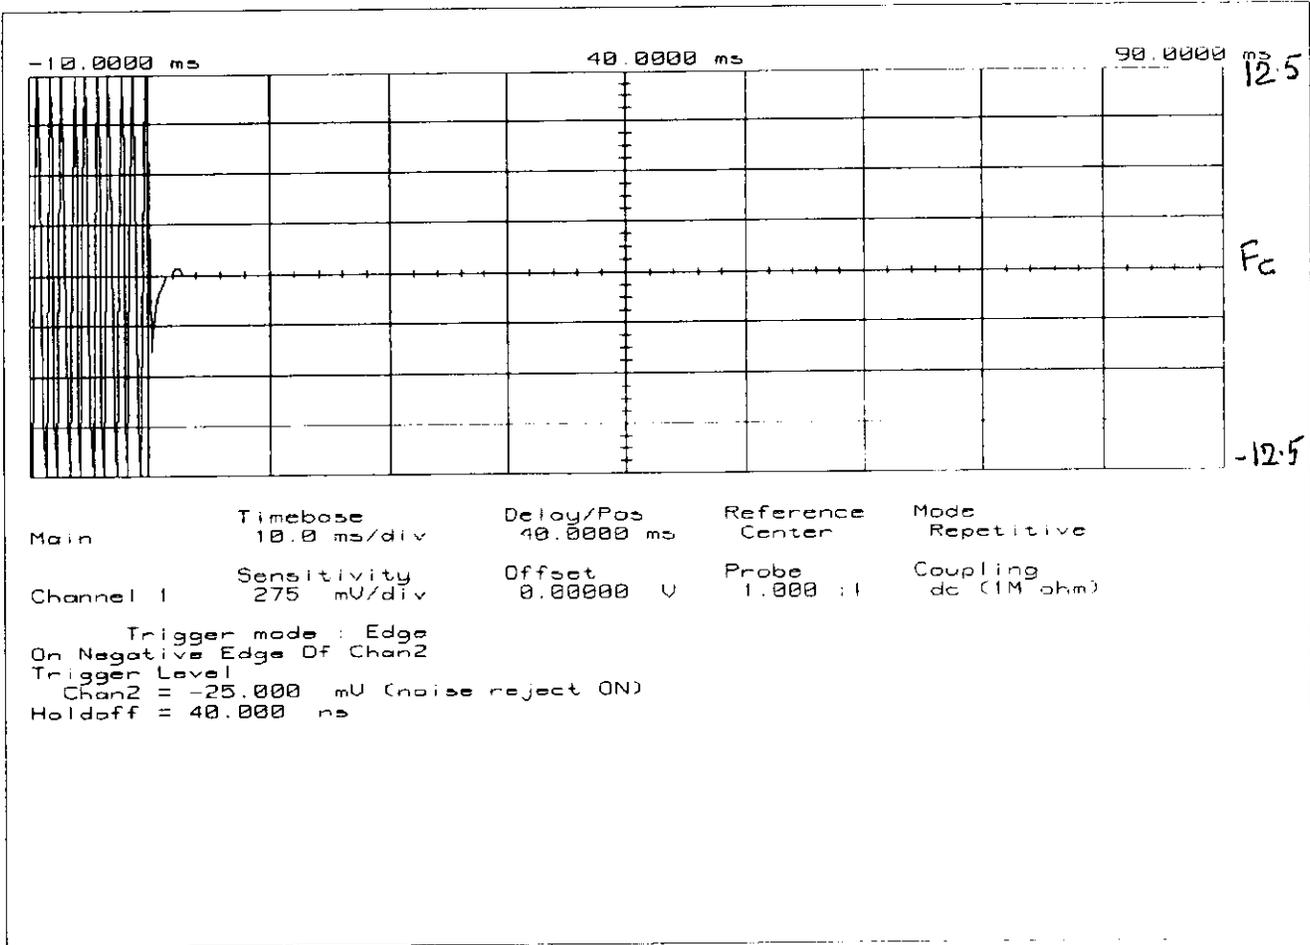

C:\COSYTRAC\80818043.PLT COPYRIGHT © 1996 BY N FLOR ASSOCIATES, INC. ALL RIGHTS RESERVED

OSCILLOSCOPE PRESENTATION  
TAIT ELECTRONICS, T839-10-0000 (POWER AMP)  
1998-JUL-16, 10:18, THR

MODULATION: Ref Gen=12.5 kHz Deviation  
REMARK: CARRIER OFF TIME

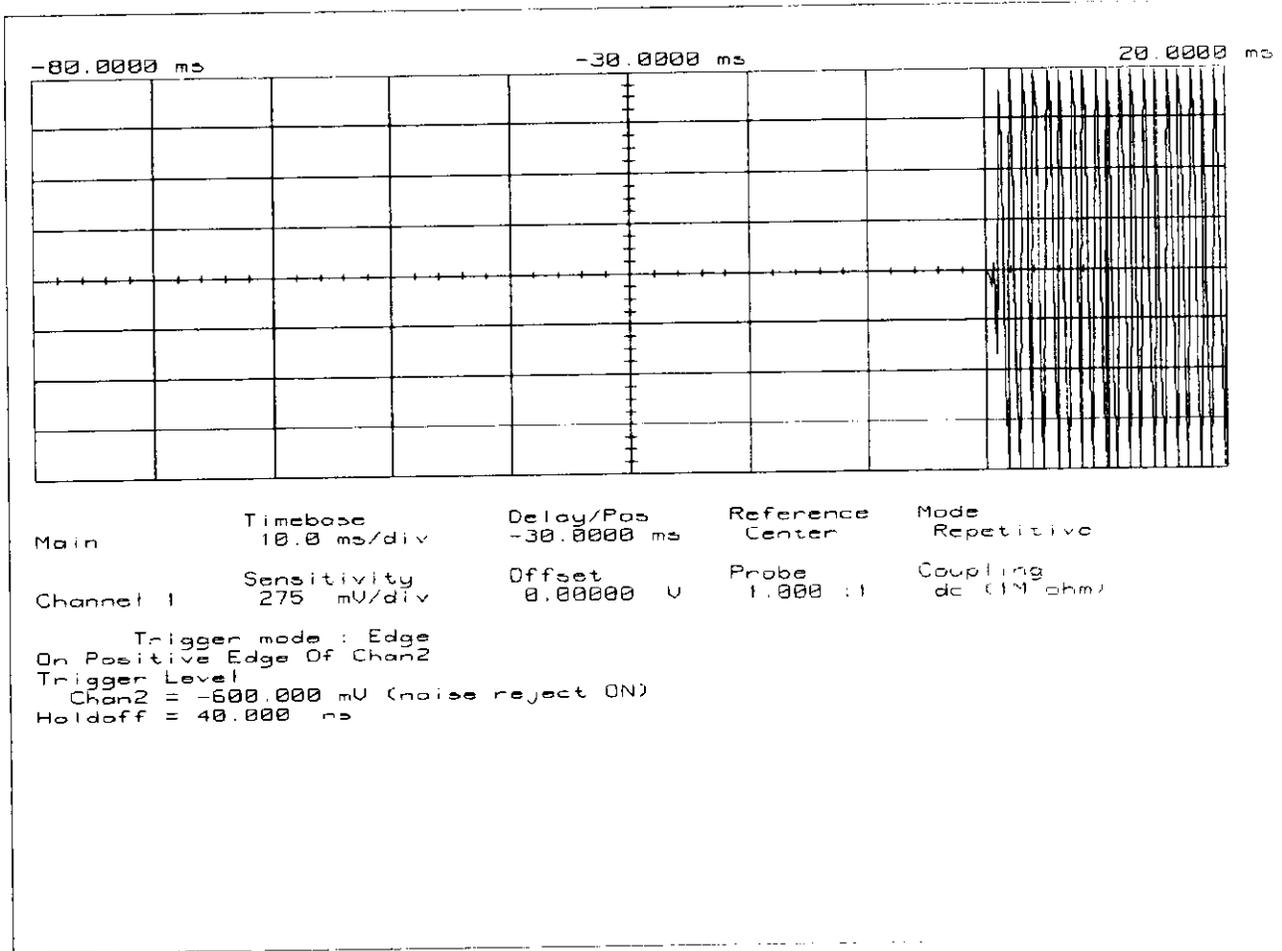


OSCILLOSCOPE PRESENTATION

TAIT ELECTRONICS, T839-10-0000 (POWER AMP)

1998-JUL-16, 10:14, THR

MODULATION: Ref Gen=25 kHz Deviation

REMARK: CARRIER ON TIME

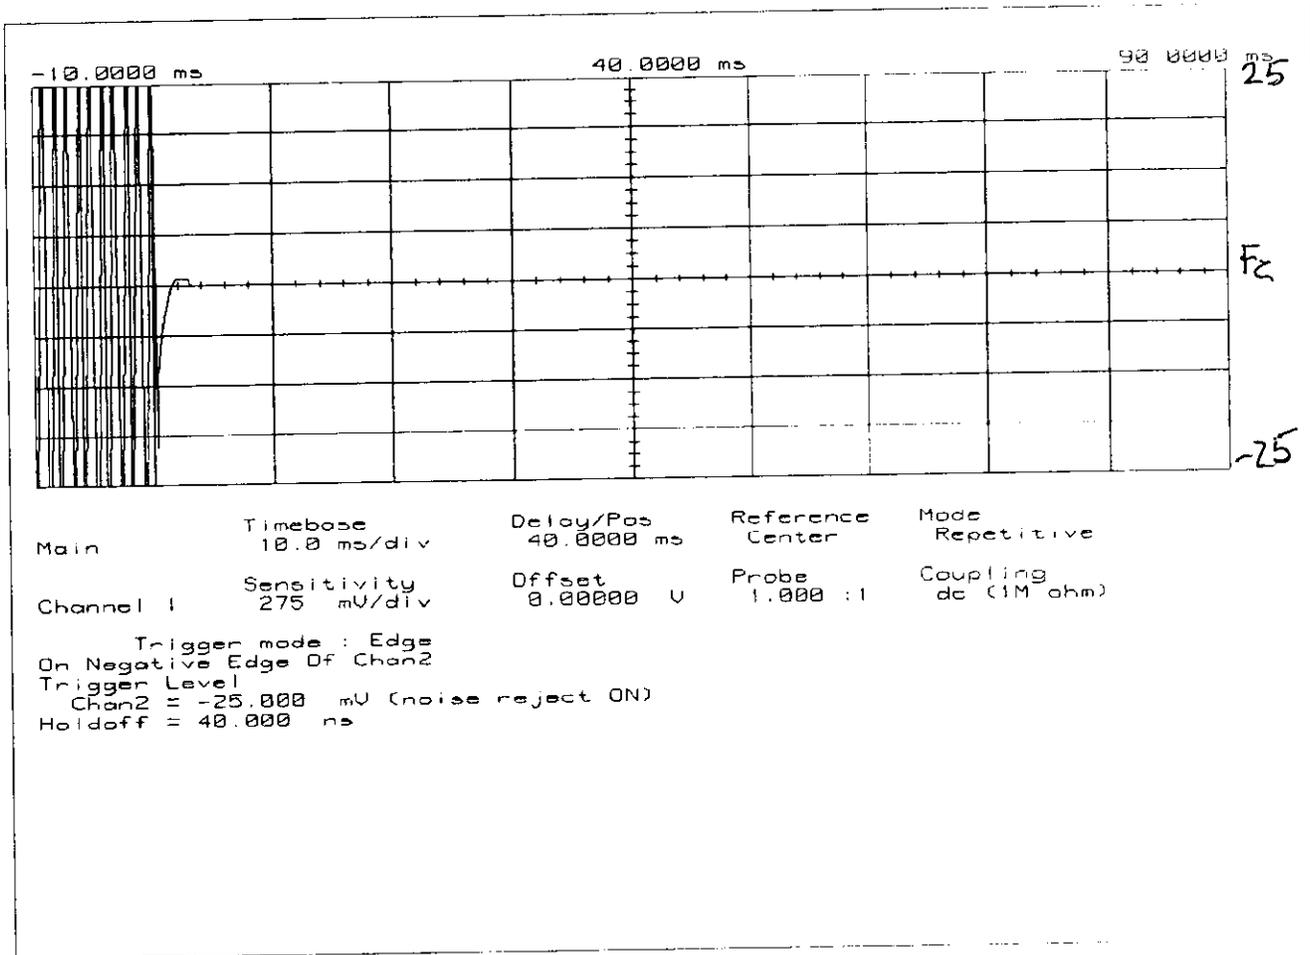


OSCILLOSCOPE PRESENTATION

TAIT ELECTRONICS, T839-10-0000 (POWER AMP)

1998-JUL-16, 10:15, THR

MODULATION: Ref Gen=25 kHz Deviation

REMARK: CARRIER OFF TIME

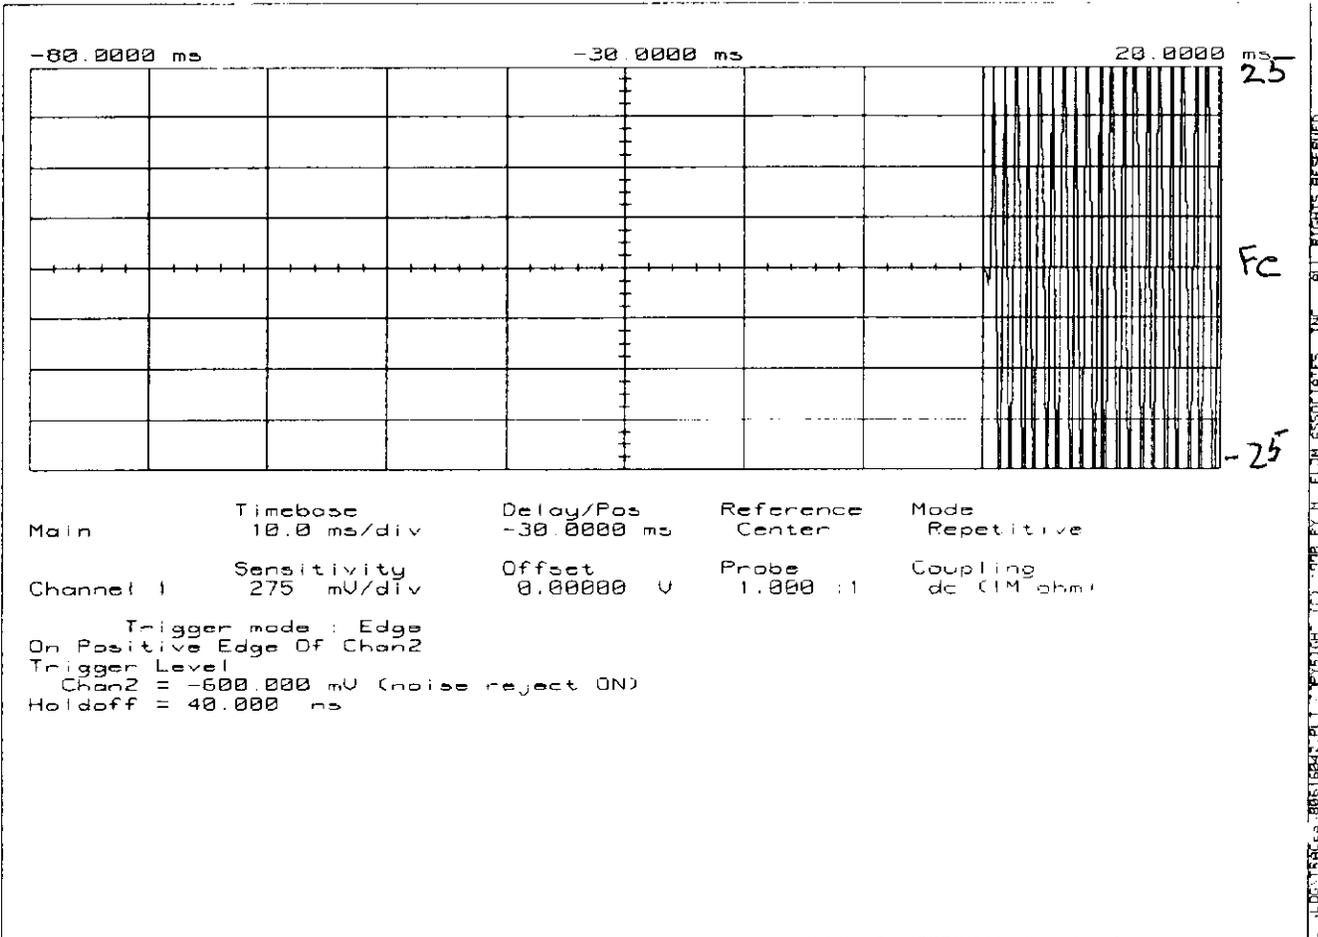

PAGE NO. 44.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

SPECIFICATION: FCC: 47 CFR 2.987(a)  
IC: RSS-119, Section 6.6

GUIDE: TIA/EIA-603, Paragraph 2.2.15

TEST CONDITIONS: S. T. & H.


TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. MODULATION CAPABILITY/DISTORTION
- TEST B. AUDIO FREQUENCY RESPONSE
- TEST C. HUM AND NOISE LEVEL
- TEST D. RESPONSE OF LOW PASS FILTER
- TEST E. MODULATION LIMITING

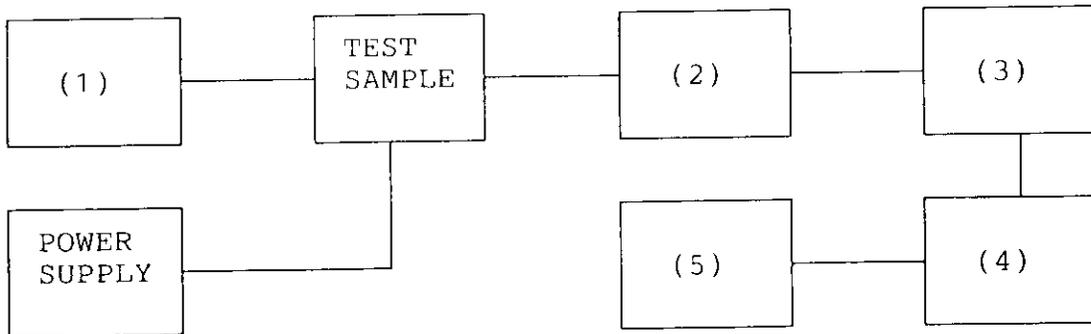

(1) AUDIO OSCILLATOR/GENERATOR

HP 204D	---
HP 8903A	---
HP 3312A	<u>x</u>
_____	<u>x</u>

(2) COAXIAL ATTENUATOR

NARDA 766-10	---
SIERRA 661A-30	<u>x</u>
BIRD 8329 (30 dB)	---
_____	---

(3) MODULATION ANALYZER

HP 8901A	<u>x</u>
_____	---

(4) AUDIO ANALYZER

HP 8903A	<u>x</u>
_____	---

(5) SCOPE

HP 1741A	---
HP 181T	---
TEK 935	---
_____	---

PAGE NO.

46.

CASTEL0007

NAME OF TEST:

Audio Low Pass Filter (Voice Input)

NOT APPLICABLE

PAGE NO. 47.

NAME OF TEST: Audio Frequency Response

SPECIFICATION: FCC: 47 CFR 2.987(a)  
IC: N/A

GUIDE: TIA/EIA-603, Section 2.2.6

TEST CONDITIONS: S. T. & H.

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

48.

CASTEL0007

NAME OF TEST:

Audio Frequency Response

NOT APPLICABLE

PAGE NO.

49.

CASTEL0007

NAME OF TEST:

Modulation Limiting

SPECIFICATION:

IC: RSS-119, Section 6.6  
FCC: 47 CFR 2.987(b)

GUIDE:

TIA/EIA-603, Paragraph 2.2.3

TEST CONDITIONS:

S. T. & H.

TEST EQUIPMENT:

As per attached page

MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation ( $\pm 1.5$  kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

50.

CASTEL0007

NAME OF TEST:

Modulation Limiting

NOT APPLICABLE

PAGE NO.

51.

CASTEL0007

NAME OF TEST:

Frequency Stability (Temperature Variation)

SPECIFICATION:

FCC: 47 CFR 2.995(a)(1)  
IC: RSS-119, Section 7.0

GUIDE:

TIA/EIA-602, Section 2.2.2

TEST CONDITIONS:

As indicated

TEST EQUIPMENT:


As per attached page

#### MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to  $-30^{\circ}\text{C}$  and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

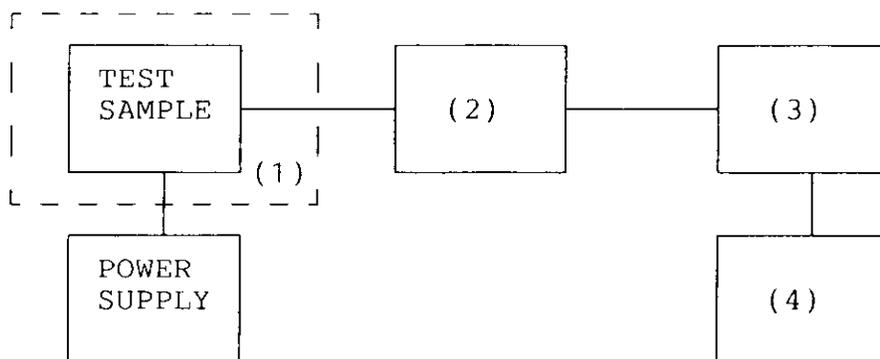

(1) TEMPERATURE, HUMIDITY, VIBRATION

TENNEY TEMPERATURE CHAMBER	<u>x</u>
WEBER HUMIDITY CHAMBER	---
L.A.B. RVH 18-100	---

(2) COAXIAL ATTENUATOR

NARDA 766-10	---
SIERRA 661A-30	<u>x</u>
BIRD 8329 (30 dB)	<u>x</u>

(3) R.F. POWER

HP 435A POWER METER	---
HP 436A POWER METER	<u>x</u>
HP 8901A POWER METER	<u>x</u>

(4) FREQUENCY COUNTER

HP 5383A	---
HP 5334B	<u>x</u>
HP 8901A	<u>x</u>

PAGE NO.

53.

CASTEL0007

NAME OF TEST:

Frequency Stability (Temperature Variation)

NOT APPLICABLE

PAGE NO. 54. CASTEL0007

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: FCC: 47 CFR 2.995 (b)(1)  
IC: RSS-119, Section 7.0

GUIDE: TIA/EIA-602, Section 2.2.2

TEST CONDITIONS: As indicated

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

MEASUREMENT RESULTS

LIMIT, ppm = 2.5  
LIMIT, Hz = 360

STV, %	Vdc	<u>CHANGE IN FREQUENCY, Hz</u>	
85	102	144.000000	0
100	120	144.000000	0
115	138	143.999990	-10

SUPERVISED BY:

*M. J. F. Eng.*  
MORTON FLOM, P. Eng.

PAGE NO.

55.

CASTEL0007

NAME OF TEST:

Necessary Bandwidth and Emission Bandwidth

PARAGRAPH:

47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3  
MAXIMUM DEVIATION (D), kHz = 5  
CONSTANT FACTOR (K) = 1  
NECESSARY BANDWIDTH ( $B_N$ ), kHz =  $(2 \times M) + (2 \times D \times K)$   
= 16.0

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3  
MAXIMUM DEVIATION (D), kHz = 2.5  
CONSTANT FACTOR (K) = 1  
NECESSARY BANDWIDTH ( $B_N$ ), kHz =  $(2 \times M) + (2 \times D \times K)$   
= 11.0

SUPERVISED BY:

  
MORTON FLOM, P. Eng.

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

CASTEL0007

THIS IS TO CERTIFY:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

  
MORTON FLOM, P. Eng.

## STATEMENT OF QUALIFICATIONS

### EDUCATION:

1. B. ENG. in ENGINEERING PHYSICS, 1949, McGill University, Montreal, Canada.
2. Post Graduate Studies, McGill University & Sir George Williams University, Montreal.

### PROFESSIONAL AFFILIATIONS:

1. ARIZONA SOCIETY OF PROFESSIONAL ENGINEERS (NSPE), #026 031 821.
2. ORDER OF ENGINEERS (QUEBEC) 1949. #4534.
3. ASSOCIATION OF PROFESSIONAL ENGINEERS, GEOPHYSICISTS & GEOLOGISTS OF ALBERTA #5916.
4. REGISTERED ENGINEERING CONSULTANT - GOVERNMENT OF CANADA, DEPARTMENT OF COMMUNICATIONS. Radio Equipment Approvals.
5. IEEE, Lifetime Member No. 0417204 (member since 1947).

### EXPERIENCE:

1. Research/Development/Senior Project Engineer, R.C.A. LIMITED (4 years).
2. Owner/Chief Engineer of Electronics. Design/Manufacturing & Cable TV Companies (10 years).
3. CONSULTING ENGINEER (over 25 years).

  
MORTON FLOM, P. Eng.

## TEST INSTRUMENTATION LIST

*All equipment calibrated  
within last 90 days*

### ADAPTER

HP X281 (Coaxial waveguide); HP S281; HP 85659 (Quasi peak)

### AMPLIFIER

Pre-amp. HP 10885A (2-1300 MHz); HP 8447D, HP 8447E, HP 8449A

### ANTENNA See end

### ATTENUATOR

Kay 432D; Power, Sierra 661A-30; Narda 76610; Narda 4779-3, -6, -10 dB

### AUDIO OSCILLATOR

HP 204D; AIEC DTC-1; Motorola S-1333B; HP 3312A; HP 8903A

### BATTERY

Sears Diehard, Stock #4341

### CAMERA

Oscilloscope, Tektronix C5A; Polaroid Impulse AF; Kodak DC-50

### CAPACITOR

Feed-Thru, 10  $\mu$ F, Solar 6512-106R; Solar 7525-1

### CLOSE FIELD PROBE

HP 11940A, 11941A, HP 11945A

### COMPUTER

HP 332; HP Vectra 486/25VL; Various PC Compatibles

### CONVERTOR, Down

HP 117 10B

### COUPLER

Narda 1080, Waveguide; HP S750E (Cross guide); Waveline 274/40; Solar 7415-3; Solar 7835-891 & -896

### CURRENT PROBE

Solar 6741-1

### DETECTOR

HP 8470B

### DIGITAL MULTIMETER

HP 3476A w/H.F. Probe; Fluke 8030A-01; HP 3478A

### DISTORTION ANALYZER

HP 334A; HP 8903A

### ELECTRONIC COUNTER

HP 5383A; HP 5334B

### FILTER

Cirquel FHT/7-50-57/50-1A/1B (HP); Jerrold TLB-1; THB-1, Piezo 5064; Eagle TNF-I Series, Krohn-Hite 3202; Phelps-Dodge #PD-495-8; Newton #PD6000 Line Protector; 870-890 MHz (Lab Design); 900 MHz (Lab Design); Solar High-Pass s/n 882029

### FREQ. DEV. METER

HP 8901A

### FREQ. DOUBLER

HP 11721A

### FREQUENCY METER

HP 537A; HP 536A

### GENERATOR

Solar 6550-1 (power sweep); HP 8640B, GAW 1012, HP 8656A (signal); Solar 8282-1 (spike)

### HUMIDITY CHAMBER

Ember Co FW30; Bowser 0

### LIMITER, R.F.

HP 11867A; HP 11693A; HP 10509A

### LISN

Singer 91221-1; Ailtech 94641-1 (50 $\mu$ H)

### LOAD, POWER

Telewave TLW-25; Bird 8329

### MILLIAMETER

HP 428B

### MIXER

HP 10514A; Mini-Circuits TAK-1H

### OPEN FIELD SITE

As filed with FCC & IC and kept up-dated.

### TURNTABLES:

Up to 2000# capacity

### GROUND SCREEN:

Complies with docket 80-284

### ANTENNA MAST:

Complies as above

### OSCILLOSCOPE

HP 1741A; HP 181T; Tektronix 1935; HP 54502A

### PHANTOM

M.F.A. Labs Left and Right human head

### PLOTTER

HP 7470; HP7475A

### POWER METER

AF GR 1840A; HP 435A with 8481A & 8482H Power Sensors; HP 436A; HP 8901A

### POWER SUPPLY

HP 6286A; Heathkit 1P 2711; 1P 5220; Honda EM400 (portable gas gen.); HP 6012

### PRINTER

Brother HL-8; Brother HL-10V; HP DeskJet 640C

### R. F. PRESELECTOR

HP 85685A

### RADIATION METER

Narda 8717 w/8010 Amp, 8021B and 8760 probes

### RESISTOR, PRECISION

Solar 7144-1.0, 7144-10.0; Solar 8525-1

### SCALE

Weigh-Tronix 3632T-50

### SCANNER

HP 9190A Scanjet

### SCREEN ROOM

Lindgren 22-2/2-0

### SIGNAL LEVEL METER

Jerrold 704B

### SIGNAL SAMPLER

R. F. Bird 4273-030, 4275-030

### SINAD/VOLTMETER

Helper Sinadder

### SPECTRUM ANALYZER

HP 8558B, 8557; HP 8563E; HP 853A; HP 8566B/8568B

### TEMPERATURE CHAMBER

Tenney, Jr

### TEMPERATURE PROBE

Fluke 80T-150C

### TERMINATION

Narda 320B Waveguide. Waveline #281

### TEST SET

Semi-Automatic: HP 8953A; HP 8954A Interface; Computer / Controller; P.S. Programmer; HP 59501A; RF Communications: HP 8920A

### TRANSFORMERS

Audio Isolation: Solar 6220-1A; Impedance: HP 11694A; Isolation: Solar 7032-1; Matching: Solar 7033-1

### TRANSMISSION & NOISE

#### MEASURING SET

HP 3555B

### VIBRATION CHAMBER

Unholtz-Dickie T 500; Unholtz-Dickie T 4000

### VOLTMETER

HP 410C; HP 3478A

### WATTMETER

Bird 43, Sierra 174A-2

### ANTENNAS

#### 30 - 50 Hz

Emco 7603 M-Field; Emco 7604 M-Field

#### 20 - 200 MHz

Aprel Biconical Model AAB20200

#### 20 - 300 MHz

Emco Biconical H-Field

#### 25 - 1000 MHz

Singer DM-105A; EMCO 3121C

#### 200 - 1000 MHz

Aprel Log Periodic, Model AALP 2001

#### 10 kHz - 30 MHz

Emco 3107B, E-Field; Emco 3101B/1, Rod E-Field

#### 10 kHz - 32 MHz

Singer 94593-1 (Loop)

#### 150 kHz - 32 MHz

Singer 92197-1 (41")

#### 150 kHz - 32 MHz

Singer 93049-1 (9')

#### 1 - 10 GHz

Singer 90794-A Discone

#### 1 - 18 GHz

Horn: Aprel Model AAH-118

#### 18 - 40 GHz

Emco 3116, Horn

#### 40 - 60 GHz

Horn: HP 11970U, HP 11971U,

HP 11975A (Lo Drive Amplifier)

#### 50 - 75 GHz

Mixer, HP 11970V, HP 11971V

#### 75 - 110 GHz

Mixer, HP 11970W