

EMC Technologies (NZ) Ltd

Test Report No 00709.2

Report date: 16 July 2001

TEST REPORT

Tait T2040-815 Transceiver

tested for compliance with the

Code of Federal Regulations (CFR) 47

Part 22 – Public Mobile Services

and

Part 90 –Private Land Mobile Services


and

Part 15 – Radio Frequency Devices

for

Tait Electronics Ltd

This Test Report is issued with the authority of:



Andrew Cutler - General Manager

Prepared By:



Karen Miller - Office Administrator



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn,
Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New
Zealand

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

This report may not be reproduced except in full

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Table of Contents

1.	CLIENT INFORMATION	2
2.	DESCRIPTION OF TEST SAMPLE	2
3.	SUMMARY OF TEST RESULTS	3
4.	TEST SAMPLE DESCRIPTION	4
5.	TEST CONDITIONS	5
6.	ATTESTATION	6
7.	TEST RESULTS	7
8.	TEST EQUIPMENT USED	21
9.	ACCREDITATIONS	21
10.	PHOTOGRAPH (S)	22

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

1. CLIENT INFORMATION

Company Name	Tait Electronics Ltd
Address	558 Wairakei Road Burnside
City	Christchurch
Country	New Zealand
Contact	Linda Grose

2. DESCRIPTION OF TEST SAMPLE

Brand Name	Tait
Model Number	T2040-815
Product	Mobile Transceiver
Manufacturer	Tait Electronics Ltd
Country of Origin	New Zealand
Serial Number	17085689
FCC ID	CASTEL0056

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

3. SUMMARY OF TEST RESULTS

Testing was carried out in accordance with the test methods defined in 47 CFR Part 2. Listed below are the relevant Part 2 test methods and the limits defined in Part 22, Part 90 and Part 101.

<u>CLAUSE</u>	<u>TEST PERFORMED</u>	<u>RESULT</u>
2.1041	Measurement procedures	Noted
2.1046	RF power output	Noted
90.205	Power and antenna height limits	Complies
101.113	Transmitter power limitations	Complies
2.1047	Modulation Characteristics	
2.1047(a)	Low pass filter response	Complies
2.1047(b)	Modulation limiting characteristics	Complies
90.211(a)	Modulation characteristics	Complies
2.1049	Occupied bandwidth	Noted
2.202	Bandwidths	Noted
22.357	Emission types	Complies
22.359(a)	Emission masks	Complies
90.207	Types of emissions	Complies
90.209	Bandwidth limitations	Complies
90.210	Emission masks	Complies
2.1051	Spurious emissions at antenna terminals	Complies
2.1053	Field strength of spurious radiation	Complies
2.1057	Frequency spectrum to be investigated	Noted
15.109	Radiated emission limits	Complies
15.111	Antenna power conducted limits for receivers	Complies
2.1055	Frequency stability	Noted
22.355	Frequency tolerance	Complies
90.213	Frequency stability	Complies

4. TEST SAMPLE DESCRIPTION

The sample tested is a mobile transceiver with the following specifications:

Rated Transmitter Output Power

High power: 15 Watts (41.8 dBm)

Low power: 5 Watts (37.0 dBm)

Test frequency

Transmit: 813.100 MHz Receive: 860.100 MHz

Frequency Range

800.0 – 870.0 MHz

FCC Frequency Bands

Transmit: 806 – 821 MHz Receive: 851 – 866 MHz

Emission Types and Necessary Bandwidths

Frequency Modulation, analogue speech with wide band option

16k0F3E: 25.0 kHz channel spacing with 16 kHz necessary bandwidth

Power Supply

External DC power supply.

Typically a lead acid battery with a nominal voltage of 13.8 Vdc.

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

5. TEST CONDITIONS

Standard Temperature and Humidity

Temperature: +25°C ± 4° maintained.
Relative Humidity: 60% ± 10% observed.

Standard Test Power Source

External 13.8 Vdc power supply.

Standard Test Voltage: 13.8 Vdc

Extreme Temperature

High Temperature: + 50°C maintained.
Low Temperature: - 30 °C maintained.

Tests carried out in 10° intervals over this range

Extreme Test Voltages

High Voltage: 15.9 Vdc (115%)
Low Voltage: 11.7 Vdc (85%)

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

6. ATTESTATION

This report describes the tests and measurements performed for the purpose of determining compliance with the specification with the following conditions:


The test sample was selected by the client.

The report relates only to the sample tested.

This report does not contain corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

In addition this equipment has been tested in accordance with the requirements contained in the appropriate Commission regulations. To the best of my knowledge, these tests were performed using measurement procedures that are consistent with industry or Commission standards and demonstrate that the equipment complies with the appropriate standards. Each unit manufactured, imported, or marketed, as defined in the Commission's regulations, will conform to the sample(s) tested with the variations statistical basis. I further certify that the necessary measurements were made by EMC Technologies NZ Ltd, 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand.



Andrew Cutler
General Manager
EMC Technologies NZ Ltd

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

7. TEST RESULTS

RF power output

Measurements were carried out at the RF output terminals of the transmitter using a 30 dB power attenuator and a 50 Ω dummy load.

Measurements were carried out when the transmitter was not being modulated.

Measurements were made with the input voltage set to 13.8 Vdc.

RF power output (Watts)			
Temp.	Level	Rated	Measured
+25°C	High	15.0	14.4
+25°C	Low	5.0	4.5

Limits:

Part 22 contains no transmitter base power limits.

Part 90 contains no transmitter base power limits.

Section 90.205(i) specifies that the transmitter must meet the power and height limitations contained within section 90.635. The limitations contained in this section relate to base station transmitter and therefore do not apply to this transmitter.

Result: Complies

Measurement Uncertainty: ± 0.5 dB

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Modulation Characteristics


The following graphs are attached:

- (a) Frequency response of the audio frequency low pass filter between 100 Hz and 15 kHz.

This measurement was carried out using an audio signal generator and an audio modulation analyser.

At 1 kHz an audio signal was applied which was used as a 0 dB response reference.

The frequency of the input signal was then varied and the output response noted.

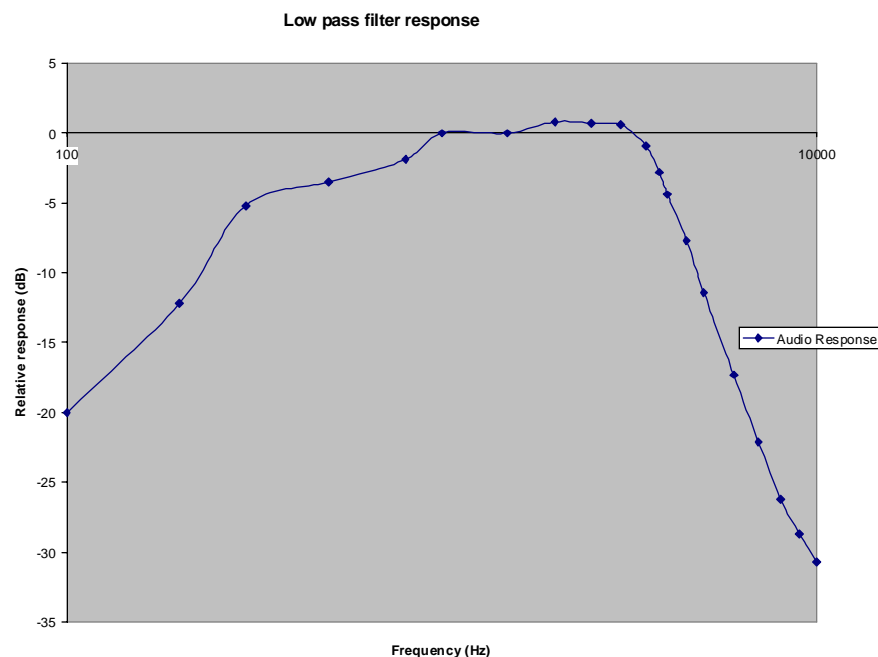

- (b) A family of curves showing the percentage of modulation versus the modulation input voltage.


These measurements were carried out with modulating frequencies from 100 Hz to 10 kHz.

At each frequency the input voltage was slowly increased with the resulting frequency deviation of the transmitter being recorded.

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

This deviation was then converted to a modulation percentage where 5 kHz deviation is 100% for 25 kHz channeling.

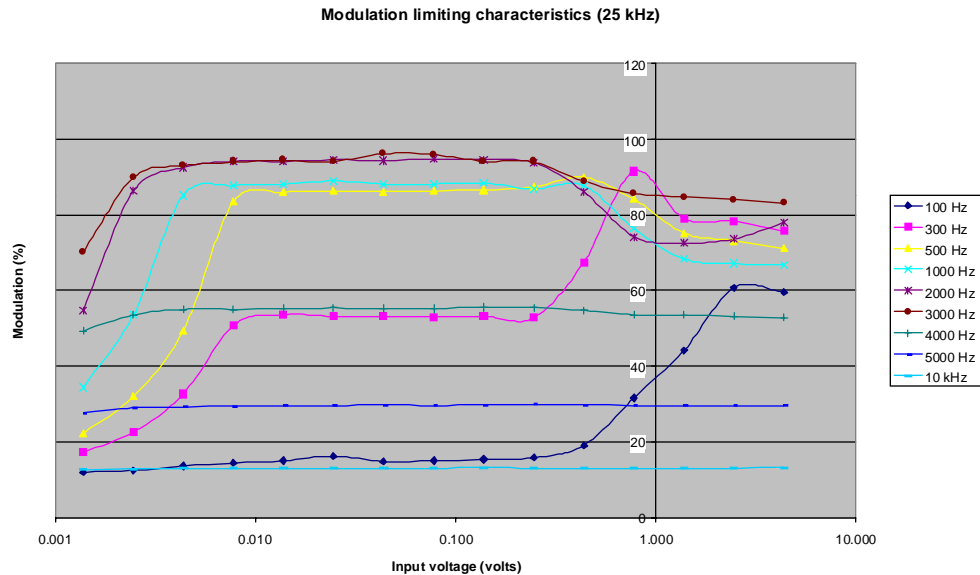

Limit

Part 22 provides no limits for these measurements.

Part 90.211 – Modulation requirements states the transmitter must meet the emission requirements of 90.210. Refer to the Occupied Bandwidth measurements in this report.

Result: Complies

Measurement Uncertainty: $\pm 1\%$.

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Occupied Bandwidth

Measurements were carried out with a 2500 Hz modulating frequency applied at a level 16 dB higher than the level required to achieve 50% modulation (2.5 kHz deviation) at the frequency of maximum response. The worst case frequency response was found to be at 2600 Hz.

Before occupied bandwidth measurements were made, the 0 dB reference point of the spectrum mask was determined by operating the transmitter with no modulation.

The spectrum mask is defined in:
Section 22.359(a) – Analog modulation
Section 90.210(b) – Mask B has been applied

Part 22 has no authorised bandwidths defined.

Using the formulas contained in Part 2.202:

$$B_n = 2 \times D + 2 \times M$$

Where D = maximum deviation: 5.0 kHz

Where M = maximum modulation frequency: 3 kHz

$$B_n = 16 \text{ kHz}$$

This is confirmed in the emission designation, 16k0F3E as declared by the client.

Section 90.209(b)(5) defines the authorised bandwidth as 20 kHz where 25 kHz channeling is used in the band 806 – 821 / 851 – 866 MHz.

Emission mask testing has been carried out with as follows:

- Part 22 where the authorised bandwidth = necessary bandwidth = 16 kHz.
- Part 90 where 20 kHz authorised bandwidths apply.

The following clauses are also covered by these tests:

Part 22.357 - Emission types:

The transmitter uses analogue speech, which complies with the appropriate emission mask.

Part 90.207 – Emission types:

Emission type F3E is used by this transmitter.


Part 90.209 – Bandwidth limitations:

Bandwidth has been calculated using the formula contained in Part 2.202 as described for the Part 22 requirements above.


EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Two plots have been provided. One plot is for high power operation and the other plot is for low power operation.
Low power (16 kHz authorised bandwidth)

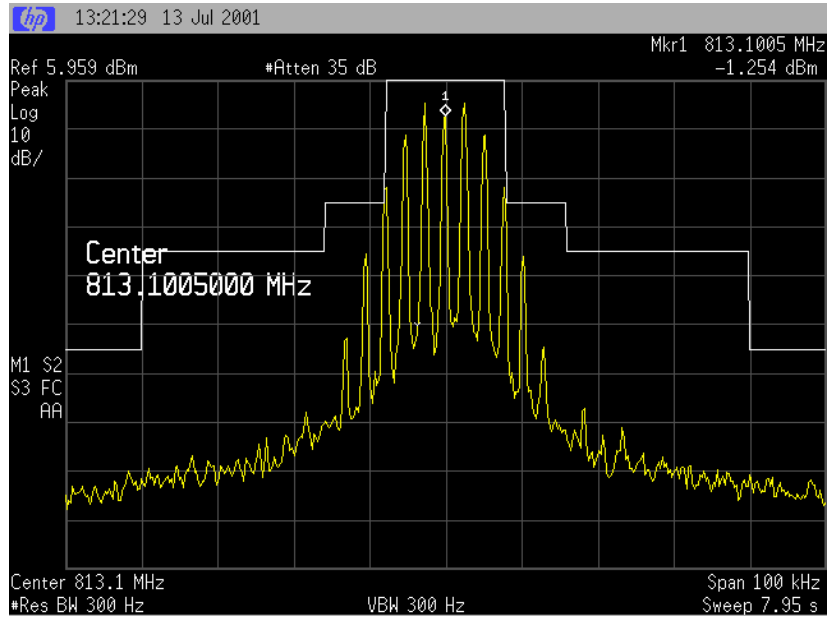


High power (16 kHz authorised bandwidth)

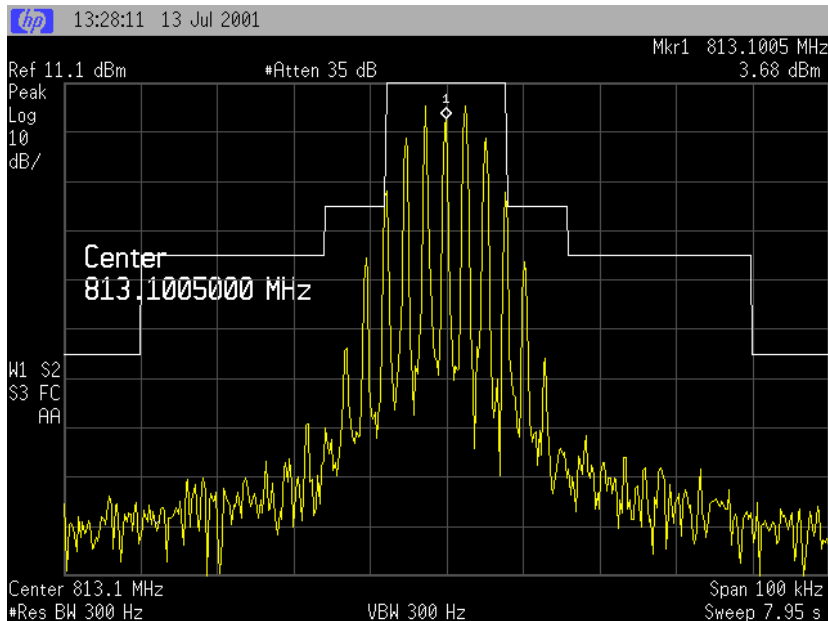


EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

High power (20 kHz authorised bandwidth)

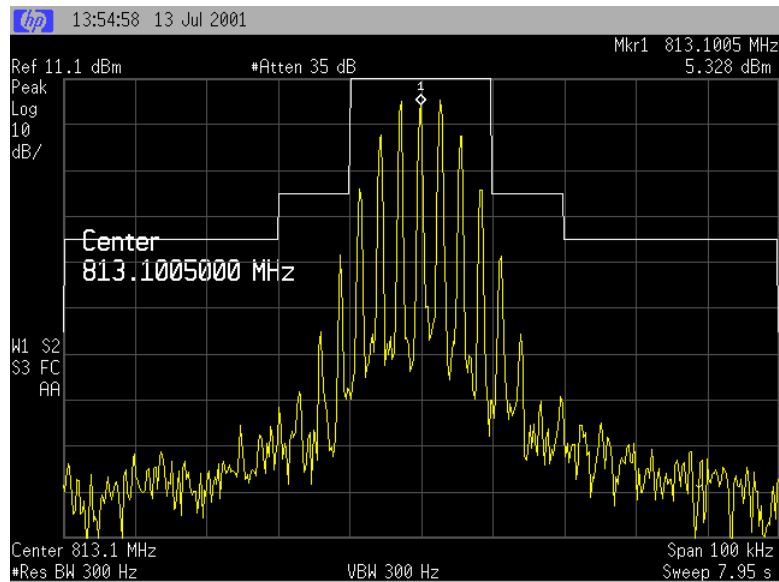

Low power (20 kHz authorised bandwidth)

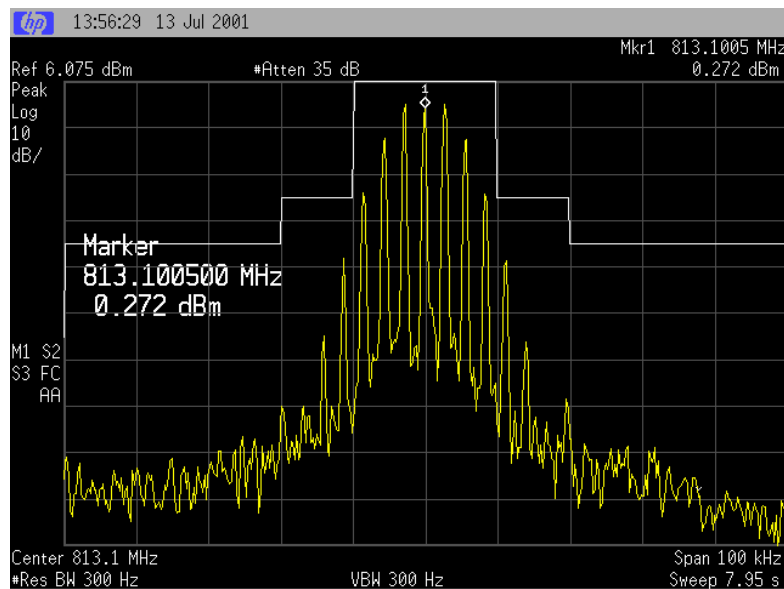

Result: Complies

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Surious emissions at antenna terminals

Frequency: 813.1 MHz

Measured Spurious Emission		
Spurious emission (MHz)	Emission level – High power (dBm)	Emission level – Low power (dBm)
802.4	-36.6	-43.3
1626.2	-33.3	-38.0
2439.3	less than -40	less than -40
3252.4	less than -40	less than -40
4065.5	less than -40	less than -40
4878.6	less than -40	less than -40
5691.7	less than -40	less than -40
6504.8	less than -40	less than -40
7317.9	less than -40	less than -40
8131.0	less than -40	less than -40

Limit

Part 22.359(a) Analogue Modulation, (3) on any frequency removed by more than 250% all emissions are to be attenuated by at least $43 + 10 \log (P)$ dB or 80 dB which ever is the lesser attenuation.

Part 90.210(b) Mask B, (3) on any frequency removed by more than 250% all emissions are to be attenuated by at least $43 + 10 \log (P)$.

Part 2.1051 states that emissions greater than 20 dB below the limit need not be specified

Part 2.1057 states that the spectrum should be investigated up to the 10th harmonic if the transmitter operates below 10 GHz.

Rated powers are 15 watts and 5 watts. $43 + 10 \log (P)$ gives 50 dB and 43 dB.

This gives a limit of -13 dBm.

No measurements less than -40 dBm have been reported except those reported above.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Field strength of spurious emissions at antenna terminals

Frequency: 813.100 MHz

Transmitter Harmonics:

Emission Frequency (MHz)	Level (dBuV/m)	Power (dBm)	Limit (dBm)	Margin (dB)	Polarity
1626.2	52.9	-42.3	-13.0	-29.3	Horizontal
2439.3	54.8	-40.4	-13.0	-27.4	Horizontal
3252.4	41.3	-53.9	-13.0	-40.9	Vertical
4065.5	45.8	-49.4	-13.0	-36.4	Vertical
4878.6	62.0	-33.2	-13.0	-20.2	Vertical
5691.7	49.5	-45.7	-13.0	-32.7	Vertical
6504.8	50.0	-45.2	-13.0	-32.2	Vertical
7317.9	-	-	-13.0	-	Vert/Hort
8131.0	-	-	-13.0	-	Vert/Hort
8944.1	-	-	-13.0	-	Vert/Hort

Other significant emissions detected:

Emission Frequency (MHz)	Level (dBuV/m)	Power (dBm)	Limit (dBm)	Margin (dB)	Polarity
40.000	42.6	-52.6	-13.0	-39.6	Horizontal
185.480	38.3	-56.9	-13.0	-43.9	Horizontal
189.513	37.8	-57.4	-13.0	-44.4	Vertical

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site which is located at Dakota Lane, Ardmore Aerodrome, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on February 11, 2000.

The transmitter tested operating on high power with a 50 Ω dummy load attached to the output while being powered using a 13.8 Vdc gell cell.

Field strength measurements have been carried out and converted to transmitted power measurements using the formula:

$$\text{Field strength (V/m)} = \sqrt{(1.64 \times 30 \times P) / D}$$

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Where:

P is the eirp transmitted power

1.64 is the gain of a dipole antenna when compared to an isotropic antenna

D is D is the distance in metres. In this case 3 metres.

Limit

Part 22.359(a) Analogue Modulation, (3) on any frequency removed by more than 250% all emissions are to be attenuated by at least $43 + 10 \log (P)$ dB.

Part 90.210(b) Mask B, (3) on any frequency removed by more than 250% all emissions are to be attenuated by at least $43 + 10 \log (P)$.

Rated power is 15 watts and 5 watts which gives a limit of -13 dBm.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 4.1 dB

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Field strength of receiver spurious emissions

Receive frequency: 813.100 MHz

IF Frequencies: 61.9 MHz, 10.7 MHz and 0.455 MHz

Tests carried out in accordance with Part 15, Section 15.109.

Receiver Local Oscillator:

Frequency (MHz)	Level Vertical (dBuV/m)	Level Horizontal (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity
798.2	41.2	46.0	46.0	0.0	Horizontal
1596.4	28.4	27.9	54.0	25.6	Vertical
2394.6	41.6	40.2	54.0	12.4	Vertical
3192.8	45.0	-	54.0	9.0	Vertical
3991.0	-	-	54.0	-	Vert/Hort
4789.2	-	-	54.0	-	Vert/Hort
5587.4	-	-	54.0	-	Vert/Hort
6385.6	-	-	54.0	-	Vert/Hort
7183.8	-	-	54.0	-	Vert/Hort
7982.0	-	-	54.0	-	Vert/Hort

Other emissions observed (transmitter in standby):

Frequency (MHz)	Level Vertical (dBuV/m)	Level Horizontal (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity
32.000	18.0		40.0	22.0	Vertical
34.000	22.8		40.0	17.2	Vertical
36.000	20.0		40.0	20.0	Vertical
40.000	25.4		40.0	14.6	Vertical
44.000	28.0		40.0	12.0	Vertical
48.000	27.0		40.0	13.0	Vertical
52.000	29.0	25.0	40.0	11.0	Vertical
54.000	23.5		40.0	16.5	Vertical
56.000	36.3		40.0	3.7	Vertical
60.000	25.6	26.7	40.0	13.3	Horizontal
60.480	29.6	30.5	40.0	9.5	Horizontal
62.500	31.3		40.0	8.7	Vertical
64.000	23.0		40.0	17.0	Vertical
66.530	31.4		40.0	8.6	Vertical
68.000	25.0		40.0	15.0	Vertical

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Frequency (MHz)	Level Vertical (dBuV/m)	Level Horizontal (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity
68.540	34.0	19.4	40.0	6.0	Vertical
70.000	23.0		40.0	17.0	Vertical
70.560	32.9		40.0	7.1	Vertical
72.000	33.1		40.0	6.9	Vertical
72.570	33.7		40.0	6.3	Vertical
73.590	31.9		40.0	8.1	Vertical
74.000	25.1		40.0	14.9	Vertical
74.590	29.3		40.0	10.7	Vertical
76.000	28.0		40.0	12.0	Vertical
76.600	26.3		40.0	13.7	Vertical
80.000	23.9		40.0	16.1	Vertical
84.000	23.1		40.0	16.9	Vertical
88.000	22.0		43.5	21.5	Vertical
104.000	22.8		43.5	20.7	Vertical
108.000	24.7		43.5	18.8	Vertical
112.000	24.0		43.5	19.5	Vertical
116.000	22.6		43.5	20.9	Vertical
128.000	23.2		43.5	20.3	Vertical
129.000	26.4		43.5	17.1	Vertical
131.000	28.4		43.5	15.1	Vertical
133.000	25.5		43.5	18.0	Vertical
139.100	27.3		43.5	16.2	Vertical
141.100	28.8		43.5	14.7	Vertical
149.200	25.4		43.5	18.1	Vertical
155.238	27.8		43.5	15.7	Vertical
162.300	24.0		43.5	19.5	Vertical
163.300	29.6		43.5	13.9	Vertical
165.315	36.2	36.0	43.5	7.3	Vertical
167.333	38.4		43.5	5.1	Vertical
169.350	33.7	35.0	43.5	8.5	Horizontal
171.365	35.3		43.5	8.2	Vertical
173.382	37.7	41.9	43.5	1.6	Horizontal
177.410		42.0	43.5	1.5	Horizontal
181.446		39.1	43.5	4.4	Horizontal
183.463	31.0		43.5	12.5	Vertical
185.480	32.0	41.8	43.5	1.7	Horizontal
189.512		39.1	43.5	4.4	Horizontal
193.545		32.2	43.5	11.3	Horizontal
233.865	23.0		46.0	23.0	Vertical
234.873	25.0		46.0	21.0	Vertical

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Frequency (MHz)	Level Vertical (dBuV/m)	Level Horizontal (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity
262.090		32.8	46.0	13.2	Horizontal
266.123		31.2	46.0	14.8	Horizontal
270.155		33.3	46.0	12.7	Horizontal
274.190		33.7	46.0	12.3	Horizontal
278.210		33.4	46.0	12.6	Horizontal
282.240		22.0	46.0	24.0	Horizontal
294.350		32.3	46.0	13.7	Horizontal
314.505	20.0		46.0	26.0	Vertical

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site which is located at Dakota Lane, Ardmore Aerodrome, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on February 11, 2000.

Testing carried out with a 800 MHz dipole antenna attached to the transceiver. The transceiver was powered using a 13.8 Vdc gell cell battery.

Limit

Part 15 section 15.109(a). The following limits have been applied:

30 – 88 MHz: 100 uV/m = 40 dBuV/m
88 – 216 MHz: 150 uV/m = 43.5 dBuV/m
216 – 960 MHz: 200 uV/m = 46.0 dBuV/m
above 960 MHz: 500 uV/m = 54.0 dBuV/m

Result: Complies

Measurement Uncertainty: ± 4.1 dB

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Antenna power conduction limits for receivers

Receive frequency: 813.100 MHz

IF Frequencies: 61.9 MHz, 10.7 MHz and 0.455 MHz

Tests carried out in accordance with Part 15, Section 15.111.

Spurious emission measurements were made at the antenna terminals using a spectrum analyser.

Frequency (MHz)	Level (dBm)	Limit (dBm)
798.2	-99.3	-57.0
1596.4	-	-57.0
2394.6	-106.1	-57.0
3192.8	-91.0	-57.0
3991.0	-78.9	-57.0
4789.2	-	-57.0
5587.4	-	-57.0
6385.6	-90.4	-57.0
7183.8	-79.3	-57.0
7982.0	-	-57.0

Limit

The spurious emission power should not exceed 2 nW (-57 dBm).

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Frequency Stability

Frequency stability measurements were made over the range - 30 °C to + 50°C in + 10°C increments.

At each temperature the transmitter was given a period of 30 minutes to stabilise. The transmitter was then turned on and the frequency error measured after a period of 1 minute.

Measurements were made with the supply varied between 115% and 85% of the nominal supply voltage (115 Vac).

Nominal Frequency: 813.1 MHz

Frequency Error (Hz)			
Voltage Temp.	11.7 Vdc	13.8 Vdc	15.9 Vdc
+50°C	+398.0	+396.0	+405.0
+40°C	+425.0	+418.0	+415.0
+30°C	+509.0	+509.0	+509.0
+20°C	+437.0	+437.0	+437.0
+10°C	-263.0	-263.0	-262.0
0°C	-397.0	-402.0	-412.0
-10°C	-825.0	-831.0	-829.0
-20°C	-1302.0	-1301.0	-1300.0
-30°C	-1506.0	-1503.0	-1505.0

Limit

Part 22.355 states that mobile stations operating in the band 806 – 821 MHz shall have a frequency stability that does not exceed 2.5 ppm.

Part 90.213 states that mobile stations operating in the band 806 – 821 MHz shall have a frequency stability that does not exceed 2.5 ppm.

This transmitter operates on 813.1 MHz.

$$2.5 \text{ ppm} = 2.5 \times 813.1 = 2032 \text{ Hz}$$

Result: Complies.

Measurement Uncertainty: ±30 Hz

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

8. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial #	Asset
Aerial Controller	EMCO	1090	9112-1062	RFS 3710
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708
Attenuator	Hewlett Packard	8491A	24838	E1329
Attenuator	Wienschel	49-20-43	GC104	E1308
Audio Analyzer	Hewlett Packard	HP 8903B	2216A01713	E1146
Biconical Antenna	Schwarzbeck	BBA 9106		RFS 3612
Coax Cable	Sucoflex	104PA	2736/4PA	
DC Power Supply	Hewlett Packard	HP6032A	2743A-02859	E1069
Frequency Counter	Hewlett Packard	HP 5342A	1916A01835	E1224
Horn Antenna	Electrometrics	RGA-60	6234	E1494
Level generator	Anritsu	MG443B	M61689	E1143
Log Periodic Antenna	Schwarzbeck	UHALP 9107		RFS 3702
Measurement Receiver	Rohde & Schwarz	ESCS 30	839873/1	
Modulation Analyzer	Hewlett Packard	HP 8901B	2608A00782	E1090
Resistance Thermometer Meter	DSIR	RT200	35	E1409
RF Power Meter	Hewlett Packard	HP 436A	2512A22439	E1198
Rubidium Oscillator	Ball Efratom	FRS - C	4287	E1053
Spectrum Analyser	Hewlett Packard	E7405A	US 39150142	RFS 3776
Spectrum Analyzer	Hewlett Packard	E7405A	US39150142	3776
Thermal chamber	Contherm	M180F	86025	E1129
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709

9. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd registration with the Federal Communications Commission as a listed facility, Registration Number: 90838, which was updated on February 11th, 2000.

All measurement equipment has been calibrated in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to the New Zealand Code of Laboratory Management Practice incorporating ISO Guide 25: 1990 and ISO 9002: 1994.

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

10. PHOTOGRAPH (S)



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full


Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

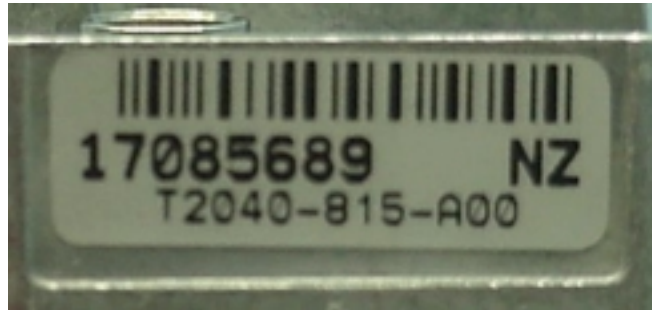

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861



E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 23 of 27

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

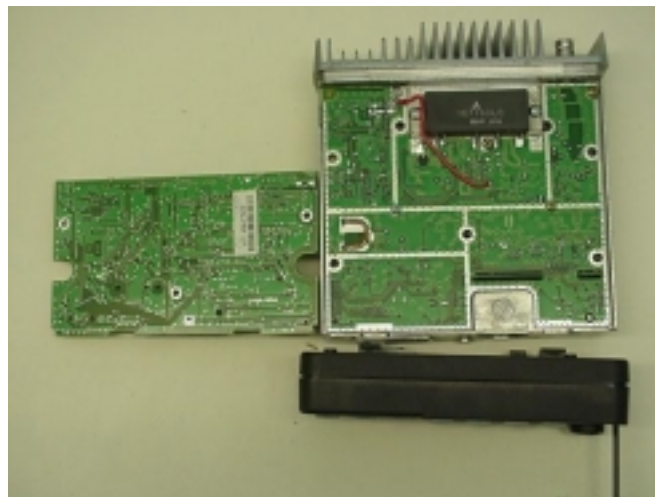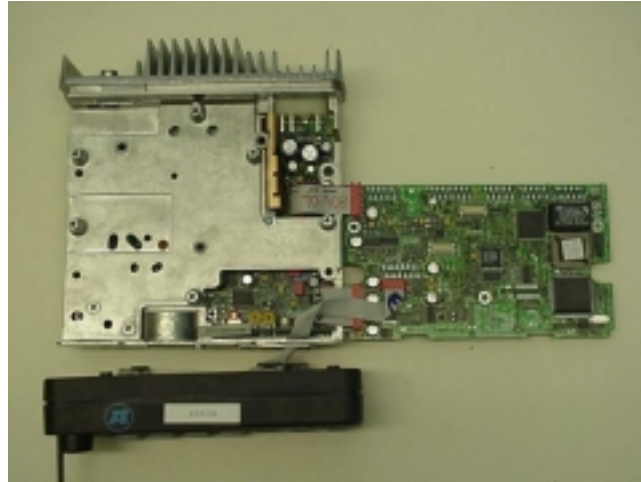

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz


Web Site: www.emctech.com.au

Page 24 of 27

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Transmitter Radiated Emissions Test Set Up

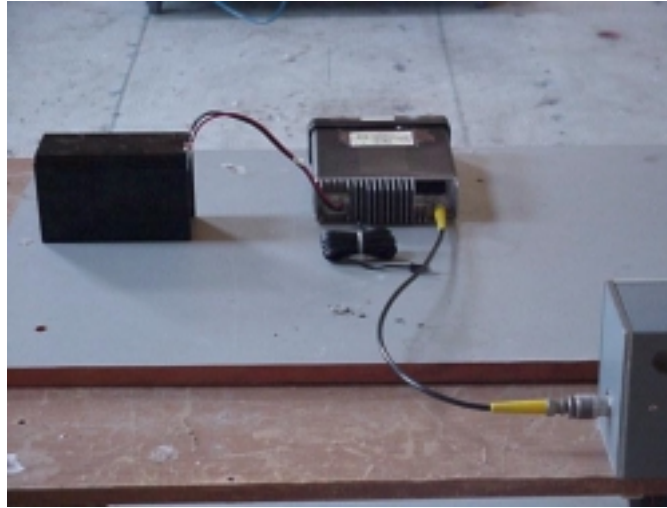

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz


Web Site: www.emctech.com.au

Page 25 of 27

EMC Technologies (NZ) Ltd

Test Report No 10709.2
Report date: 16th July 2001

Receiver Radiated Emissions Test Set Up

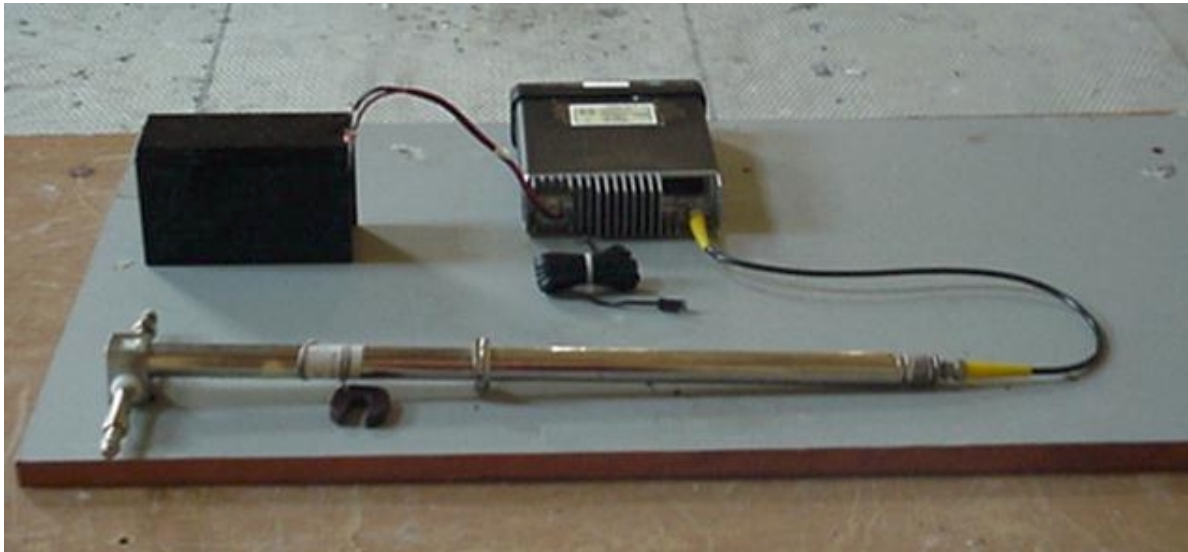

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 26 of 27