

Laboratory Test Report

Class II Permissive Change

On the

TMAB1Z External Radio Frequency Power Amplifier

Tested In accordance with

FCC 47 CFR Parts 22 and 90

Report Revision: 1
Issue Date: 14-Aug-2006
FCC ID: CASTMAB1Z

PREPARED BY: Mike James
Test Engineer

CHECKED & APPROVED BY: Steve Crompton
Laboratory Manager



All tests reported herein have been performed in accordance with the laboratory's scope of accreditation

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager.

TABLE OF CONTENTS

REVISION HISTORY	3
INTRODUCTION	4
REPORT PREPARED FOR	4
DESCRIPTION OF SAMPLE	4
STATEMENT OF COMPLIANCE	4
TEST CONDITIONS	4
NECESSARY BANDWIDTH AND EMISSION DESIGNATORS	5
TEST RESULTS.....	5
TRANSMITTER OUTPUT POWER (CONDUCTED)	5
SPURIOUS EMISSIONS (CONDUCTED).....	6
SPURIOUS EMISSIONS (RADIATED)	7
TRANSIENT FREQUENCY BEHAVIOR	10
TEST EQUIPMENT USED	13
ANNEX A	14
TEST SETUP DETAILS.....	14

REVISION HISTORY

Date	Revision	Comments
14-Aug-2006	1	Initial test report

TELTEST Laboratories

Tait Electronics Limited

Report Number 2472

FCC ID:CASTMAB1Z

INTRODUCTION

This is a Class II permissive change to the TMAB1Z External Radio Frequency Power Amplifier (FCC ID: CASTMAB1Z), following circuit changes to overcome overheating issues, and confirms compliance with:

FCC CFR 47 Parts 22 & 90

The TMAB1Z was originally tested as Teltest Laboratories Report 2290

REPORT PREPARED FOR

Tait Electronics Ltd
PO Box 1645
558 Wairakei Rd
Christchurch
New Zealand

DESCRIPTION OF SAMPLE

FCC ID: CASTMAB1Z
Type: TMAB1Z
Product code: TMAA42-B100
Serial Numbers: 13144477

The TMAB1Z is an External Radio Frequency Power Amplifier designed to operate in the 136MHz to 174MHz band. It has a fixed output power of 110W, and output impedance of 50 ohms. It has been tested with the TMAB32-B100 (serial number 19057434) mobile transceiver, which has its output power fixed at 1 watt. The mobile performs all modulation, and the TMAB1Z is only used to increase the output power of the mobile.

STATEMENT OF COMPLIANCE

The TMAA42-B100 External Radio Frequency Power Amplifier as tested in this report was found to conform to the following standards:

FCC CFR 47 Parts 22 & 90

TEST CONDITIONS

Unless otherwise stated, all testing was performed at the following conditions.

Ambient Temperature	15°C → 30°C
Relative Humidity	20% → 75%
Standard Test Voltage	13.8Vdc

NECESSARY BANDWIDTH AND EMISSION DESIGNATORS

The TMAA42-B100 ERFPA does not provide any modulation.
It is intended to be used with the following types of emissions as defined in 90.207

F3E – FM, Analogue Voice
F1E – FM, Digital Voice
F1D – FM, Digital Data, no subcarrier
F2D – FM, Digital Data, modulated subcarrier
F7E – FM, Two or more channels containing quantized or digital voice information
F7D – FM, Two or more channels containing quantized or digital information

TEST RESULTS

TRANSMITTER OUTPUT POWER (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1046

GUIDE: TIA/EIA-603C 2.2.1

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The coaxial attenuator has an impedance of 50 Ohms.
3. The unmodulated output power was measured with an RF Power meter.

MEASUREMENT RESULTS:

Manufacturer's Rated Output Power:

162.1 MHz	110 W nominal	W nominal
POWER (W)	111.8	
Variation from Nominal (%)	+1.6	
Measurement Uncertainty (dB)	±0.6	

LIMIT CLAUSE: FCC 47 CFR 90.205 (r)

Radio Type: Mobile Transceiver
Frequency Band: 150 MHz → 174 MHz

The output power shall not exceed by more than 20% the manufacturer's rated output power for the particular transmitter.

TELTEST Laboratories

Tait Electronics Limited

Report Number 2472

FCC ID:CASTMAB1Z

SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1051

GUIDE: TIA/EIA-603C 2.2.13

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The frequency range examined was from the lowest frequency generated within the EUT, to a frequency higher than the 10th Harmonic:
3. Spurious emissions that were attenuated more than 20dB below the limit were not recorded.

MEASUREMENT RESULTS:

See the table on the following page for 12.5 kHz channel spacing.

LIMIT CLAUSE: FCC 47 CFR 90.210

SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATION: FCC CFR 2.1051

Tx FREQUENCY: 162.1 MHz

12.5 kHz Channel Spacing		162.1 MHz @ 110 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
149.0878	-33.8		-84.2
161.8748	-38.6		-89.0
162.0621	-35.2		-85.6
162.1370	-35.9		-86.3
162.3253	-38.6		-89.0
175.1119	-32.0		-82.4
324.1999	-39.6		-90.0
No other emissions were detected at a level greater than 20 dB below the limit.			
Measurement Uncertainty (dB)		±3	

LIMITS:

Carrier Output Power Watts	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10}(P_{\text{Watts}})$	
110 W	-20 dBm	70.4 dBc

SPURIOUS EMISSIONS (RADIATED)

TELTEST Laboratories

Tait Electronics Limited

Report Number 2472

FCC ID:CASTMAB1Z

SPECIFICATION: FCC 47 CFR 2.1053

GUIDE: TIA/EIA-603C 2.2.12

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The EUT was placed on a wooden turntable at a distance of three metres from the test antenna. The output terminal was connected to an RF dummy load.
3. The turntable was rotated through 360° to obtain the maximum response of each spurious emission. Valid emissions were determined by switching the EUT on and off.
4. The EUT was replaced by a signal generator and substitution antenna to make measurements by the substitution method.

MEASUREMENT RESULTS:

See the table on the following page

LIMIT CLAUSE: FCC 47 CFR 90.210

Test Conditions on Open Area Test Site

Ambient Temperature	6°C
Relative Humidity	75%
Standard Test Voltage	13.8Vdc

SPURIOUS EMISSIONS (RADIATED)

SPECIFICATION: FCC CFR 2.1053

Tx FREQUENCY: 162.1 MHz

12.5 kHz Channel Spacing		162.1 MHz @ 110 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
486.3	-29.1		-79.5
648.4	-22.4		-72.8
810.5	-28.4		-78.8
No other emissions were detected at a level greater than 20 dB below the limit.			
Measurement Uncertainty (dB)		±4.6	

LIMITS:

Carrier Output Power Watts	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10} (P_{\text{Watts}})$	
110 W	-20 dBm	70.4 dBc

TRANSIENT FREQUENCY BEHAVIOR

SPECIFICATION: FCC 47 CFR 90.214

GUIDE: TIA/EIA-603C 2.2.19

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. Measurements and plots were made following the TIA/EIA procedure.

MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSE: FCC 47 CFR 90.214

TELTEST Laboratories

Tait Electronics Limited

Report Number 2472

FCC ID:CASTMAB1Z

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 162.1 MHz 110 W 12.5 kHz Channel Spacing

FREQUENCY	162.1 MHz @ 110 W Tx	
TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t_1	-0.6	N/A
t_2	-0.3	N/A
t_3	N/A	0.3
$t_2 \rightarrow t_3$ ppm	-1.3	
ERROR LIMIT ($t_2 \rightarrow t_3$) ppm	2.5	
Measurement Uncertainty	Freq ± 130 Hz Time ± 0.2 %	

Confirm that during periods t_1 and t_3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	Y	
Confirm that during the period t_2 the frequency difference does not exceed half a channel separation.	YES	NO
	Y	
Confirm that during the period t_2 to t_3 the frequency difference does not exceed the frequency error limit.	YES	NO
	Y	

LIMIT:

TRANSIENT PERIODS	FREQUENCY RANGE 150MHz – 174 MHz	FREQUENCY RANGE 421MHz – 512 MHz
t_1 (ms)	5 ms	10 ms
t_2 (ms)	20 ms	25 ms
t_3 (ms)	5 ms	10 ms

TELTEST Laboratories

Tait Electronics Limited



Report Number 2472

FCC ID:CASTMAB1Z

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 162.1 MHz 110 W 12.5 kHz Channel Spacing

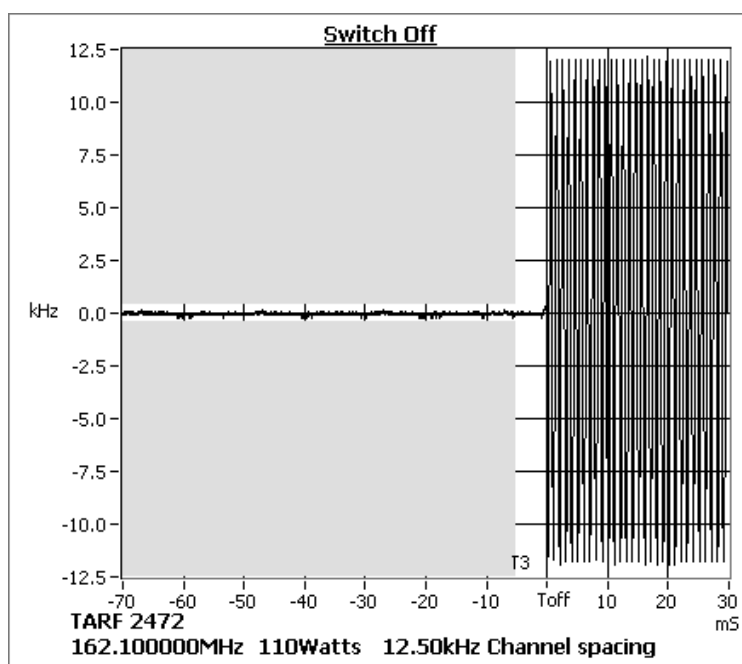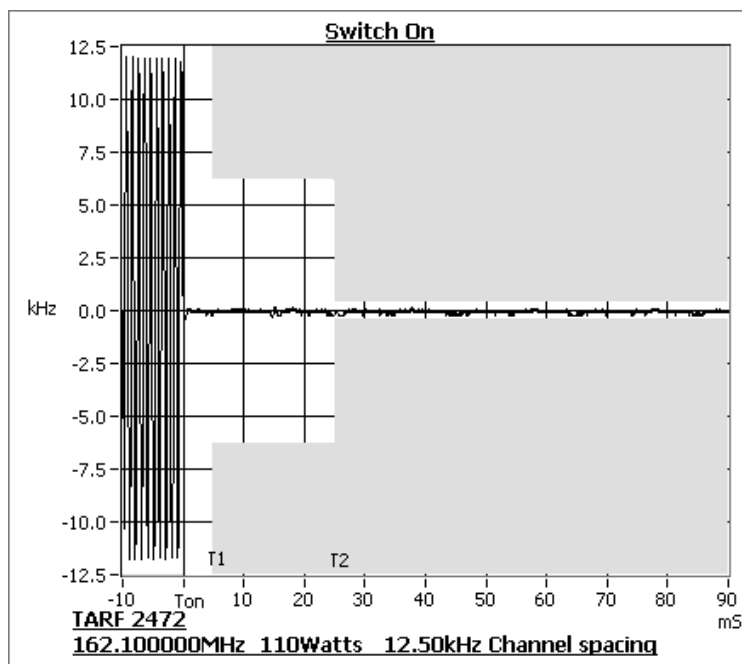

TELTEST Laboratories

Tait Electronics Limited

Report Number 2472

FCC ID:CASTMAB1Z


TEST EQUIPMENT USED

Equipment	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Signal Generator	Hewlett Packard	HP8642B (Opt 001)	2512A00176	E3064	26-Nov-06
Signal Generator	Agilent	E4422B	GB40050320	E3788	22-Nov-06
Modulation Analyser	Hewlett Packard	HP8901B (Opt 002)	2441A00393	E3073	26-Nov-06
Audio Analyser	Hewlett Packard	HP8903A	2308A02597	E3074	28-Nov-06
Power Supply	Hewlett Packard	HP6032A	2441A00412	E3075	26-Nov-06
Oscilloscope	Tektronics	TDS340	B013611	E3585	26-Nov-06
Reference Dipoles	Emco	3121C DB1	9510-1164	E3559	17-Oct-06
Horn Antenna	Emco	DRG3115	2084	E3076	27-Sep-06
20m Coax Cable		RG214/U-50 (Ext Cal)	CBL01	E3404	29-Nov-06
Power Head	Hewlett Packard	HP11722A	2716A02037	E1575	26-Nov-06
RF Splitter Combiner	Minicircuits	ZFSC-4-1	-	E4083	18-Jan-07
Antenna Tower	Electrometrics	EM-4720-2	112	E4447	N/A
Controller	Electrometrics	EM-4700	119	E4445	N/A
Turntable	Electrometrics	EM-4704A	105	E4446	N/A
Attenuator	Weinschel	67-30-33	BR0531	E4280	26-Nov-06

ANNEX A

TEST SETUP DETAILS

Radiated Emissions.

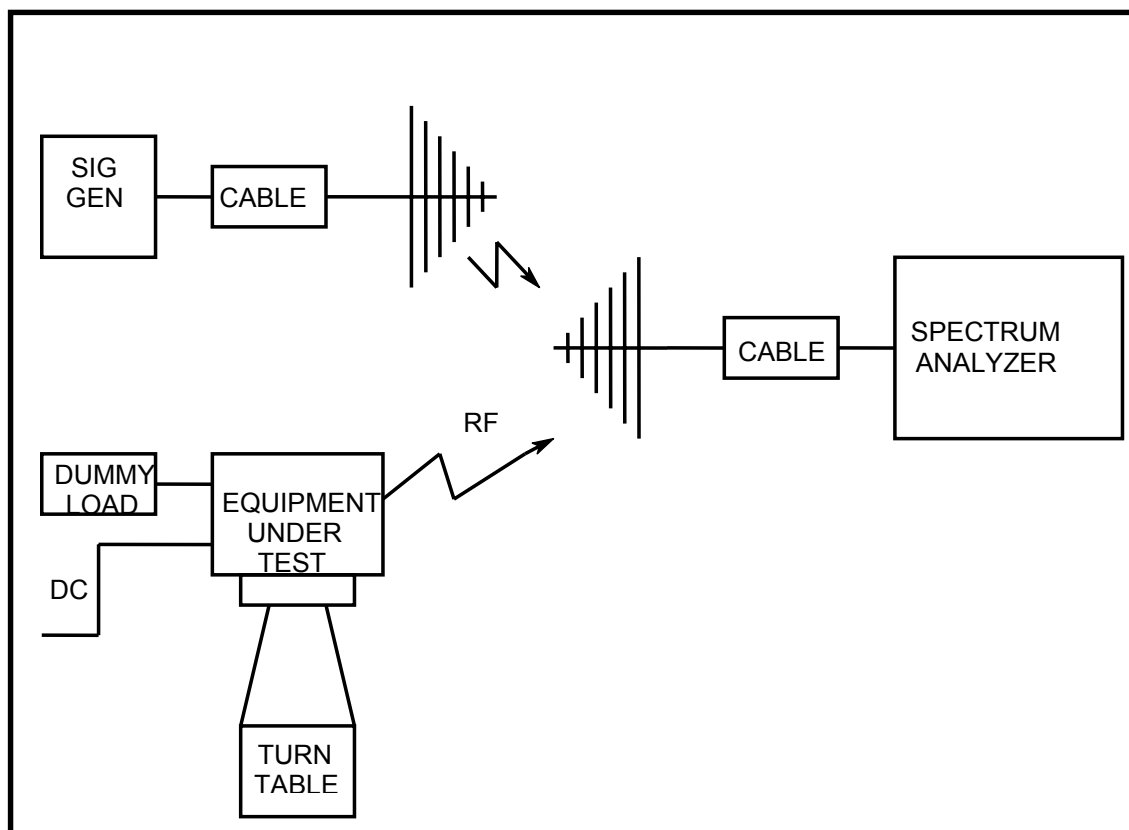

TELTEST Laboratories

Tait Electronics Limited

Report Number 2472

FCC ID:CASTMAB1Z

Conducted Measurements

The Spectrum Analyser is connected to the EUT via a 30dB attenuator for Conducted Emissions testing.

