

LABORATORY TEST REPORT
RADIO PERFORMANCE MEASUREMENTS

for the

TPDK5D Handportable Transceiver

Tested in accordance with:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12
RSS-Gen Issue 5

Report Revision: 1
Issue Date: 11 October 2018

PREPARED BY: L. M. White


Test Technician

CHECKED & APPROVED BY: M. C. James


Laboratory Technical Manager



IANZ
ACCREDITED LABORATORY

FCC REGISTRATION: 838288
IC LISTING REGISTRATION: SITE# 737A-1

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager

TABLE OF CONTENTS

REVISION	3
INTRODUCTION	4
STATEMENT OF COMPLIANCE	5
MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS	6
TEST RESULTS.....	8
TRANSMITTER OUTPUT POWER (CONDUCTED)	8
TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS.....	10
TRANSMITTER MODULATION LIMITING	17
TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS	23
ADJACENT CHANNEL POWER RATIO.....	88
TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED).....	97
TRANSMITTER SPURIOUS EMISSIONS (RADIATED).....	111
TRANSMITTER FREQUENCY STABILITY - TEMPERATURE	115
RECEIVER SPURIOUS EMISSIONS (CONDUCTED).....	118
TEST EQUIPMENT LIST.....	120
ANNEX A – TEST SETUP DETAILS.....	121

REVISION

Date	Revision	Comments
11 October 2018	1	Initial test report

INTRODUCTION

Type approval testing of the TPK5D, 3 Watt, Handportable transceiver in order to demonstrate compliance with FCC 47 Parts 22 & 90, and RSS-119 Issue 12 & RSS-Gen Issue 5. This radio supports analogue, digital FFSK, Digital Mobile Radio (DMR), APCO P25 phase-1 and APCO P25 phase-2 modulations.

REPORT PREPARED FOR

Tait International Ltd
245 Wooldridge Road
Harewood
Christchurch 8051
New Zealand

DESCRIPTION OF SAMPLE

Manufacturer: Tait International Limited
Equipment: Handportable Transceiver
Type: TPK5D
Product Code: T03-00043-KZZL
Serial Number(s): 26033343
Frequency range: 762 → 870 MHz
Transmit Power: 3 W

Modulation		Channel Spacing	Speech Channels	Symbol Rate (symbols/sec)	Data Rate (bps)
Analogue FM		12.5 kHz & 25kHz	1	-	-
FFSK	Fast Frequency Shift Keying	12.5 kHz & 25kHz	-	1200	1200
		12.5 kHz & 25kHz	-	2400	2400
Digital Mobile Radio (DMR)	4 Level FSK (2 slot TDMA) (ETSI TS102 361-1)	12.5 kHz	2	4800	9600
APCO P25 Phase 1	C4FM (TIA 102)	12.5 kHz	1	4800	9600
APCO P25 Phase 2	H-CPM (2 slot TDMA) (TIA 102)	12.5 kHz	2	6000	12000

HARDWARE & SOFTWARE

Quantity: 1

	Analogue, FFSK and DMR tests	P25 tests
Hardware ID	TPDB5X-K500_0001	TPDB5X-K500_0001
Boot Code	QPD5B_S00_3.05.11.0001	QPD5B_S00_3.05.11.0001
DSP	QPD5A_E00_2.19.03.0049	QPD5A_A02_2.12.11.0061
Radio Application	QPD5F_E00_2.19.03.0049	QPD5F_A00_2.12.11.0061
Firmware Package	QI93P_E00_2.19.03.0049	QI94P_A02_2.12.11.0061
FPGA Image	QPD5G_S00_1.12.14.0001	QPD5G_S00_1.12.13.0001

TEST CONDITIONS

All testing was performed between 19 September → 10 October 2018, and under the following conditions:

Ambient temperature: 15°C → 30°C
Relative Humidity: 20% → 75%
Standard Test Voltage: 7.5 V_{DC}

STATEMENT OF COMPLIANCE

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch, New Zealand, declare under our sole responsibility that the product:

Equipment: Handportable Transceiver
Type: TPK5D
Product Code: T03-00043-KZZL
Serial Number(s): 26033343
Quantity: 1

to which this declaration relates, is in conformity with the following standards:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12 & RSS-Gen Issue 5

Signature:



M. C. James
Laboratory Technical Manager

Date:

16 October 2018

MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS

MODULATION TYPES:

F3E	Analogue Frequency Modulation (FM)	
F2D	FFSK	1200 bps and 2400 bps
FXW	DMR Digital Voice	9600 bps
FXD	DMR Digital Data	9600 bps
F1E, F7E	P25 phase 1 Digital Voice	9600 bps
F1D, F7D	P25 phase 1 Digital Data	9600 bps
F1W	P25 phase 2 Digital Voice / Data	12000 bps

CHANNEL SPACING: 12.5 kHz

EMISSION DESIGNATORS:

	12.5 kHz	25.0 kHz
Analogue FM	11K0F3E	16K0F3E
FFSK Data 1200 bps	6K60F2D	9K60F2D
FFSK Data 2400 bps	7K80F2D	10K8F2D
Digital Voice DMR	7K60FXW	
Digital Data DMR	7K60FXD	
Digital Voice P25 phase 1	8K10F1E	
Digital Data P25 phase 1	8K10F1D	
Digital Voice P25 phase 2	8K10F1W	
Digital Data P25 phase 2	8K10F1W	

CALCULATIONS

Equation: $B_n = 2M + 2Dk$

(M is highest modulating frequency; D is peak allowable deviation; k is a constant of 1 for FM)

Analogue Voice 12.5 kHz Bandwidth

Necessary bandwidth

M = 3.0 kHz

D = 2.5 kHz

$$B_n = (2 \times 3.0) + (2 \times 2.5) \times 1$$

$$= 11.0 \text{ kHz}$$

Emission Designator

11K0F3E

F3E represents an FM voice transmission

Analogue Voice 25.0 kHz Bandwidth

Necessary bandwidth

M = 3.0 kHz

D = 5 kHz

$$B_n = (2 \times 3.0) + (2 \times 5) \times 1$$

$$= 16.0 \text{ kHz}$$

Emission Designator

16K0F3E

F3E represents an FM voice transmission

Fast Frequency Shift Keying (FFSK – 1200 bps) 12.5 kHz Bandwidth

Necessary bandwidth

M = 1.8 kHz

D = 1.5 kHz (60% of peak deviation)

$$B_n = (2 \times 1.8) + (2 \times 1.5) \times 1$$

$$= 6.6 \text{ kHz}$$

Emission Designator

6K60F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Fast Frequency Shift Keying (FFSK – 1200 bps) 25.0 kHz Bandwidth

Necessary bandwidth

M = 1.8 kHz

D = 3 kHz (60% of peak deviation)

$$B_n = (2 \times 1.8) + (2 \times 3) \times 1$$

$$= 9.6 \text{ kHz}$$

Emission Designator

9K60F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Emission Designators – Continued

Fast Frequency Shift Keying (FFSK – 2400 bps) 12.5 kHz Bandwidth

Necessary bandwidth

$$M = 2.4 \text{ kHz}$$

D = 1.5 kHz (60% of peak deviation)

$$B_n = (2 \times 2.4) + (2 \times 1.5) \times 1 \\ = 7.8 \text{ kHz}$$

Emission Designator

7K80F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Fast Frequency Shift Keying (FFSK – 2400 bps) 25.0 kHz Bandwidth

Necessary bandwidth

$$M = 2.4 \text{ kHz}$$

D = 3 kHz (60% of peak deviation)

$$B_n = (2 \times 2.4) + (2 \times 3) \times 1 \\ = 10.8 \text{ kHz}$$

Emission Designator

10K80F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Digital Voice 12.5 kHz Bandwidth DMR

99% bandwidth

$$= 7.6 \text{ kHz}$$

Emission Designator

7K60FXW

FXW represents a FM Time Division Multiple Access (TDMA) combination of data and telephony

Digital Data 12.5 kHz Bandwidth DMR

99% bandwidth

$$= 7.6 \text{ kHz}$$

Emission Designator

7K60FXD

FXD represents FM Time Division Multiple Access (TDMA) data only

Digital Voice 12.5 kHz Bandwidth P25 phase 1

99% bandwidth

$$= 8.1 \text{ kHz}$$

Emission Designator

8K10F1E

F1E represents a digital FM voice transmission

Digital Data 12.5 kHz Bandwidth P25 phase 1

99% bandwidth

$$= 8.1 \text{ kHz}$$

Emission Designator

8K10F1D

F1D represents an digital FM data transmission

Digital Voice 12.5 kHz Bandwidth P25 phase 2

99% bandwidth

$$= 8.1 \text{ kHz}$$

Emission Designator

8K10F1W

F1W represents a single FM telephony channel

Digital Data 12.5 kHz Bandwidth P25 phase 2

99% bandwidth

$$= 8.1 \text{ kHz}$$

Emission Designator

8K10F1W

F1W represents digital FM data transmission

TEST RESULTS

TRANSMITTER OUTPUT POWER (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1046
RSS-119 5.4

GUIDE: TIA/EIA-603D 2.2.1

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The coaxial attenuator has an impedance of 50 Ohms.
3. The unmodulated output power was measured with an RF Power meter.

MEASUREMENT RESULTS:

Manufacturer's Rated Output Power:

3 W and 1 W

Nominal 3 W	Measured	Variation (%)	Variation (dB)
762.1 MHz	3.0	-1.0	0.0
800.0 MHz	2.8	-5.4	-0.2
806.1 MHz	2.9	-3.2	-0.1
816.0 MHz	2.8	-7.5	-0.3
852.0 MHz	2.9	-4.1	-0.2
869.9 MHz	2.7	-9.8	-0.4
Measurement Uncertainty		± 0.6 dB	

Transmitter Output Power (Conducted) - continued

Nominal 1 W	Measured	Variation (%)	Variation (dB)
762.1 MHz	1.0	-0.2	0.0
800.0 MHz	1.0	1.6	0.1
806.1 MHz	1.0	2.6	0.1
816.0 MHz	1.0	-4.1	-0.2
852.0 MHz	1.0	2.2	0.1
869.9 MHz	0.9	-6.0	-0.3
Measurement Uncertainty		± 0.6 dB	

LIMIT CLAUSES:

FCC 47 CFR 90.205 (s)

The output power shall not exceed by more than 20%... the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

RSS-119 5.4

The output power shall be within ±1.0 dB of the manufacturer's rated power.

TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC 47 CFR 2.1047 (a)

GUIDE: TIA/EIA-603D 2.2.6

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. An audio input tone of 1000 Hz was applied with the level set to obtain 20% of maximum deviation. This was used as the 0 dB reference point.
3. The AF was varied while the audio level was held constant.
4. The response in dB relative to 1000 Hz was measured.

MEASUREMENT RESULTS:


See the plots on the following pages for 12.5 kHz and 25.0 kHz channel spacing tested at 3 W transmit power.

LIMIT CLAUSE: TIA/EIA-603D 3.2.6

MEASUREMENT UNCERTAINTY: $\pm 1.5\%$

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 762.1 MHz 12.5 kHz Channel Spacing

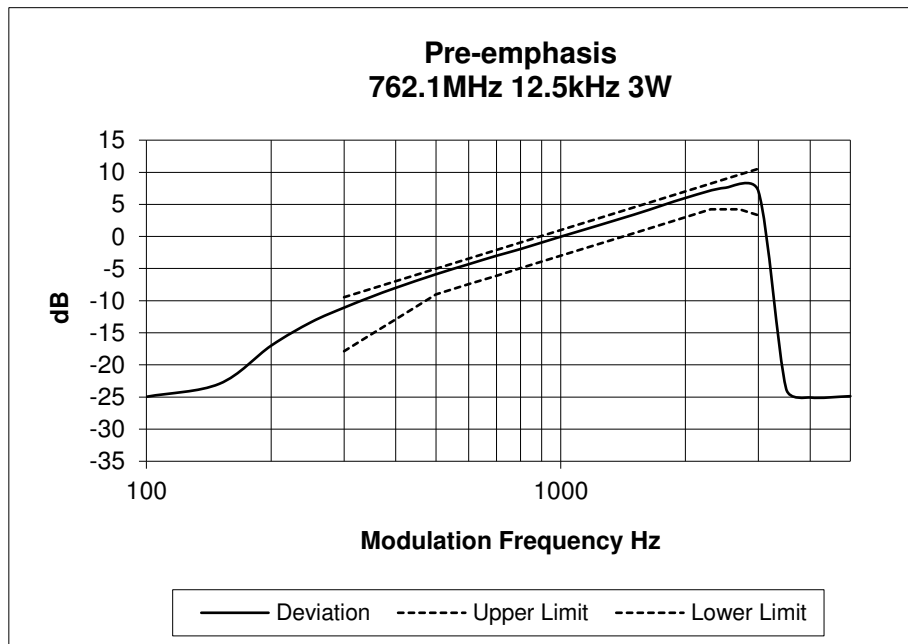


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 800.0 MHz


12.5 kHz Channel Spacing

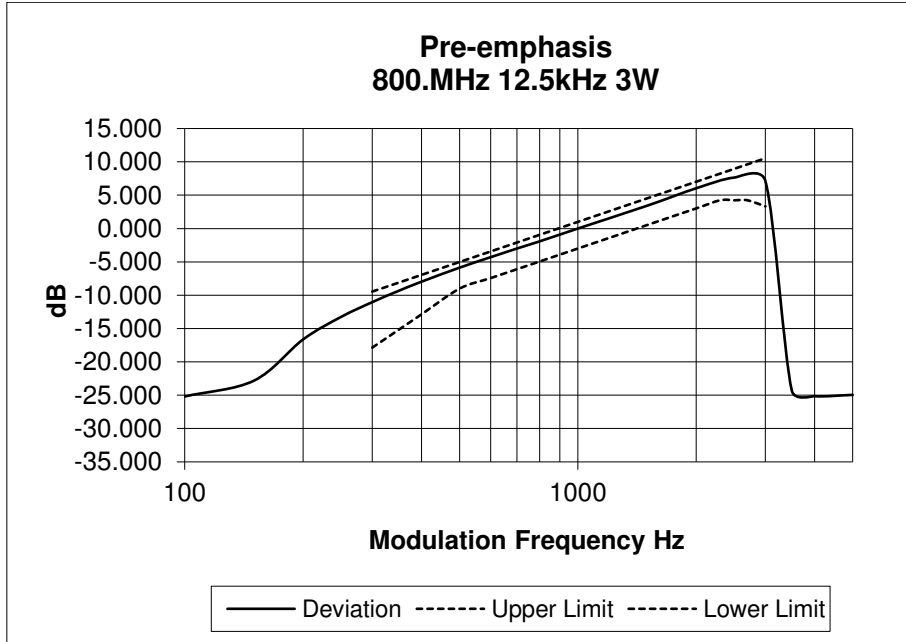

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 806.1 MHz

12.5 kHz Channel Spacing

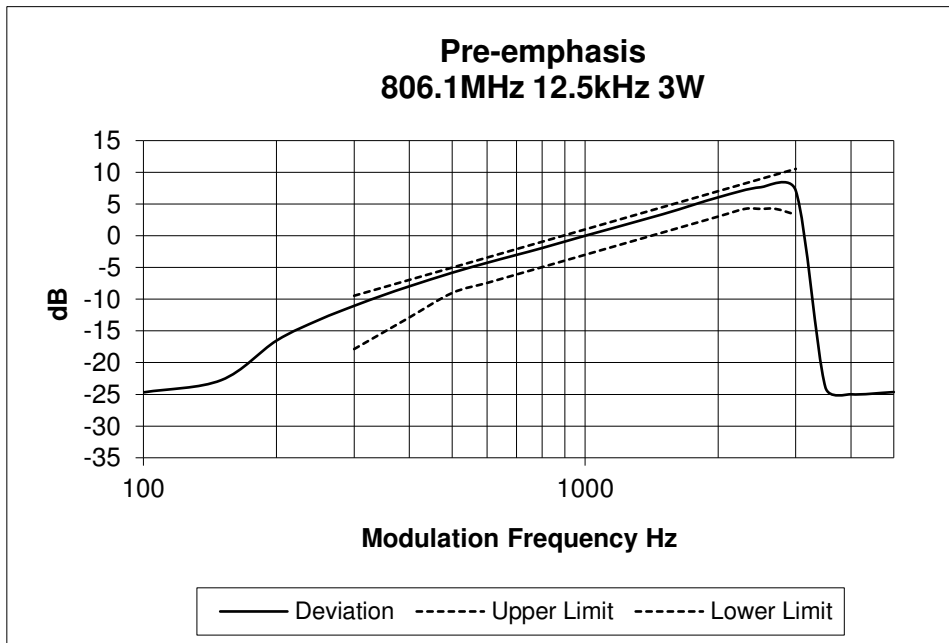


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 816.0 MHz


12.5 kHz Channel Spacing

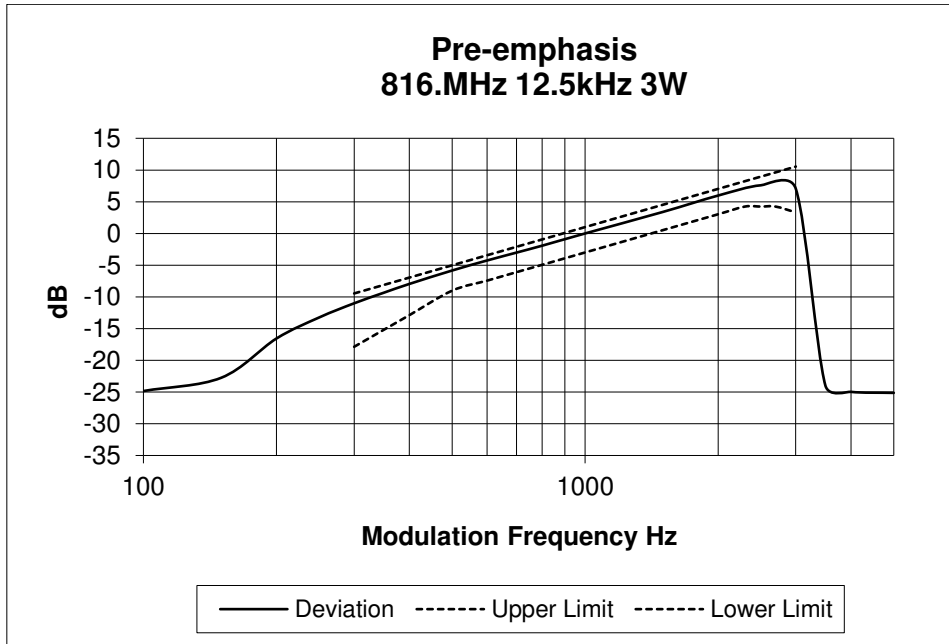

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 852.0 MHz

12.5 kHz Channel Spacing

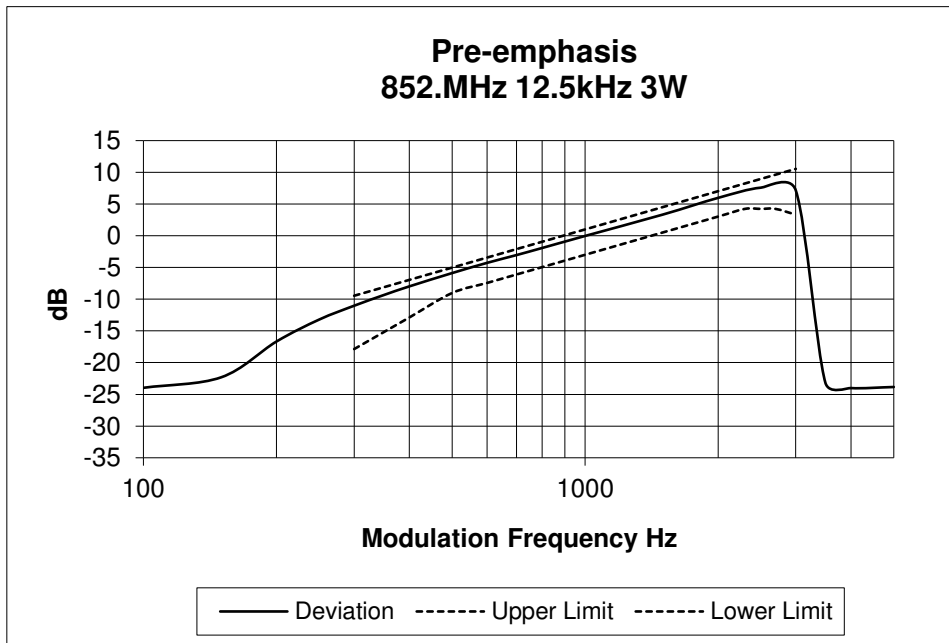


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 869.1 MHz


12.5 kHz Channel Spacing

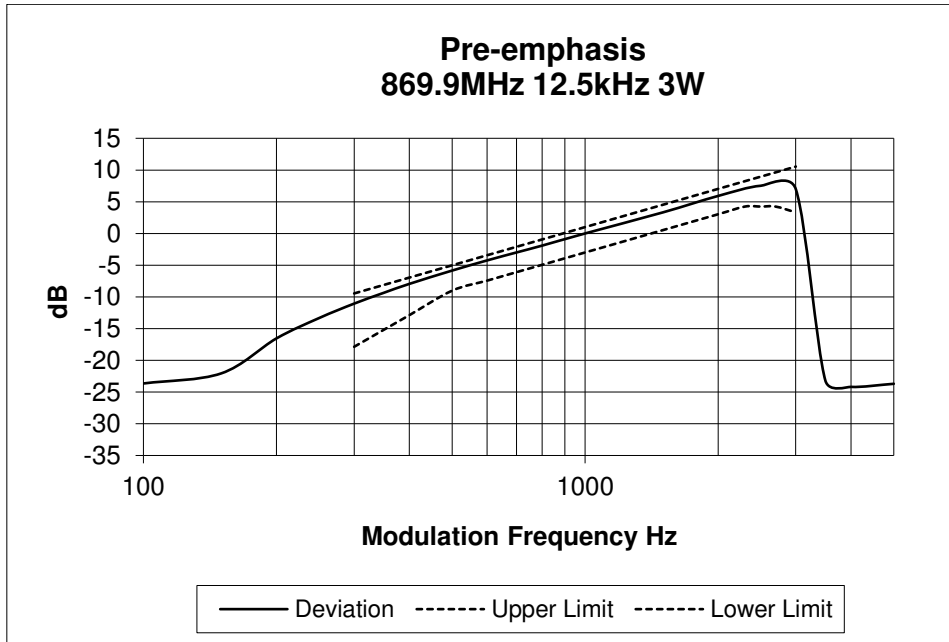

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 762.1 MHz

25.0 kHz Channel Spacing

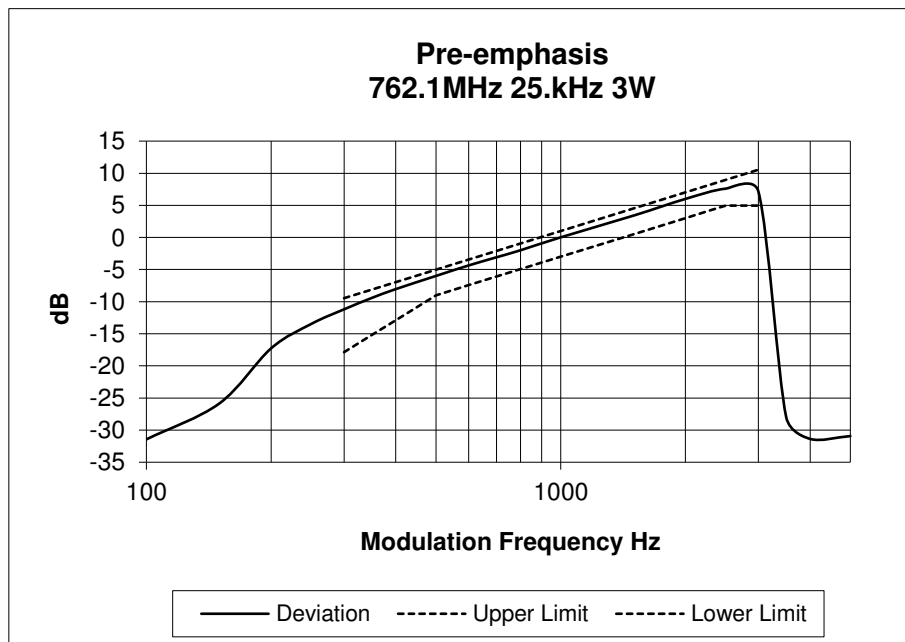


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 800.0 MHz


25.0 kHz Channel Spacing

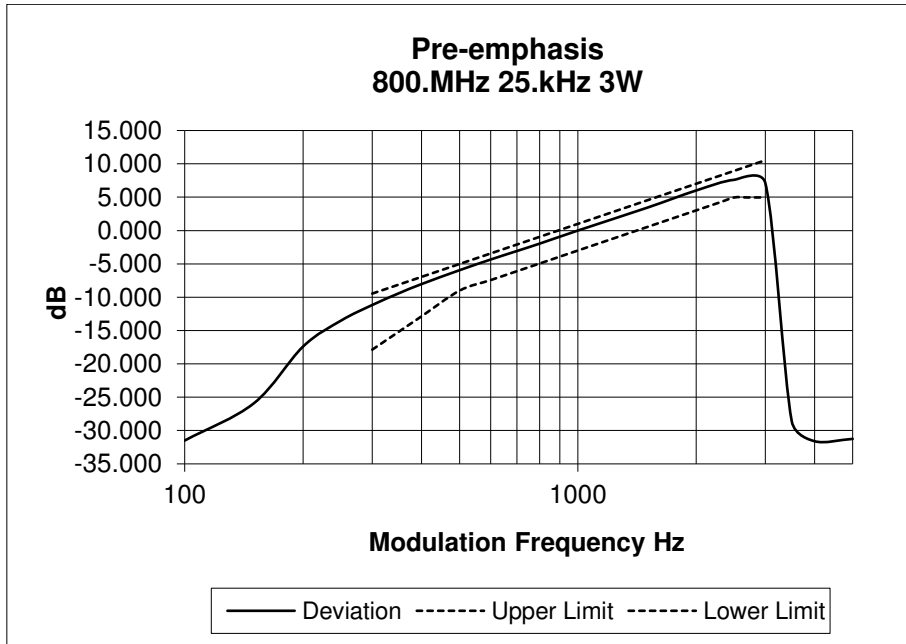

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 806.1 MHz

25.0 kHz Channel Spacing

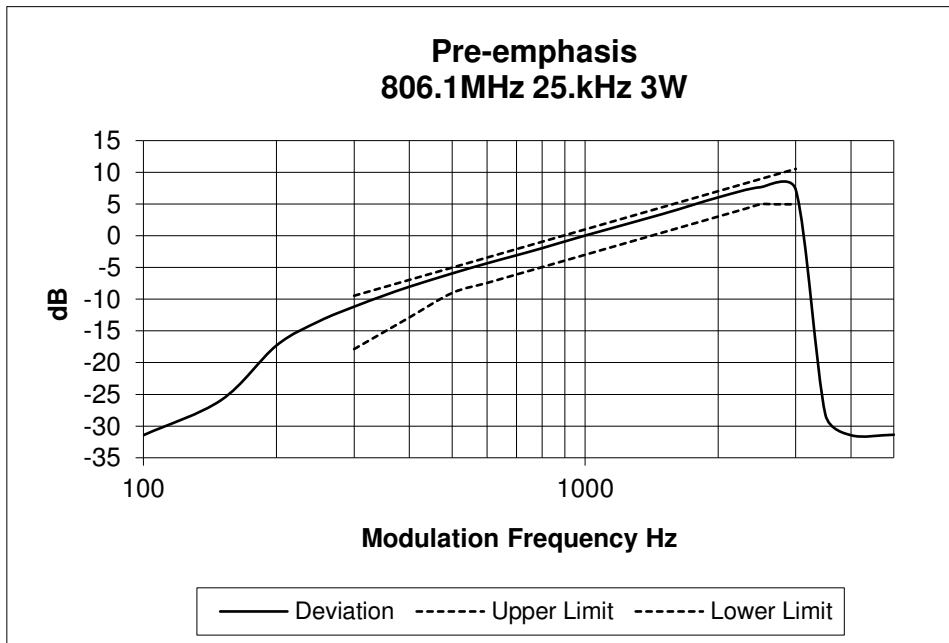


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 816.0 MHz


25.0 kHz Channel Spacing

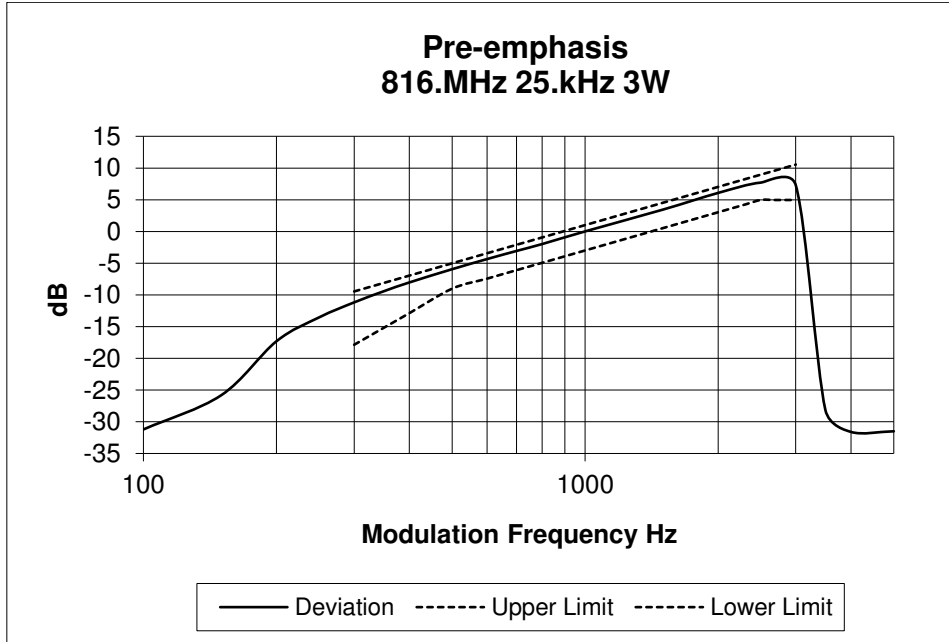

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 852.0 MHz

25.0 kHz Channel Spacing

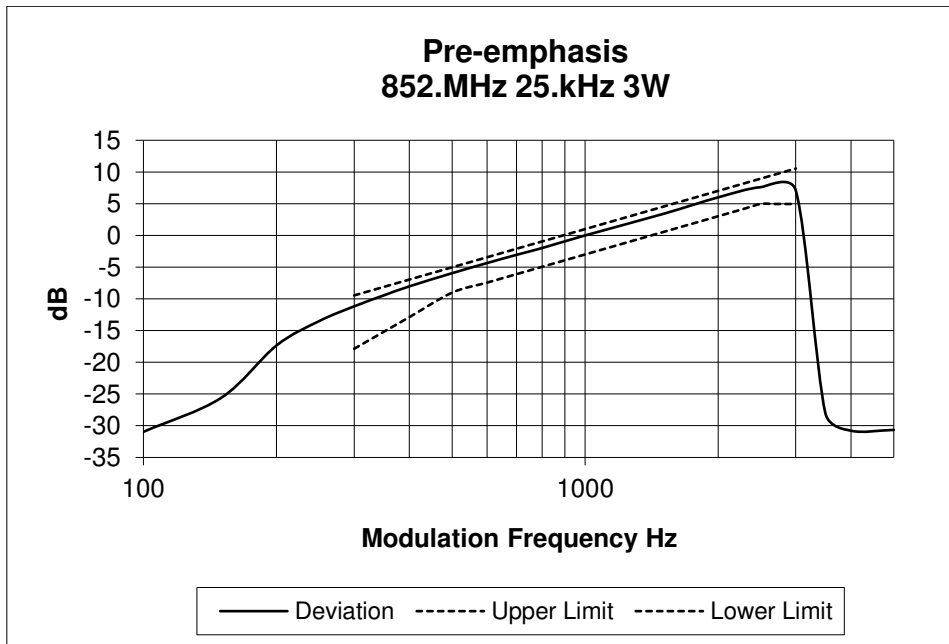


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 869.9 MHz

25.0 kHz Channel Spacing

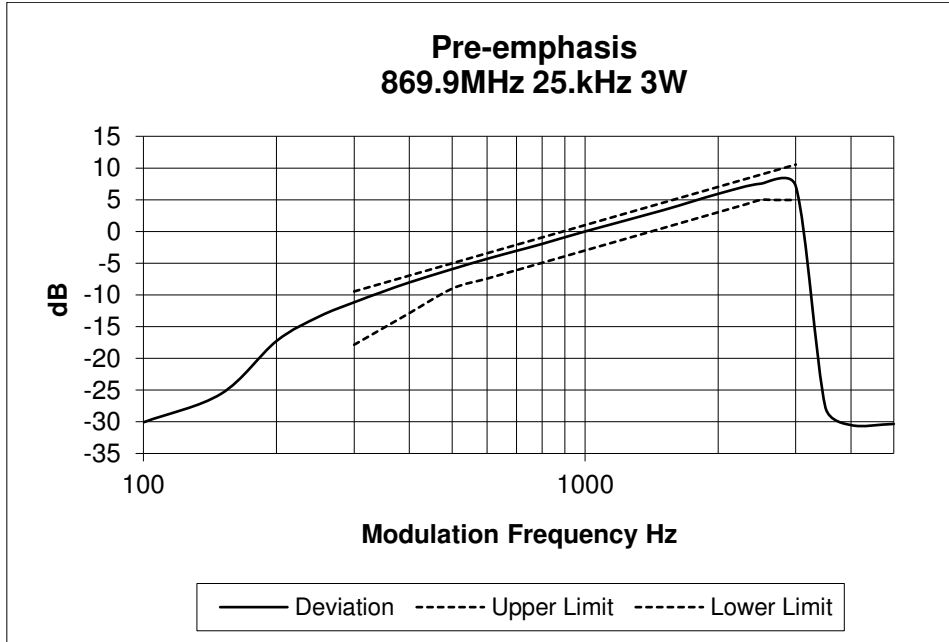

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC 47 CFR 2.1047 (b)

GUIDE: TIA/EIA-603D 2.2.3

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The modulation response was measured at three audio frequencies while varying the input level.
3. Measurements were made for both Positive and Negative Deviation.

MEASUREMENT RESULTS:


See the plots on the following pages for 12.5 kHz and 25 kHz channel spacing.

LIMIT CLAUSE: TIA/EIA-603D 1.3.4.4

MEASUREMENT UNCERTAINTY: $\pm 1.5\%$


Tx FREQUENCY: 762.1 MHz

12.5 kHz Channel Spacing

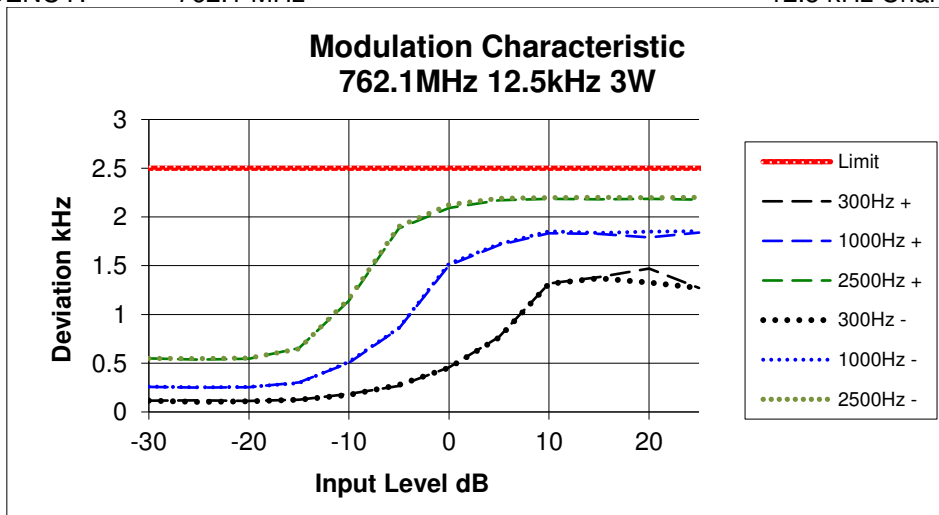

Tx FREQUENCY: 800.0 MHz

12.5 kHz Channel Spacing

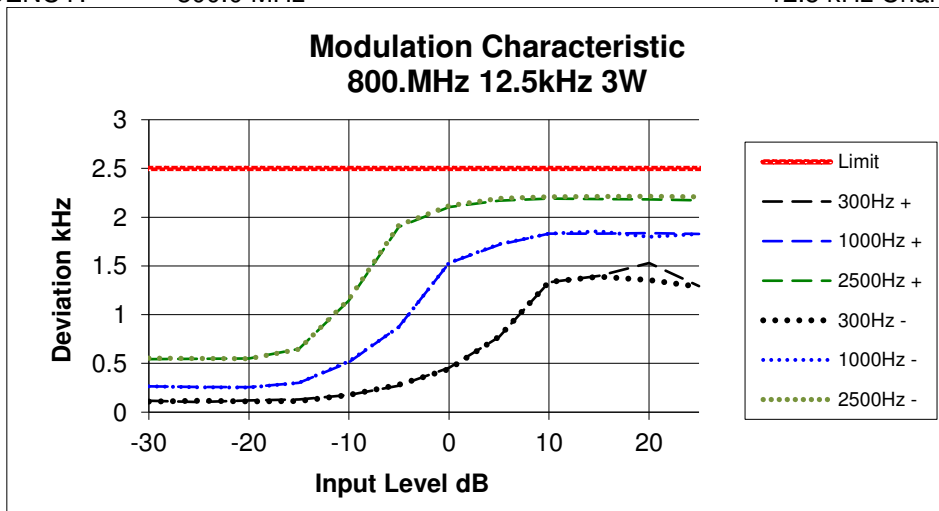


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 806.1 MHz

12.5 kHz Channel Spacing

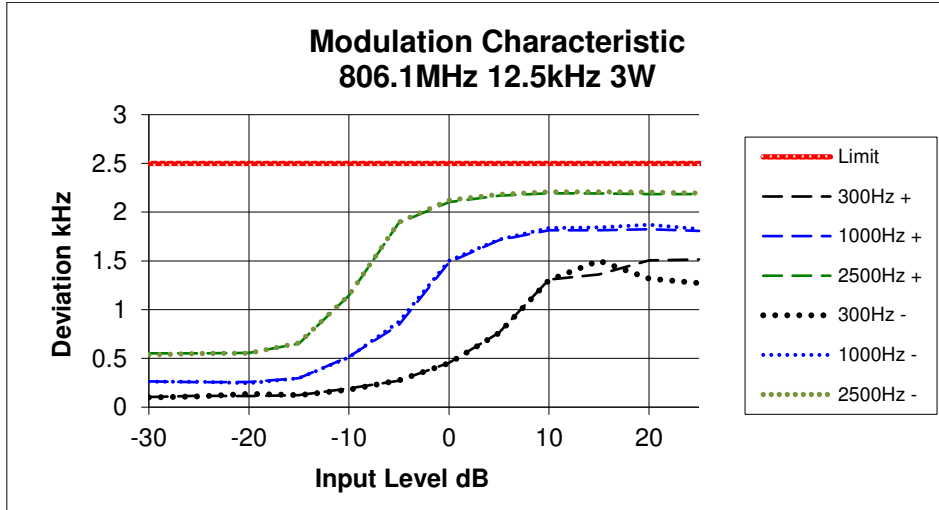

Tx FREQUENCY: 816.0 MHz

12.5 kHz Channel Spacing

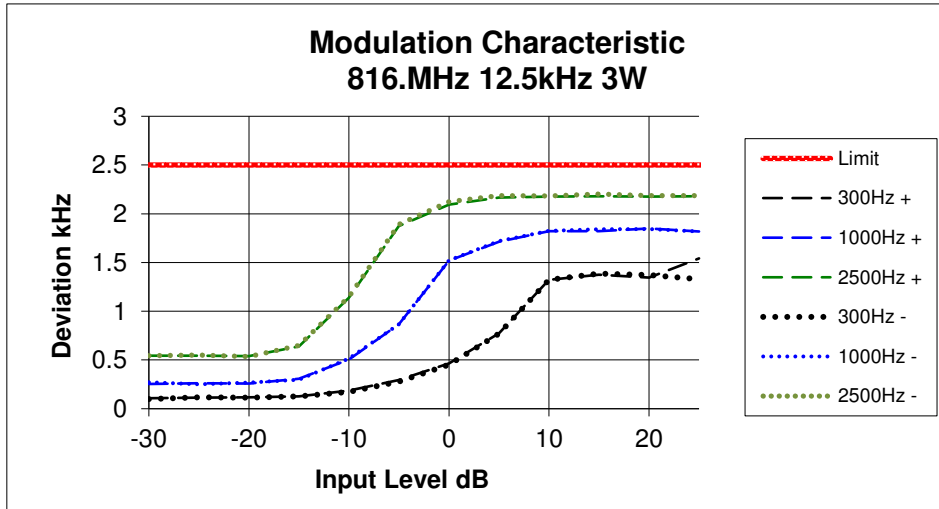


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 852.0 MHz

12.5 kHz Channel Spacing

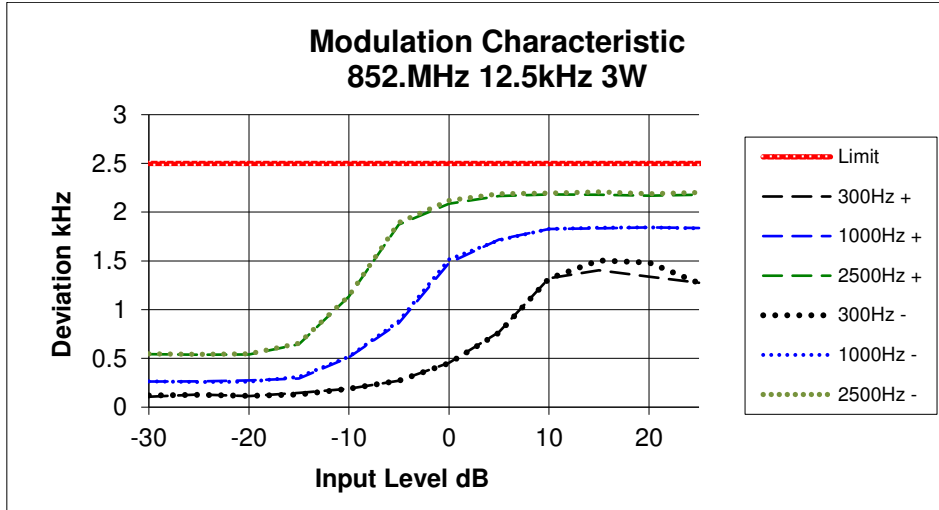

Tx FREQUENCY: 869.9 MHz

12.5 kHz Channel Spacing

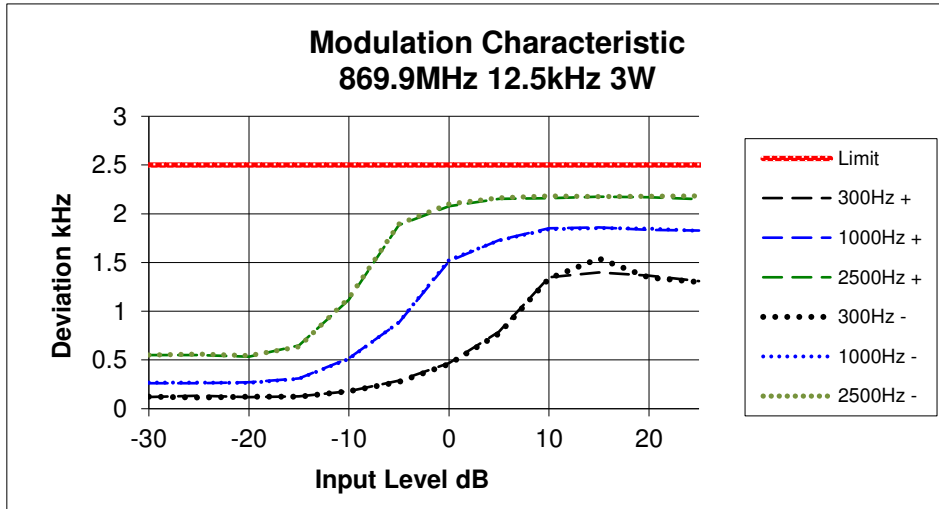


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 762.1 MHz

25.0 kHz Channel Spacing

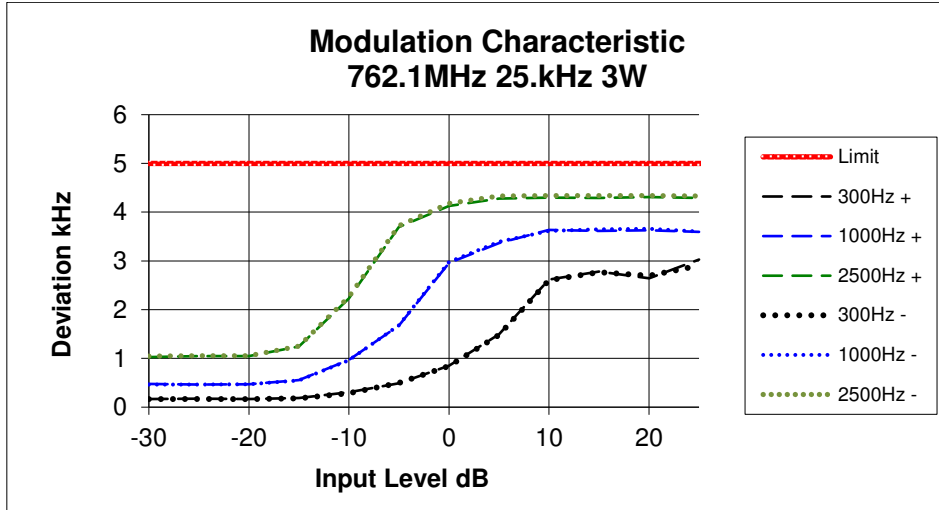

Tx FREQUENCY: 800.0 MHz

25.0 kHz Channel Spacing

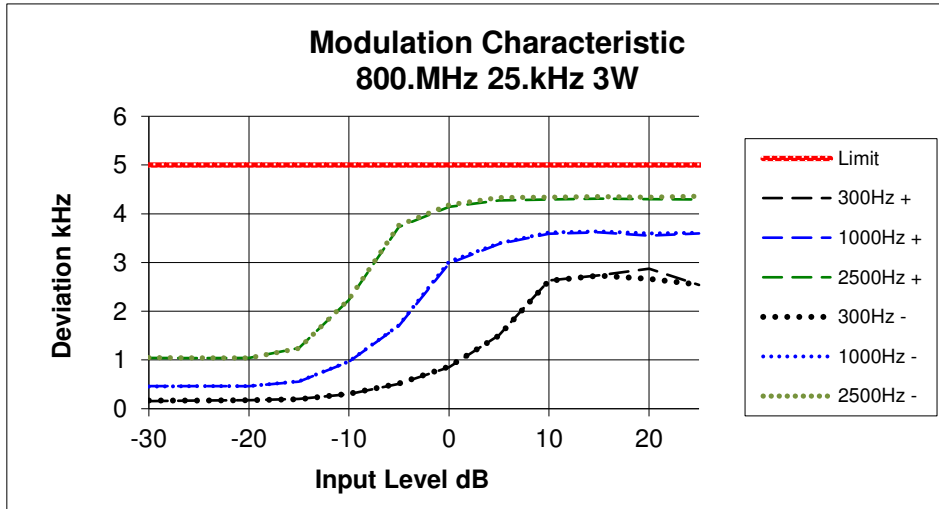


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 806.1 MHz

25.0 kHz Channel Spacing

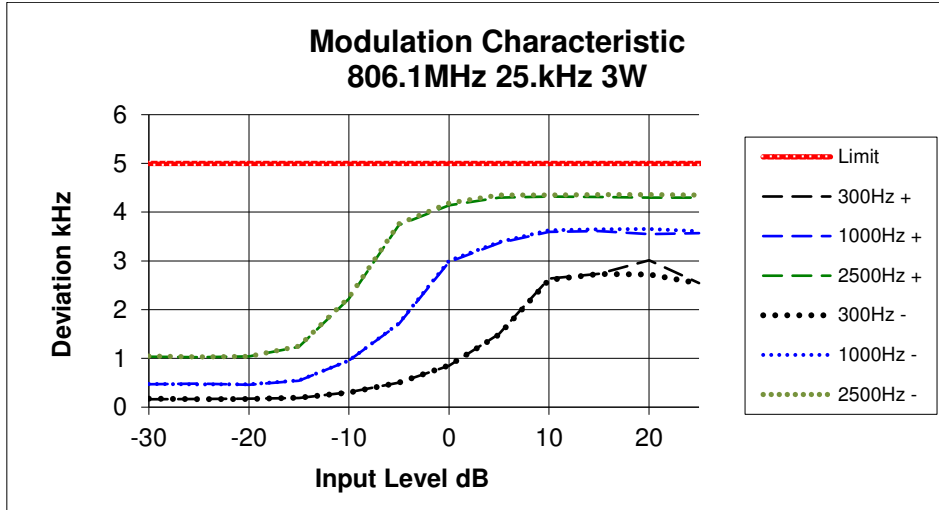

Tx FREQUENCY: 816.0 MHz

25.0 kHz Channel Spacing

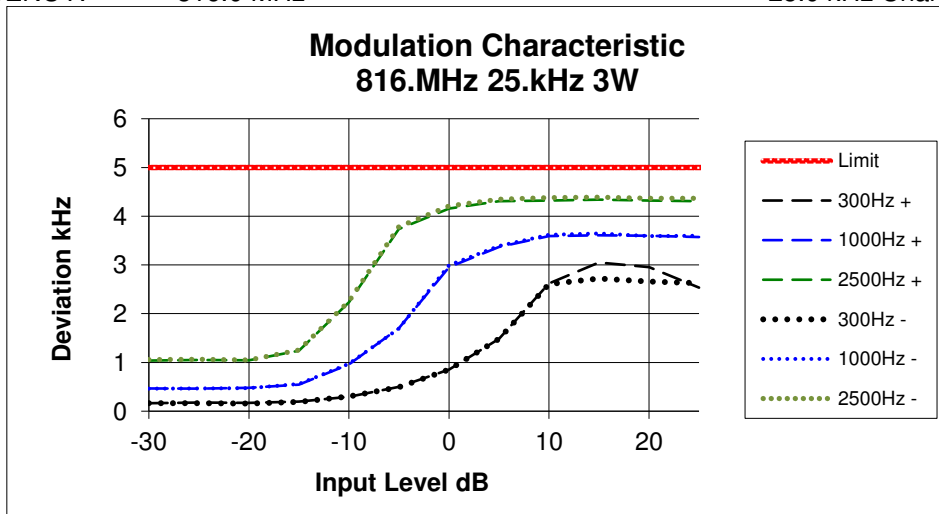


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 852.0 MHz

25.0 kHz Channel Spacing

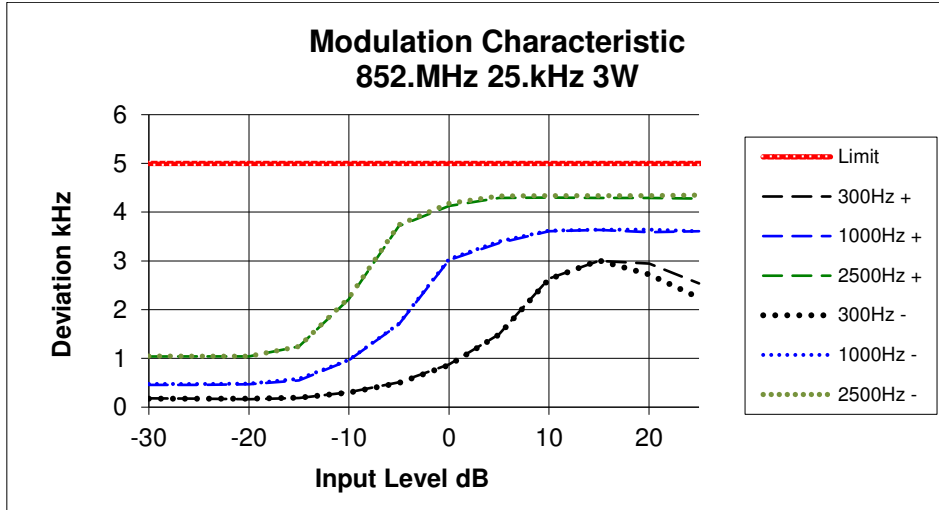

Tx FREQUENCY: 869.9 MHz

25.0 kHz Channel Spacing

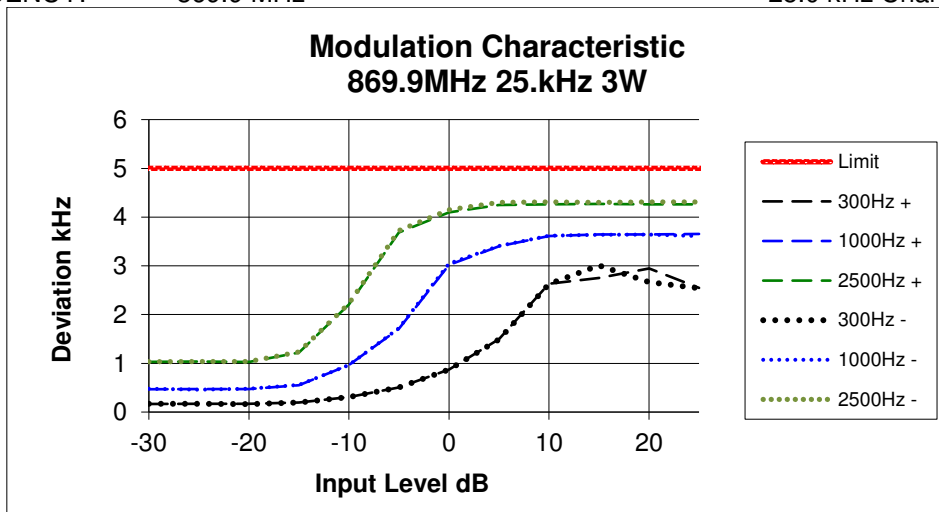

TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS

SPECIFICATION: FCC 47 CFR 2.1049 (c) RSS-119 5.5

GUIDE: TIA/EIA-603D 2.2.11 (Analogue)
TIA-102.CAAA-C 2.2.5 (Digital)

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment Set up.
2. For analogue measurements: The EUT was modulated by a 2500 Hz tone at an input level 16 dB above a level that produced 50% deviation. The input level was established at the frequency of maximum response of the audio modulating circuit.
For Data measurements: The EUT was modulated with an internally generated pseudo random bit sequence at the appropriate Baud rates.
3. The Occupied Bandwidth was measured on the Spectrum Analyser, with bandwidth settings as follows.

Emission Mask D – Resolution Bandwidth = 100 Hz, Video Bandwidth = 1 kHz

Emission Mask B, C, G, and H – Resolution bandwidth = 300 Hz, Video Bandwidth = 3 kHz

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz and 25.0 kHz channel spacing.

MEASUREMENT UNCERTAINTY 95% $\pm 0.65\text{dB}$

LIMIT CLAUSE: FCC 47 CFR 90.210 RSS-119 5.5

EMISSION MASKS - FCC

Emission Mask B	12.5 kHz & 25 kHz Ch Sp	Analogue	
Emission Mask H	12.5 kHz & 25 kHz Ch Sp	FFSK, Digital Voice/data	806 & 852 MHz
Emission Mask G	12.5 kHz & 25 kHz Ch Sp	FFSK, Digital Voice/data	816 & 869 MHz

EMISSION MASKS – ISED (RSS-119)

Emission Mask D	12.5 kHz Ch Sp	Analogue, FFSK, Digital	all frequencies
Emission Mask B	25.0 kHz Ch Sp	Analogue	all frequencies
Emission Mask G	25.0 kHz Ch Sp	FFSK, Digital	all frequencies

DATA SPEED


Digital Voice/Data	12.5 kHz Channel Spacing	9600 bps & 12000 bps
FFSK	12.5 kHz Channel Spacing	1200 bps & 2400 bps

Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 12.5 kHz Channel Spacing

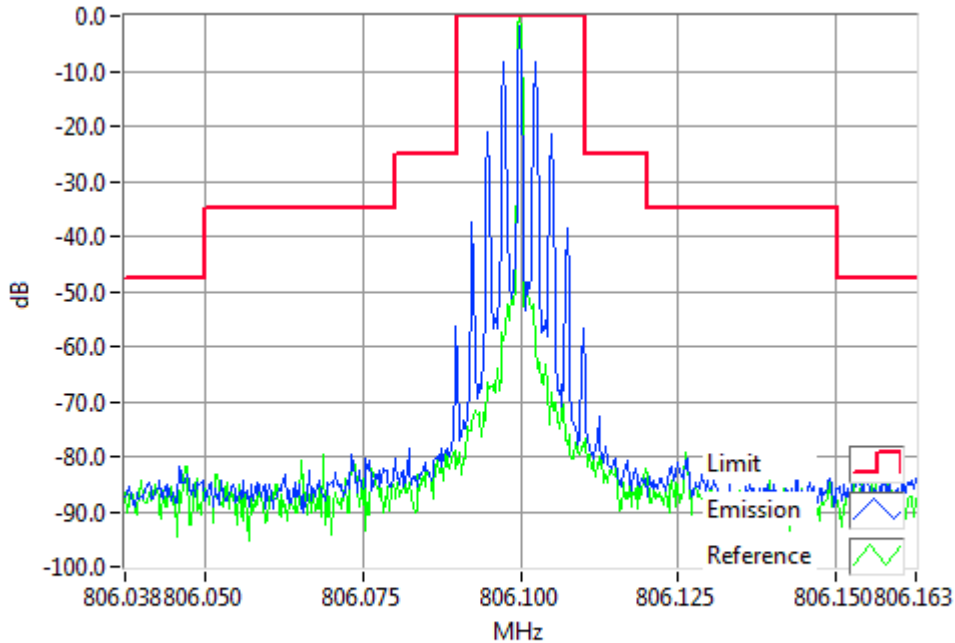

Analogue Modulation 806.1000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

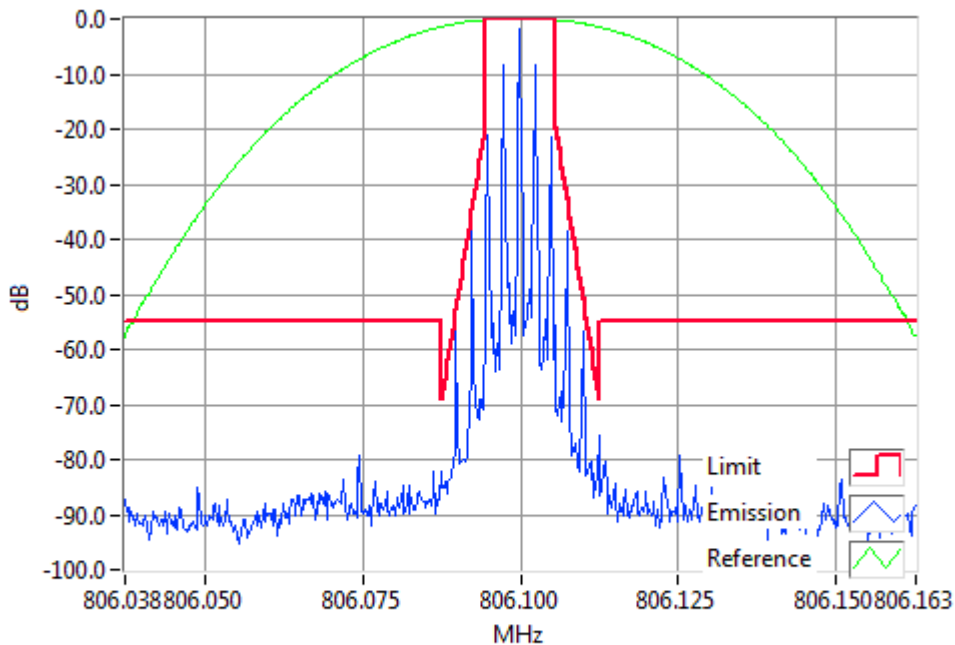


Analogue Modulation 806.1000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE

Tx FREQUENCY: 806.1 MHz 1 W 12.5 kHz Channel Spacing

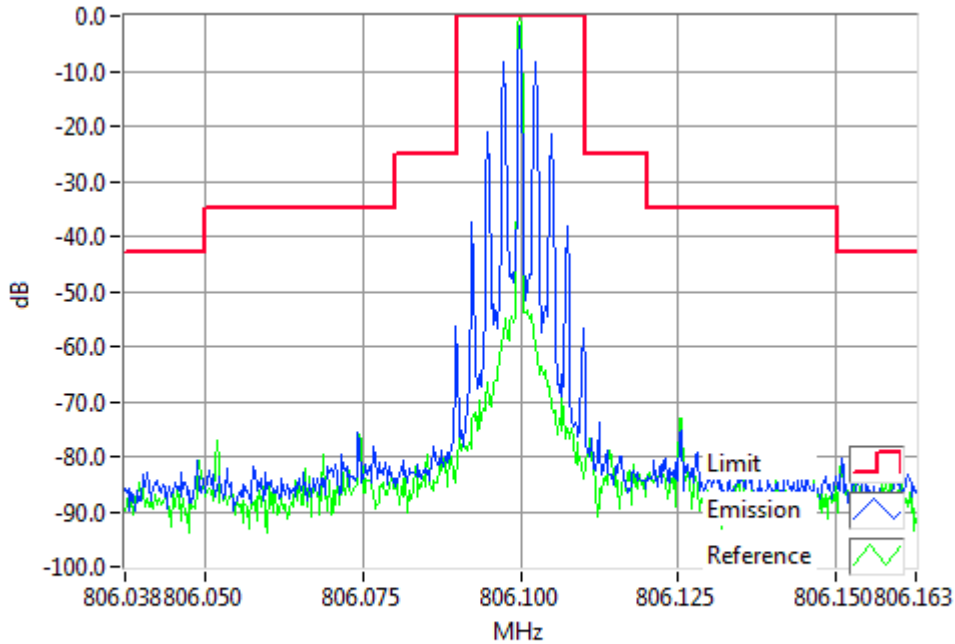

Analogue Modulation 806.1000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

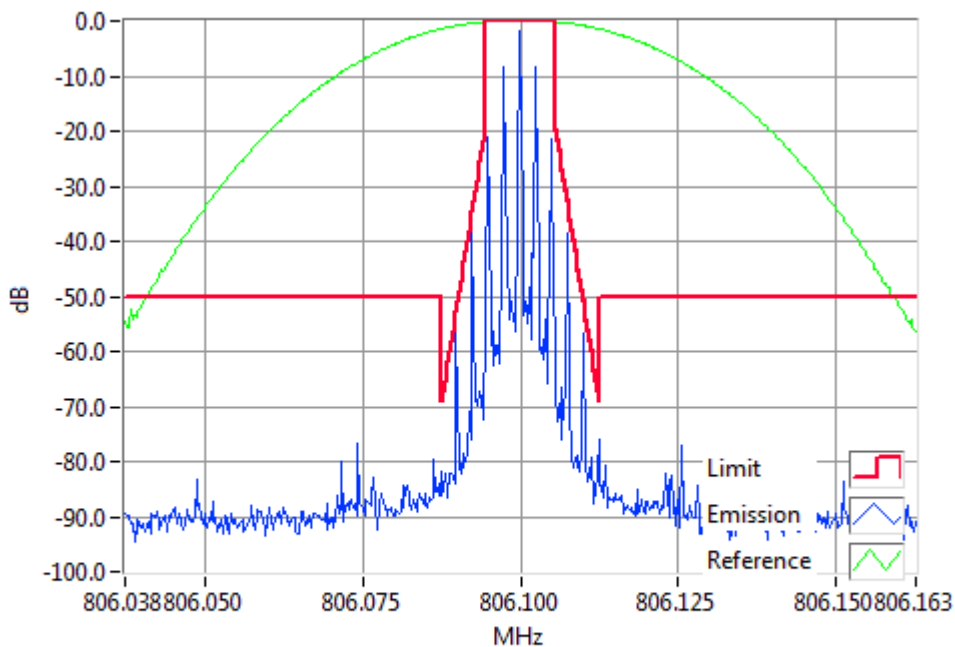


Analogue Modulation 806.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 12.5 kHz Channel Spacing

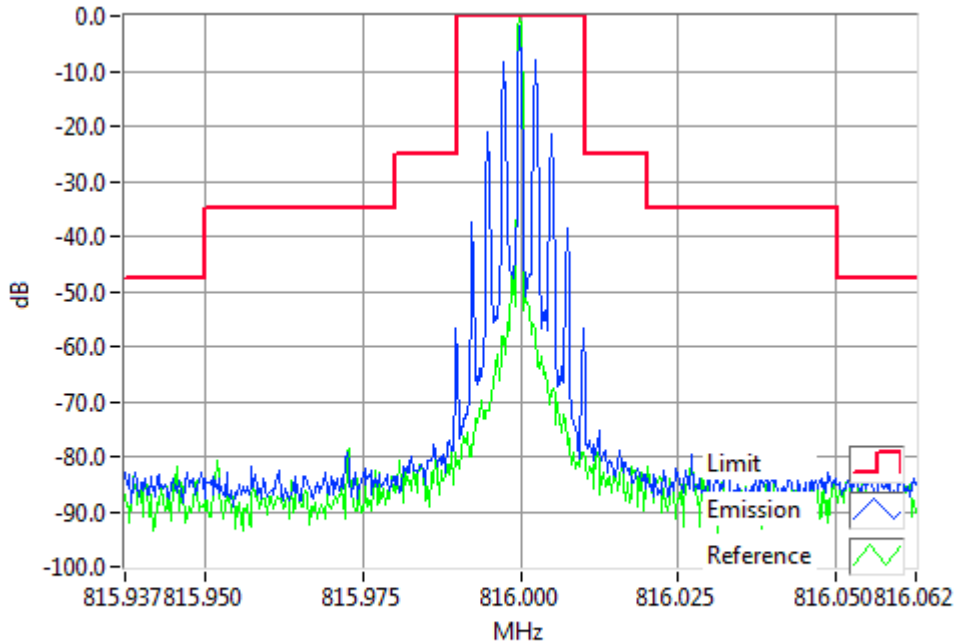

Analogue Modulation 816.0000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


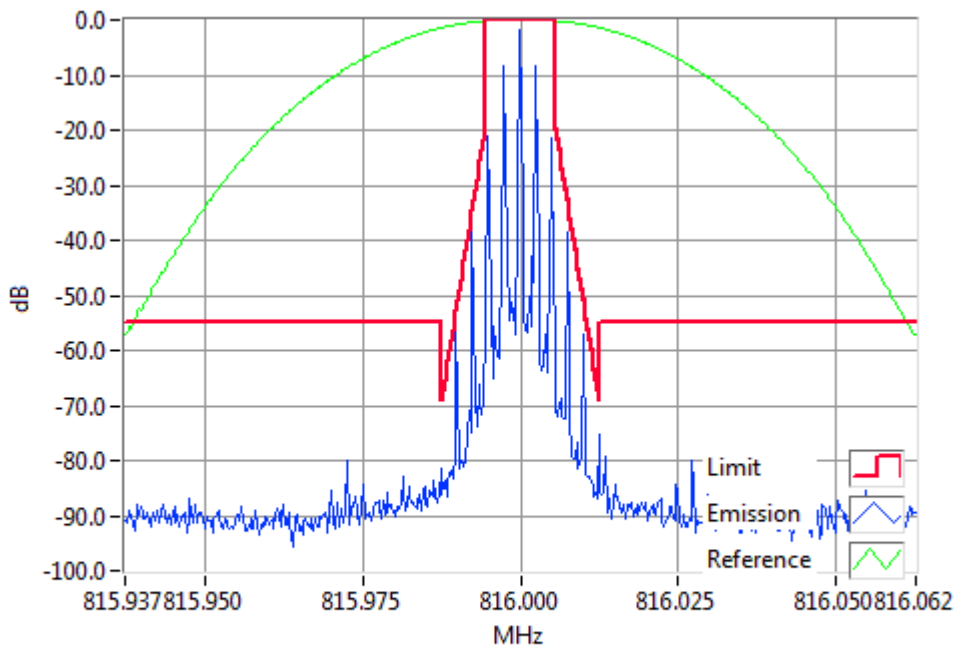


Analogue Modulation 816.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE

Tx FREQUENCY: 816.0 MHz 1 W 12.5 kHz Channel Spacing

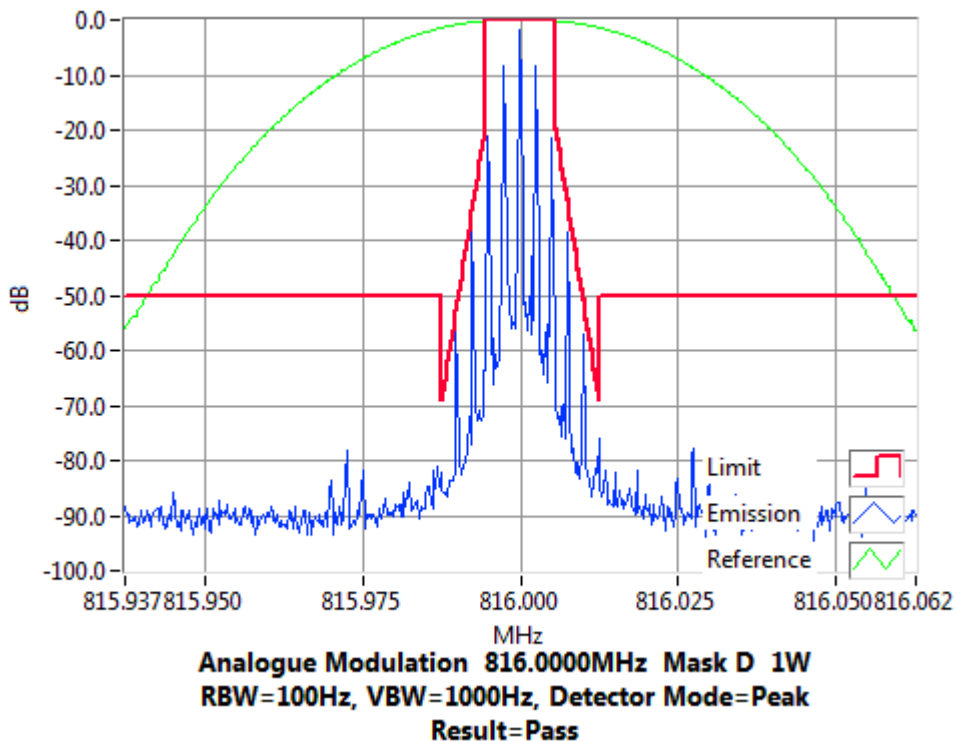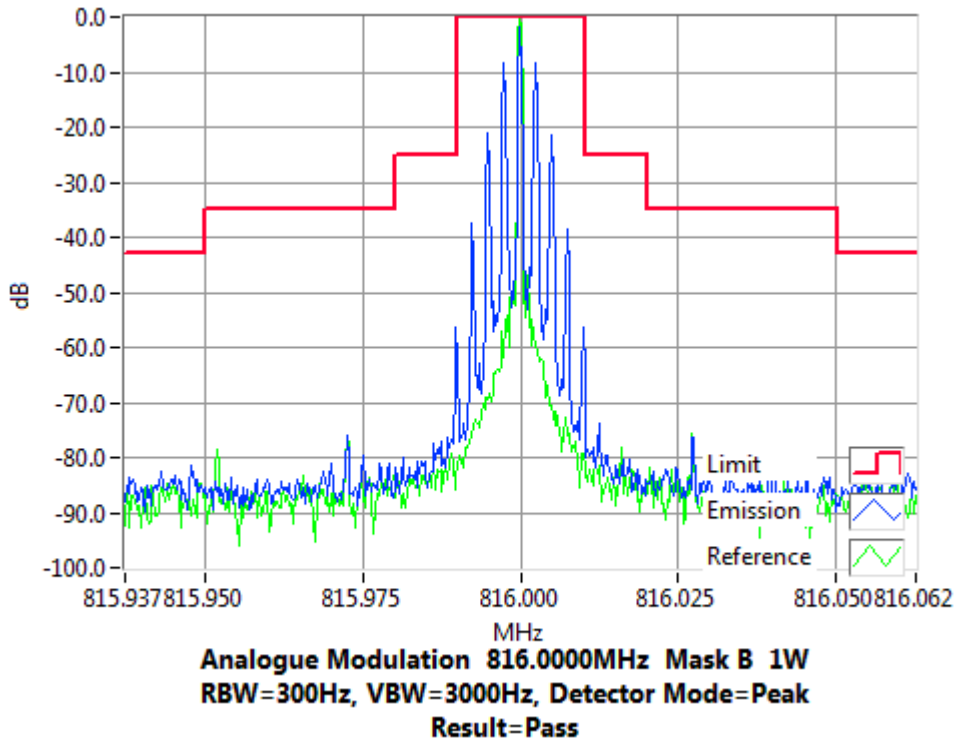


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 12.5 kHz Channel Spacing

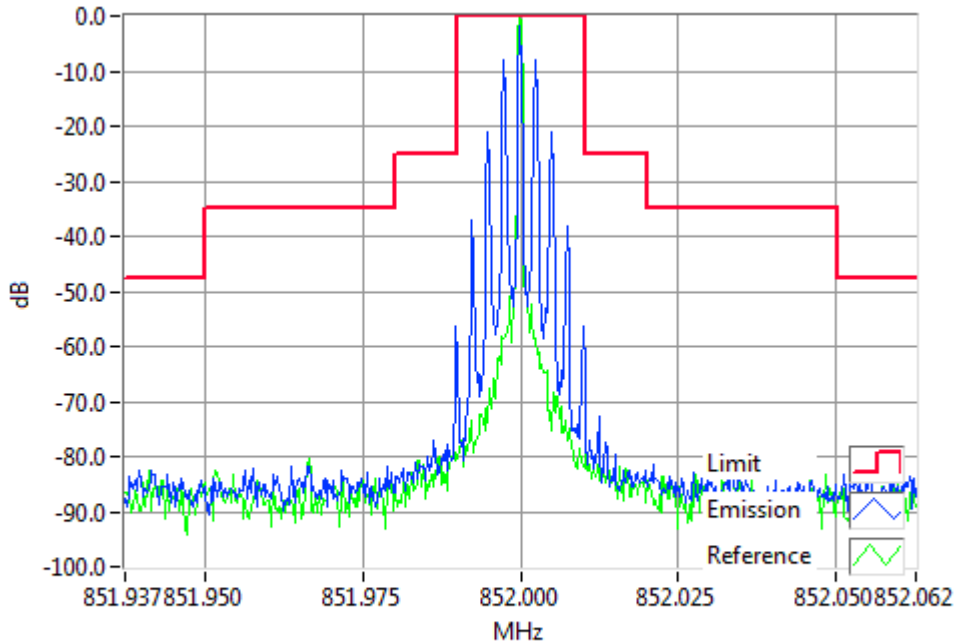

Analogue Modulation 852.0000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

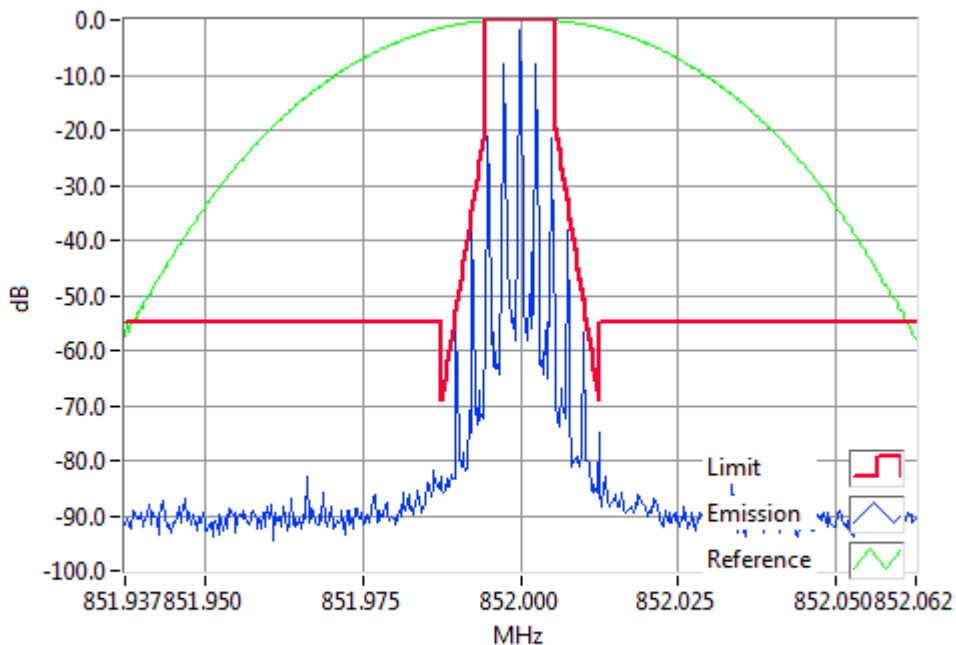


Analogue Modulation 852.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE

Tx FREQUENCY: 852.0 MHz 1 W 12.5 kHz Channel Spacing

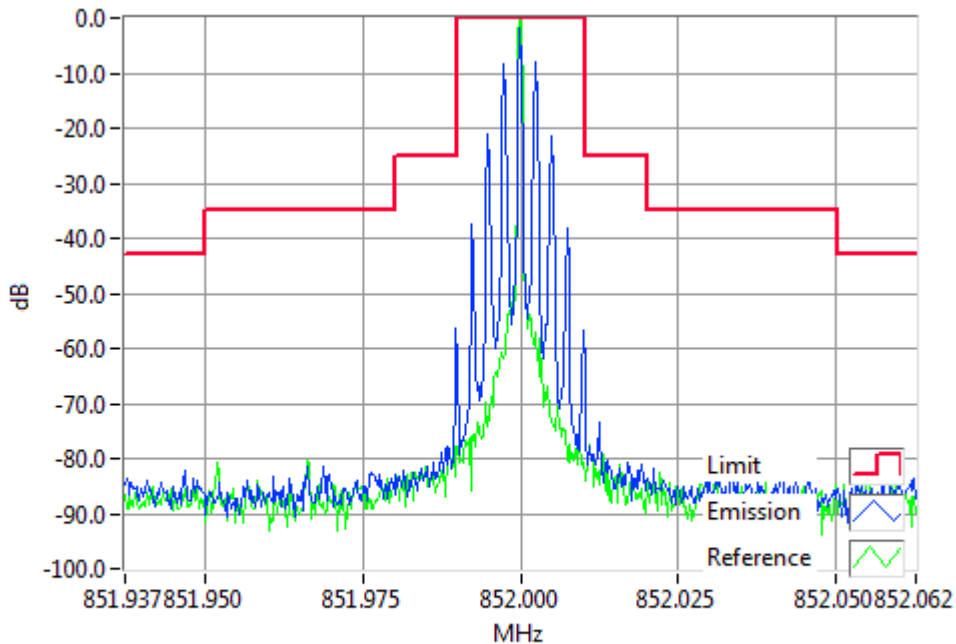

Analogue Modulation 852.0000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

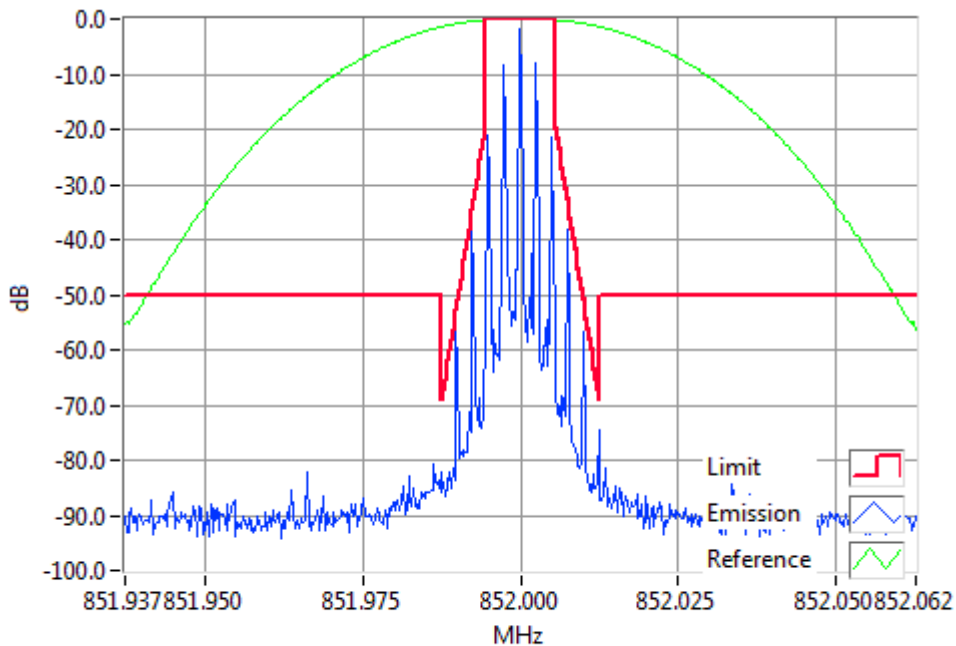


Analogue Modulation 852.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 12.5 kHz Channel Spacing

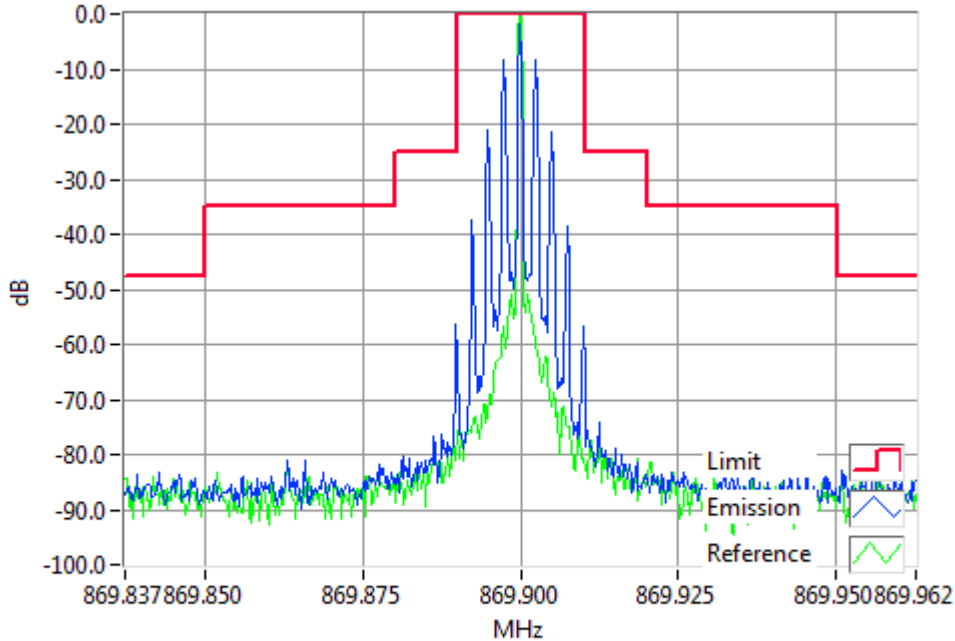

Analogue Modulation 869.9000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

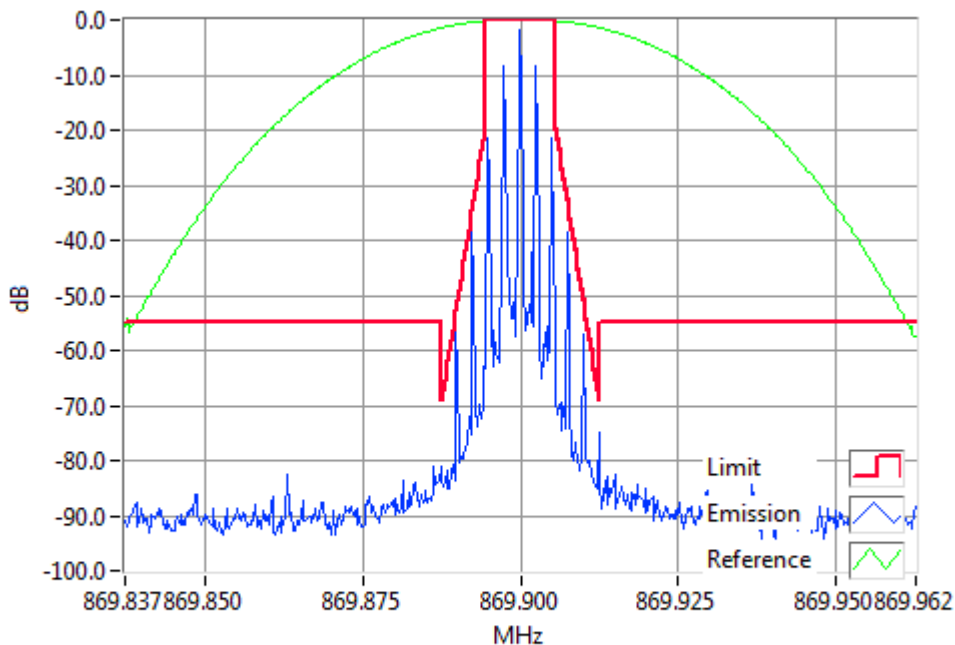


Analogue Modulation 869.9000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE

Tx FREQUENCY: 869.9 MHz 1 W 12.5 kHz Channel Spacing

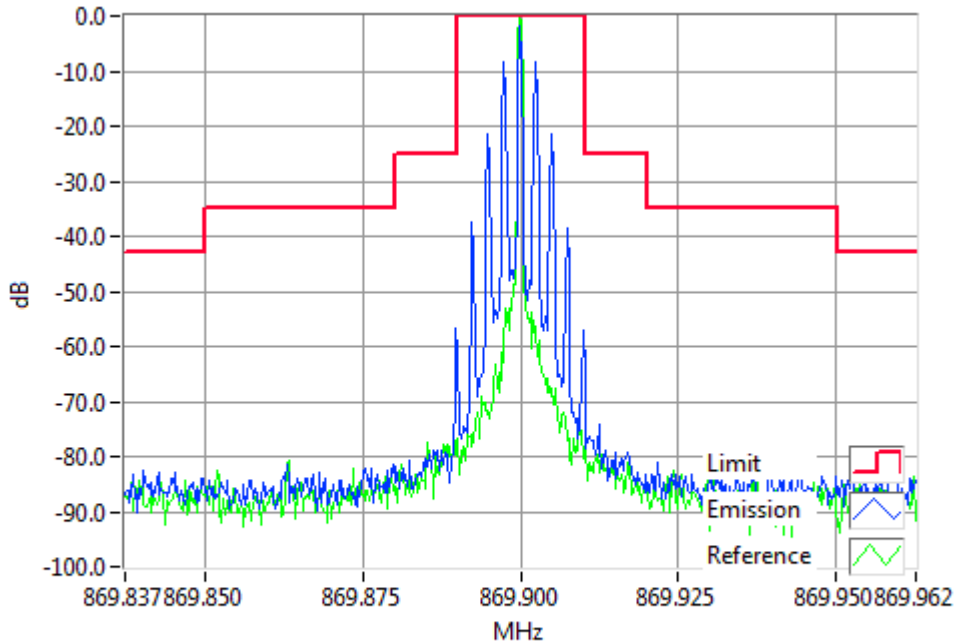

Analogue Modulation 869.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

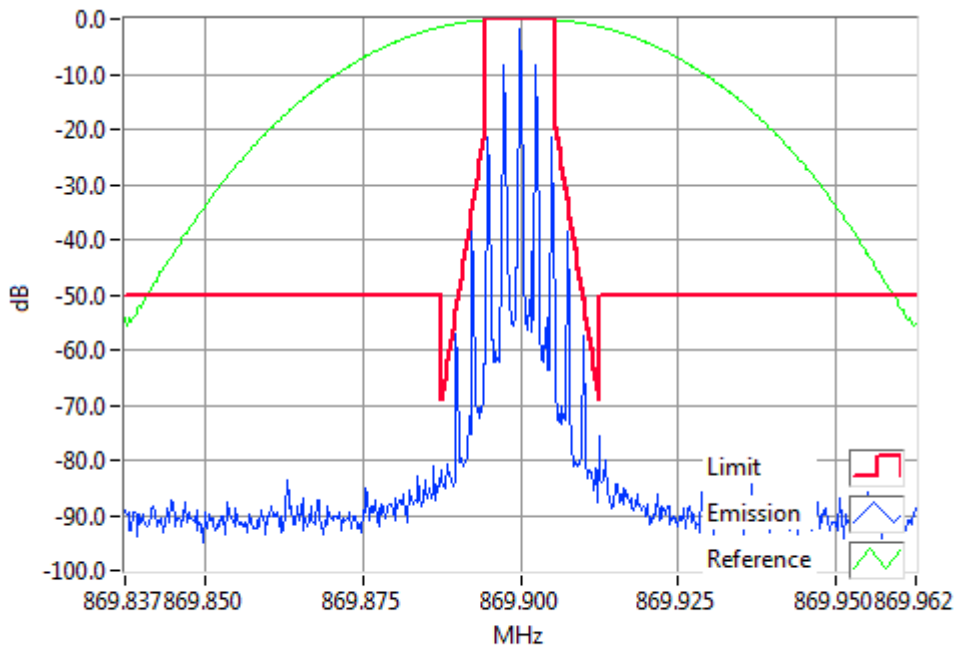


Analogue Modulation 869.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 25 kHz Channel Spacing

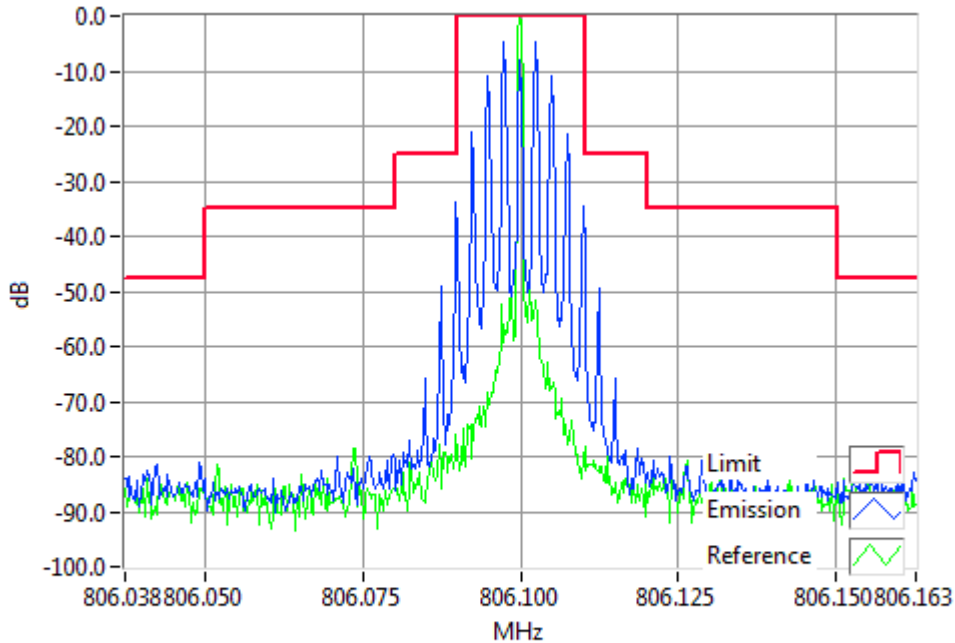

Analogue Modulation 806.1000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 806.1 MHz 1 W 25 kHz Channel Spacing

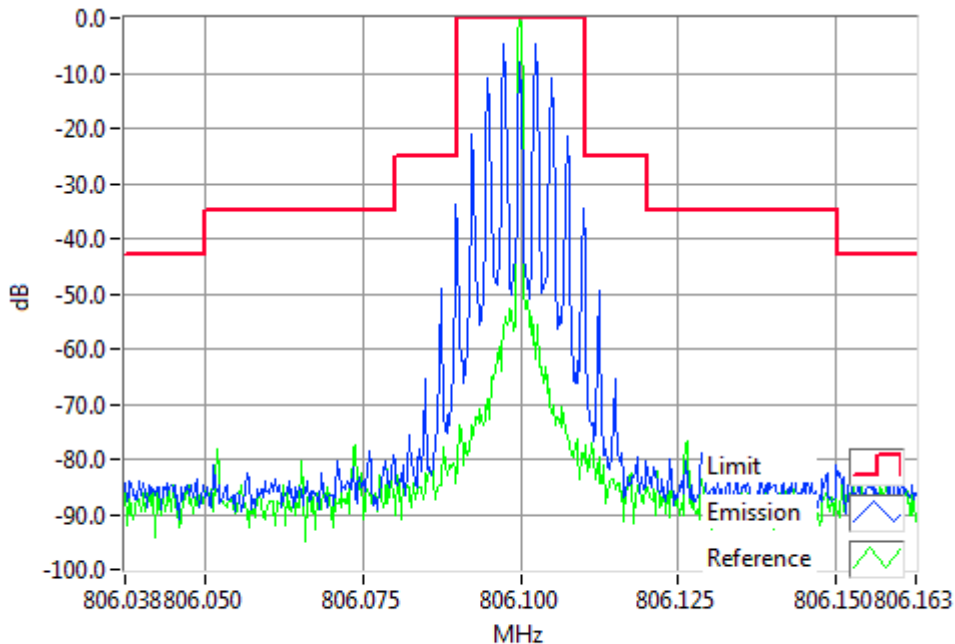


Analogue Modulation 806.1000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 25 kHz Channel Spacing

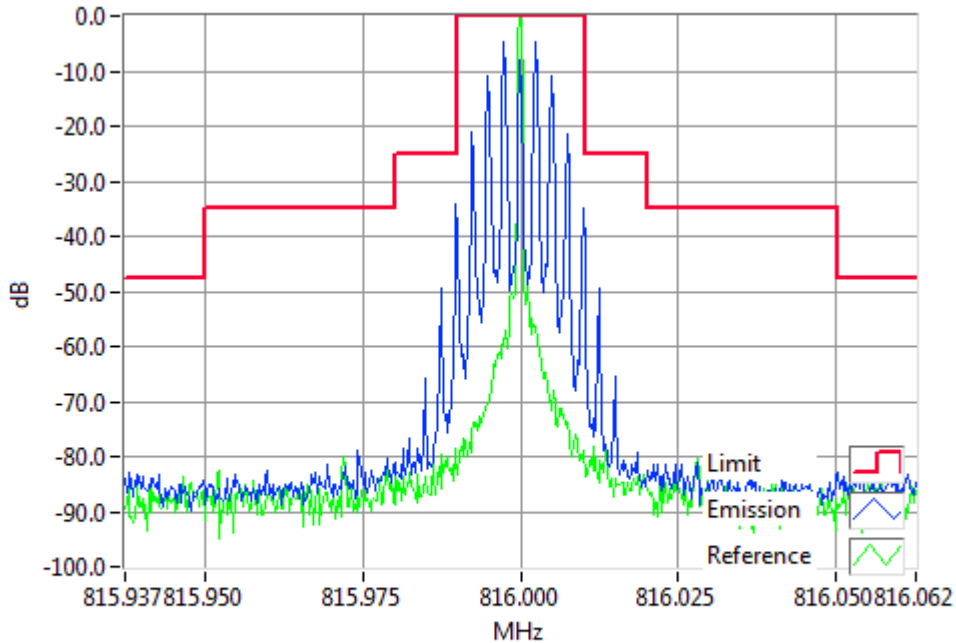

Analogue Modulation 816.0000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 816.0 MHz 1 W 25 kHz Channel Spacing

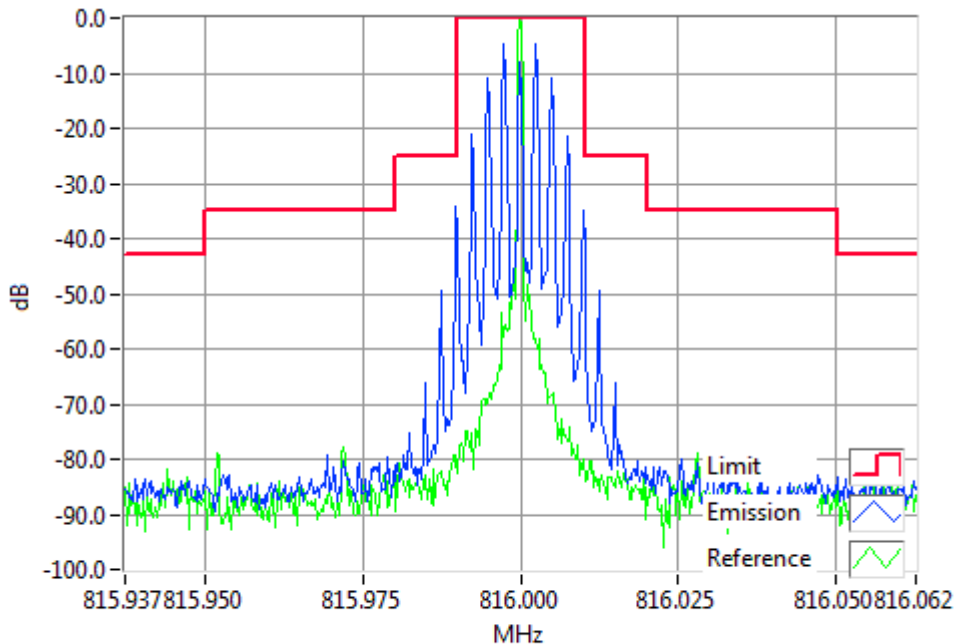


Analogue Modulation 816.0000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 25 kHz Channel Spacing

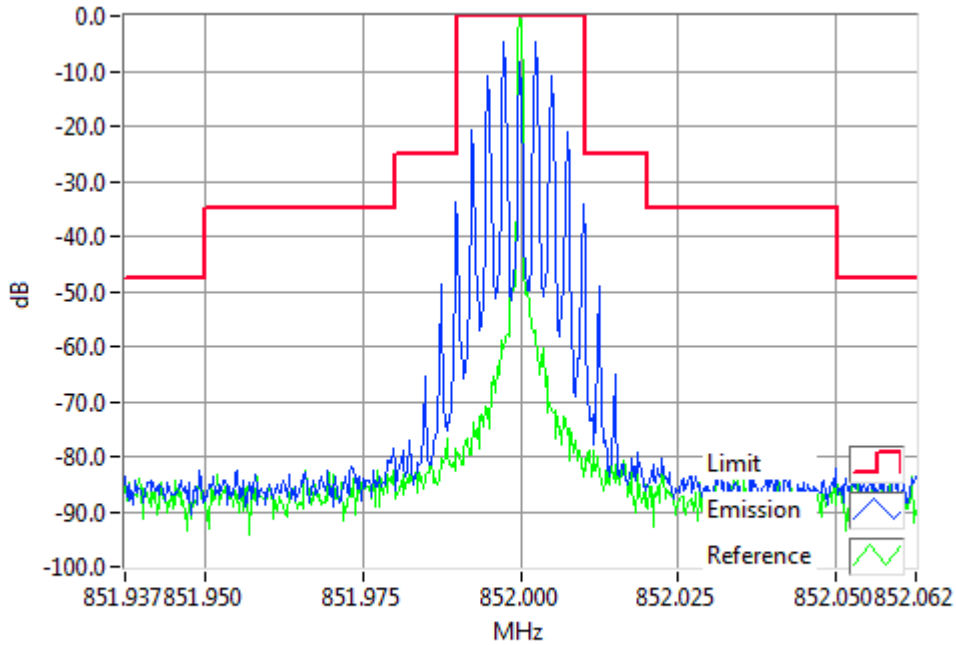

Analogue Modulation 852.0000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 852.0 MHz 1 W 25 kHz Channel Spacing

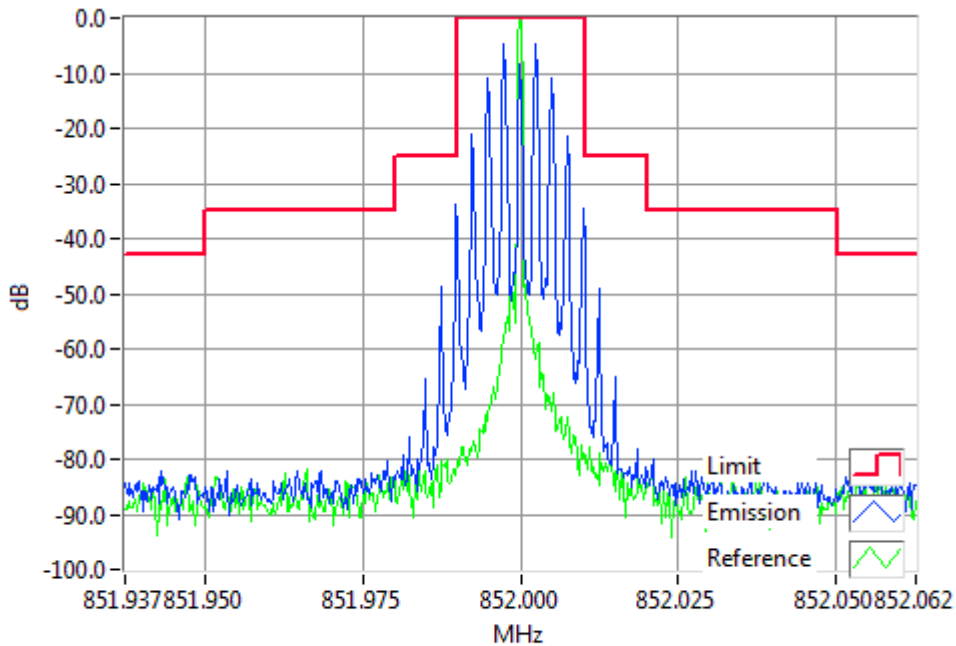


Analogue Modulation 852.0000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 25 kHz Channel Spacing

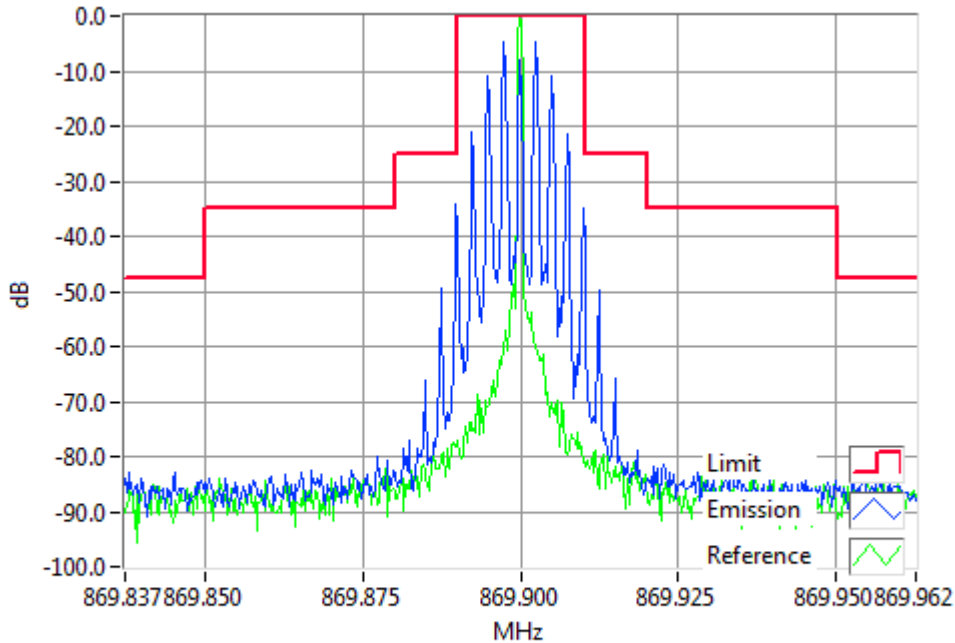

Analogue Modulation 869.9000MHz Mask B 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 869.9 MHz 1 W 25 kHz Channel Spacing

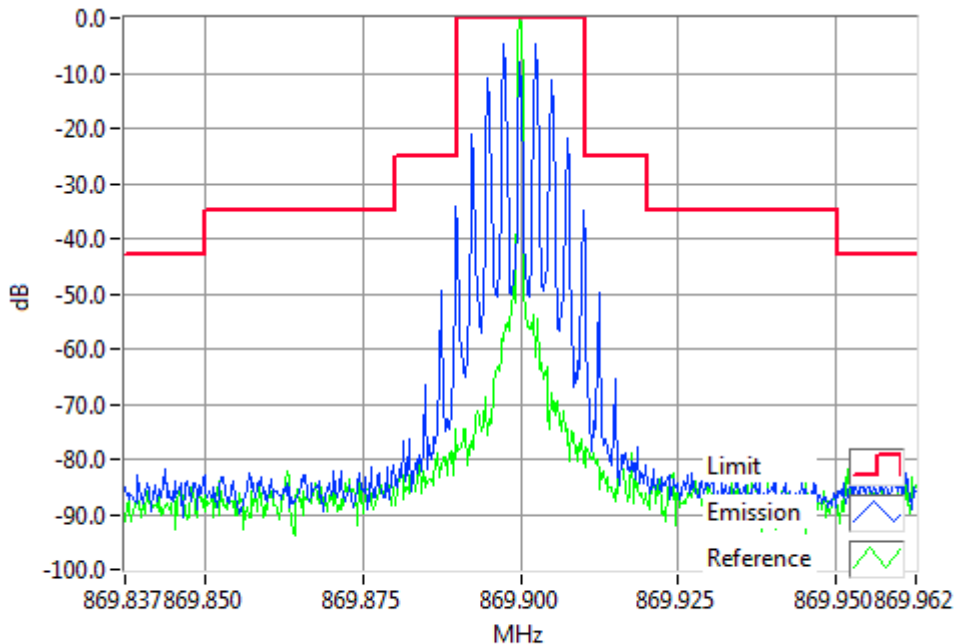


Analogue Modulation 869.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 12.5 kHz Channel Spacing

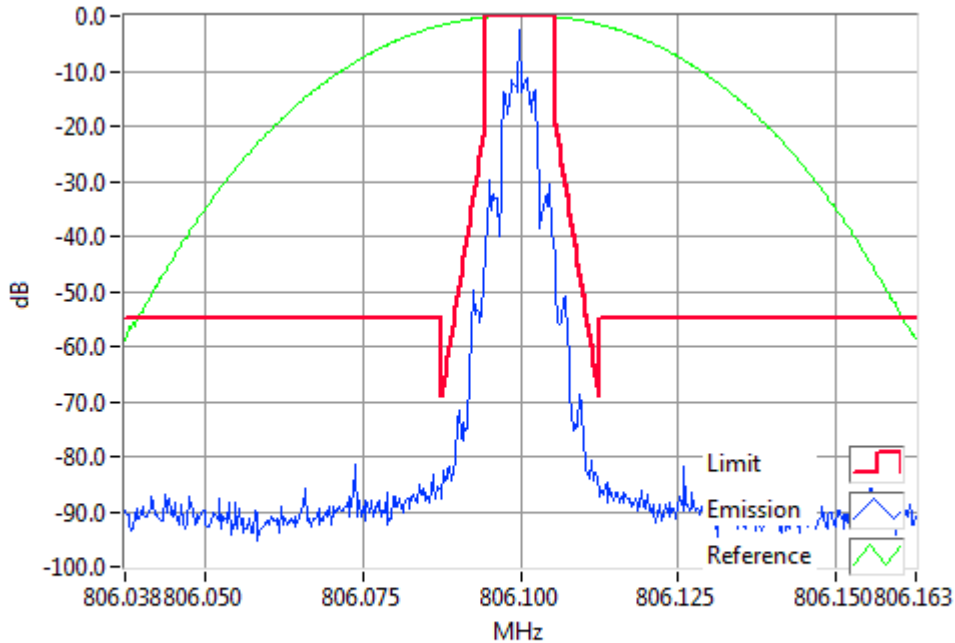

FFSK1200 806.1000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

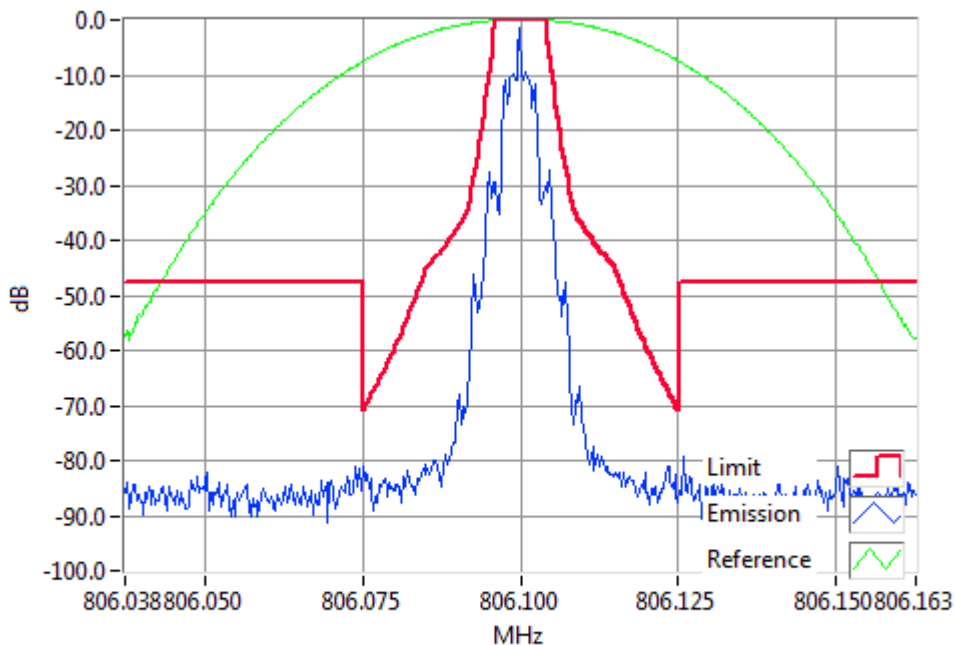


FFSK1200 806.1000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps

Tx FREQUENCY: 806.1 MHz 1 W 12.5 kHz Channel Spacing

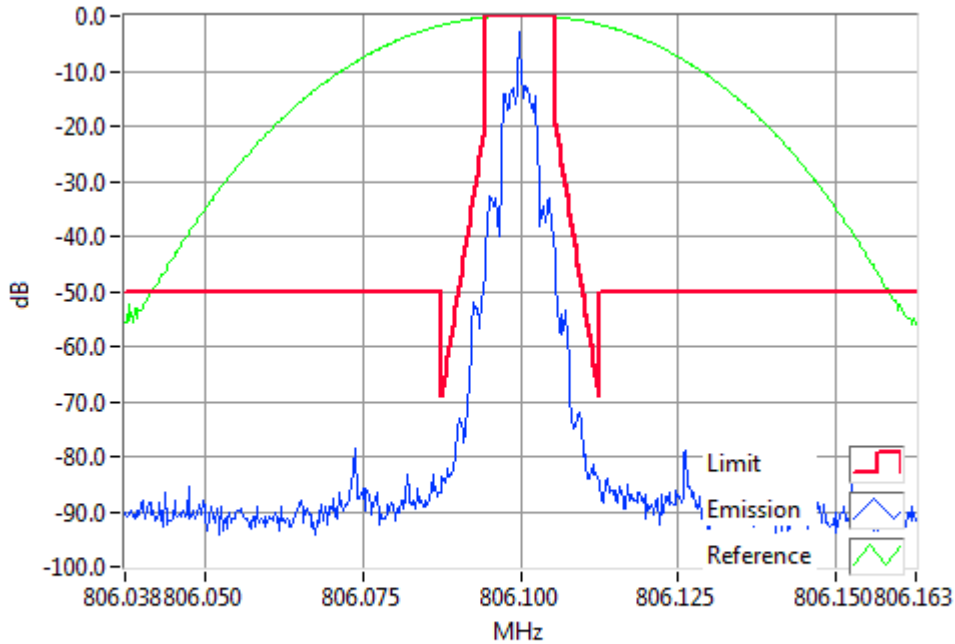

FFSK1200 806.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

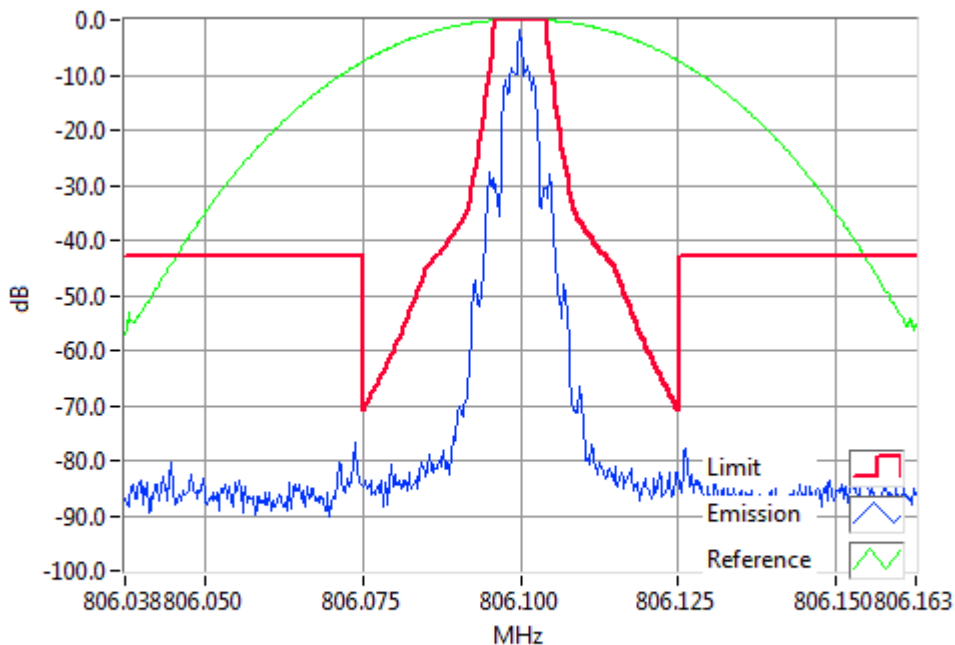


FFSK1200 806.1000MHz Mask H 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 12.5 kHz Channel Spacing

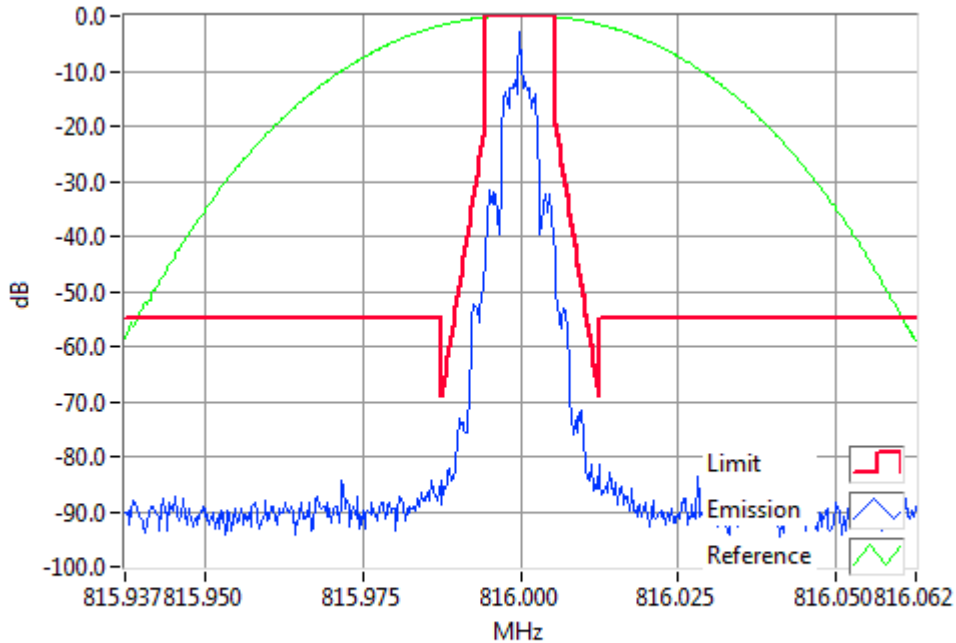

FFSK1200 816.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

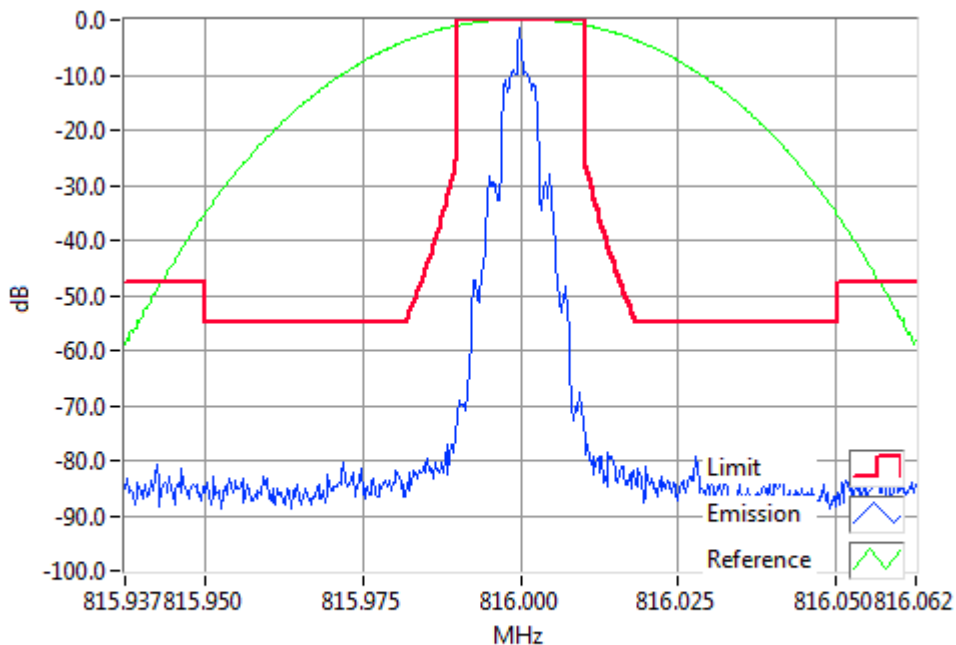


FFSK1200 816.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps

Tx FREQUENCY: 816.0 MHz 1 W 12.5 kHz Channel Spacing

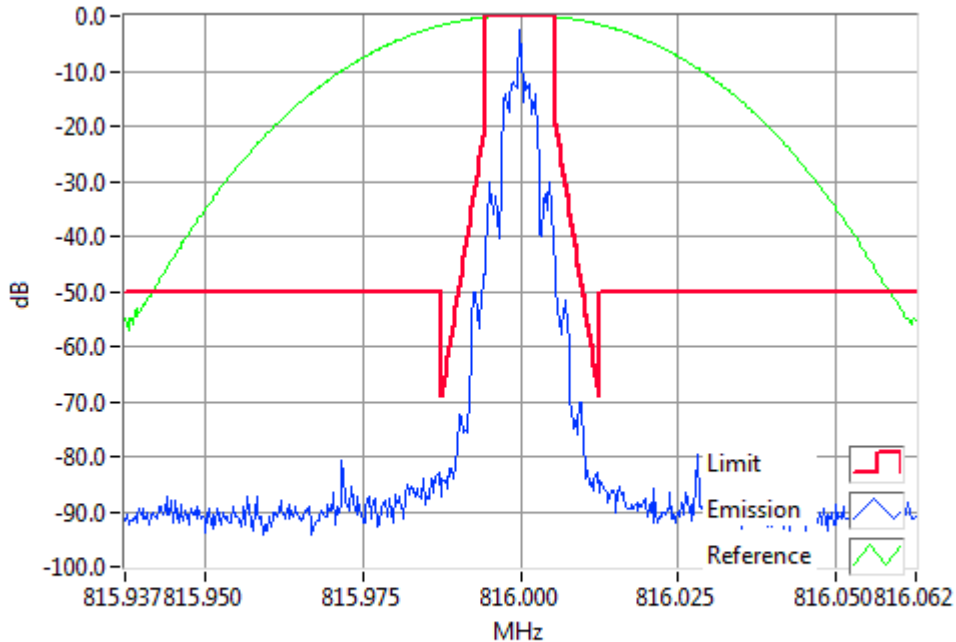

FFSK1200 816.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

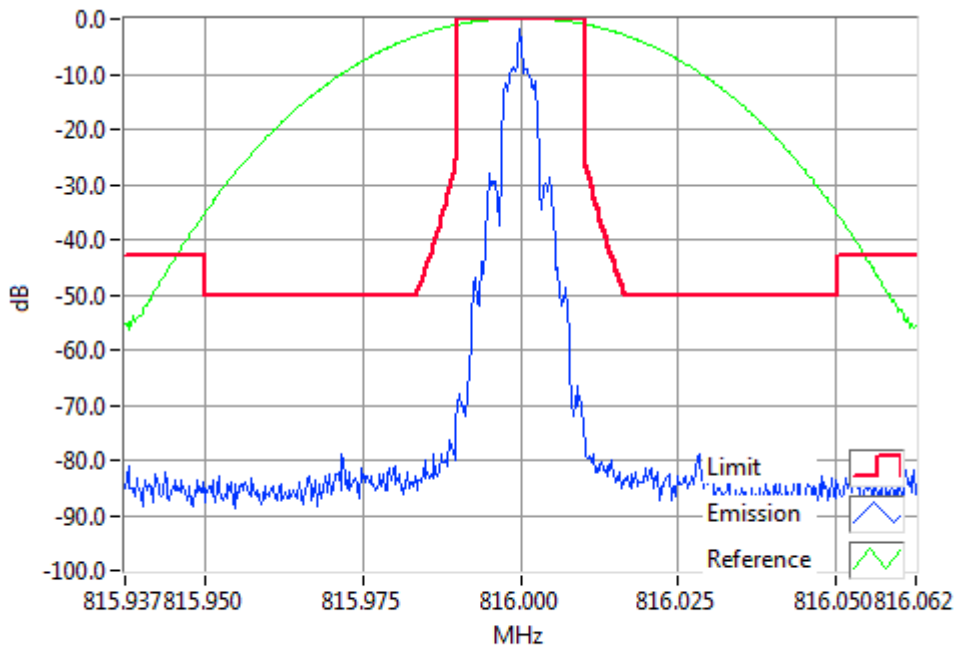


FFSK1200 816.0000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 12.5 kHz Channel Spacing

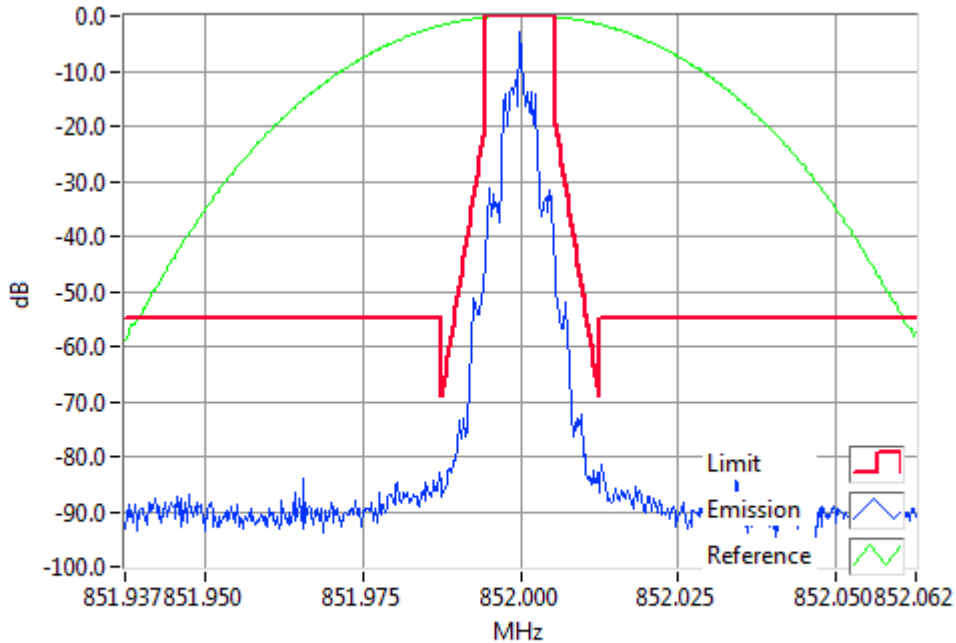

FFSK1200 852.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

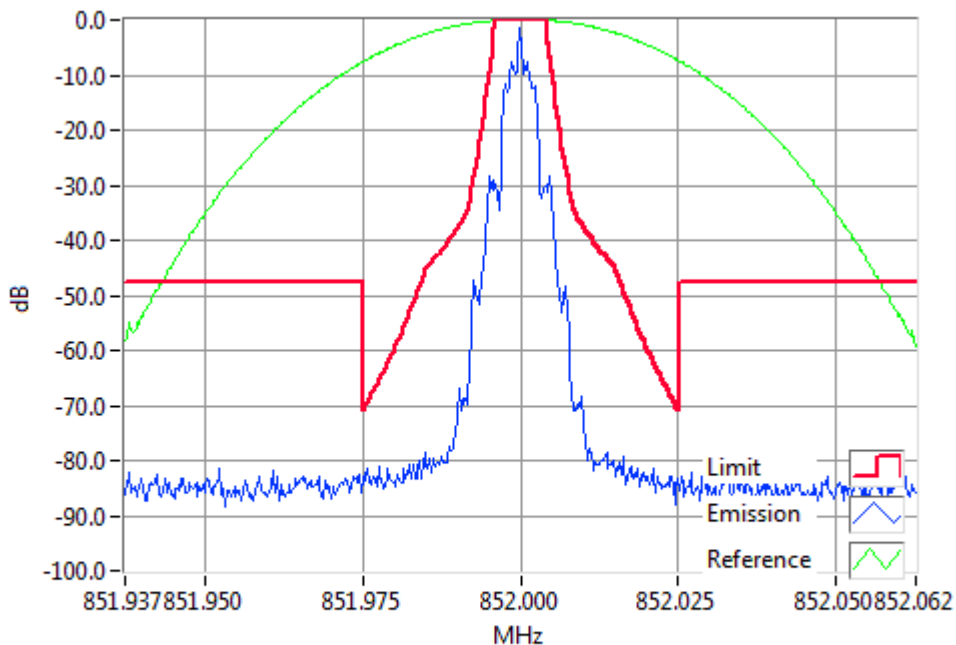


FFSK1200 852.0000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps

Tx FREQUENCY: 852.0 MHz 1 W 12.5 kHz Channel Spacing

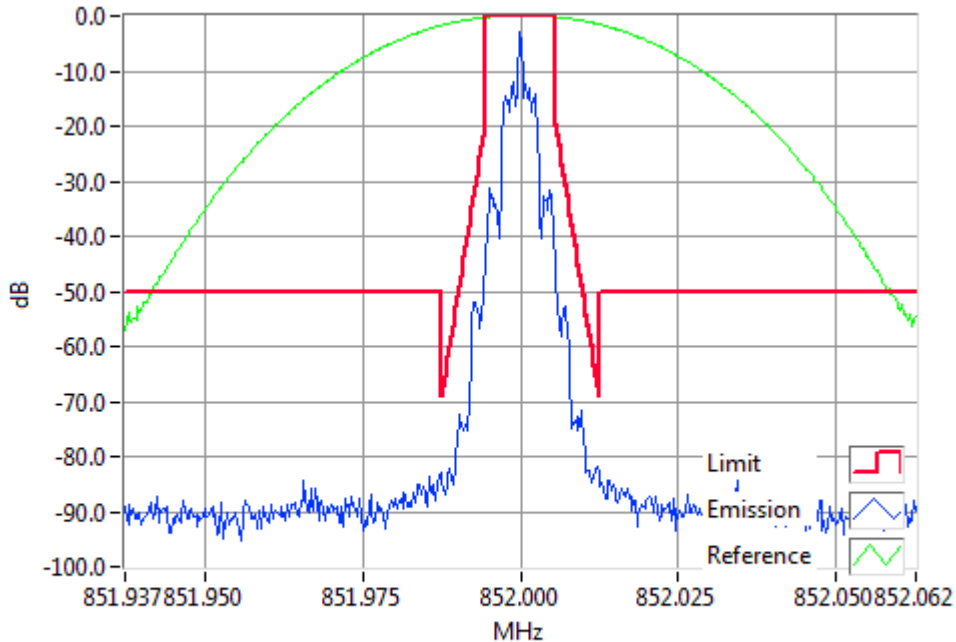

FFSK1200 852.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

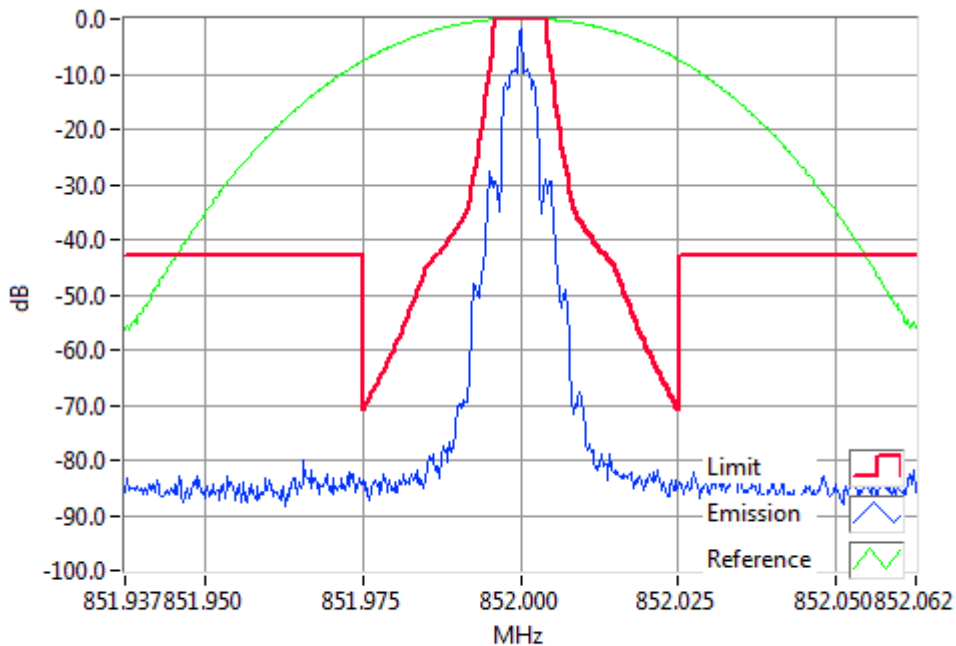


FFSK1200 852.0000MHz Mask H 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 12.5 kHz Channel Spacing

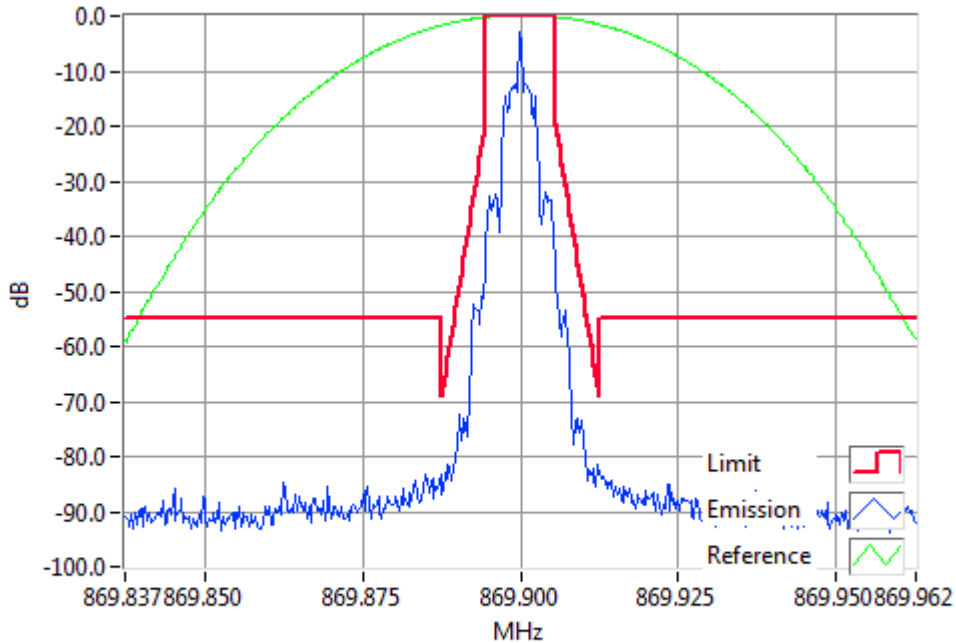

FFSK1200 869.9000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

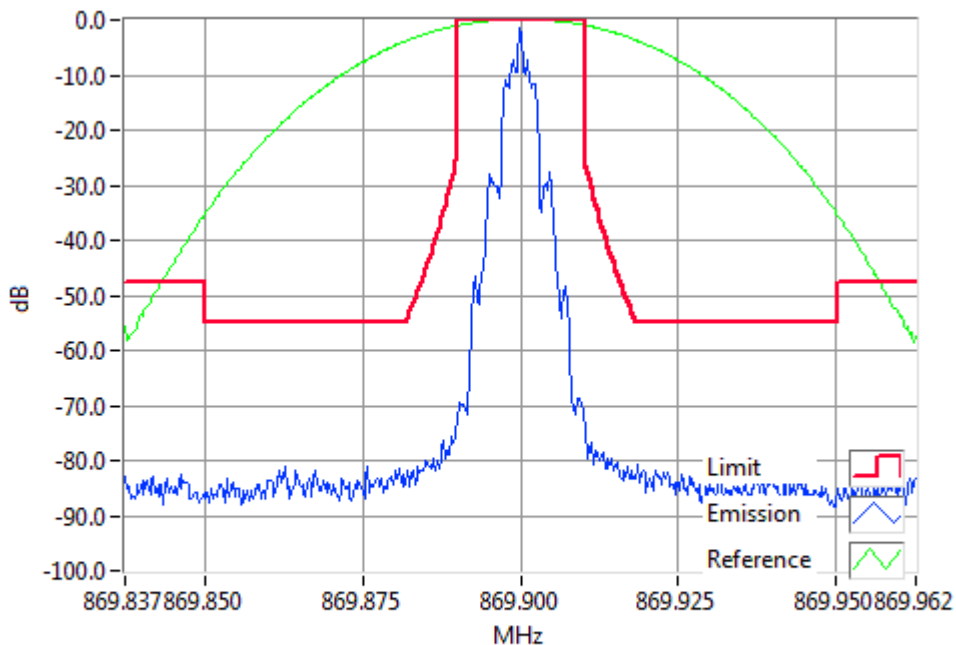


FFSK1200 869.9000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps

Tx FREQUENCY: 869.9 MHz 1 W 12.5 kHz Channel Spacing

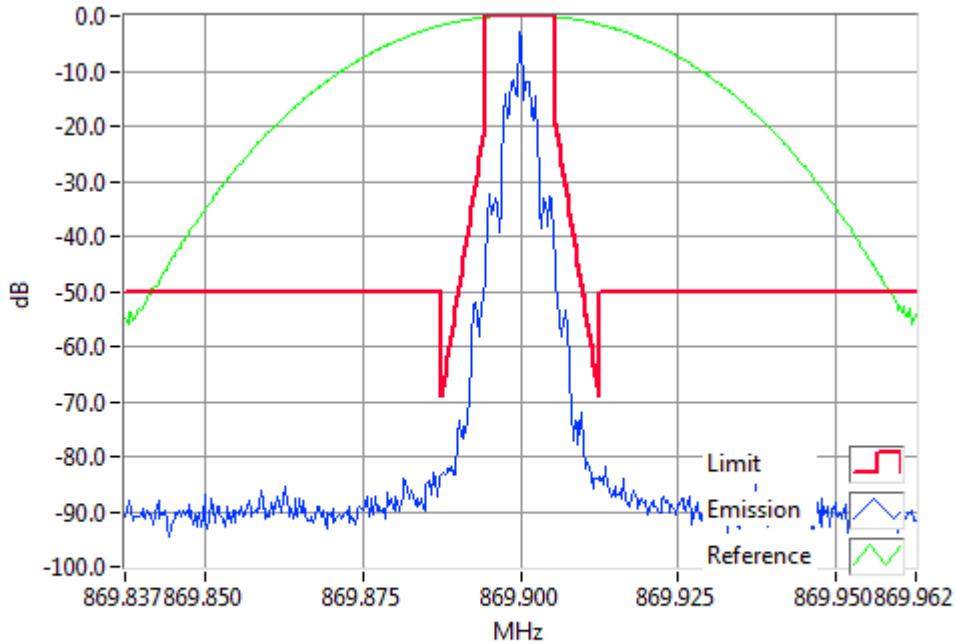

FFSK1200 869.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

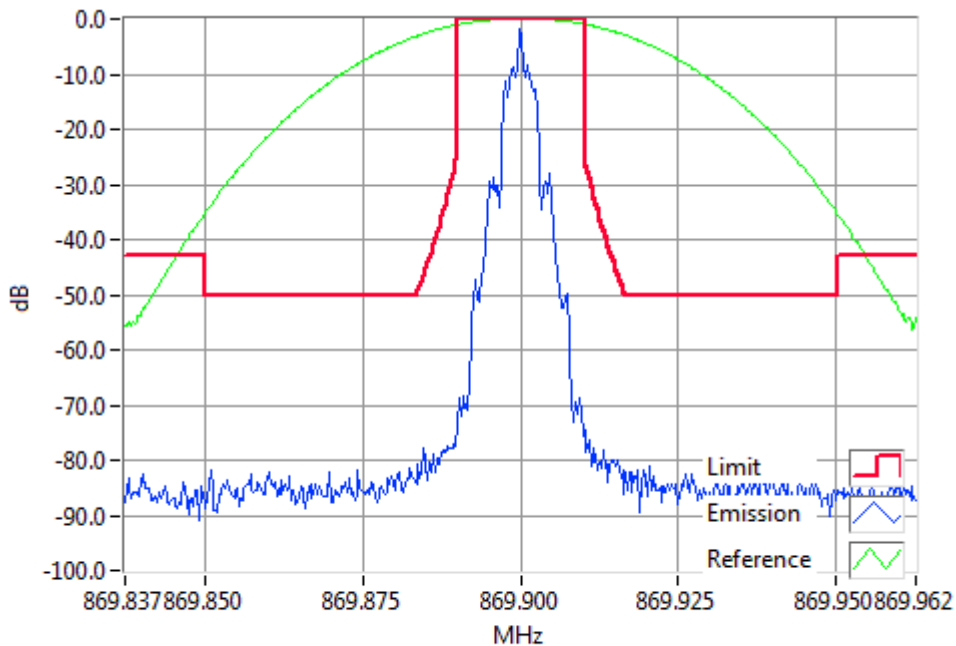


FFSK1200 869.9000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 25 kHz Channel Spacing

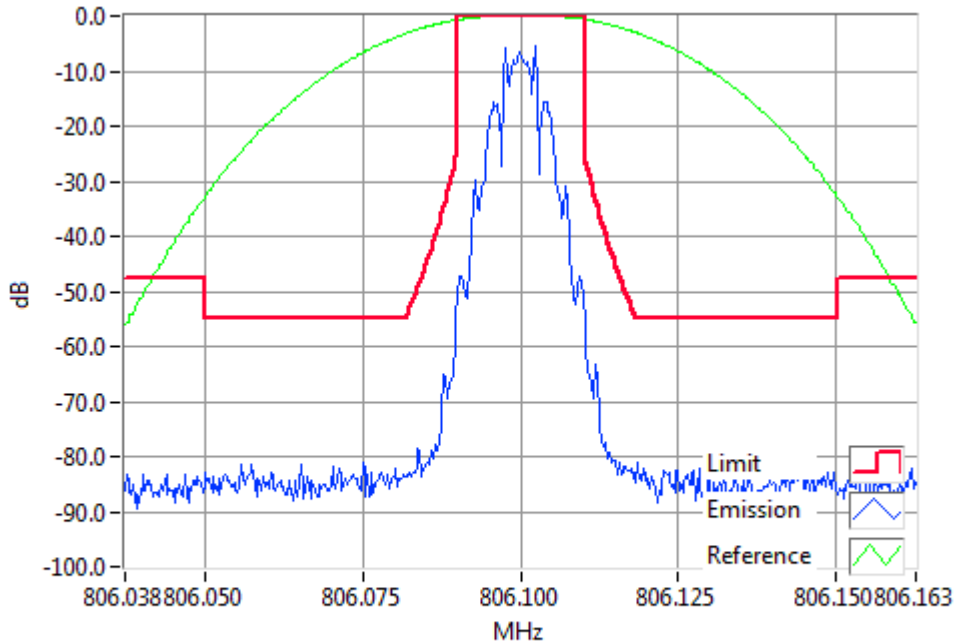

FFSK1200 806.1000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

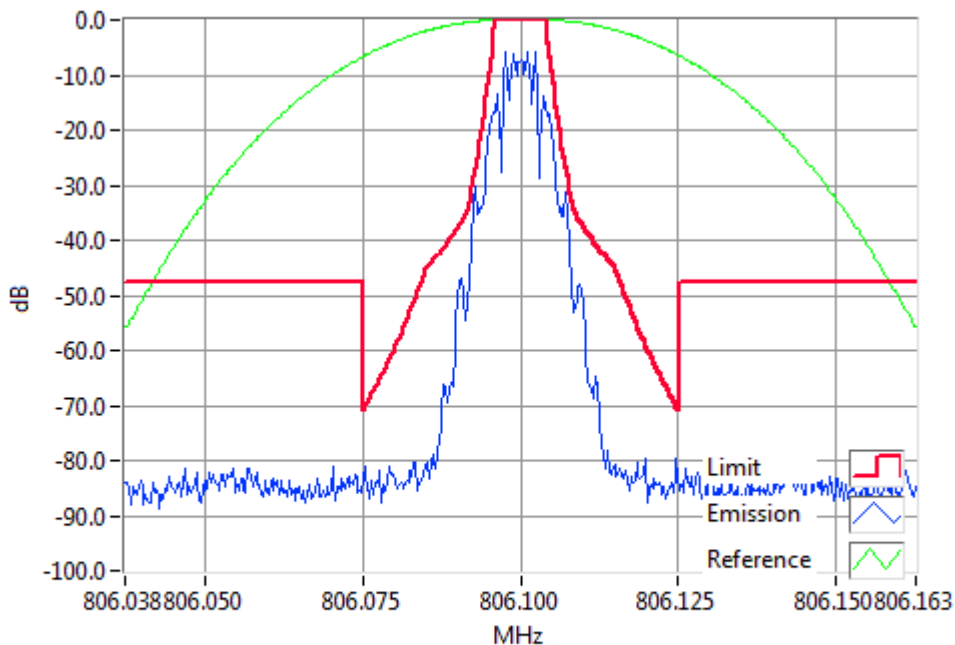


FFSK1200 806.1000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps

Tx FREQUENCY: 806.1 MHz 1 W 25 kHz Channel Spacing

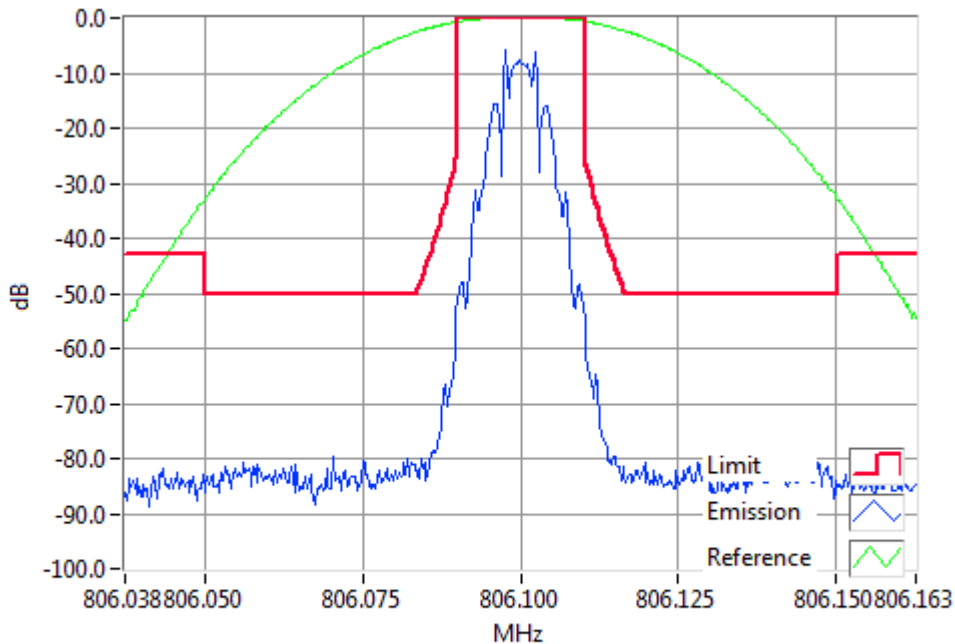

FFSK1200 806.1000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

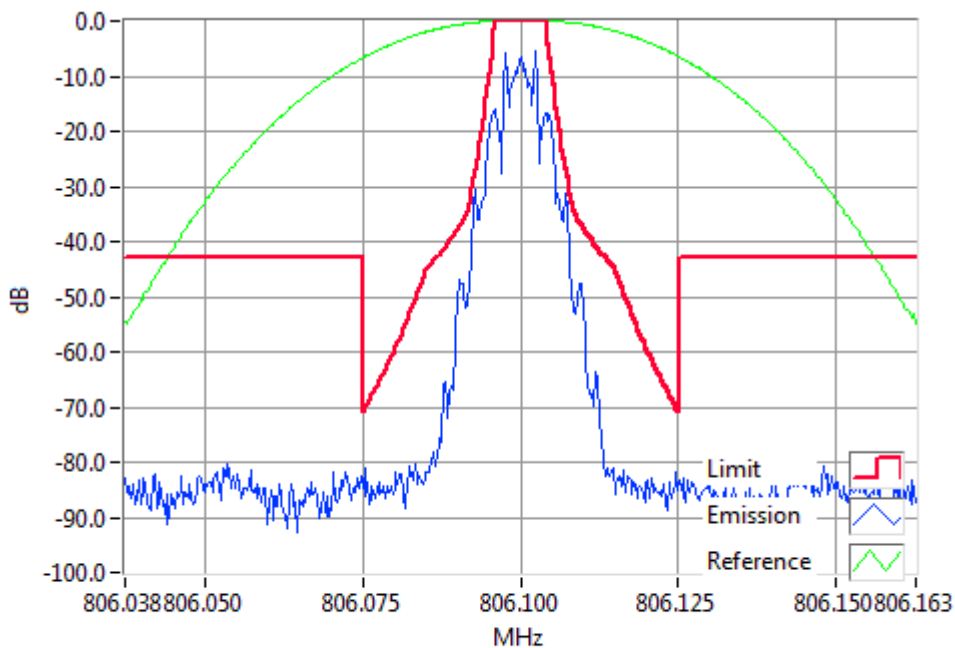


FFSK1200 806.1000MHz Mask H 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 25 kHz Channel Spacing

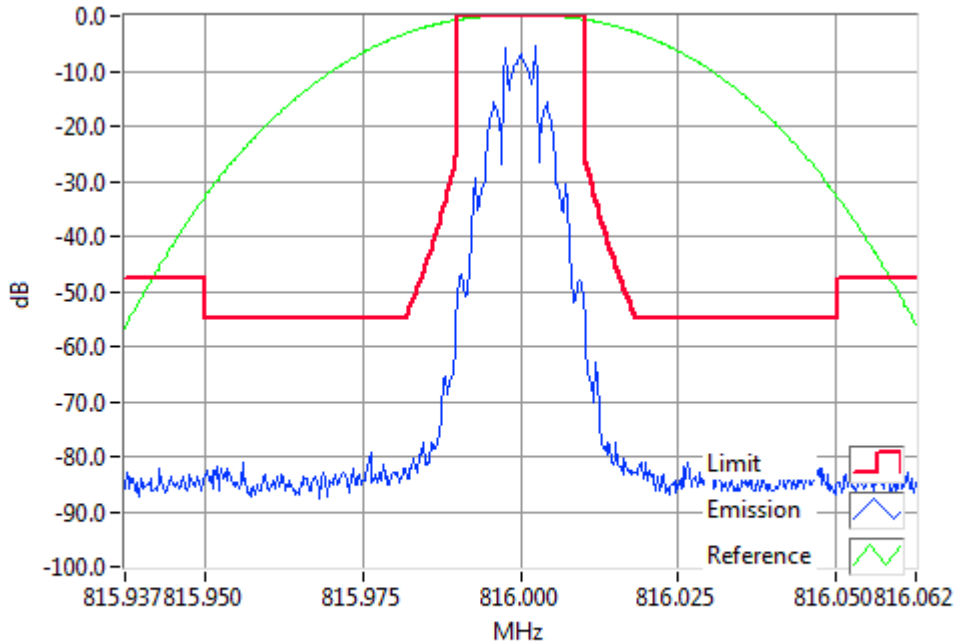

FFSK1200 816.000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 816.0 MHz 1 W 25 kHz Channel Spacing

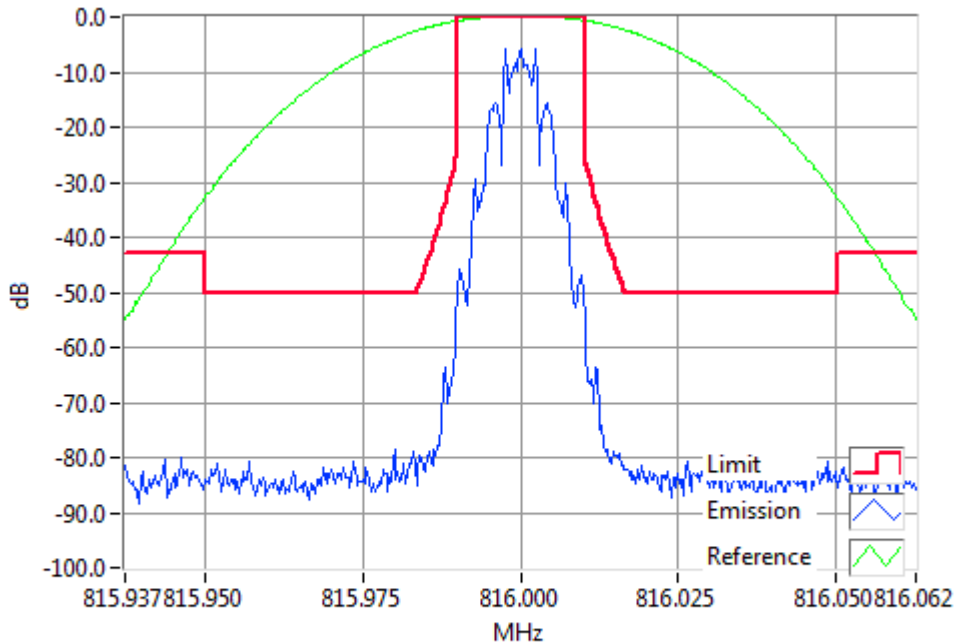


FFSK1200 816.000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 25 kHz Channel Spacing

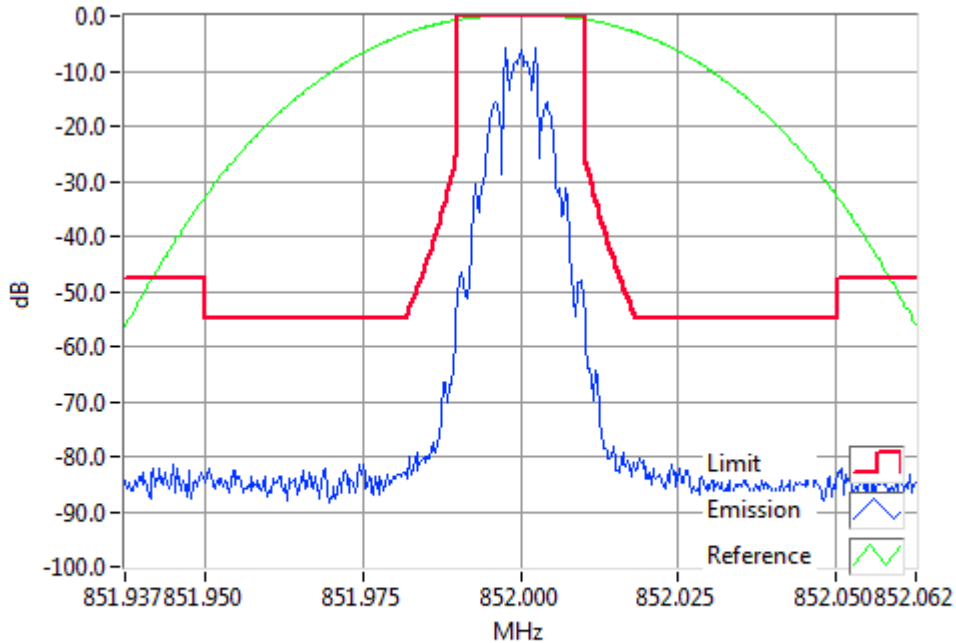

FFSK1200 852.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

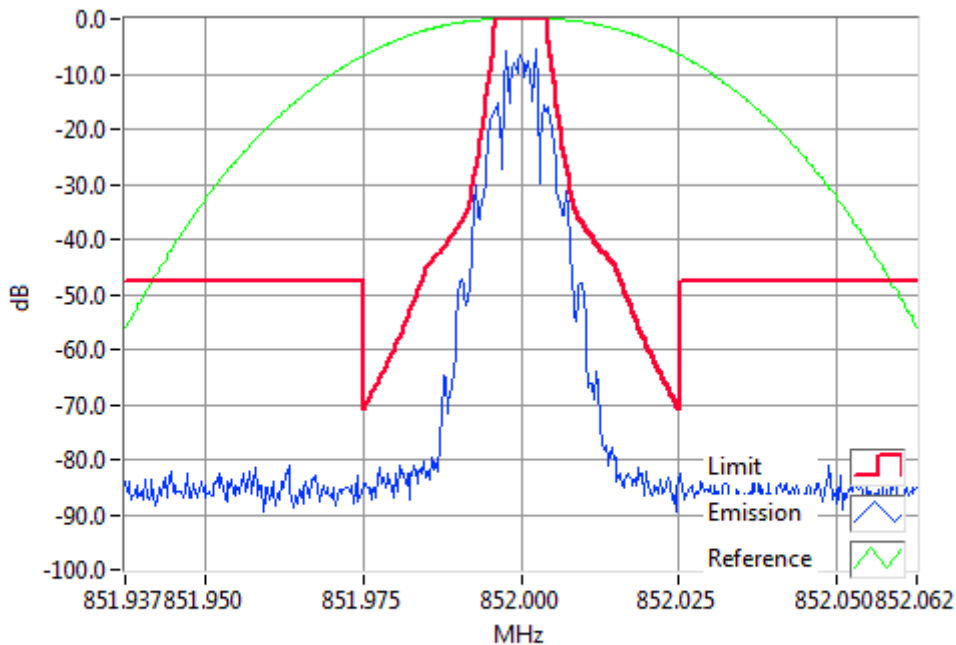


FFSK1200 852.0000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps

Tx FREQUENCY: 852.0 MHz 1 W 25 kHz Channel Spacing

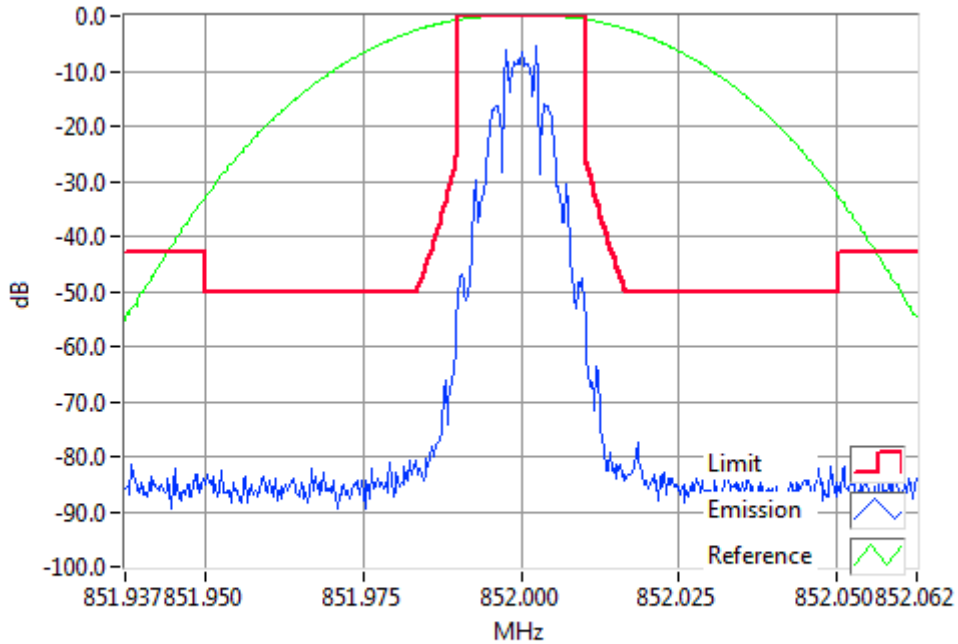

FFSK1200 852.0000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

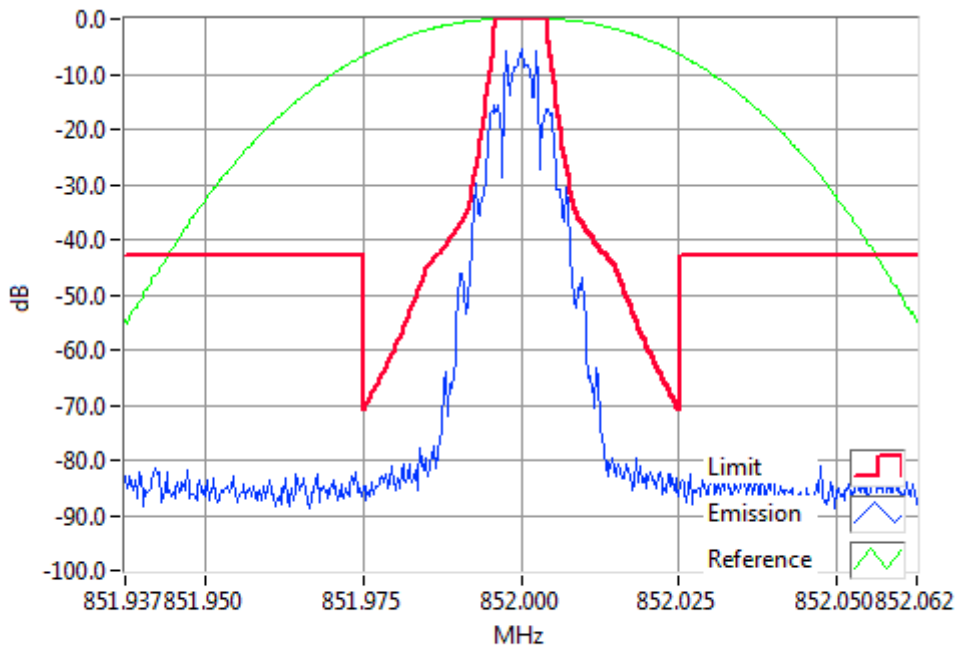


FFSK1200 852.0000MHz Mask H 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 25 kHz Channel Spacing

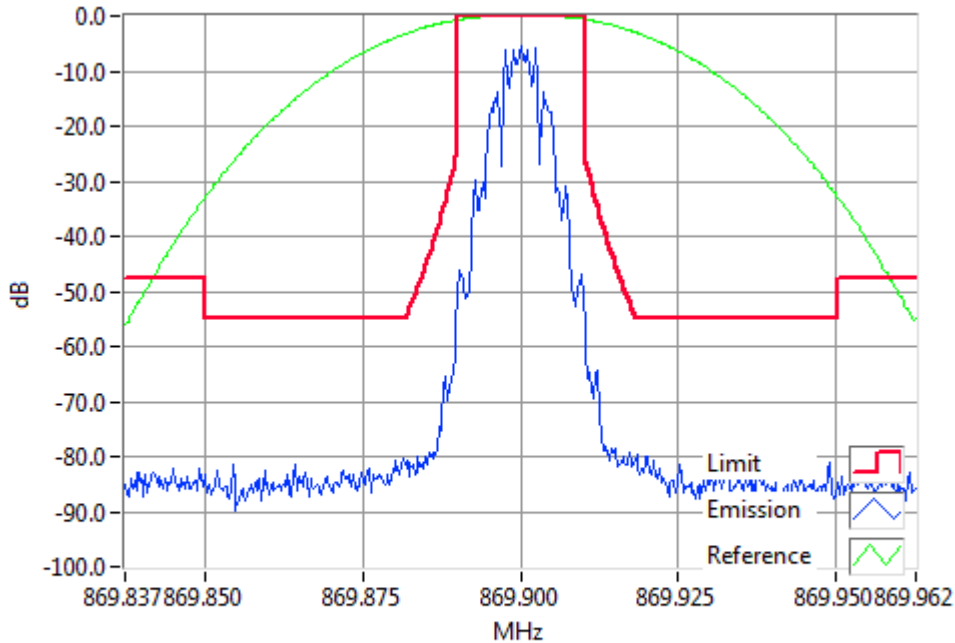

FFSK1200 869.9000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 869.9 MHz 1 W 25 kHz Channel Spacing

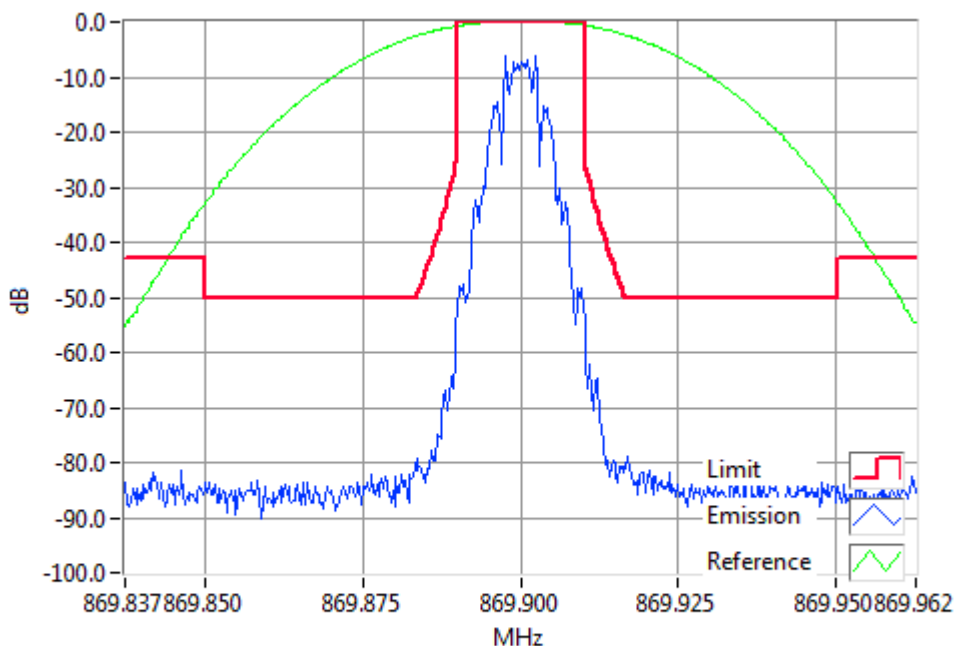


FFSK1200 869.9000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 12.5 kHz Channel Spacing

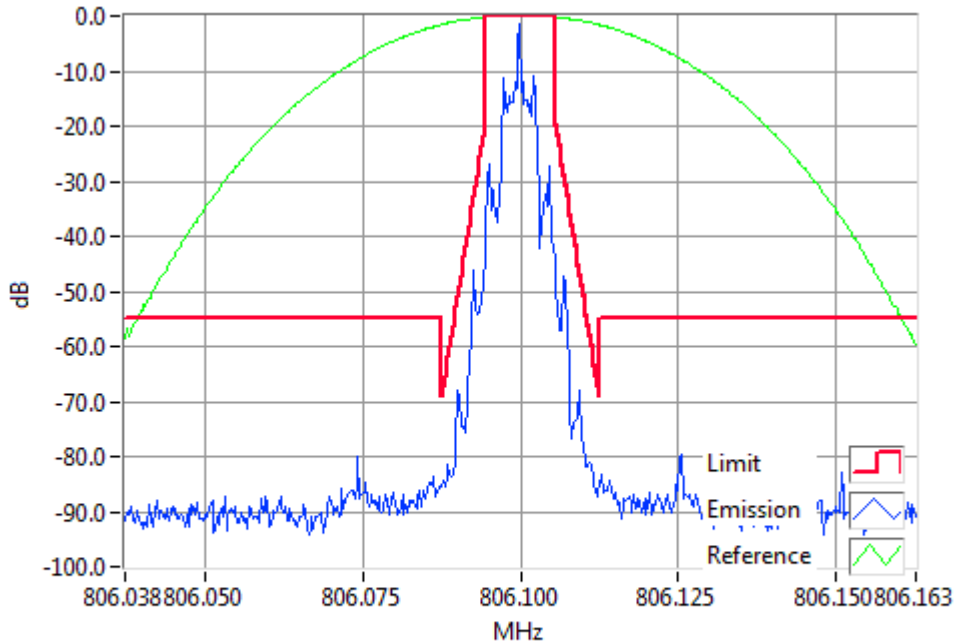

FFSK2400 806.1000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


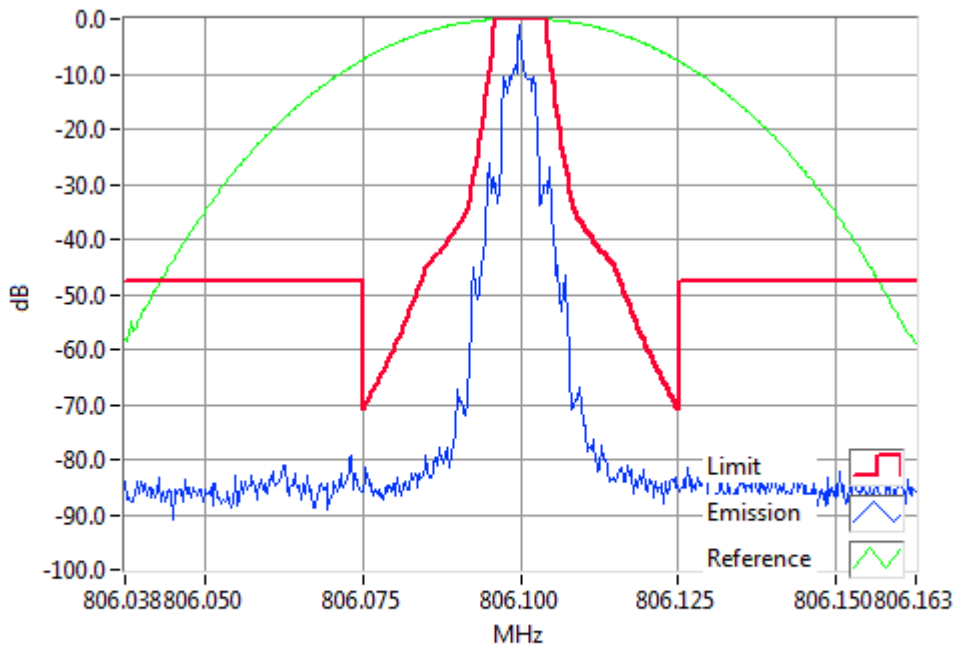


FFSK2400 806.1000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps

Tx FREQUENCY: 806.1 MHz 1 W 12.5 kHz Channel Spacing

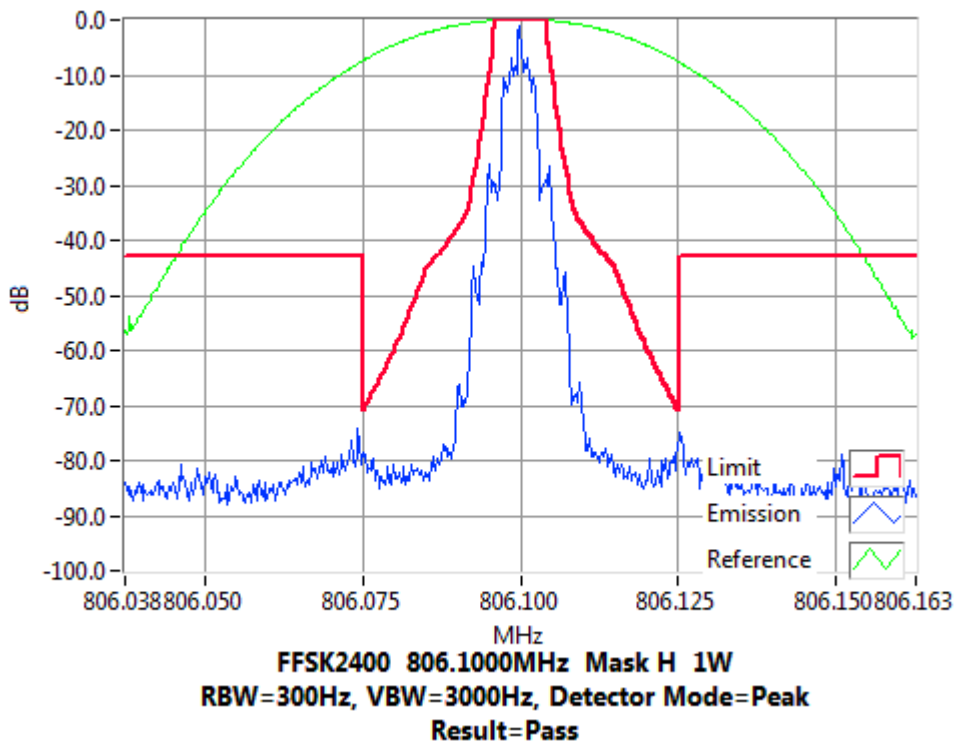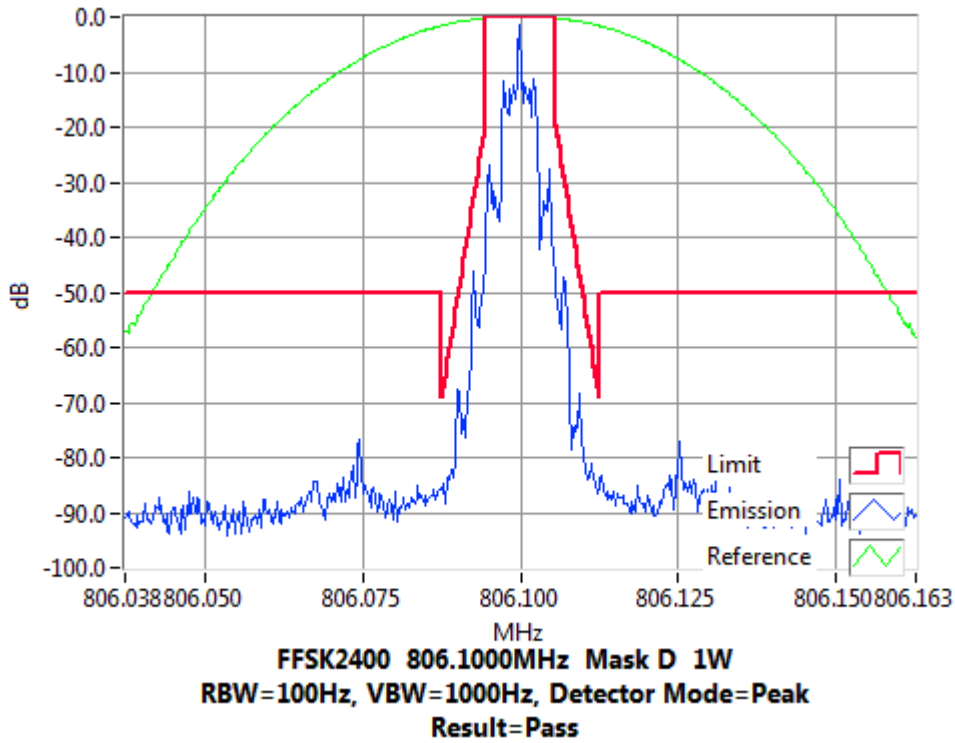


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 12.5 kHz Channel Spacing

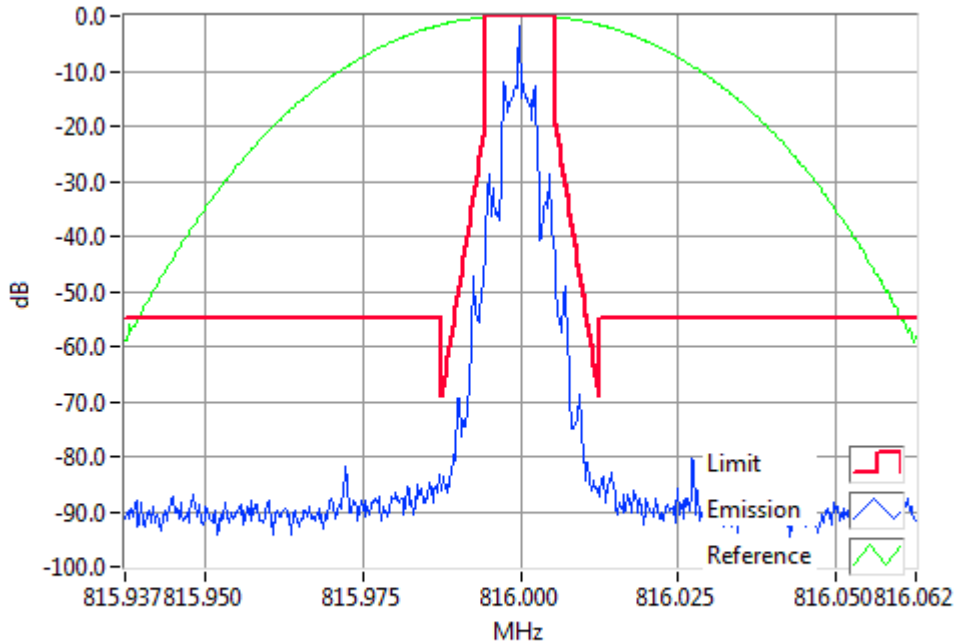

FFSK2400 816.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


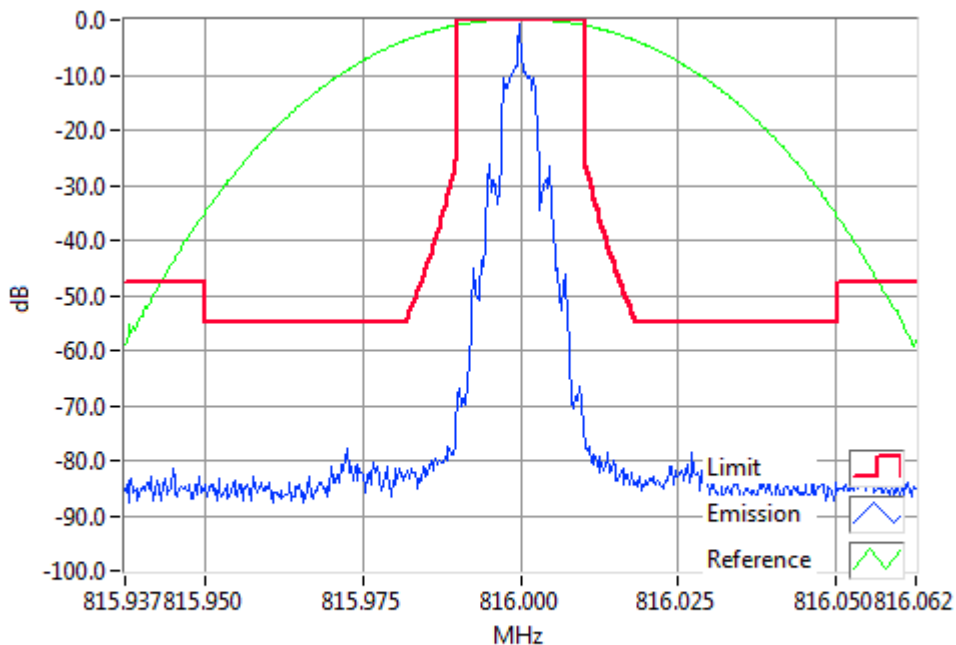


FFSK2400 816.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps

Tx FREQUENCY: 816.0 MHz 1 W 12.5 kHz Channel Spacing

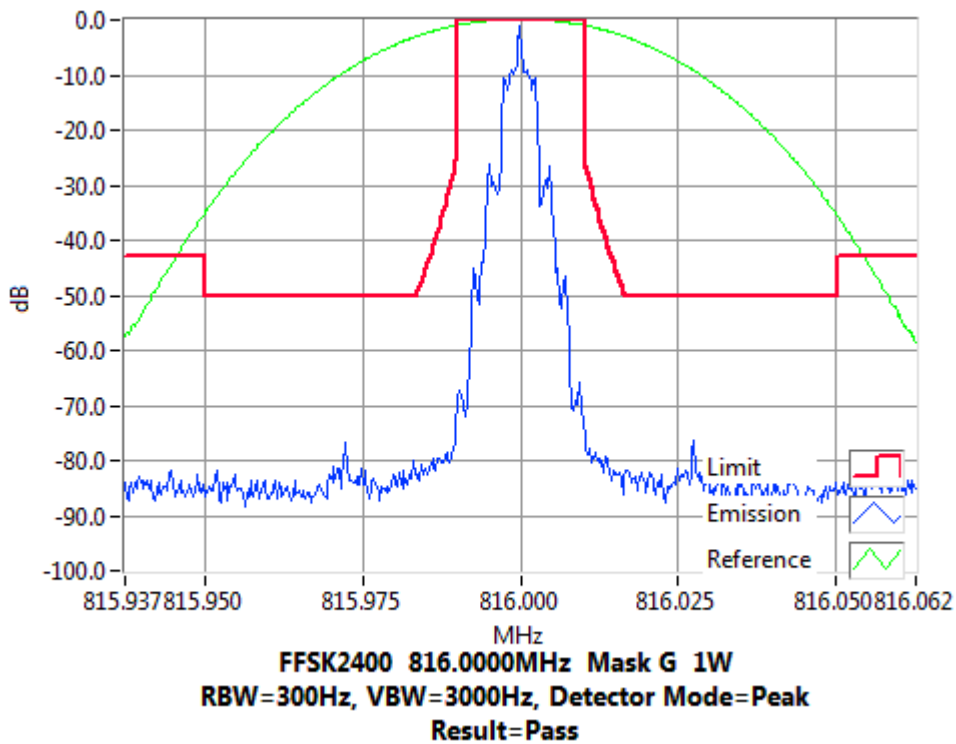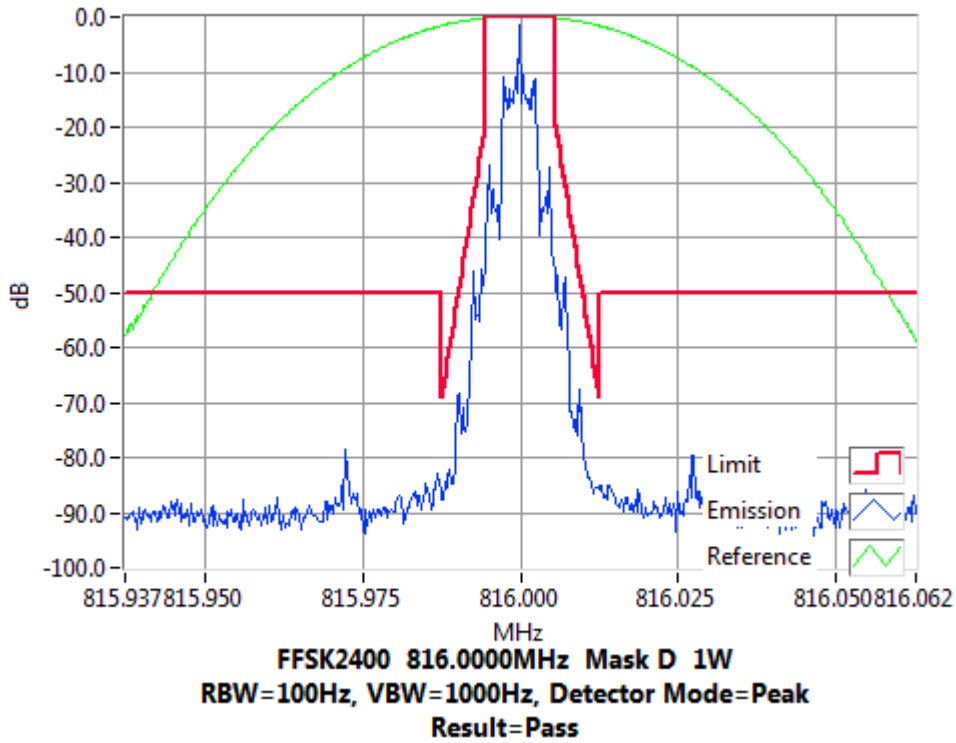


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 12.5 kHz Channel Spacing

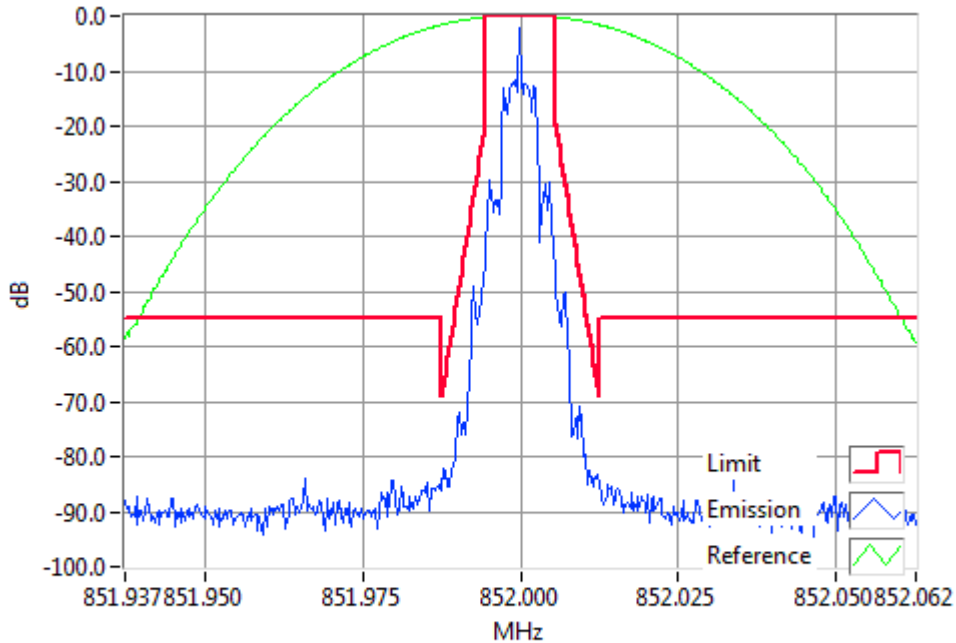

FFSK2400 852.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


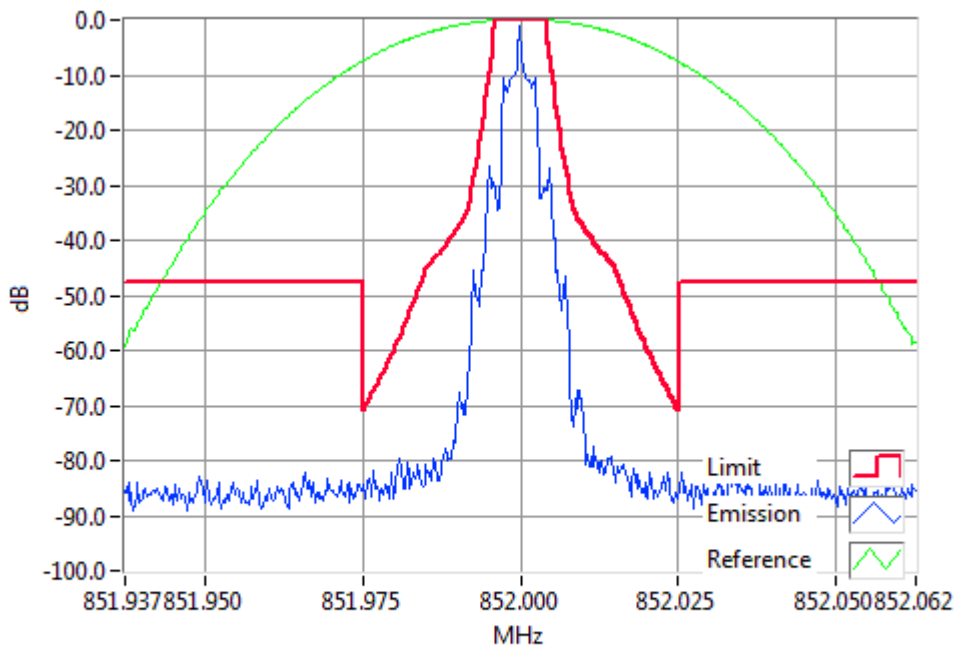


FFSK2400 852.0000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps

Tx FREQUENCY: 852.0 MHz 1 W 12.5 kHz Channel Spacing

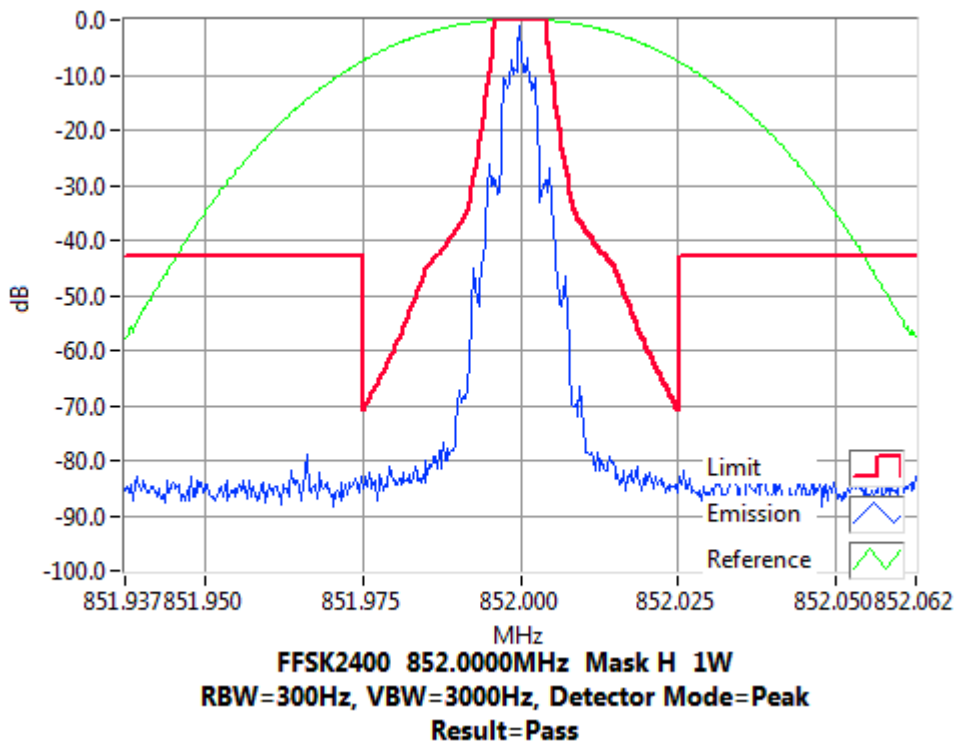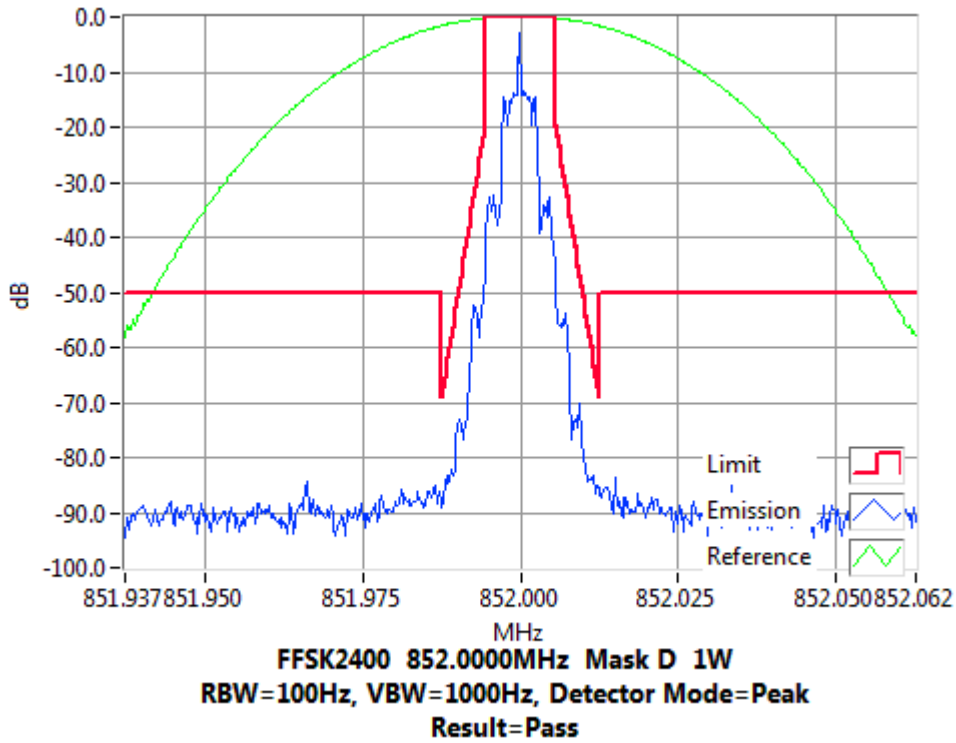


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 12.5 kHz Channel Spacing

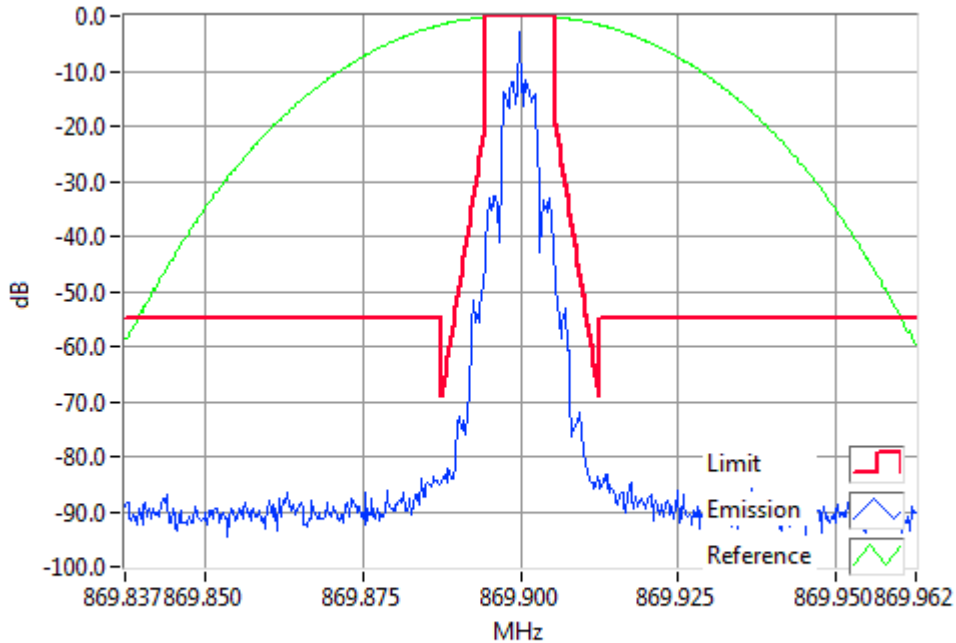

FFSK2400 869.9000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


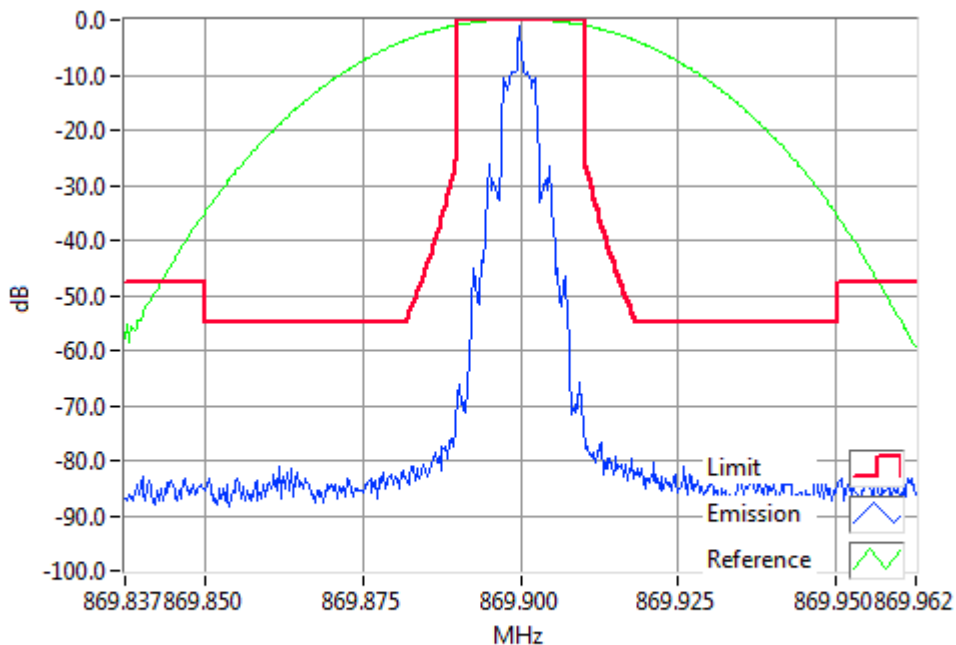


FFSK2400 869.9000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps

Tx FREQUENCY: 869.9 MHz 1 W 12.5 kHz Channel Spacing

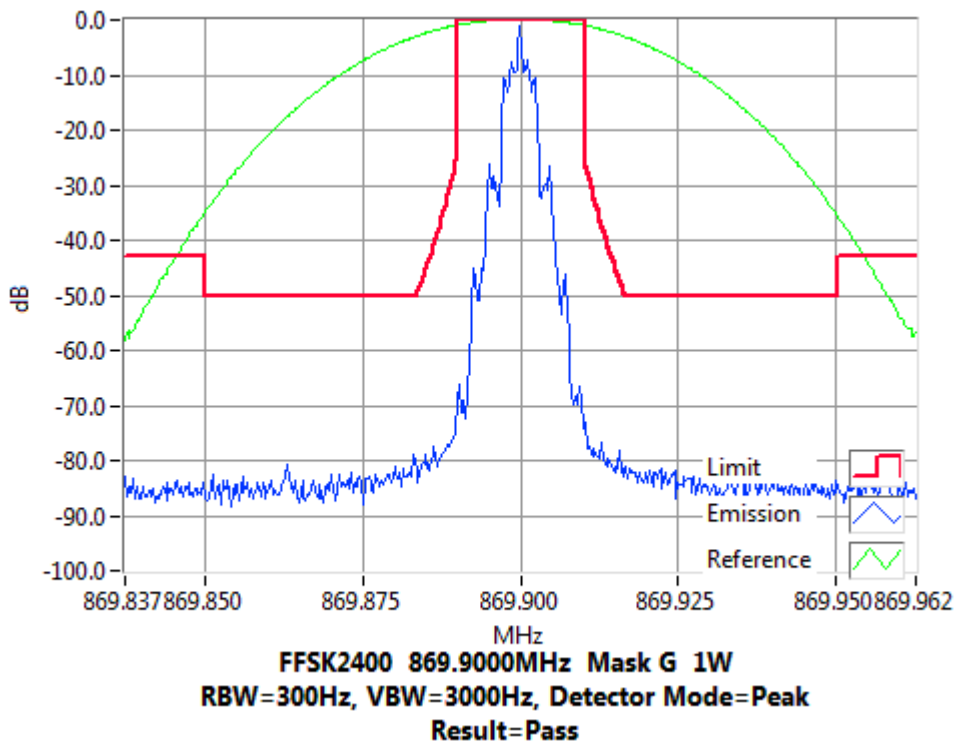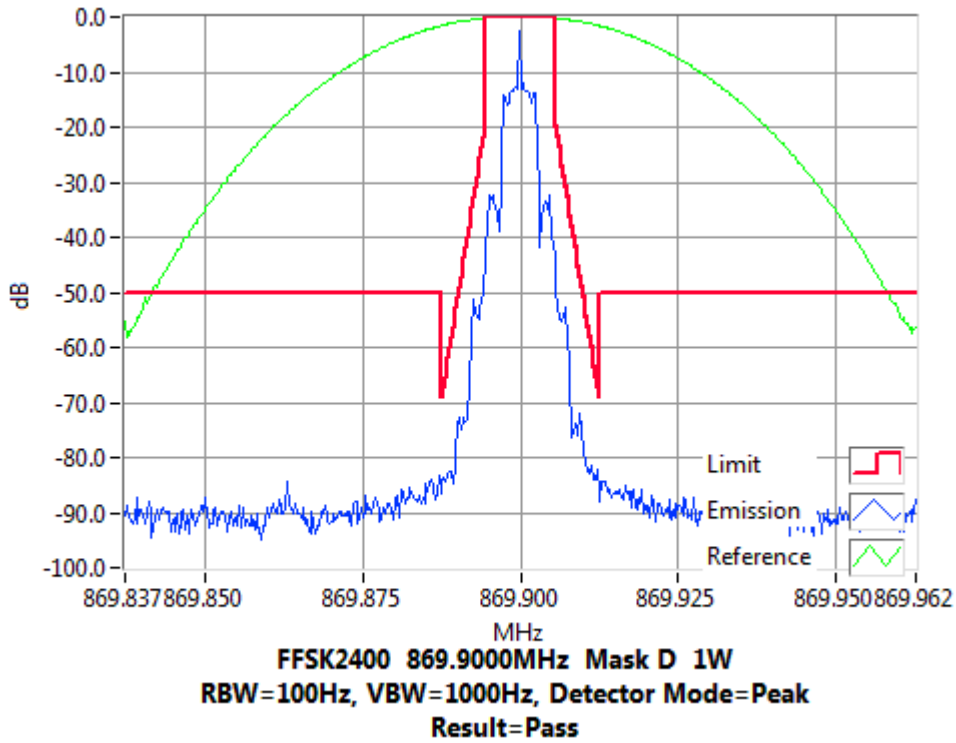


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 25 kHz Channel Spacing

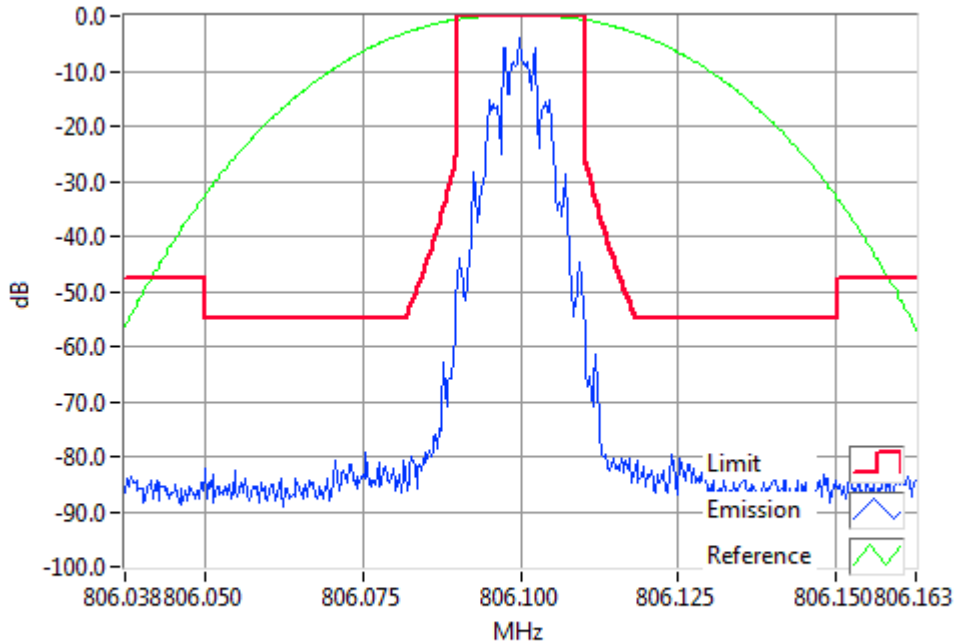

FFSK2400 806.1000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

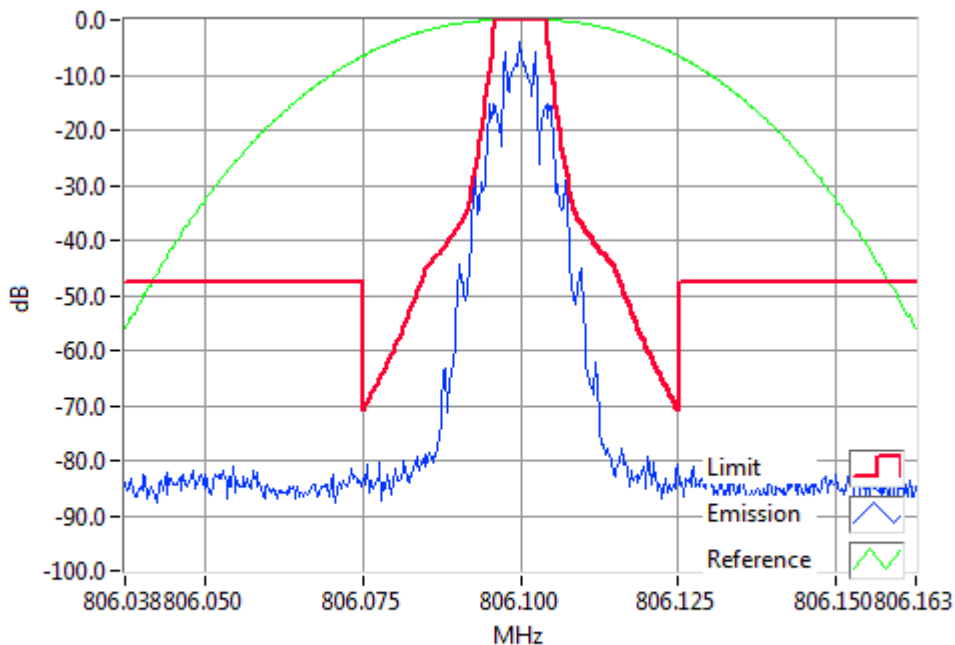


FFSK2400 806.1000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps

Tx FREQUENCY: 806.1 MHz 1 W 25 kHz Channel Spacing

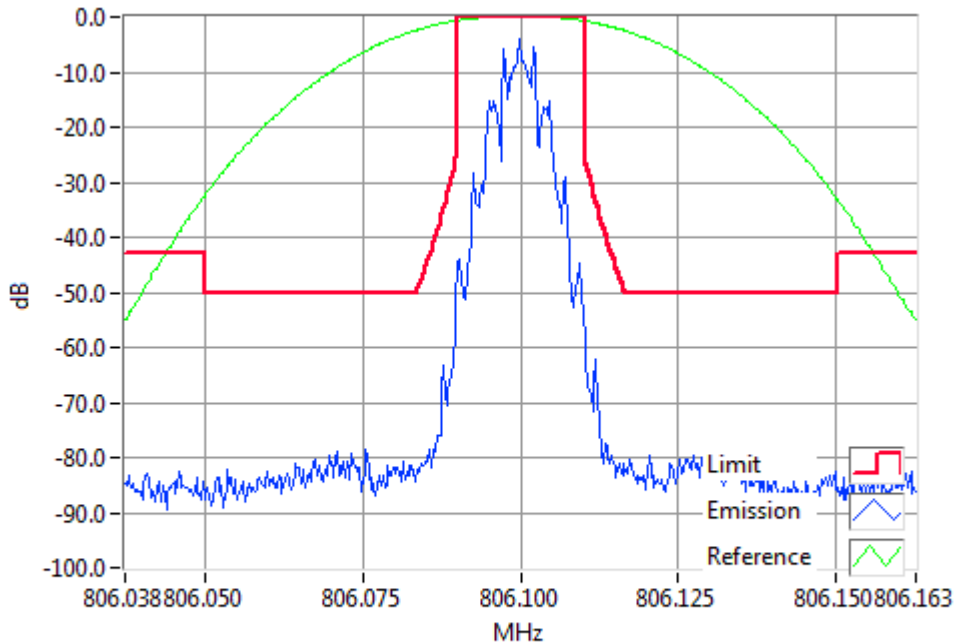

FFSK2400 806.1000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

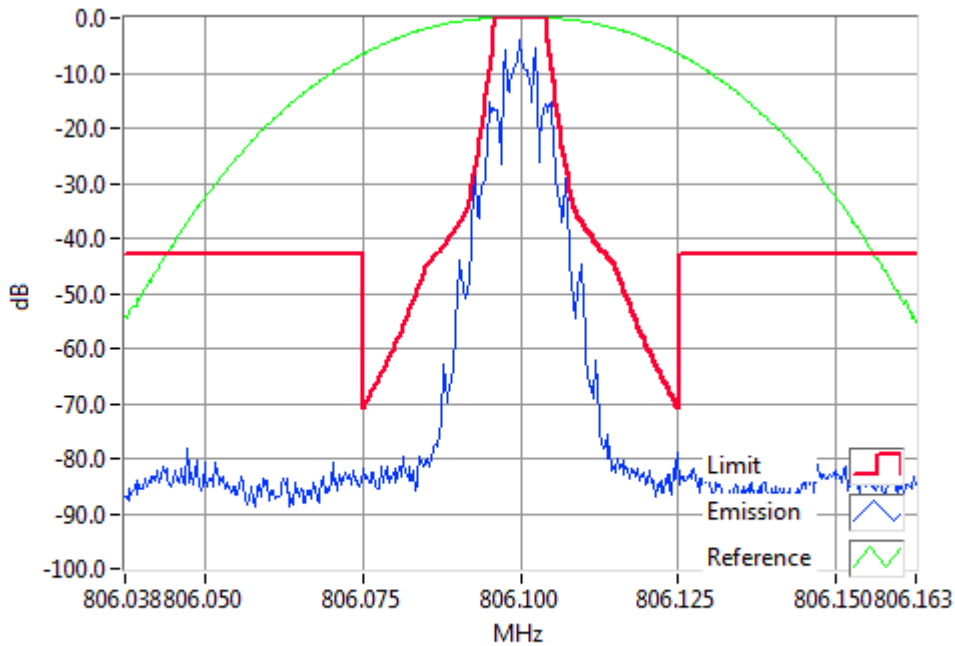


FFSK2400 806.1000MHz Mask H 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 25 kHz Channel Spacing

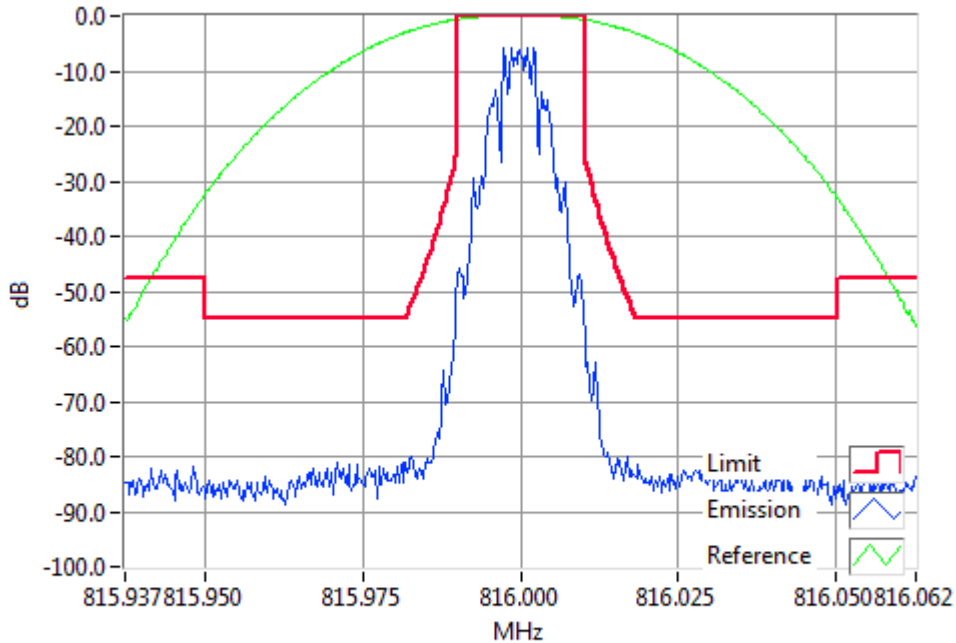

FFSK2400 816.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 816.0 MHz 1 W 25 kHz Channel Spacing

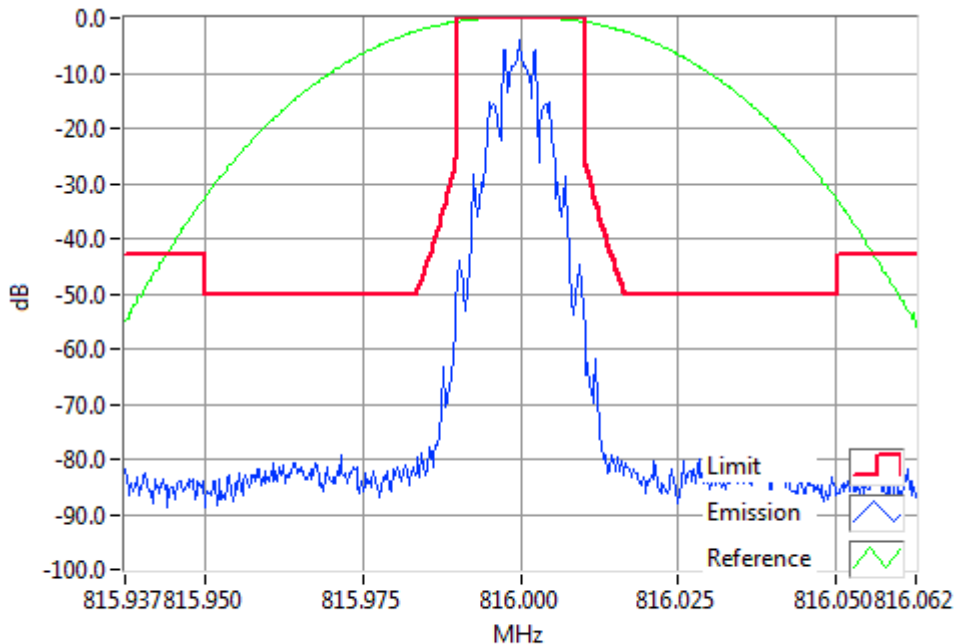


FFSK2400 816.0000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852 MHz 3 W 25 kHz Channel Spacing

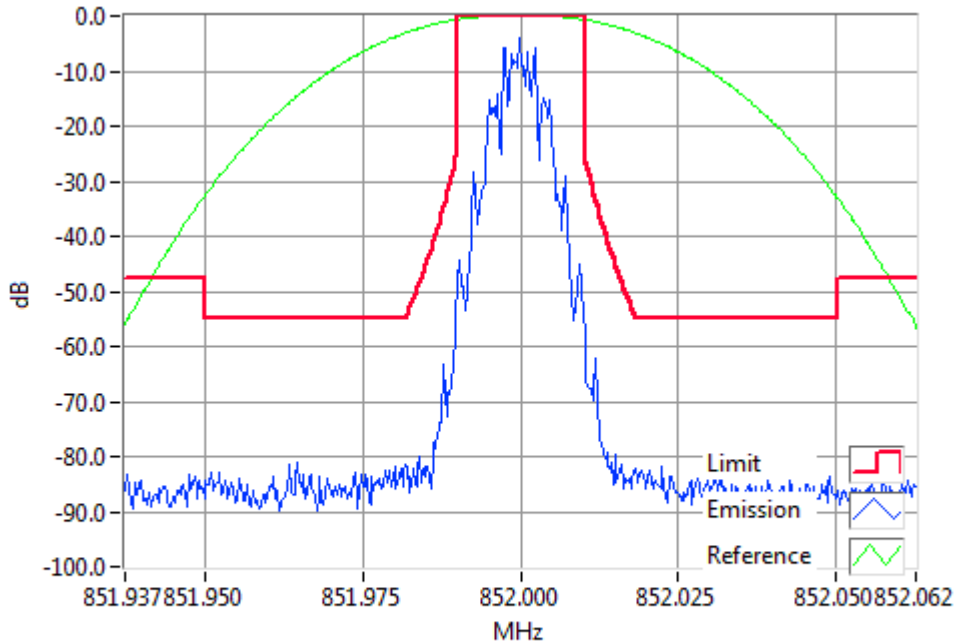

FFSK2400 852.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


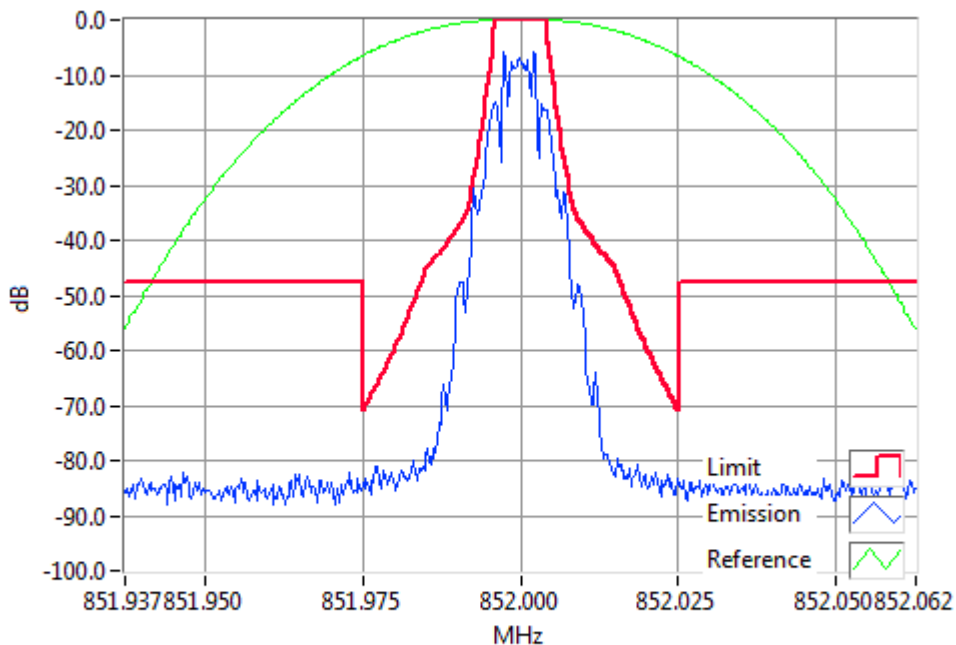


FFSK2400 852.0000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps

Tx FREQUENCY: 852 MHz 1 W 25 kHz Channel Spacing

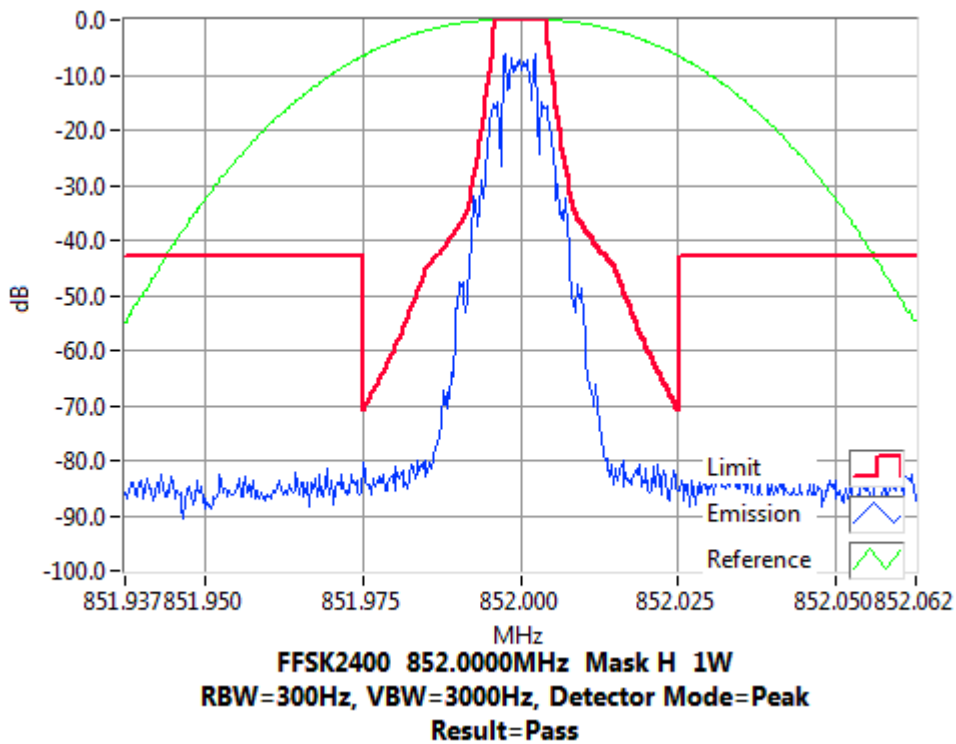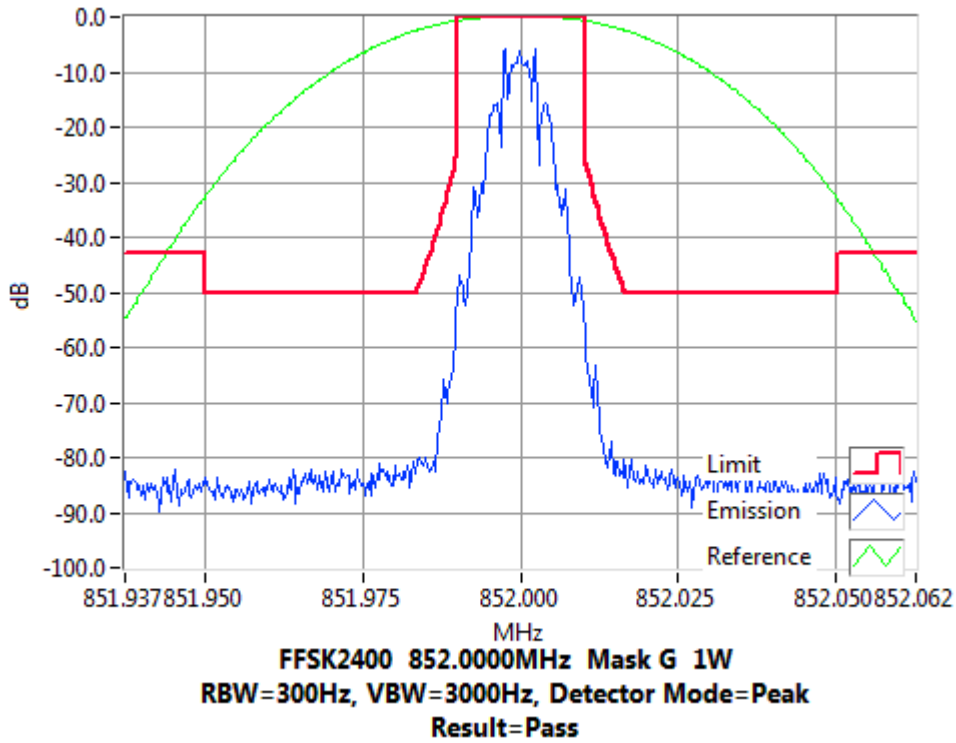


Occupied Bandwidth and Spectrum Masks

FFSK 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.0 MHz 3 W 25 kHz Channel Spacing

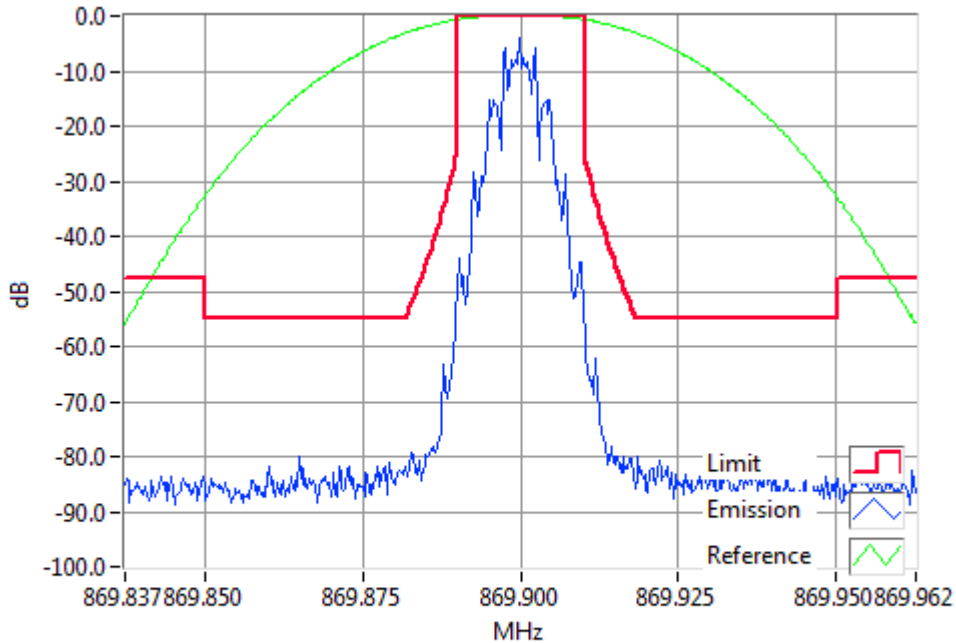

FFSK2400 869.9000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 869.0 MHz 1 W 25 kHz Channel Spacing

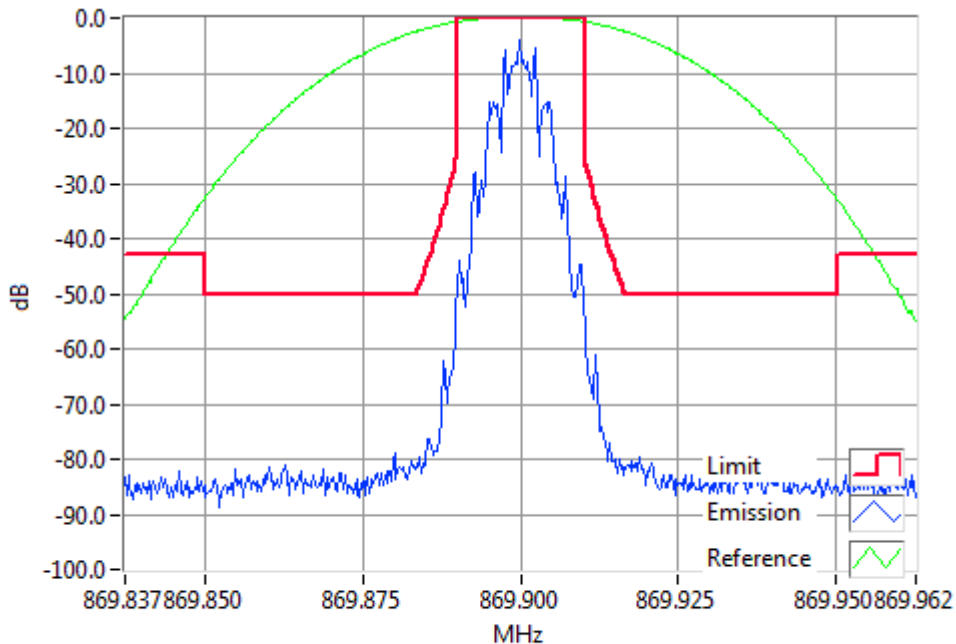


FFSK2400 869.9000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


DMR

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 12.5 kHz Channel Spacing

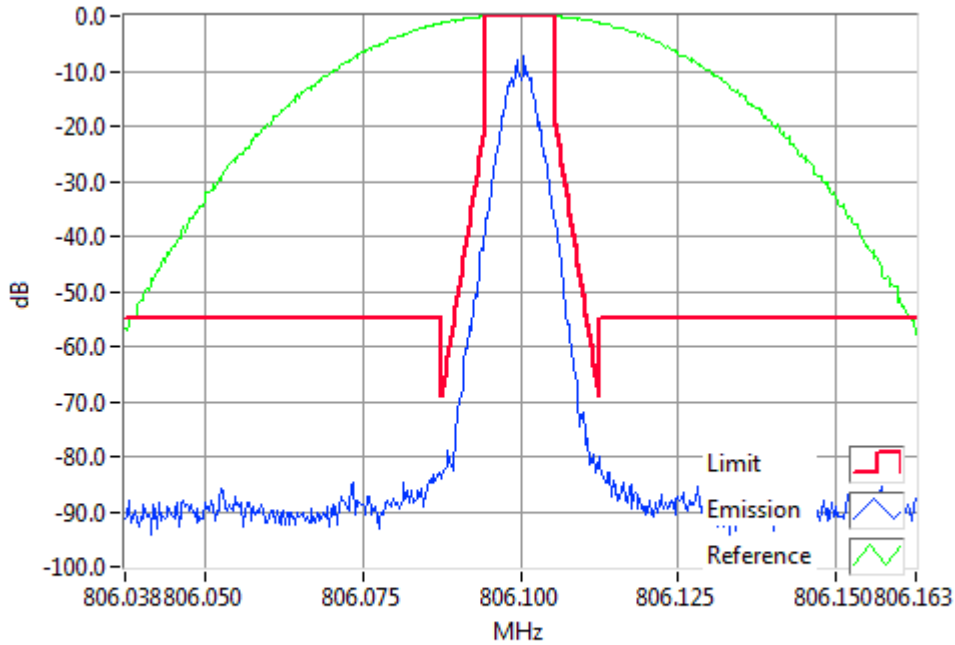

DMR 806.1000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

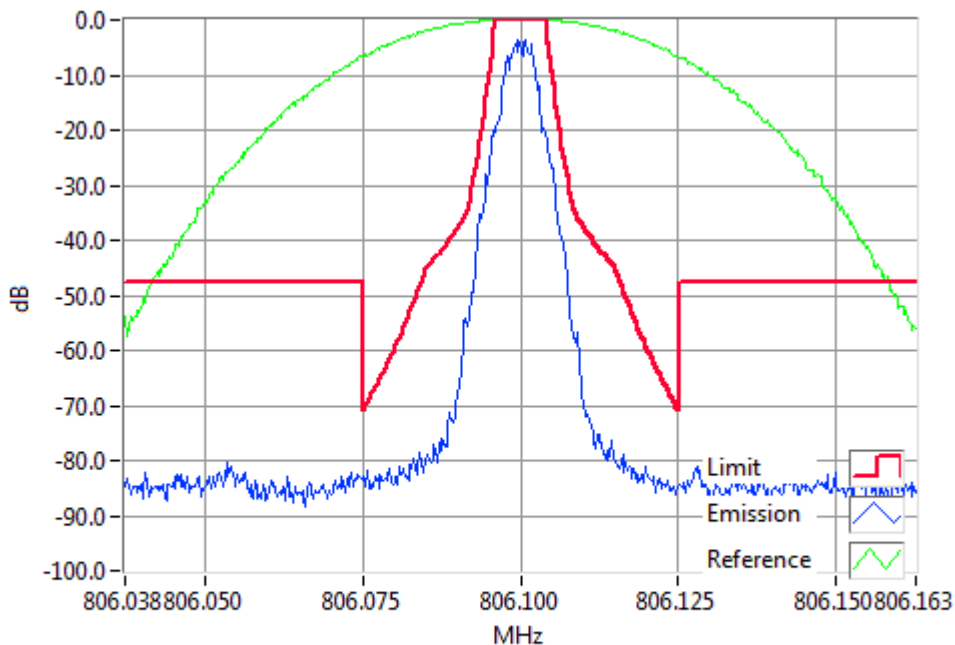


DMR 806.1000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

DMR

Tx FREQUENCY: 806.1 MHz 1 W 12.5 kHz Channel Spacing

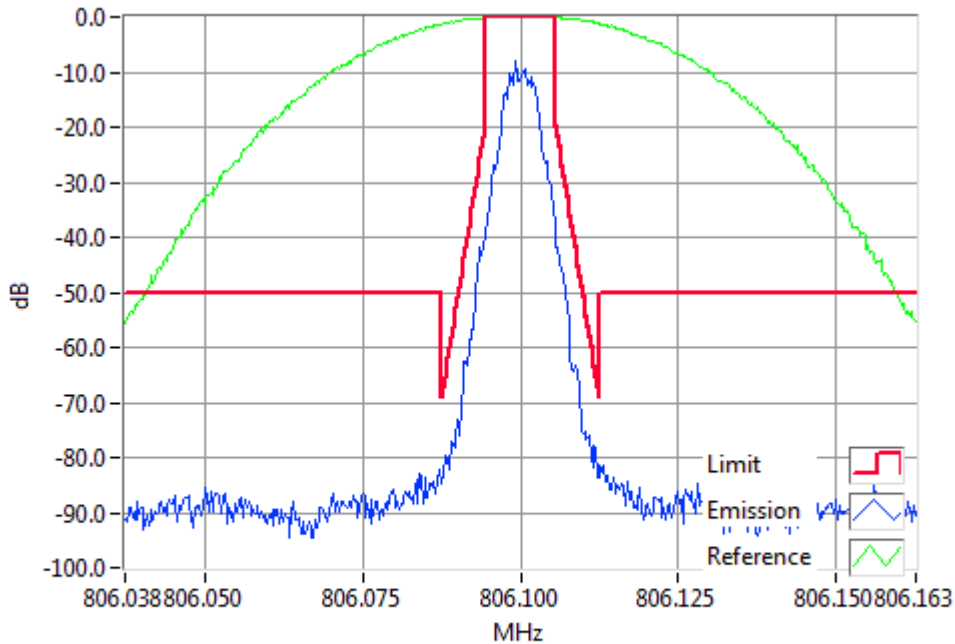

DMR 806.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

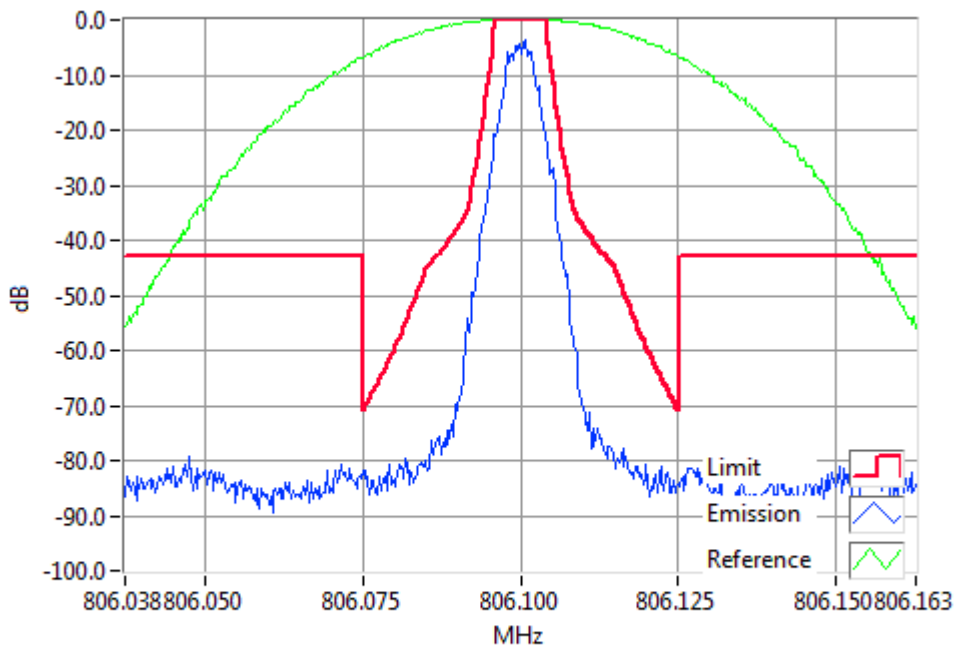


DMR 806.1000MHz Mask H 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


DMR

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 12.5 kHz Channel Spacing

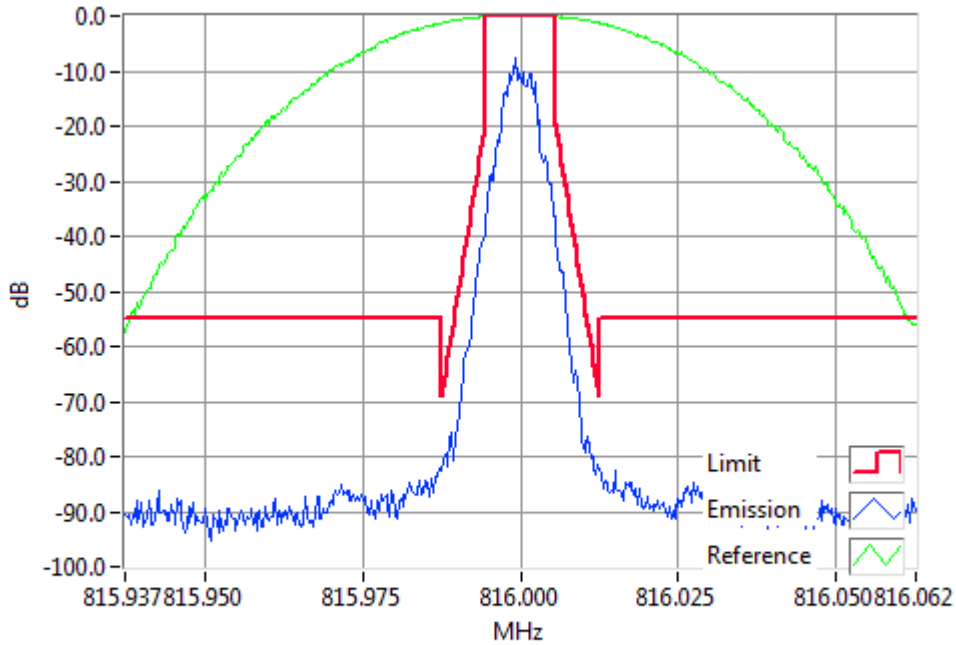

DMR 816.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

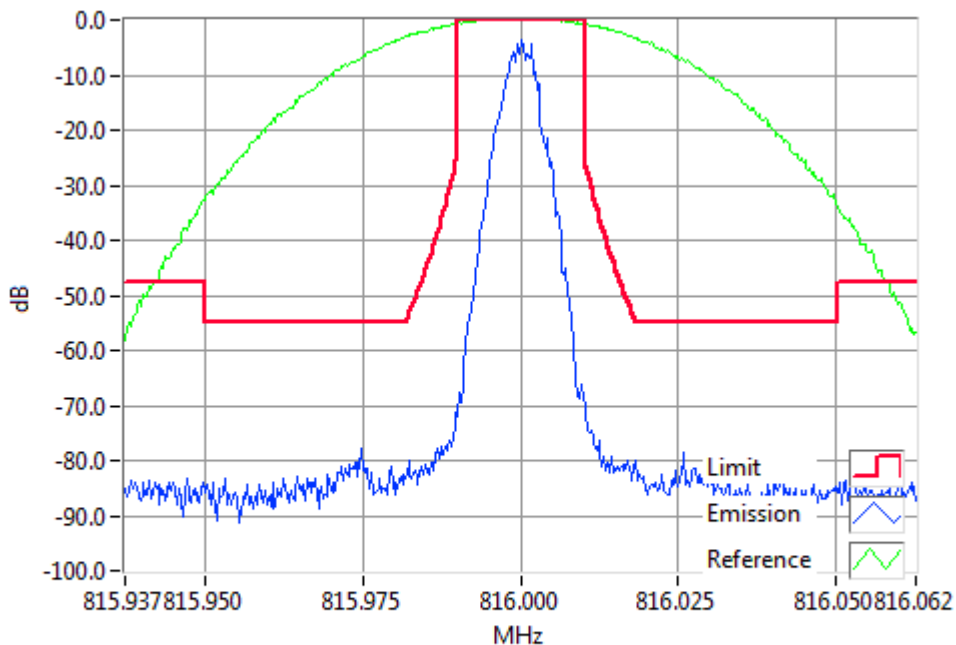


DMR 816.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

DMR

Tx FREQUENCY: 816.0 MHz 1 W 12.5 kHz Channel Spacing

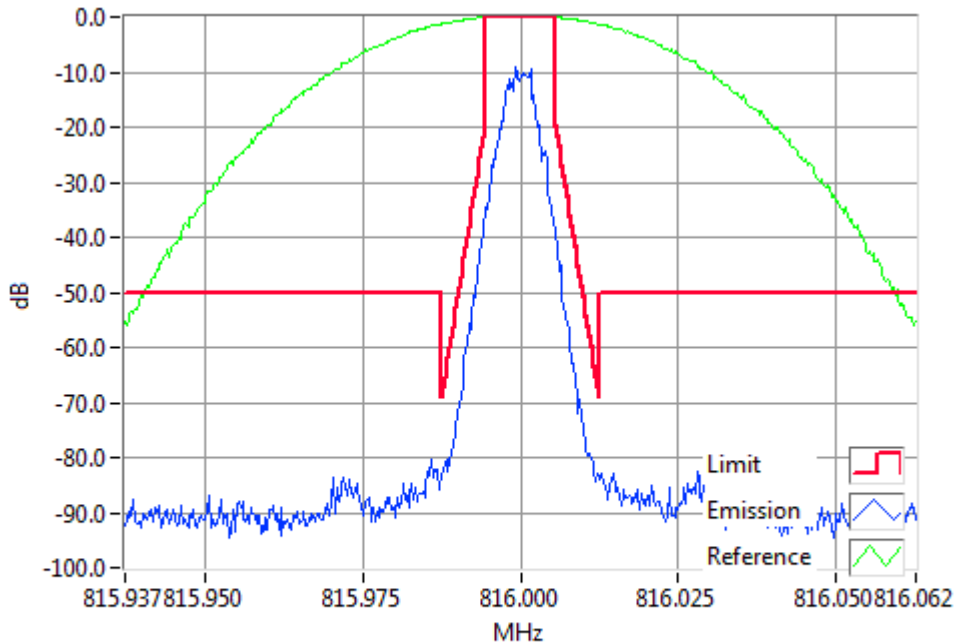

DMR 816.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

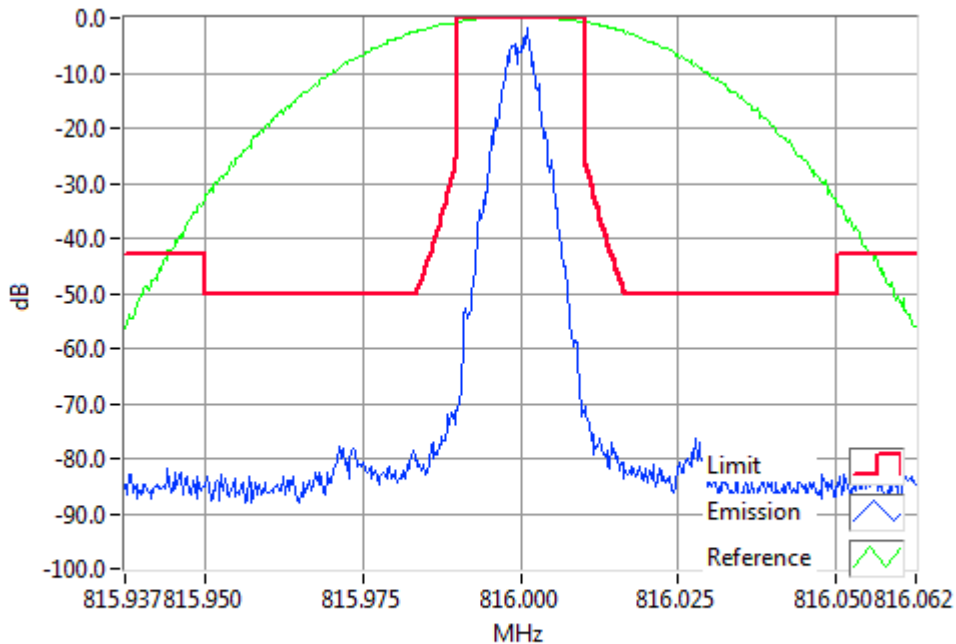


DMR 816.0000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


DMR

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 12.5 kHz Channel Spacing

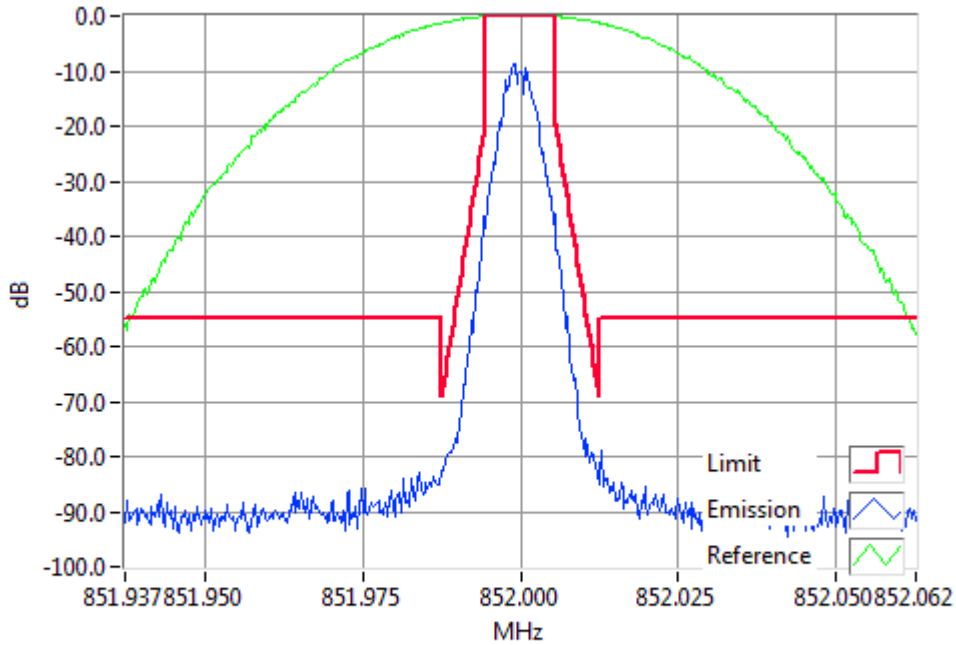

DMR 852.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


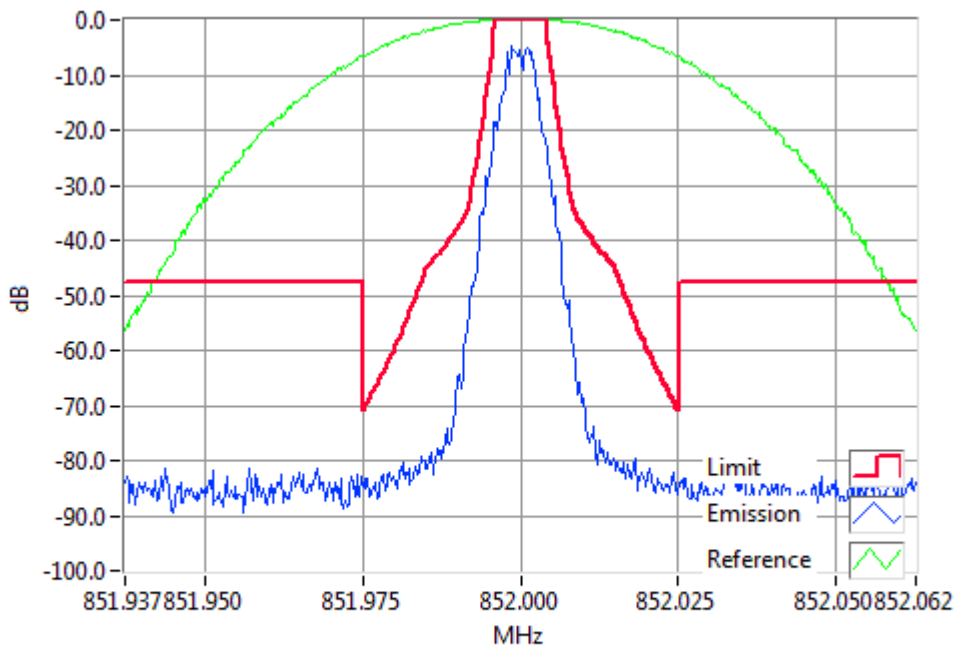


DMR 852.0000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR

Tx FREQUENCY: 852.0 MHz 1 W 12.5 kHz Channel Spacing

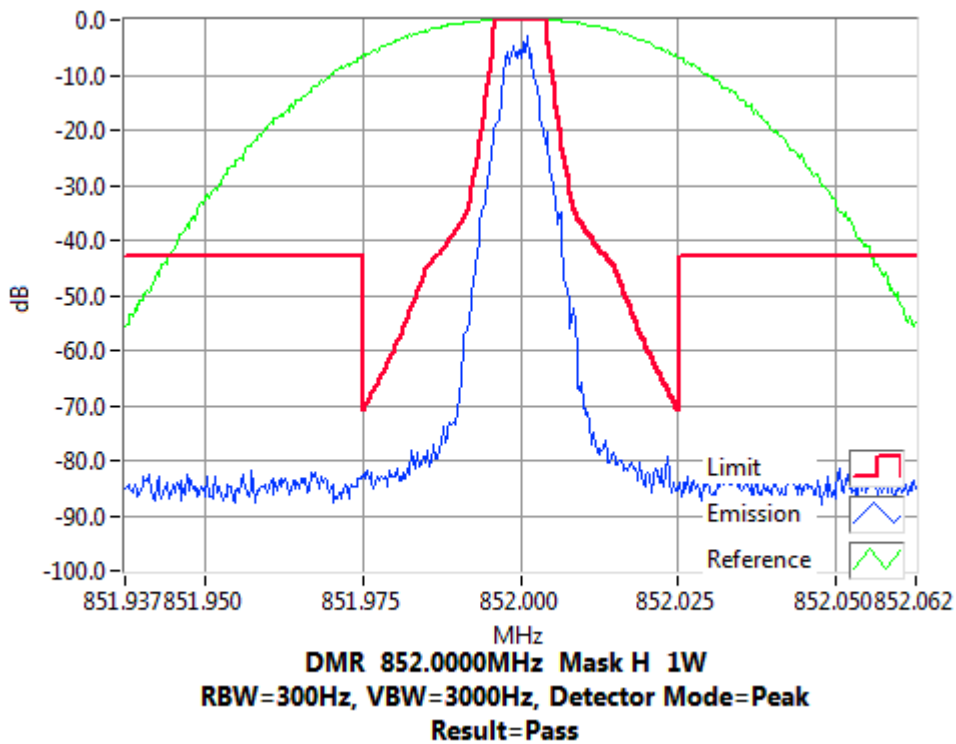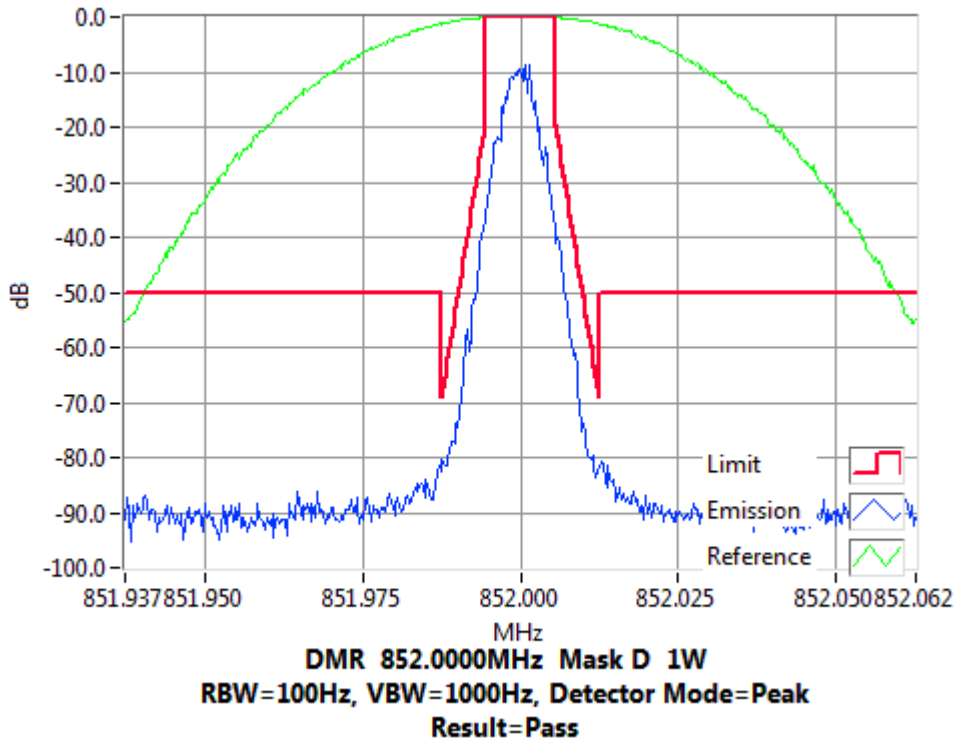


Occupied Bandwidth and Spectrum Masks


DMR

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 12.5 kHz Channel Spacing

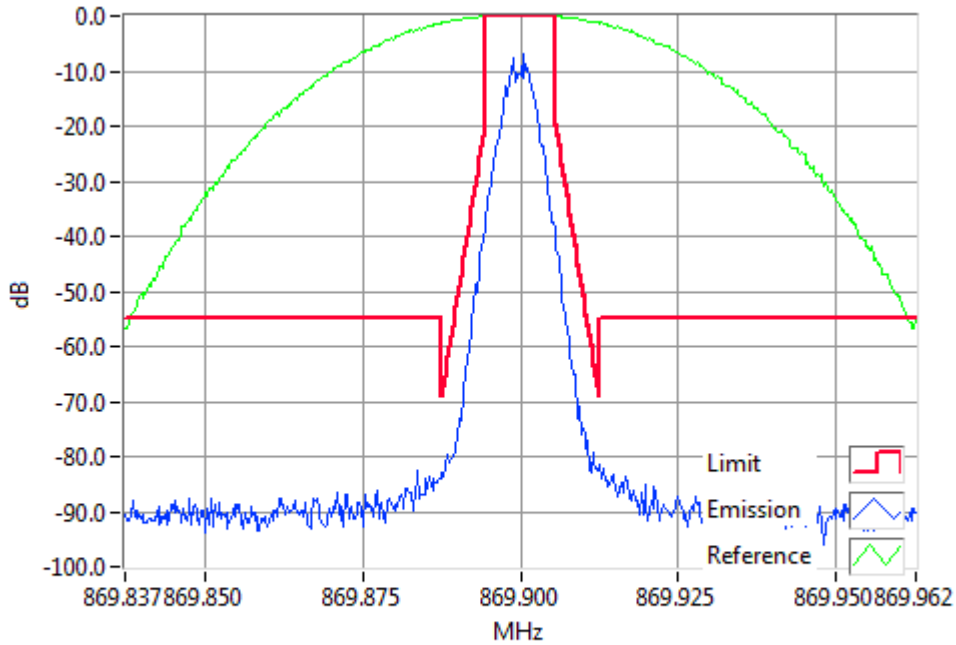

DMR 869.9000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

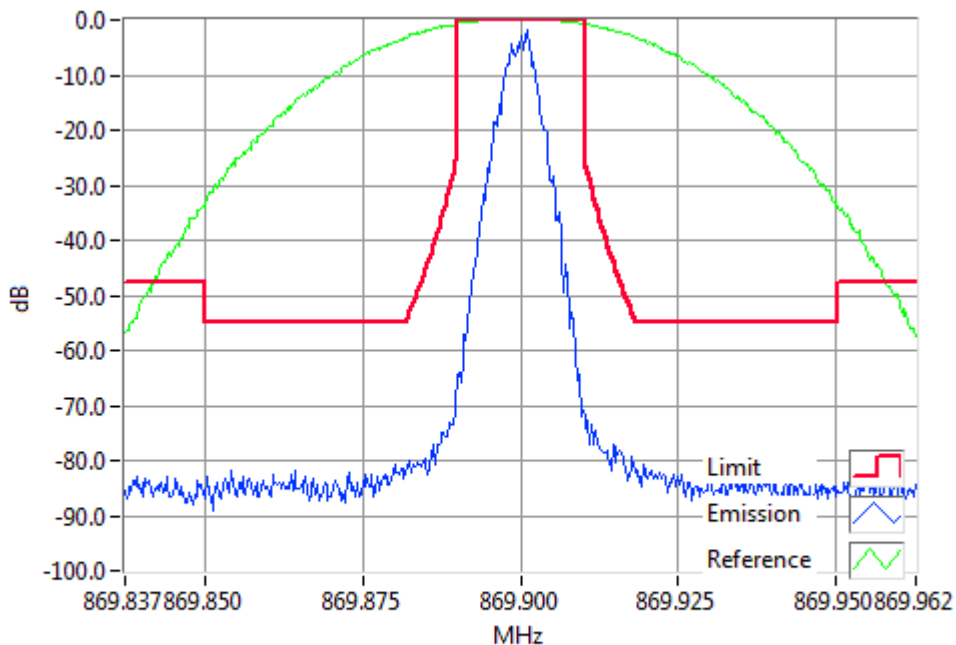


DMR 869.9000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

DMR

Tx FREQUENCY: 869.9 MHz 1 W 12.5 kHz Channel Spacing

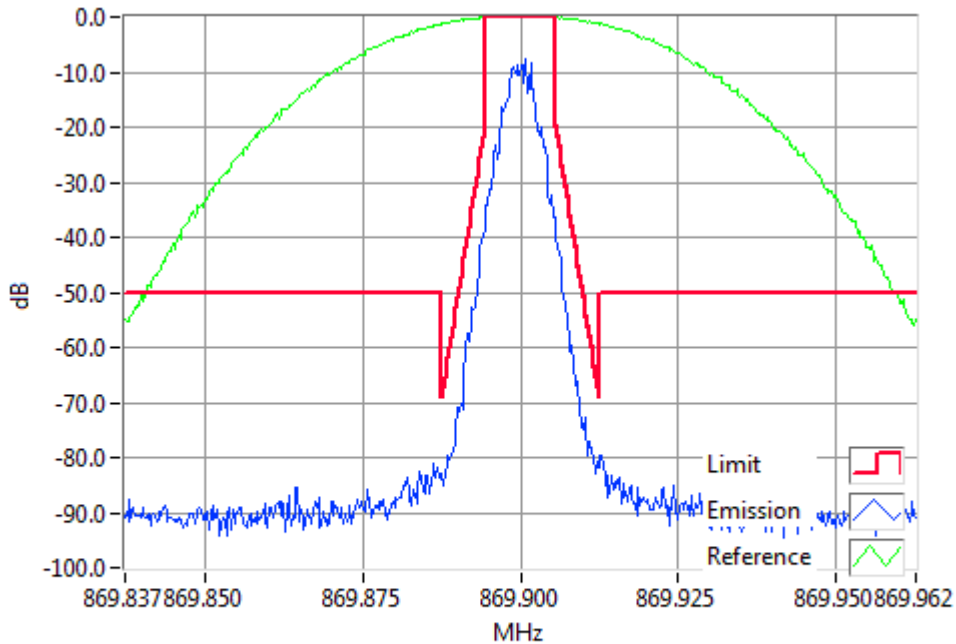

DMR 869.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

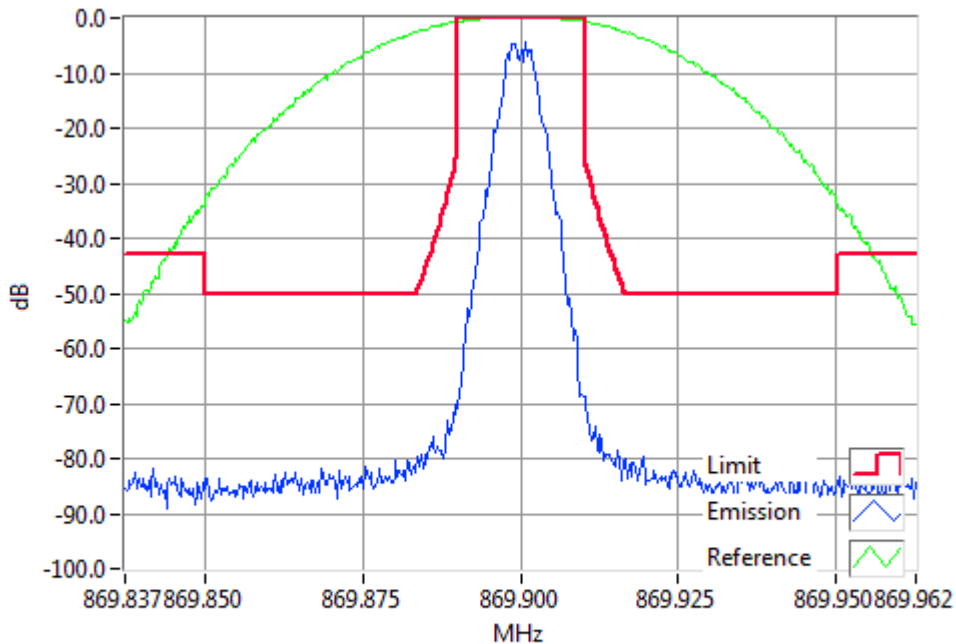


DMR 869.9000MHz Mask G 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 12.5 kHz Channel Spacing

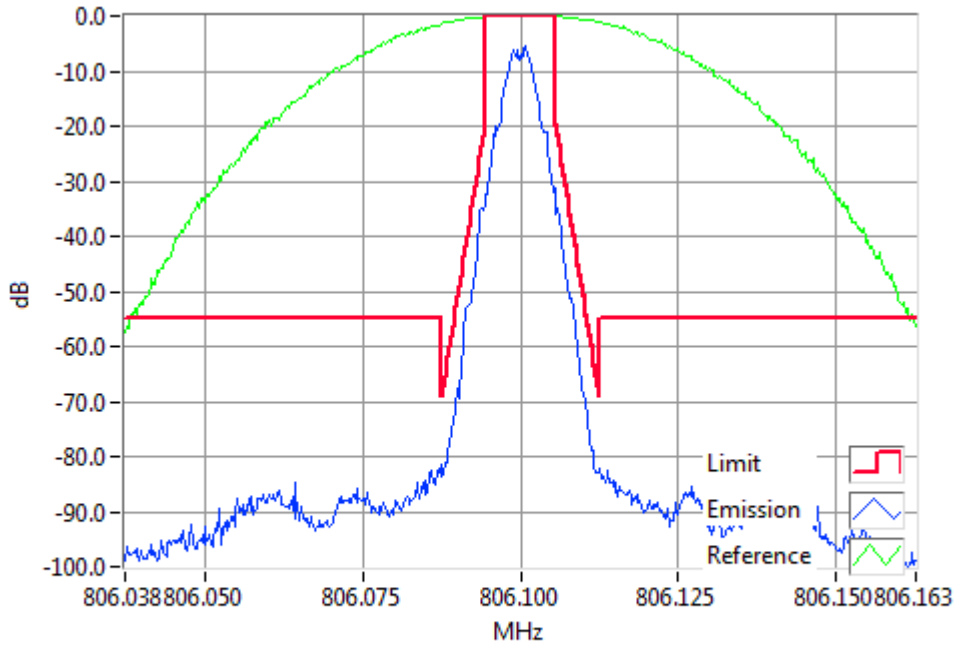

P25I 806.1000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


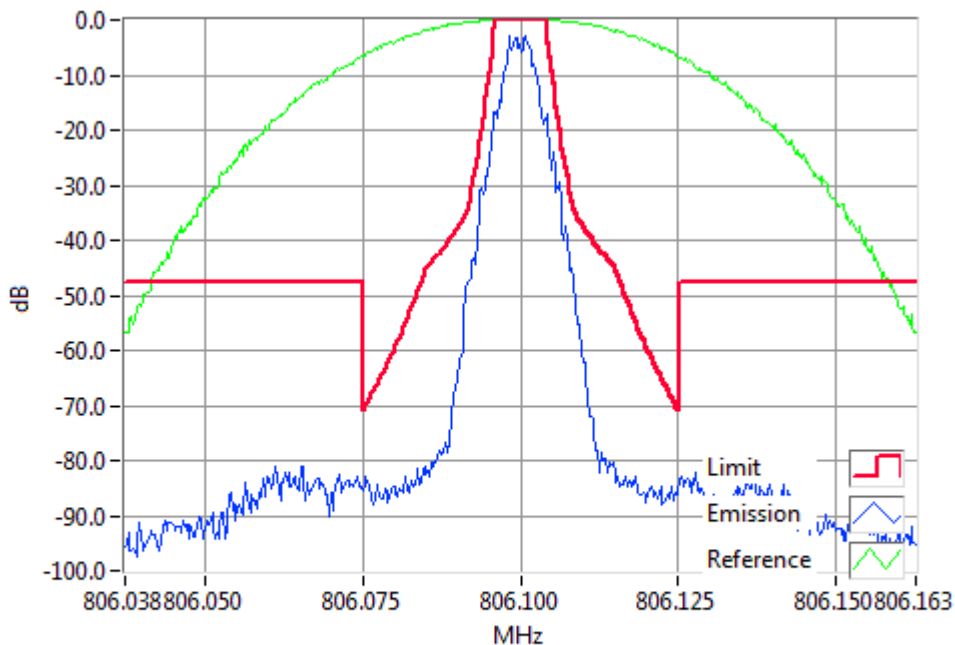


P25I 806.1000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY: 806.1 MHz 1 W 12.5 kHz Channel Spacing

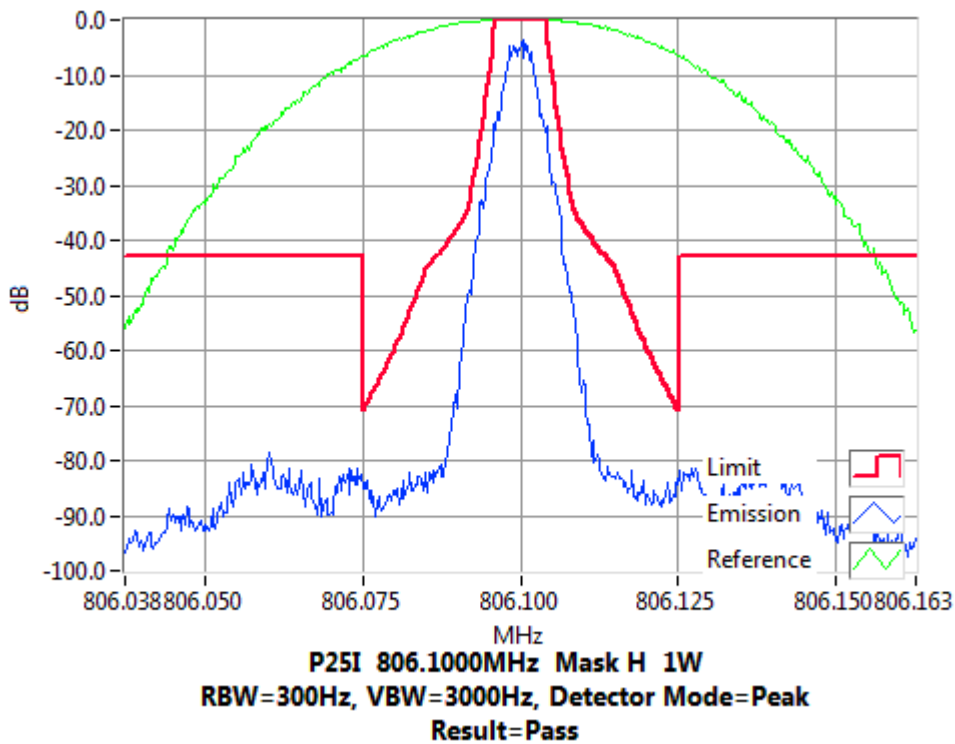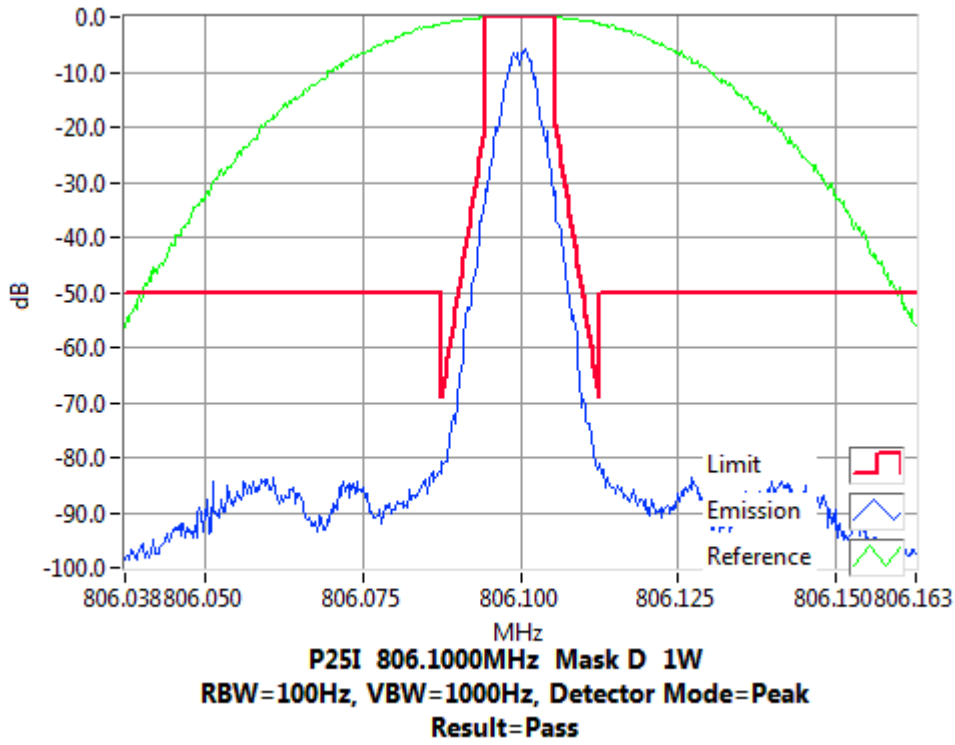


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 12.5 kHz Channel Spacing

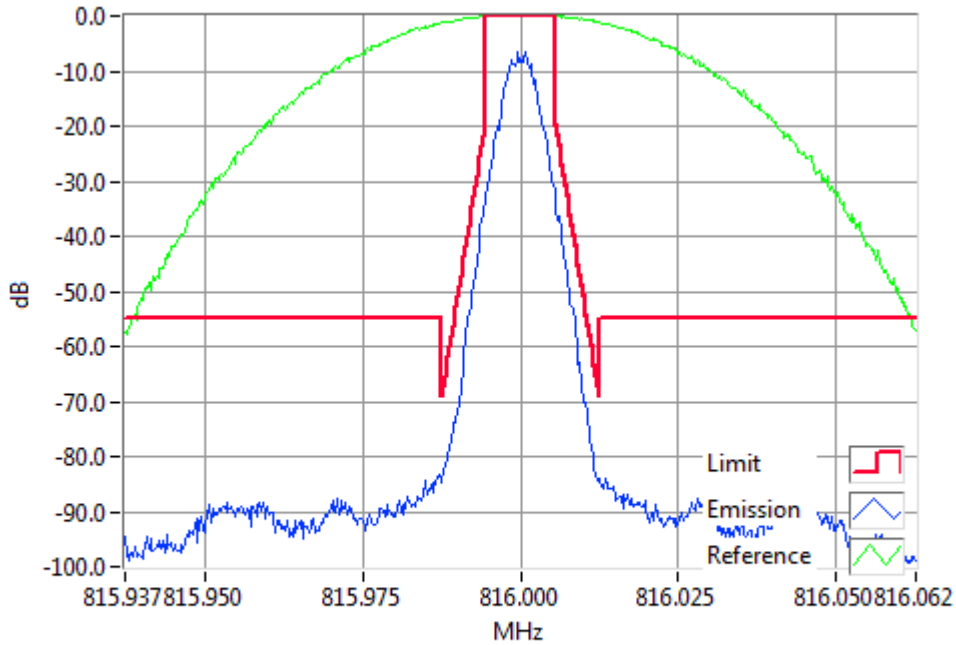

P25I 816.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


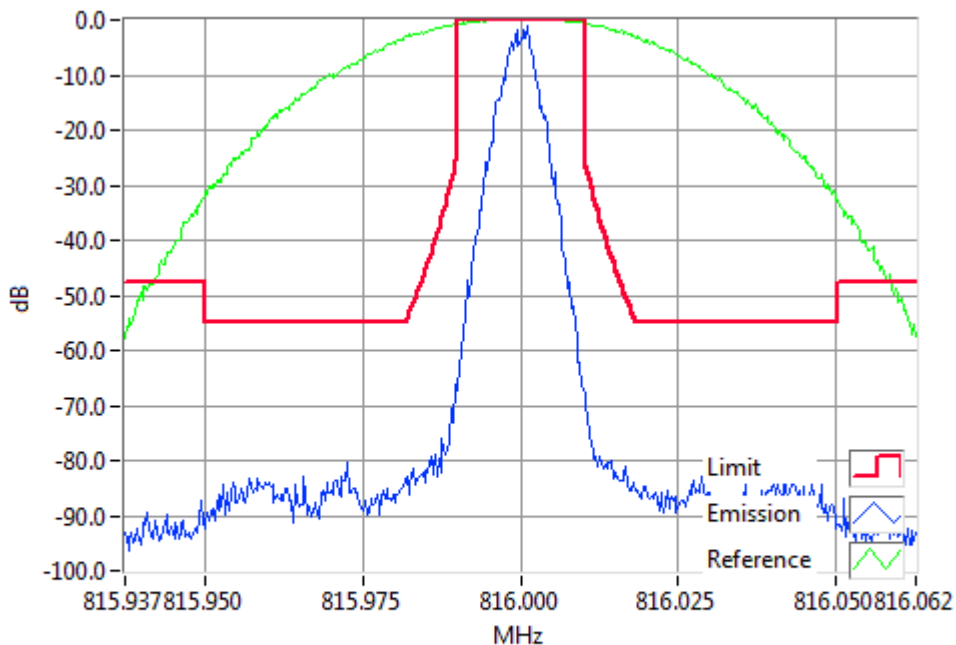


P25I 816.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY: 816.0 MHz 1 W 12.5 kHz Channel Spacing

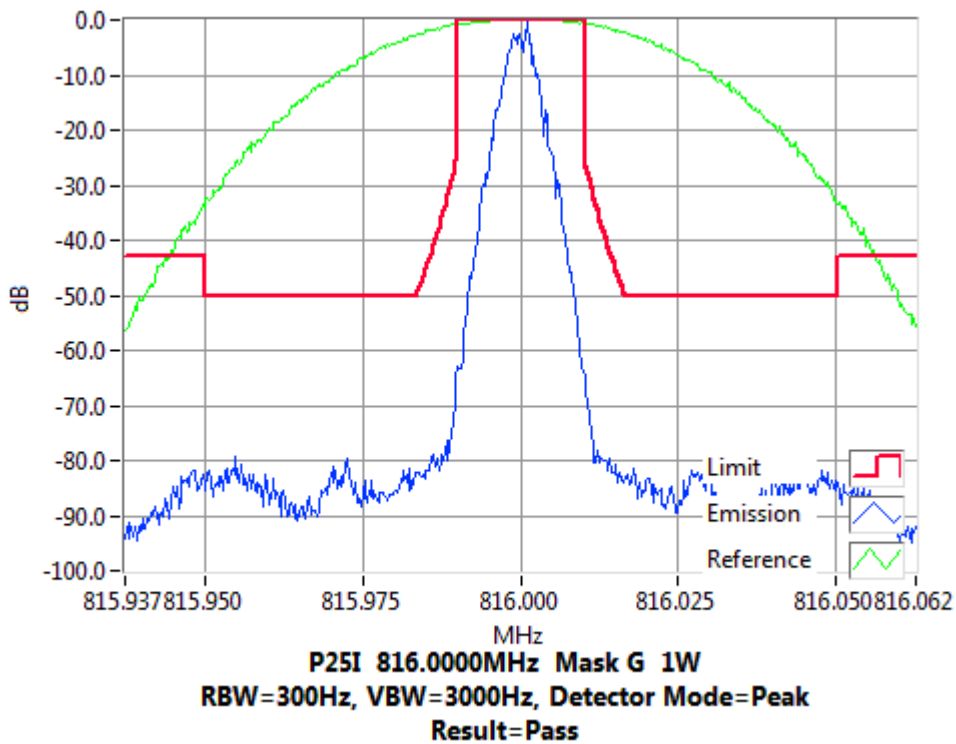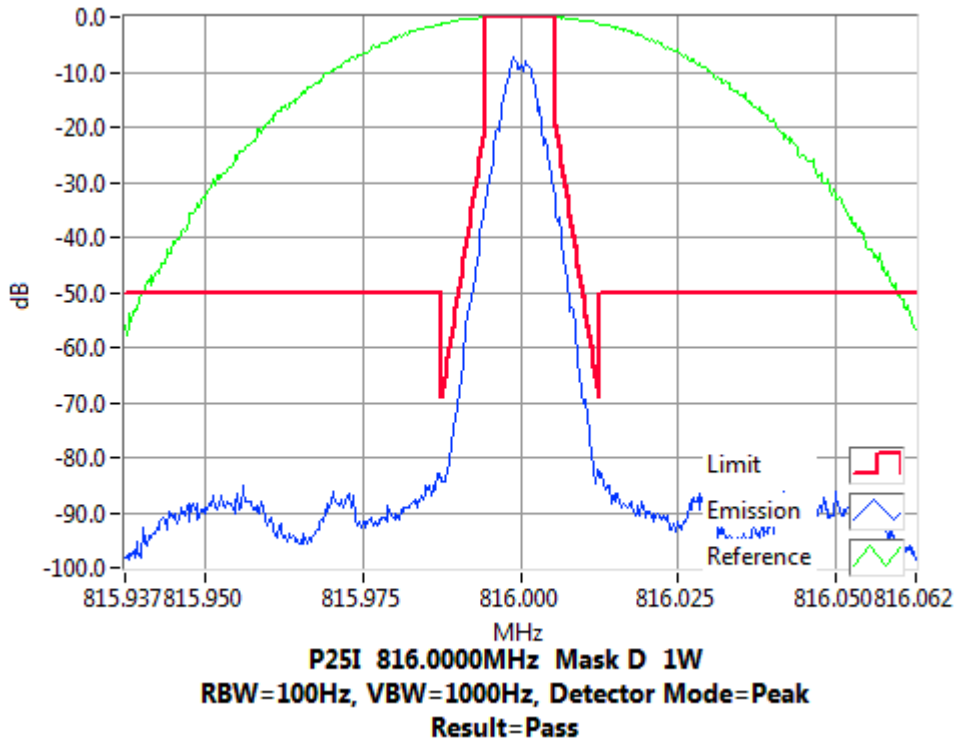


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 12.5 kHz Channel Spacing

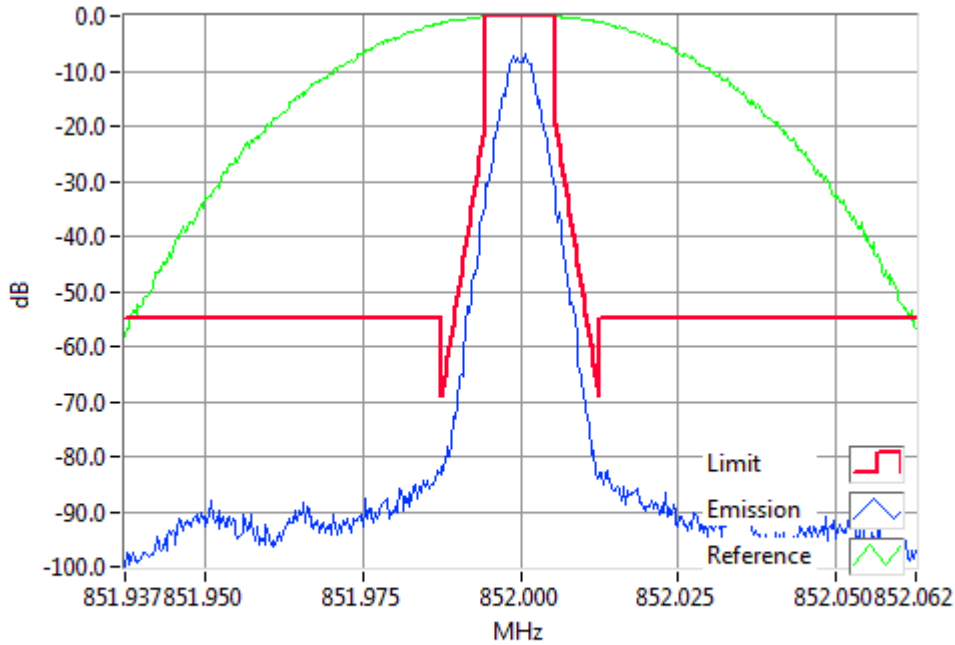

P25I 852.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


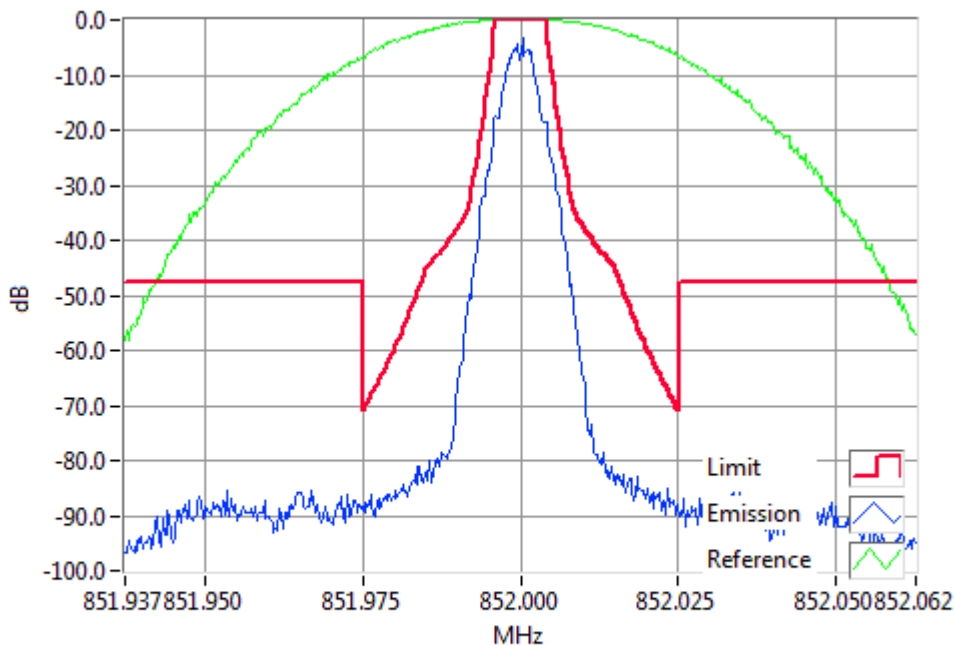


P25I 852.0000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY: 852.0 MHz 1 W 12.5 kHz Channel Spacing

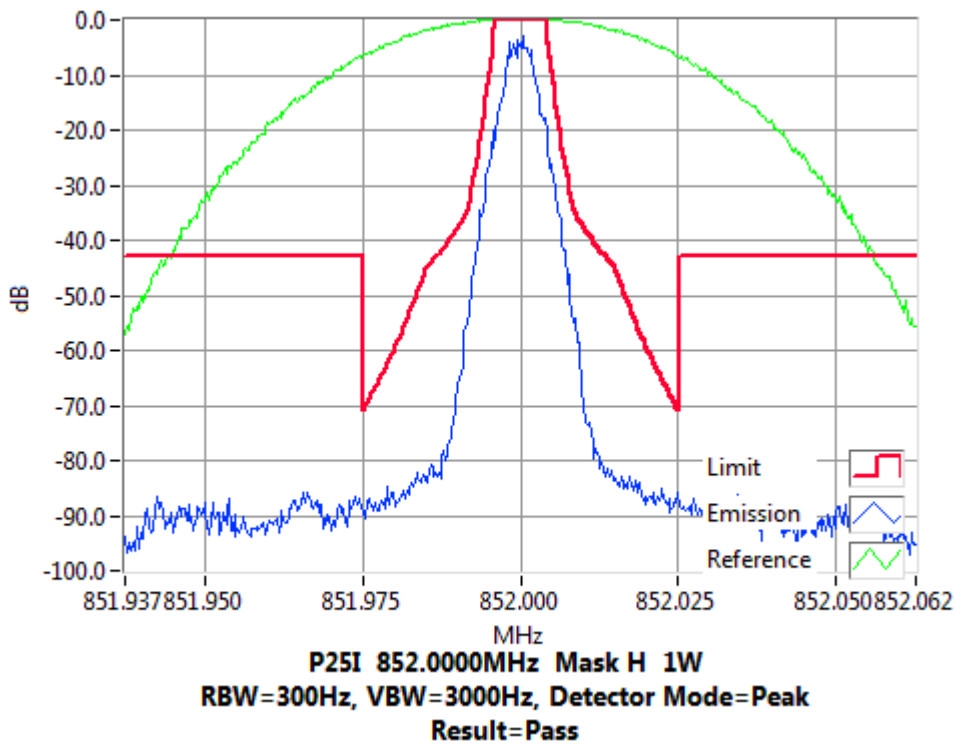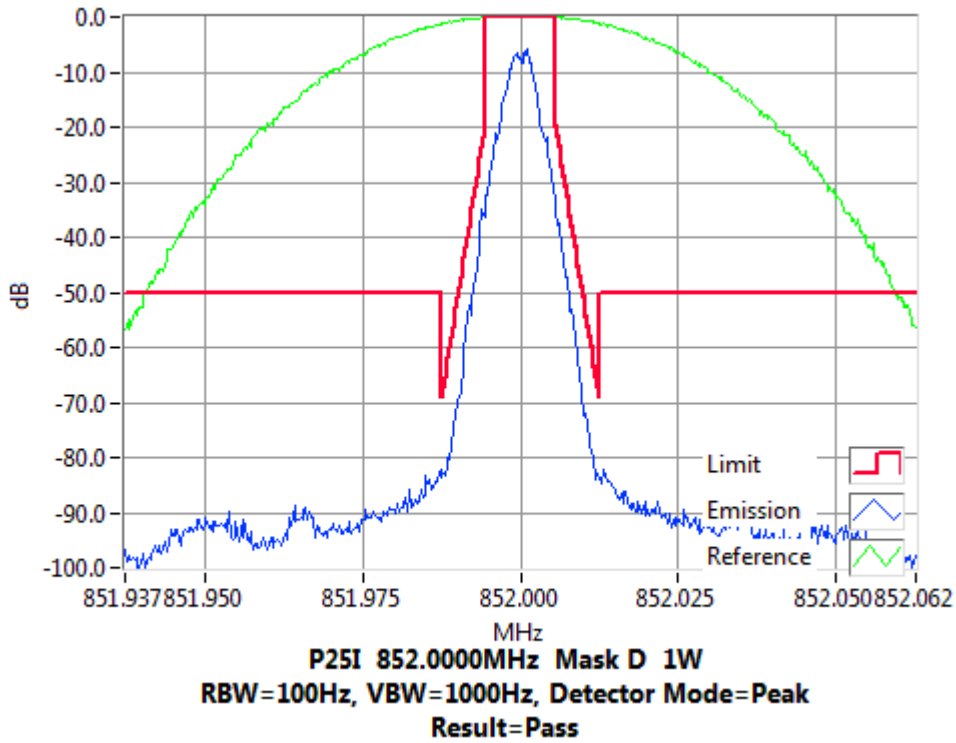


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 12.5 kHz Channel Spacing

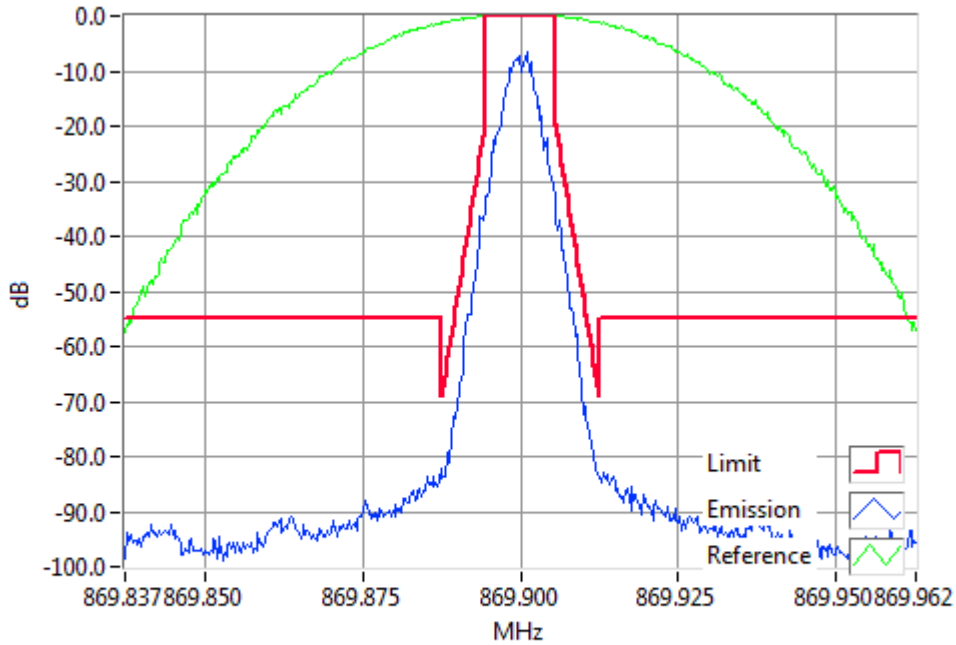

P25I 869.9000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


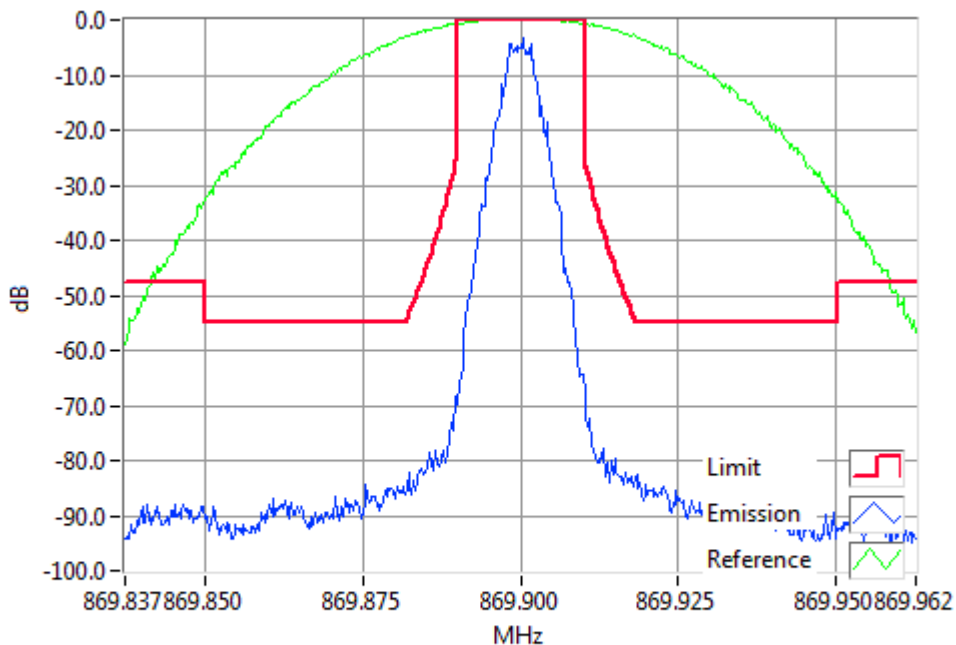


P25I 869.9000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-1

Tx FREQUENCY: 869.9 MHz 1 W 12.5 kHz Channel Spacing

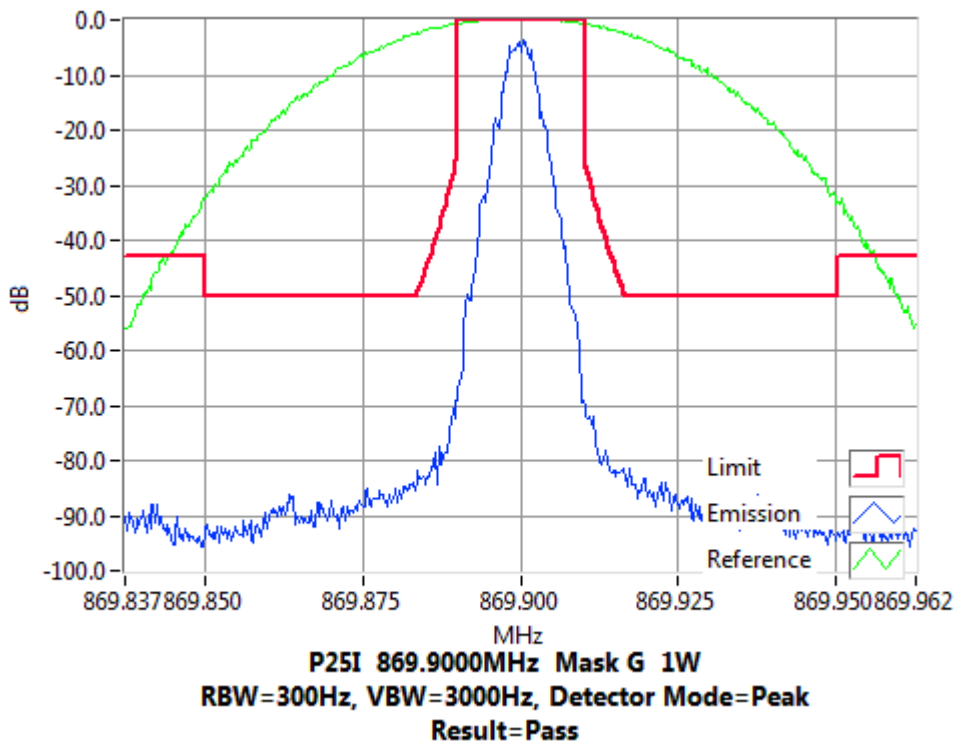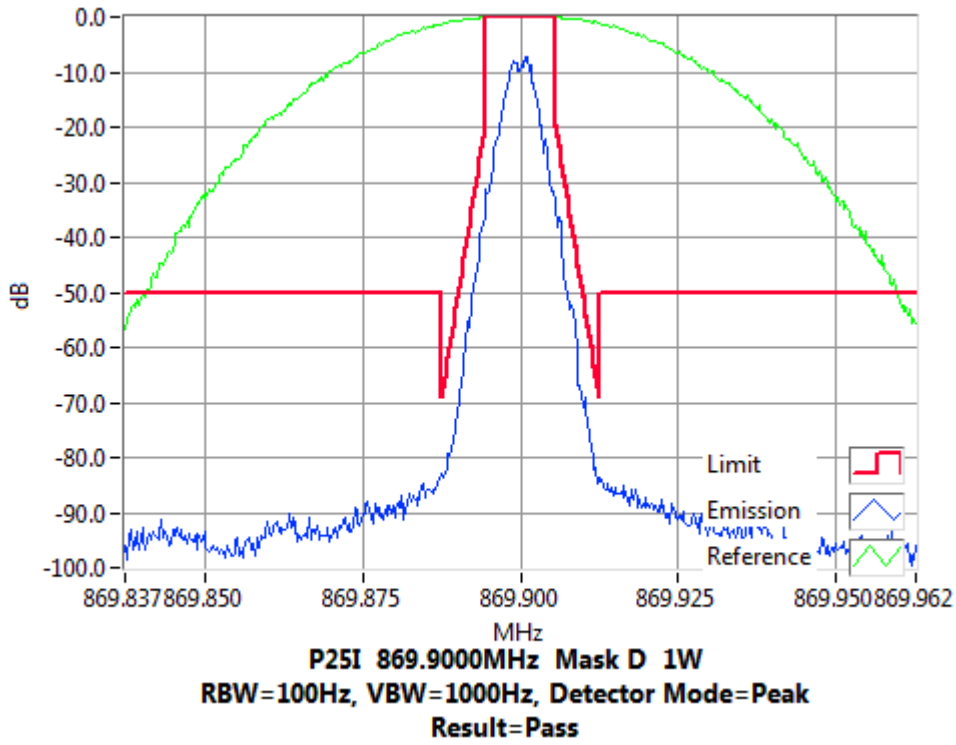


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 806.1 MHz 3 W 12.5 kHz Channel Spacing

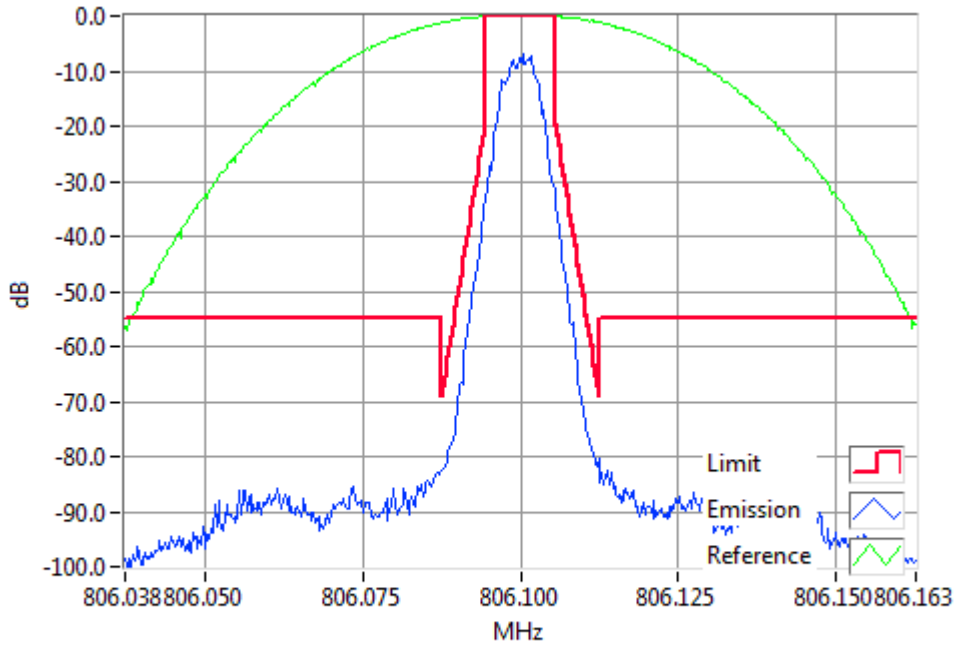

P25II 806.1000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


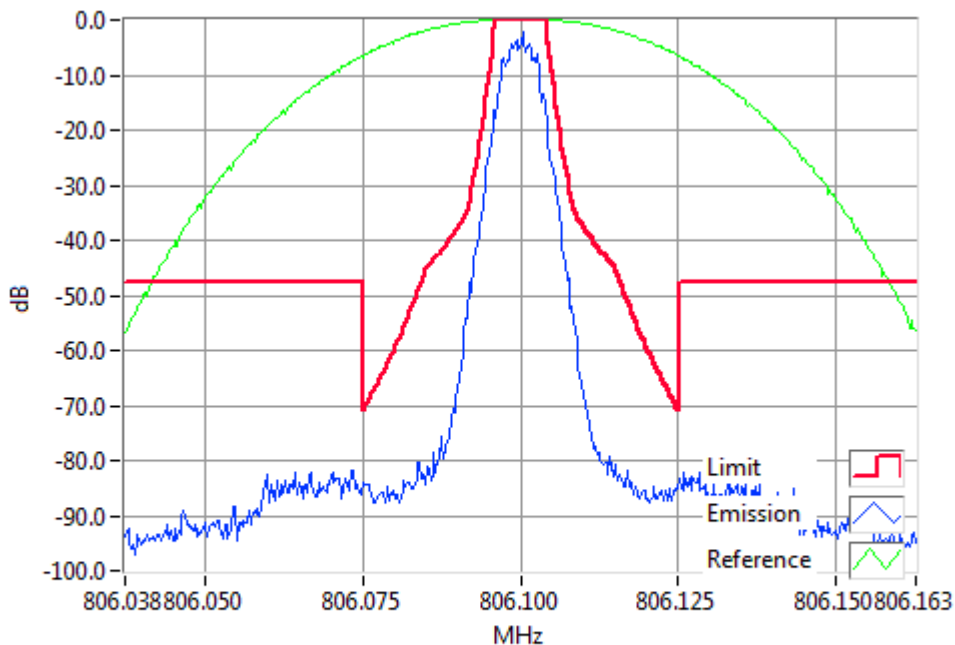


P25II 806.1000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-2

Tx FREQUENCY: 806.1 MHz 1 W 12.5 kHz Channel Spacing

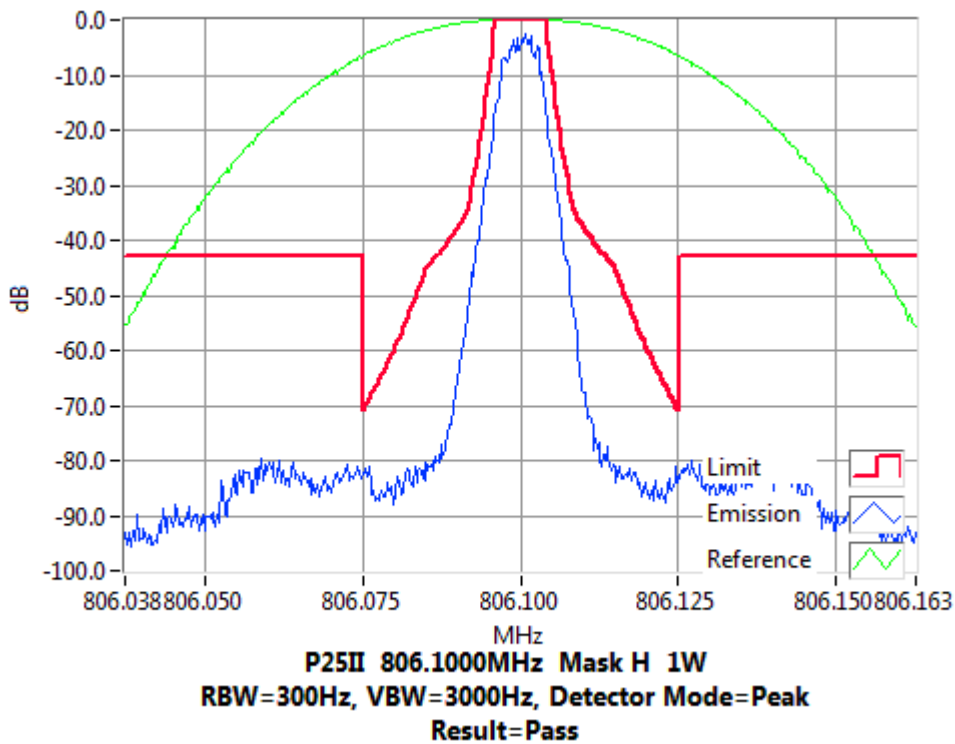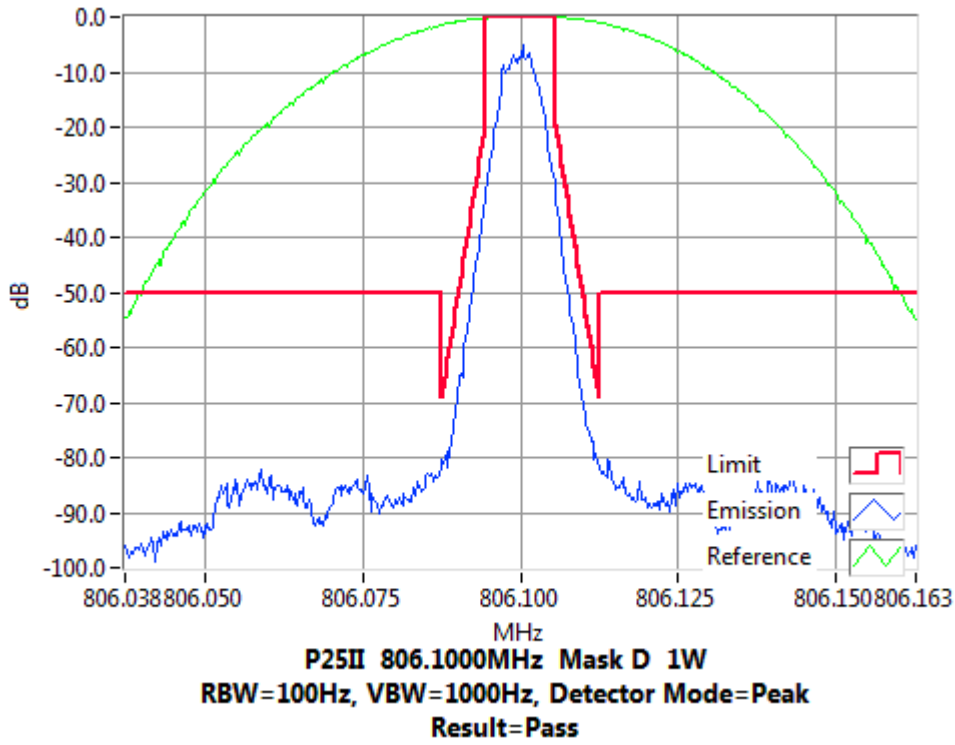


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 816.0 MHz 3 W 12.5 kHz Channel Spacing

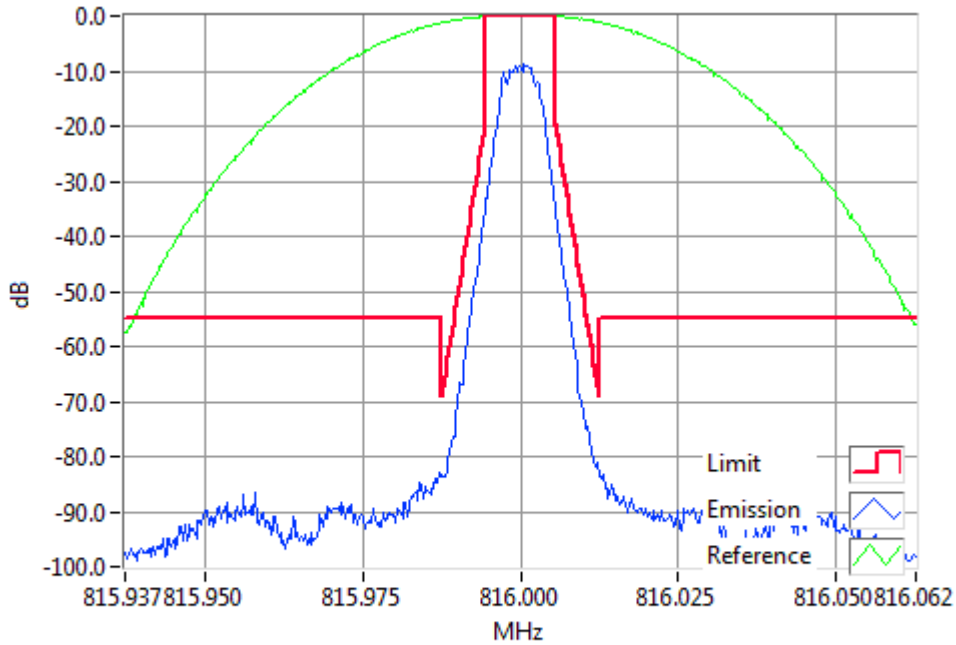

P25II 816.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


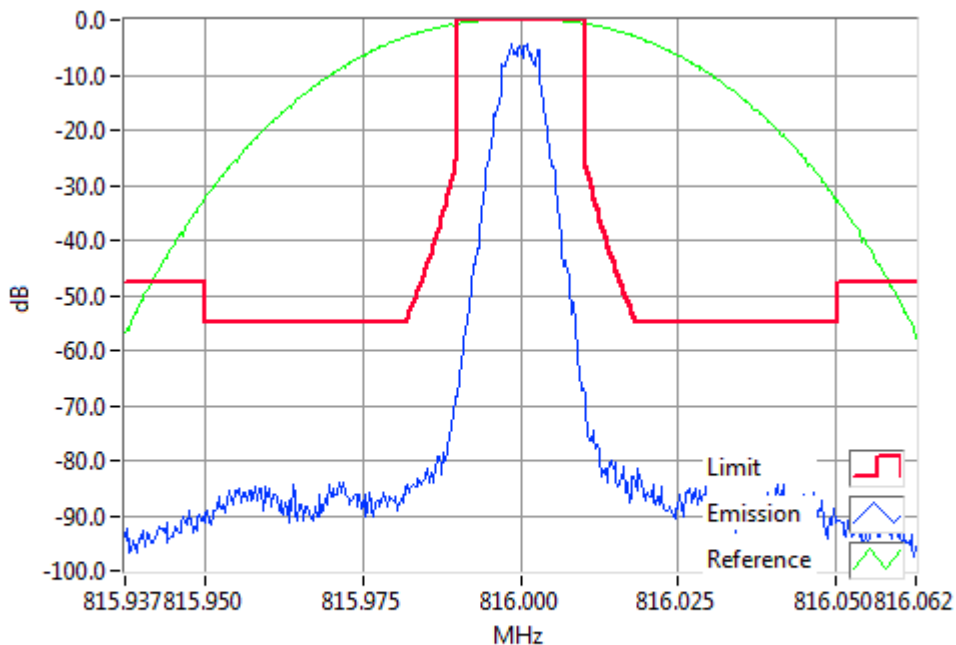


P25II 816.0000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-2

Tx FREQUENCY: 816.0 MHz 1 W 12.5 kHz Channel Spacing

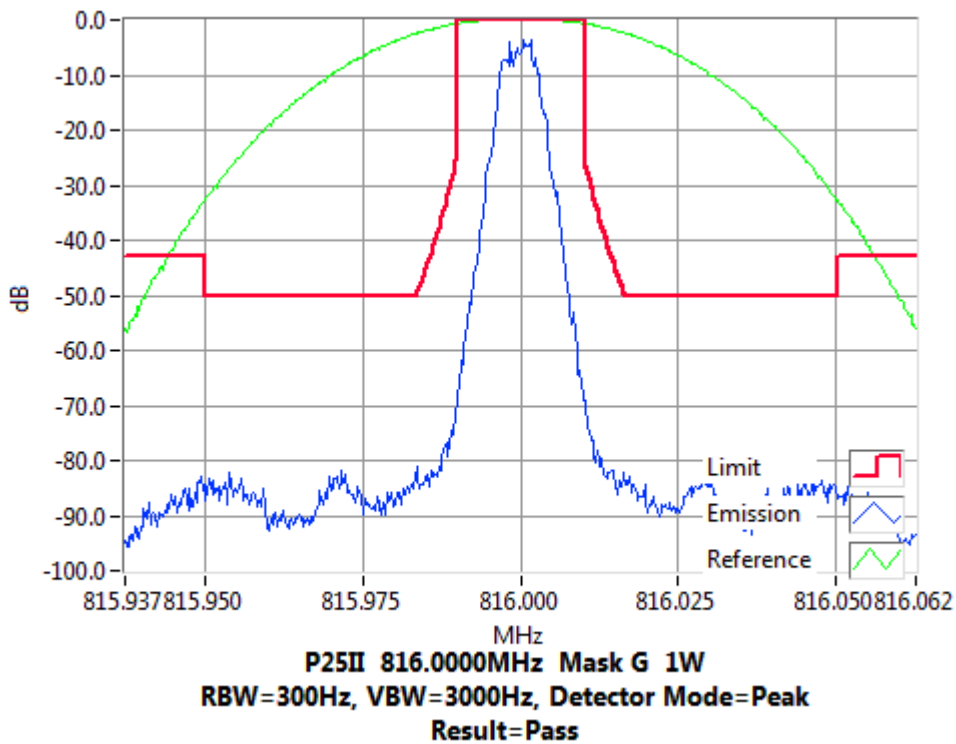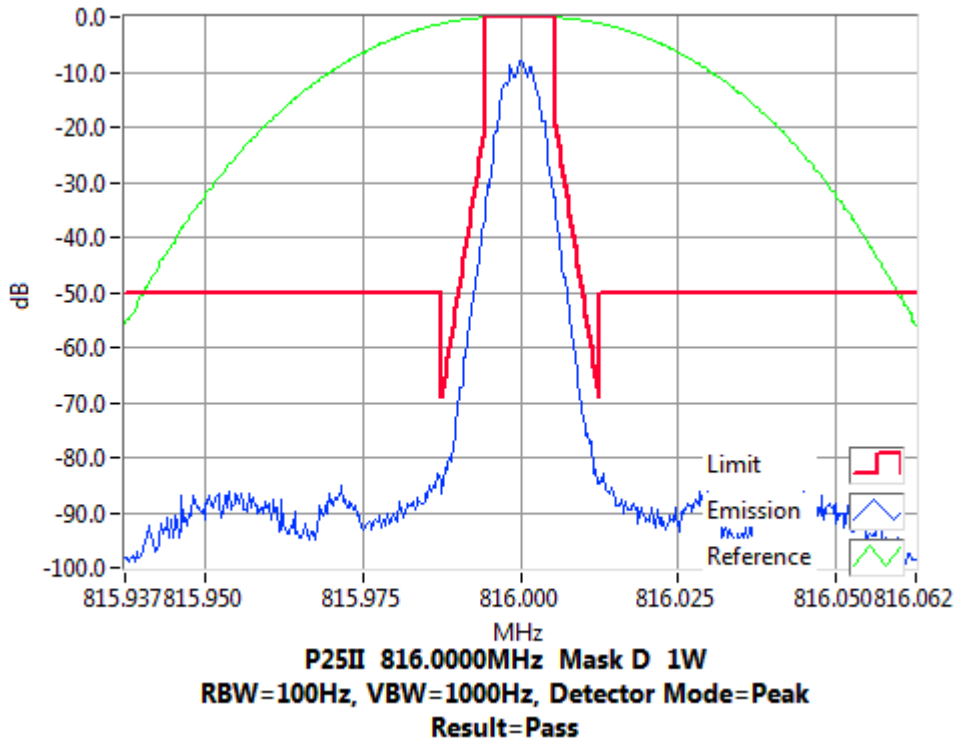


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 852.0 MHz 3 W 12.5 kHz Channel Spacing

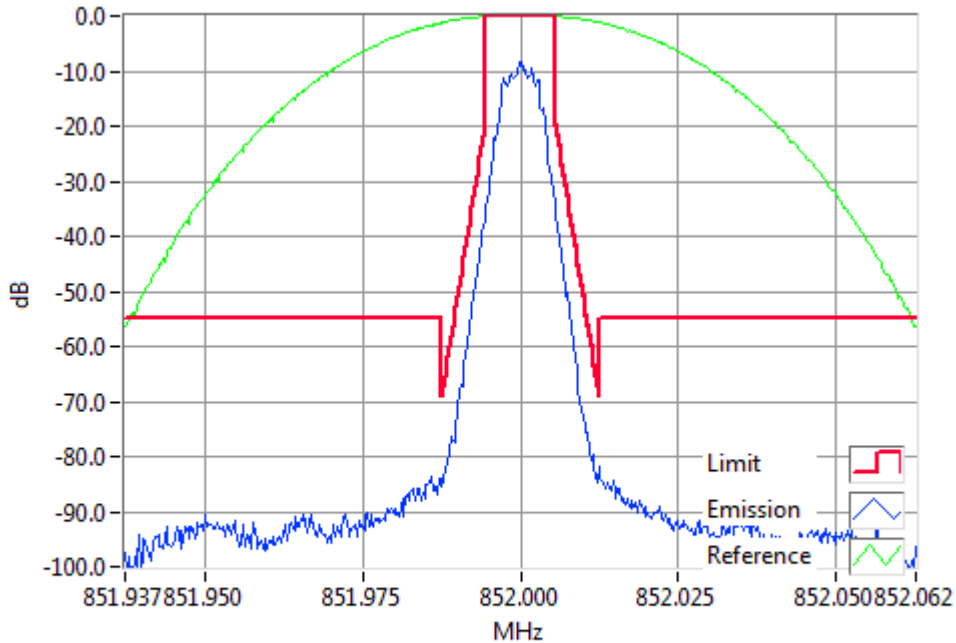

P25II 852.0000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


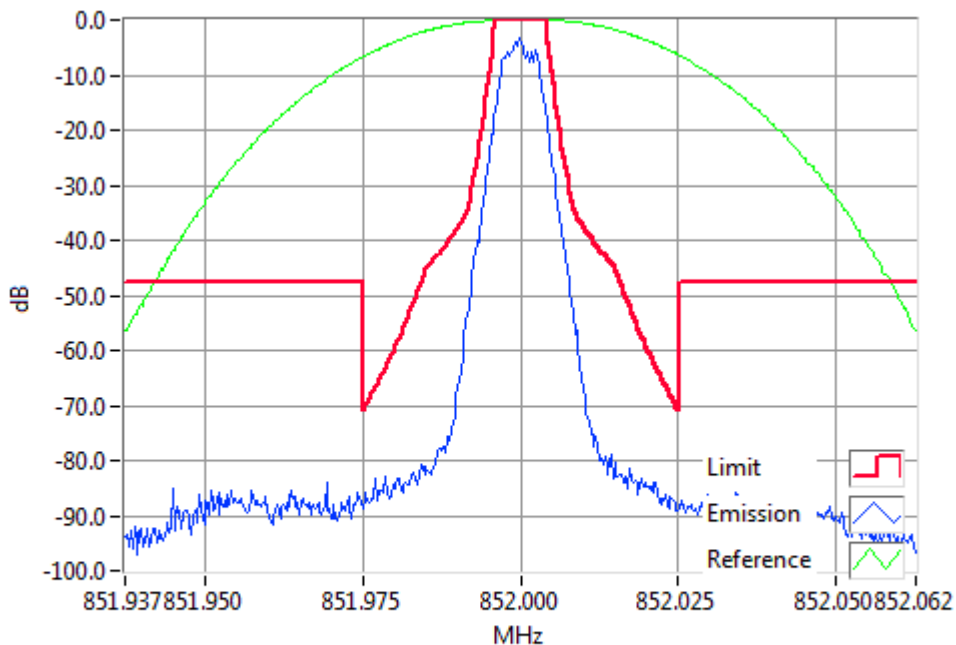


P25II 852.0000MHz Mask H 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-2

Tx FREQUENCY: 852.0 MHz 1 W 12.5 kHz Channel Spacing

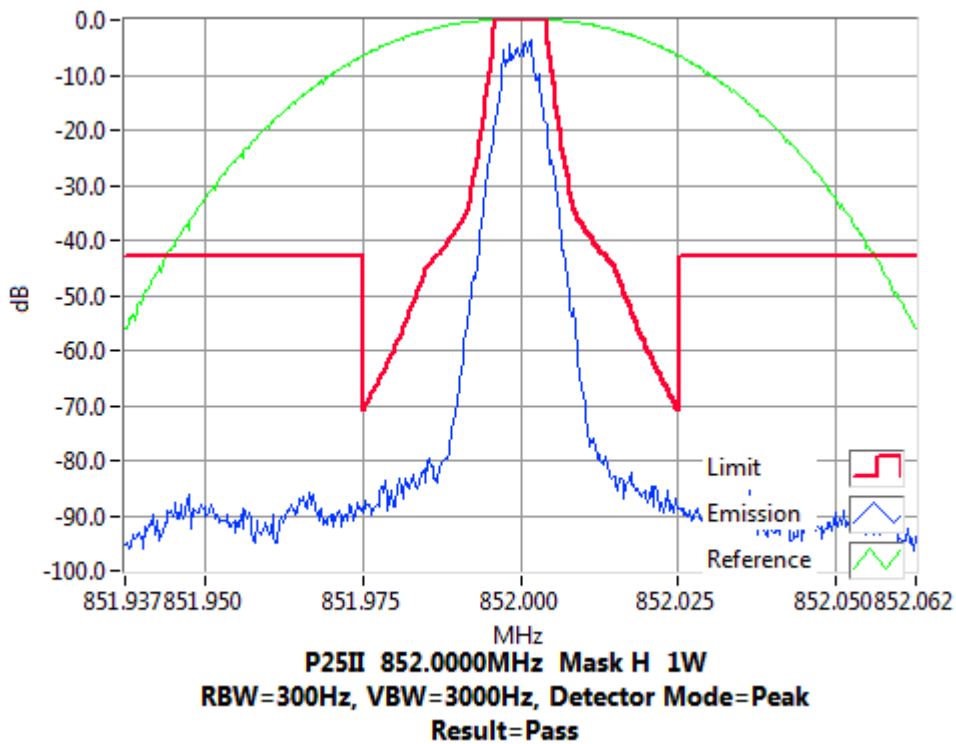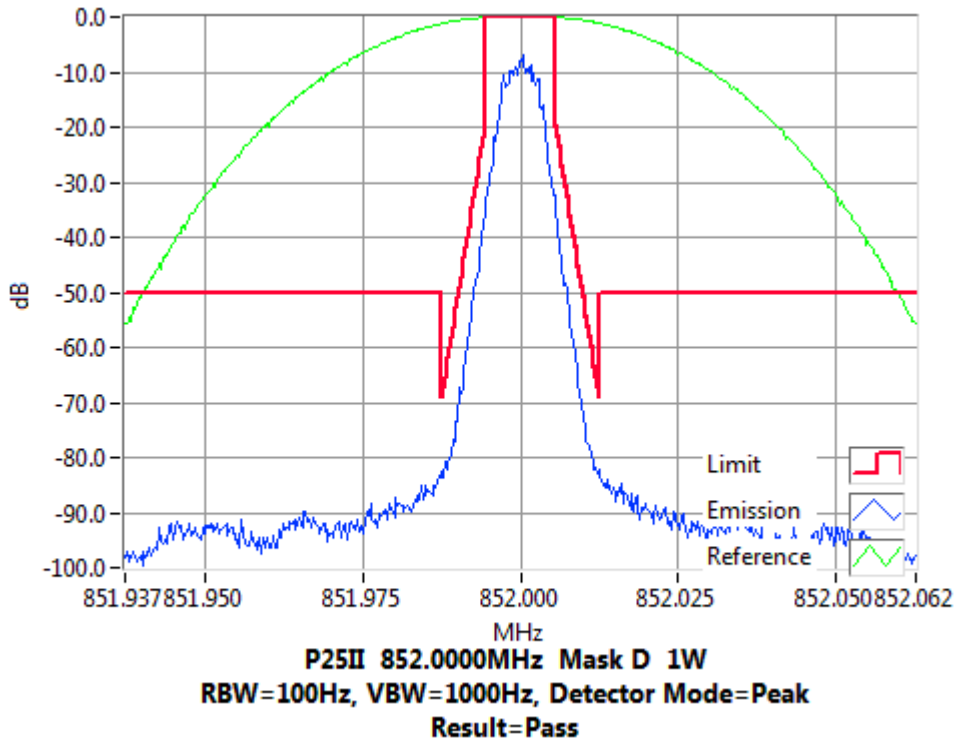


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 869.9 MHz 3 W 12.5 kHz Channel Spacing

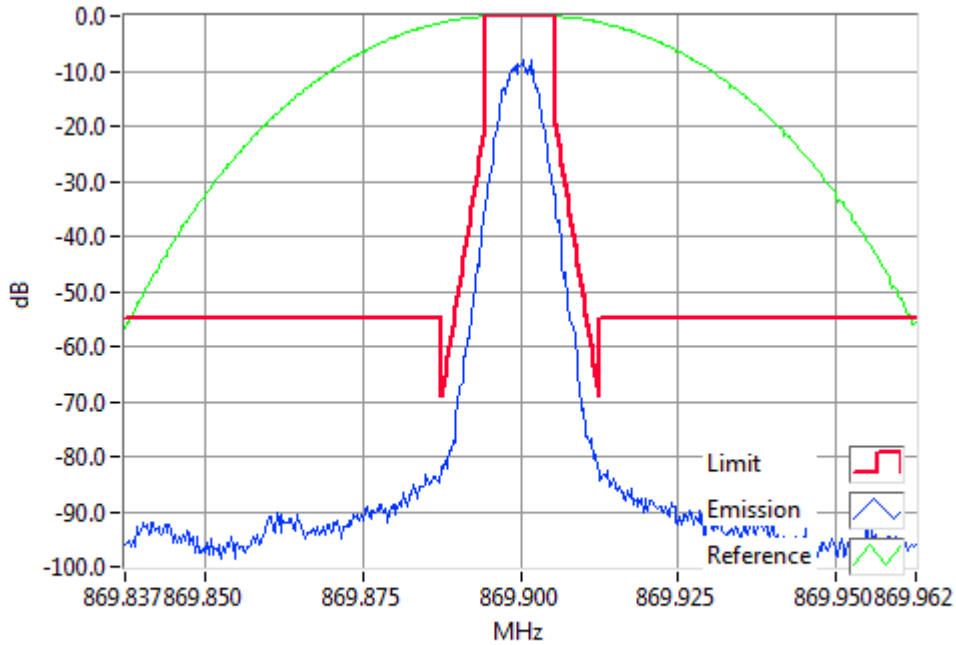

P25II 869.9000MHz Mask D 3W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


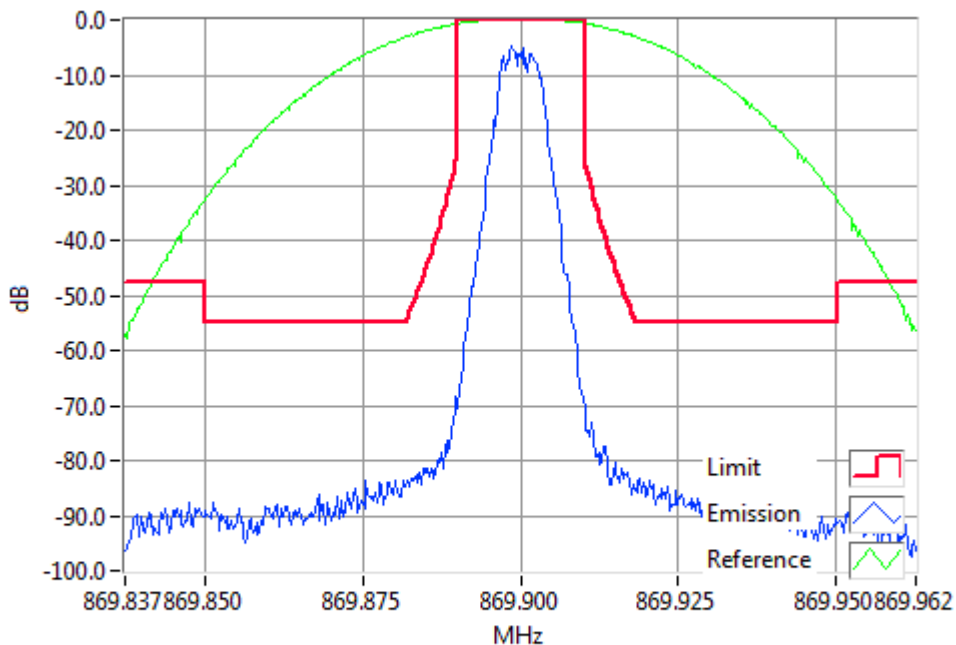


P25II 869.9000MHz Mask G 3W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

APCO P25 phase-2

Tx FREQUENCY: 869.9 MHz 1 W 12.5 kHz Channel Spacing

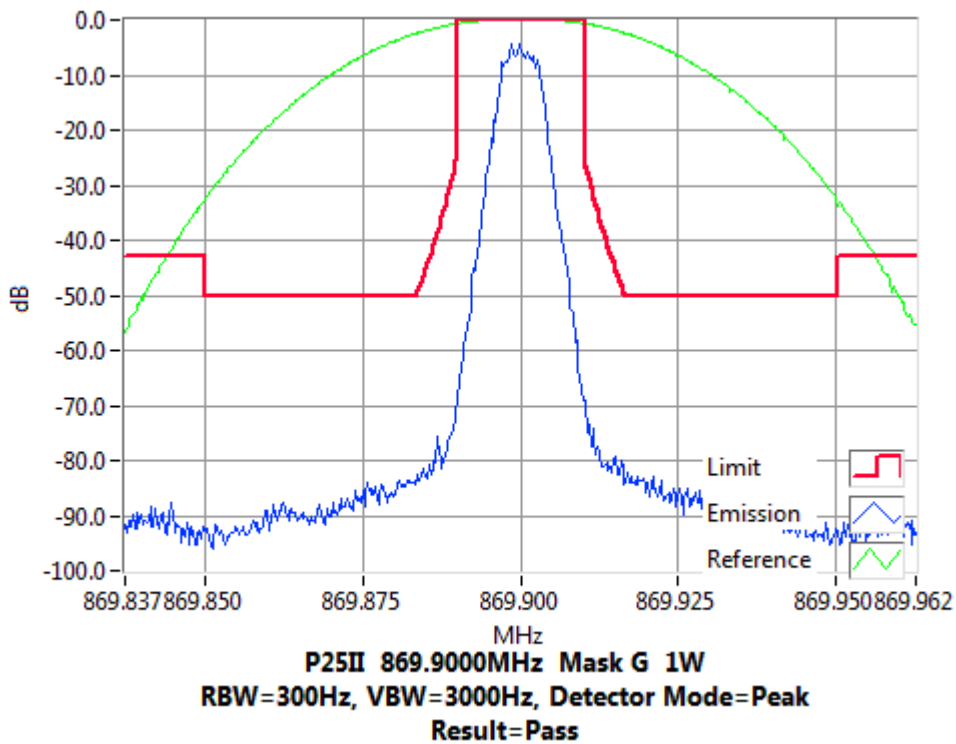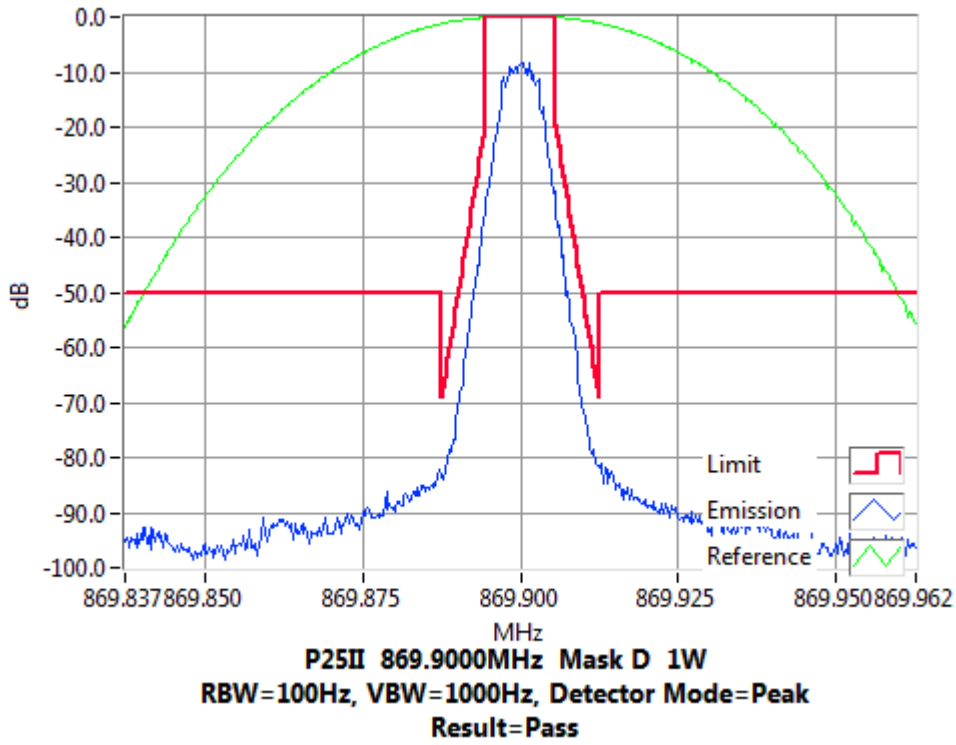

ADJACENT CHANNEL POWER RATIO

SPECIFICATION: FCC 47 CFR 90.543

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The transmitter is modulated with the standard test pattern for digital modulation.
3. The test is performed in accordance with 47 CFR 90.543

LIMIT CLAUSE: FCC 47 CFR 90.543

MEASUREMENT UNCERTAINTY: ≤12.75 GHz ± 3.0 dB

MEASUREMENT RESULTS:

Analogue

Tx FREQUENCY: 769.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-44.66	-45.13	-40
15.625 kHz	6.25 kHz	-76.73	-76.59	-60
21.875 kHz	6.25 kHz	-77.21	-76.85	-60
37.5 kHz	25 kHz	-74.00	-74.17	-60
62.5 kHz	25 kHz	-82.42	-82.38	-65
87.5 kHz	25 kHz	-84.17	-84.22	-65
150 kHz	100 kHz	-77.89	-77.93	-65
250 kHz	100 kHz	-81.08	-81.05	-65
350 kHz	100 kHz	-83.93	-83.89	-65
>400 kHz to 12 MHz	30 kHz (swept)	-86.55		-75
12 MHz to paired receive band	30 kHz (swept)	-96.14		-75
In the paired receive band	30 kHz (swept)	-101.74		-100

Analogue

Tx FREQUENCY: 774.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-46.60	-47.41	-40
15.625 kHz	6.25 kHz	-76.77	-76.65	-60
21.875 kHz	6.25 kHz	-78.58	-78.62	-60
37.5 kHz	25 kHz	-77.97	-78.09	-60
62.5 kHz	25 kHz	-78.68	-79.11	-65
87.5 kHz	25 kHz	-83.41	-83.44	-65
150 kHz	100 kHz	-78.09	-77.85	-65
250 kHz	100 kHz	-81.27	-81.09	-65
350 kHz	100 kHz	-83.71	-83.45	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.84		-75
12 MHz to paired receive band	30 kHz (swept)	-99.94		-75
In the paired receive band	30 kHz (swept)	-100.70		-100

Adjacent Channel Power - continued

Analogue
Tx FREQUENCY: 799.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-46.74	-47.43	-40
15.625 kHz	6.25 kHz	-76.77	-76.53	-60
21.875 kHz	6.25 kHz	-80.07	-80.28	-60
37.5 kHz	25 kHz	-77.86	-78.00	-60
62.5 kHz	25 kHz	-79.22	-79.68	-65
87.5 kHz	25 kHz	-84.24	-84.28	-65
150 kHz	100 kHz	-78.15	-78.20	-65
250 kHz	100 kHz	-81.64	-81.59	-65
350 kHz	100 kHz	-84.35	-84.20	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.91		-75
12 MHz to paired receive band	30 kHz (swept)	-101.50		-75
In the paired receive band	30 kHz (swept)	-101.49		-100

Analogue
Tx FREQUENCY: 804.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-51.95	-47.44	-40
15.625 kHz	6.25 kHz	-76.72	-76.32	-60
21.875 kHz	6.25 kHz	-80.54	-80.54	-60
37.5 kHz	25 kHz	-78.03	-77.88	-60
62.5 kHz	25 kHz	-79.91	-80.35	-65
87.5 kHz	25 kHz	-84.32	-84.34	-65
150 kHz	100 kHz	-78.15	-78.12	-65
250 kHz	100 kHz	-81.46	-81.44	-65
350 kHz	100 kHz	-84.52	-84.37	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.26		-75
12 MHz to paired receive band	30 kHz (swept)	-103.00		-75
In the paired receive band	30 kHz (swept)	-104.39		-100

FFSK 1200 bps
Tx FREQUENCY: 769.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-48.22	-49.74	-40
15.625 kHz	6.25 kHz	-76.76	-76.74	-60
21.875 kHz	6.25 kHz	-78.92	-79.01	-60
37.5 kHz	25 kHz	-76.60	-76.98	-60
62.5 kHz	25 kHz	-81.94	-82.17	-65
87.5 kHz	25 kHz	-84.68	-84.76	-65
150 kHz	100 kHz	-78.11	-78.18	-65
250 kHz	100 kHz	-81.13	-81.07	-65
350 kHz	100 kHz	-84.01	-83.73	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.14		-75
12 MHz to paired receive band	30 kHz (swept)	-99.37		-75
In the paired receive band	30 kHz (swept)	-101.25		-100

Adjacent Channel Power - continued

FFSK 1200 bps
Tx FREQUENCY: 774.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-48.26	-49.58	-40
15.625 kHz	6.25 kHz	-76.81	-76.68	-60
21.875 kHz	6.25 kHz	-78.83	-78.94	-60
37.5 kHz	25 kHz	-78.71	-78.75	-60
62.5 kHz	25 kHz	-79.09	-79.53	-65
87.5 kHz	25 kHz	-83.40	-83.46	-65
150 kHz	100 kHz	-77.96	-77.89	-65
250 kHz	100 kHz	-81.18	-81.07	-65
350 kHz	100 kHz	-83.61	-83.33	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.25		-75
12 MHz to paired receive band	30 kHz (swept)	-99.86		-75
In the paired receive band	30 kHz (swept)	-100.72		-100

FFSK 1200 bps
Tx FREQUENCY: 799.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-48.27	-49.52	-40
15.625 kHz	6.25 kHz	-76.83	-76.62	-60
21.875 kHz	6.25 kHz	-80.38	-80.57	-60
37.5 kHz	25 kHz	-77.98	-78.16	-60
62.5 kHz	25 kHz	-79.80	-80.18	-65
87.5 kHz	25 kHz	-84.34	-84.38	-65
150 kHz	100 kHz	-78.25	-78.22	-65
250 kHz	100 kHz	-81.51	-81.53	-65
350 kHz	100 kHz	-84.25	-84.03	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.06		-75
12 MHz to paired receive band	30 kHz (swept)	-102.04		-75
In the paired receive band	30 kHz (swept)	-101.84		-100

FFSK 1200 bps
Tx FREQUENCY: 804.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-48.28	-49.64	-40
15.625 kHz	6.25 kHz	-76.74	-76.52	-60
21.875 kHz	6.25 kHz	-80.50	-80.69	-60
37.5 kHz	25 kHz	-78.05	-78.14	-60
62.5 kHz	25 kHz	-79.81	-80.31	-65
87.5 kHz	25 kHz	-84.41	-84.44	-65
150 kHz	100 kHz	-78.25	-78.14	-65
250 kHz	100 kHz	-81.47	-81.43	-65
350 kHz	100 kHz	-84.46	-84.47	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.99		-75
12 MHz to paired receive band	30 kHz (swept)	-102.13		-75
In the paired receive band	30 kHz (swept)	-103.96		-100

Adjacent Channel Power – continued

FFSK 2400 bps
Tx FREQUENCY: 769.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-47.60	-49.09	-40
15.625 kHz	6.25 kHz	-76.84	-76.79	-60
21.875 kHz	6.25 kHz	-79.00	-79.02	-60
37.5 kHz	25 kHz	-77.32	-77.67	-60
62.5 kHz	25 kHz	-80.71	-81.13	-65
87.5 kHz	25 kHz	-84.65	-84.72	-65
150 kHz	100 kHz	-78.05	-78.00	-65
250 kHz	100 kHz	-81.04	-80.97	-65
350 kHz	100 kHz	-83.92	-83.52	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.93		-75
12 MHz to paired receive band	30 kHz (swept)	-99.18		-75
In the paired receive band	30 kHz (swept)	-101.20		-100

FFSK 2400 bps
Tx FREQUENCY: 774.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-47.76	-49.05	-40
15.625 kHz	6.25 kHz	-76.80	-76.67	-60
21.875 kHz	6.25 kHz	-78.86	-78.95	-60
37.5 kHz	25 kHz	-78.50	-78.59	-60
62.5 kHz	25 kHz	-78.90	-79.38	-65
87.5 kHz	25 kHz	-83.38	-83.46	-65
150 kHz	100 kHz	-78.06	-78.00	-65
250 kHz	100 kHz	-81.35	-81.15	-65
350 kHz	100 kHz	-83.64	-83.37	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.69		-75
12 MHz to paired receive band	30 kHz (swept)	-99.98		-75
In the paired receive band	30 kHz (swept)	-100.76		-100

FFSK 2400 bps
Tx FREQUENCY: 799.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-48.15	-49.08	-40
15.625 kHz	6.25 kHz	-76.75	-76.43	-60
21.875 kHz	6.25 kHz	-80.36	-80.51	-60
37.5 kHz	25 kHz	-78.02	-78.10	-60
62.5 kHz	25 kHz	-79.64	-80.16	-65
87.5 kHz	25 kHz	-84.35	-84.41	-65
150 kHz	100 kHz	-78.02	-78.05	-65
250 kHz	100 kHz	-81.54	-81.41	-65
350 kHz	100 kHz	-84.05	-83.79	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.35		-75
12 MHz to paired receive band	30 kHz (swept)	-101.91		-75
In the paired receive band	30 kHz (swept)	-101.28		-100

Adjacent Channel Power - continued

FFSK 2400 bps
Tx FREQUENCY: 804.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-48.00	-49.08	-40
15.625 kHz	6.25 kHz	-76.79	-76.42	-60
21.875 kHz	6.25 kHz	-80.53	-80.46	-60
37.5 kHz	25 kHz	-78.14	-78.09	-60
62.5 kHz	25 kHz	-79.72	-80.25	-65
87.5 kHz	25 kHz	-84.34	-84.41	-65
150 kHz	100 kHz	-78.13	-78.12	-65
250 kHz	100 kHz	-81.43	-81.34	-65
350 kHz	100 kHz	-84.39	-84.24	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.23		-75
12 MHz to paired receive band	30 kHz (swept)	-102.52		-75
In the paired receive band	30 kHz (swept)	-103.61		-100

DMR
Tx FREQUENCY: 769.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-42.79	-43.26	-40
15.625 kHz	6.25 kHz	-74.65	-74.57	-60
21.875 kHz	6.25 kHz	-78.26	-78.28	-60
37.5 kHz	25 kHz	-76.70	-76.97	-60
62.5 kHz	25 kHz	-81.09	-81.31	-65
87.5 kHz	25 kHz	-84.65	-84.69	-65
150 kHz	100 kHz	-78.23	-78.22	-65
250 kHz	100 kHz	-81.26	-81.17	-65
350 kHz	100 kHz	-84.06	-83.88	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.16		-75
12 MHz to paired receive band	30 kHz (swept)	-99.73		-75
In the paired receive band	30 kHz (swept)	-101.45		-100

DMR
Tx FREQUENCY: 774.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-42.69	-43.07	-40
15.625 kHz	6.25 kHz	-74.57	-74.51	-60
21.875 kHz	6.25 kHz	-78.29	-78.34	-60
37.5 kHz	25 kHz	-78.60	-78.58	-60
62.5 kHz	25 kHz	-79.74	-80.08	-65
87.5 kHz	25 kHz	-83.34	-83.40	-65
150 kHz	100 kHz	-78.00	-78.00	-65
250 kHz	100 kHz	-81.31	-81.23	-65
350 kHz	100 kHz	-83.79	-83.64	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.49		-75
12 MHz to paired receive band	30 kHz (swept)	-101.85		-75
In the paired receive band	30 kHz (swept)	-101.83		-100

Adjacent Channel Power - continued

DMR

Tx FREQUENCY: 799.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-42.09	-43.81	-40
15.625 kHz	6.25 kHz	-74.55	-74.63	-60
21.875 kHz	6.25 kHz	-79.04	-79.28	-60
37.5 kHz	25 kHz	-75.21	-75.89	-60
62.5 kHz	25 kHz	-82.35	-82.35	-65
87.5 kHz	25 kHz	-84.43	-84.43	-65
150 kHz	100 kHz	-78.05	-77.98	-65
250 kHz	100 kHz	-81.27	-81.21	-65
350 kHz	100 kHz	-83.77	-83.58	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.92		-75
12 MHz to paired receive band	30 kHz (swept)	-99.83		-75
In the paired receive band	30 kHz (swept)	-100.87		-100

DMR

Tx FREQUENCY: 804.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-42.50	-43.16	-40
15.625 kHz	6.25 kHz	-74.58	-74.48	-60
21.875 kHz	6.25 kHz	-79.51	-79.68	-60
37.5 kHz	25 kHz	-77.77	-77.86	-60
62.5 kHz	25 kHz	-79.19	-79.83	-65
87.5 kHz	25 kHz	-84.48	-84.47	-65
150 kHz	100 kHz	-77.99	-77.91	-65
250 kHz	100 kHz	-81.21	-81.16	-65
350 kHz	100 kHz	-84.25	-84.13	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.30		-75
12 MHz to paired receive band	30 kHz (swept)	-102.15		-75
In the paired receive band	30 kHz (swept)	-103.50		-100

P25 phase I

Tx FREQUENCY: 769.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-40.21	-41.43	-40
15.625 kHz	6.25 kHz	-76.81	-76.81	-60
21.875 kHz	6.25 kHz	-77.69	-77.56	-60
37.5 kHz	25 kHz	-74.20	-74.31	-60
62.5 kHz	25 kHz	-82.43	-82.41	-65
87.5 kHz	25 kHz	-84.59	-84.60	-65
150 kHz	100 kHz	-77.88	-77.94	-65
250 kHz	100 kHz	-80.69	-80.57	-65
350 kHz	100 kHz	-83.80	-83.67	-65
>400 kHz to 12 MHz	30 kHz (swept)	-88.92		-75
12 MHz to paired receive band	30 kHz (swept)	-101.19		-75
In the paired receive band	30 kHz (swept)	-102.61		-100

Adjacent Channel Power - continued

P25 phase I

Tx FREQUENCY: 774.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-40.09	-41.37	-40
15.625 kHz	6.25 kHz	-76.80	-77.05	-60
21.875 kHz	6.25 kHz	-77.36	-77.80	-60
37.5 kHz	25 kHz	-78.16	-78.28	-60
62.5 kHz	25 kHz	-82.11	-82.15	-65
87.5 kHz	25 kHz	-83.57	-83.61	-65
150 kHz	100 kHz	-77.84	-77.92	-65
250 kHz	100 kHz	-81.22	-81.17	-65
350 kHz	100 kHz	-83.67	-83.56	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.10		-75
12 MHz to paired receive band	30 kHz (swept)	-99.85		-75
In the paired receive band	30 kHz (swept)	-101.01		-100

P25 phase I

Tx FREQUENCY: 799.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-40.16	-41.53	-40
15.625 kHz	6.25 kHz	-77.01	-76.99	-60
21.875 kHz	6.25 kHz	-79.78	-79.93	-60
37.5 kHz	25 kHz	-75.01	-75.69	-60
62.5 kHz	25 kHz	-82.48	-82.43	-65
87.5 kHz	25 kHz	-84.41	-84.41	-65
150 kHz	100 kHz	-78.36	-78.35	-65
250 kHz	100 kHz	-81.74	-81.72	-65
350 kHz	100 kHz	-84.44	-84.27	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.13		-75
12 MHz to paired receive band	30 kHz (swept)	-101.92		-75
In the paired receive band	30 kHz (swept)	-101.97		-100

P25 phase I

Tx FREQUENCY: 804.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-40.38	-41.40	-40
15.625 kHz	6.25 kHz	-76.96	-76.92	-60
21.875 kHz	6.25 kHz	-80.48	-80.63	-60
37.5 kHz	25 kHz	-77.10	-77.38	-60
62.5 kHz	25 kHz	-79.27	-79.82	-65
87.5 kHz	25 kHz	-84.53	-84.53	-65
150 kHz	100 kHz	-78.43	-78.33	-65
250 kHz	100 kHz	-81.59	-81.60	-65
350 kHz	100 kHz	-84.63	-84.38	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.08		-75
12 MHz to paired receive band	30 kHz (swept)	-101.88		-75
In the paired receive band	30 kHz (swept)	-103.50		-100

Adjacent Channel Power - continued

P25 phase II
Tx FREQUENCY: 769.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-41.85	-42.16	-40
15.625 kHz	6.25 kHz	-76.84	-76.66	-60
21.875 kHz	6.25 kHz	-79.14	-79.25	-60
37.5 kHz	25 kHz	-79.03	-78.99	-60
62.5 kHz	25 kHz	-79.81	-80.20	-65
87.5 kHz	25 kHz	-84.51	-84.55	-65
150 kHz	100 kHz	-77.96	-77.97	-65
250 kHz	100 kHz	-81.01	-80.93	-65
350 kHz	100 kHz	-83.84	-83.70	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.23		-75
12 MHz to paired receive band	30 kHz (swept)	-98.68		-75
In the paired receive band	30 kHz (swept)	-101.31		-100

P25 phase II
Tx FREQUENCY: 774.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-41.75	-41.91	-40
15.625 kHz	6.25 kHz	-76.91	-76.64	-60
21.875 kHz	6.25 kHz	-79.04	-79.06	-60
37.5 kHz	25 kHz	-78.67	-78.60	-60
62.5 kHz	25 kHz	-79.74	-80.01	-65
87.5 kHz	25 kHz	-83.43	-83.49	-65
150 kHz	100 kHz	-77.81	-77.91	-65
250 kHz	100 kHz	-81.21	-81.06	-65
350 kHz	100 kHz	-83.74	-83.40	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.54		-75
12 MHz to paired receive band	30 kHz (swept)	-99.62		-75
In the paired receive band	30 kHz (swept)	-101.21		-100

P25 phase II
Tx FREQUENCY: 799.1 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP(dBc)
9.375 kHz	6.25 kHz	-42.04	-42.03	-40
15.625 kHz	6.25 kHz	-76.64	-76.68	-60
21.875 kHz	6.25 kHz	-80.15	-80.35	-60
37.5 kHz	25 kHz	-78.19	-78.30	-60
62.5 kHz	25 kHz	-80.46	-80.68	-65
87.5 kHz	25 kHz	-83.88	-84.02	-65
150 kHz	100 kHz	-78.10	-78.08	-65
250 kHz	100 kHz	-81.60	-81.58	-65
350 kHz	100 kHz	-84.38	-84.22	-65
>400 kHz to 12 MHz	30 kHz (swept)	-90.72		-75
12 MHz to paired receive band	30 kHz (swept)	-101.53		-75
In the paired receive band	30 kHz (swept)	-101.32		-100

Adjacent Channel Power - continued

P25 phase II
Tx FREQUENCY: 804.9 MHz 3 W 12.5 kHz Channel Spacing

Frequency Offset	Measurement Bandwidth	ACP Measured Lower (dBc)	ACP Measured Upper (dBc)	Maximum ACP (dBc)
9.375 kHz	6.25 kHz	-41.92	-42.00	-40
15.625 kHz	6.25 kHz	-76.83	-76.48	-60
21.875 kHz	6.25 kHz	-80.40	-80.53	-60
37.5 kHz	25 kHz	-78.17	-78.12	-60
62.5 kHz	25 kHz	-80.69	-80.98	-65
87.5 kHz	25 kHz	-83.84	-83.93	-65
150 kHz	100 kHz	-78.40	-78.28	-65
250 kHz	100 kHz	-81.63	-81.55	-65
350 kHz	100 kHz	-84.73	-84.52	-65
>400 kHz to 12 MHz	30 kHz (swept)	-89.65		-75
12 MHz to paired receive band	30 kHz (swept)	-102.22		-75
In the paired receive band	30 kHz (swept)	-104.33		-100

TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATIONS: FCC 47 CFR 2.1051

RSS-119 5.8

GUIDE: TIA/EIA-603D 2.2.13

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The frequency range examined was from the lowest frequency generated within the EUT, to a frequency higher than the 10th Harmonic:
10 kHz to Fc-BW
Fc+ BW to >10Fc (9 GHz)
3. Frequencies between 1GHz and 3GHz were measured using a band-stop filter to suppress the on-channel signal.
4. The spectrum analyser was loaded with the appropriate calibration figures to compensate for the cables, attenuator and filter losses.

Spurious emissions which were attenuated by more than 20 dB below the limit were not recorded.

A photograph of the test set-up is included below.


MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSES: FCC 47 CFR 90.210

RSS-119 5.8

Photo: Conducted Emissions Test Setup

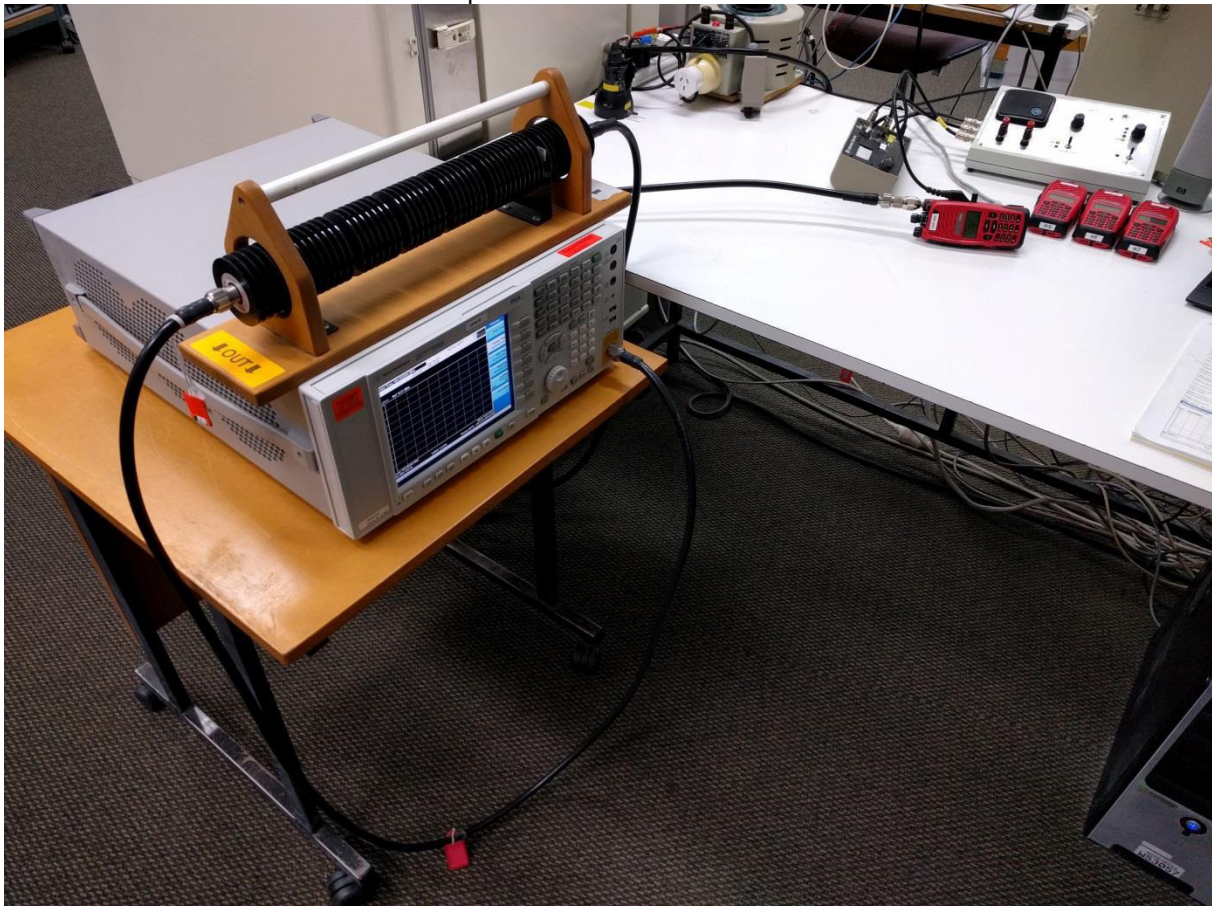

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

762.1 MHz @ 3 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

762.1 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

762.1MHz

3W

1W

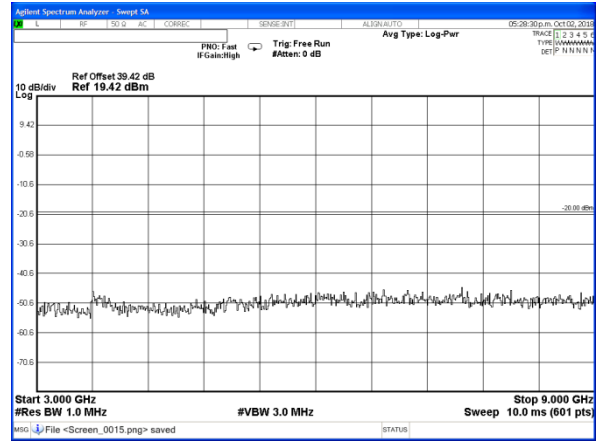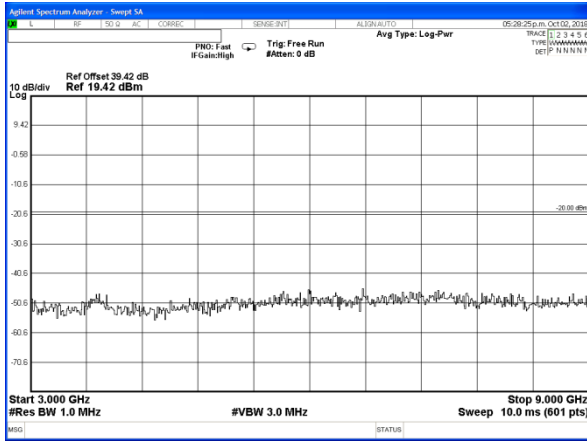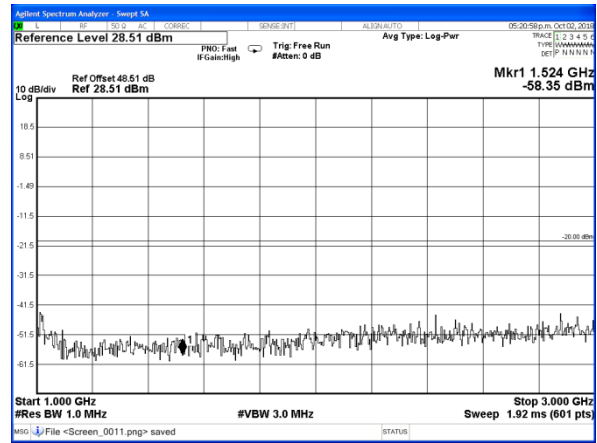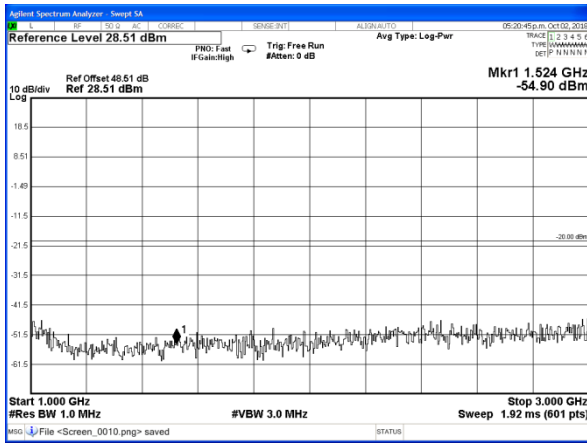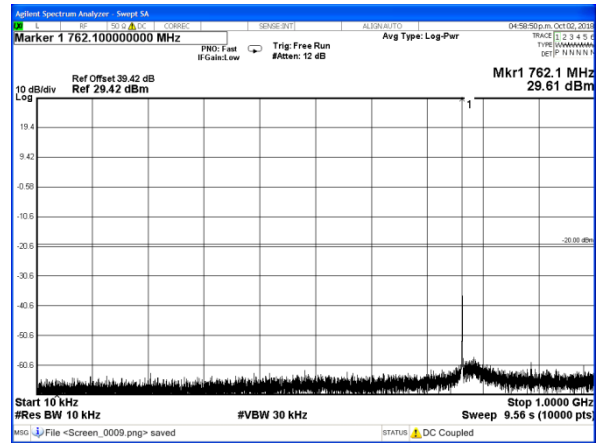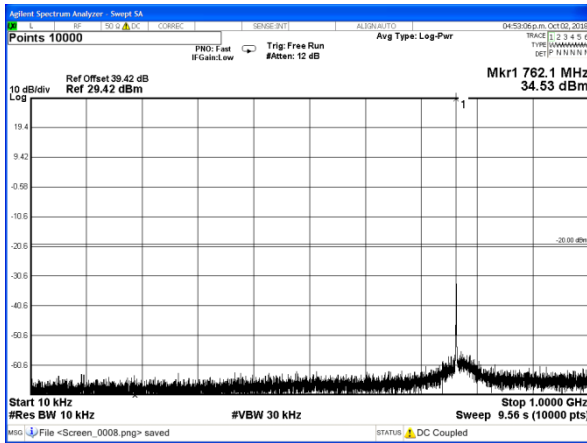

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing 800.0 MHz @ 3 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~







12.5 kHz Channel Spacing 800.0 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

800.0MHz

3W

1W

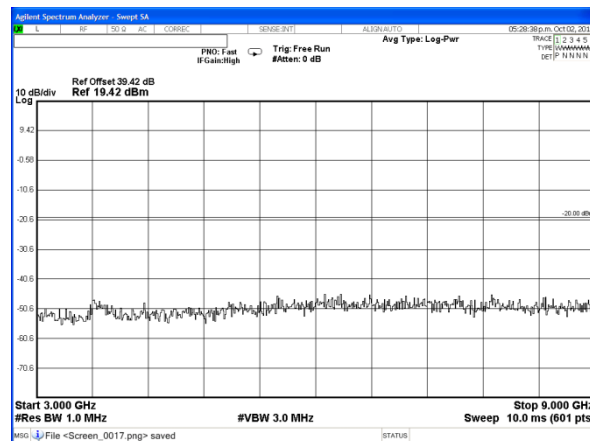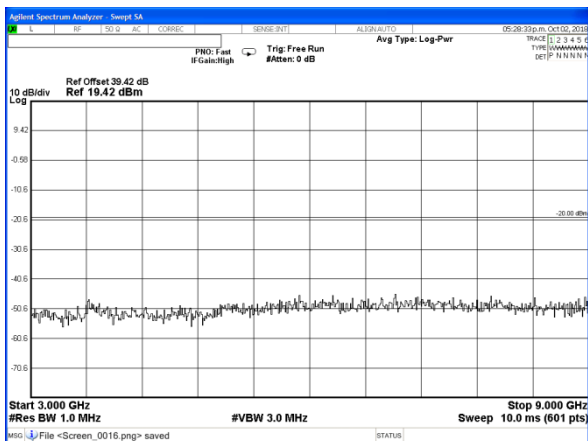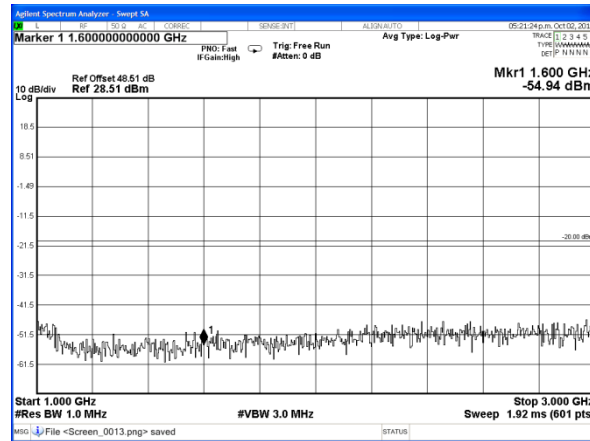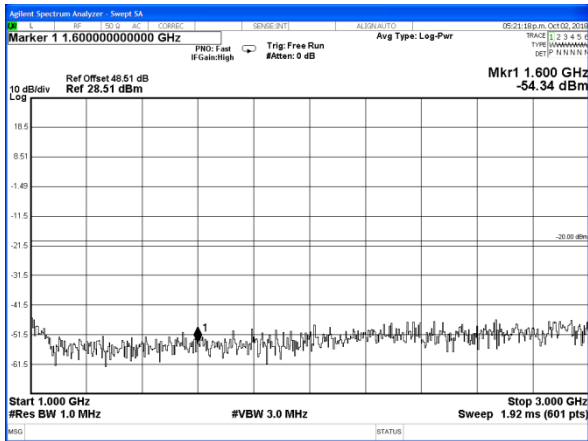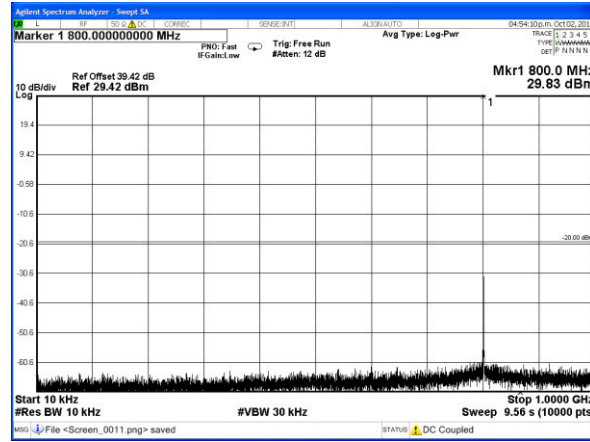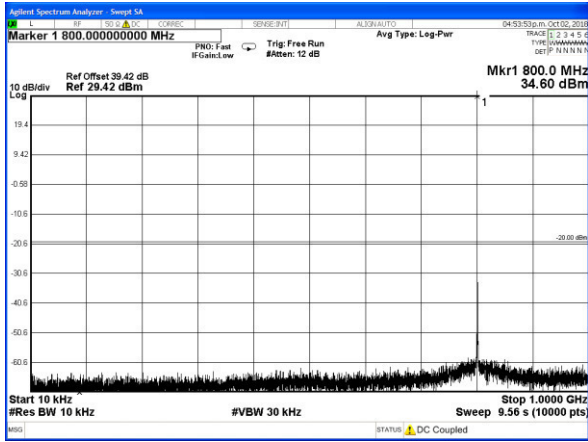

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

806.1 MHz @ 3 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

806.1 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

806.1MHz

3W

1W

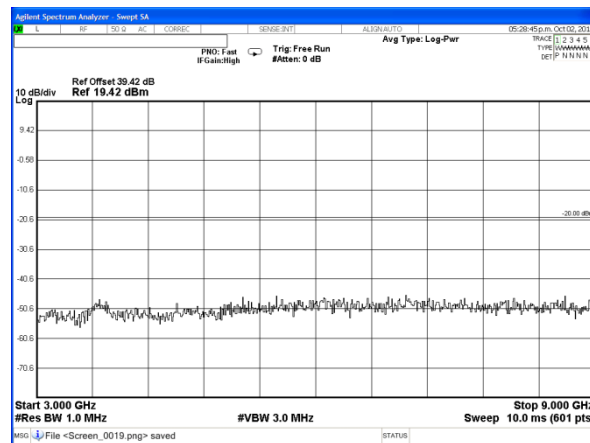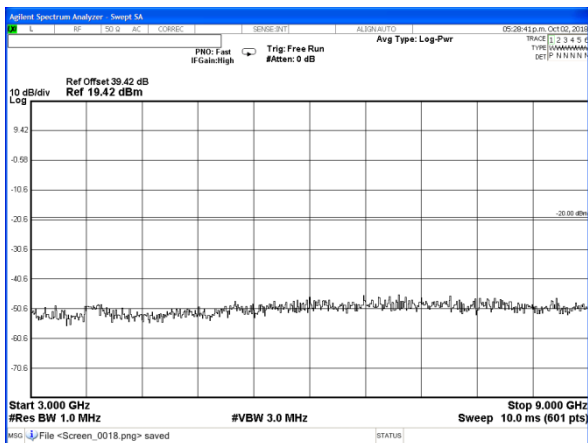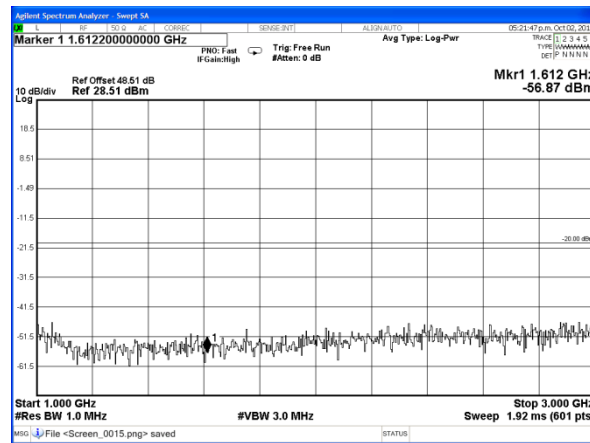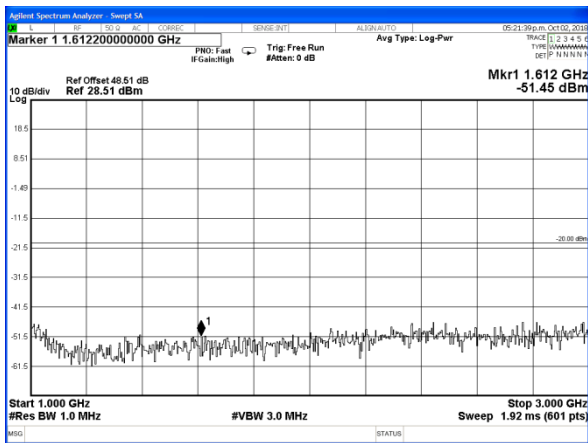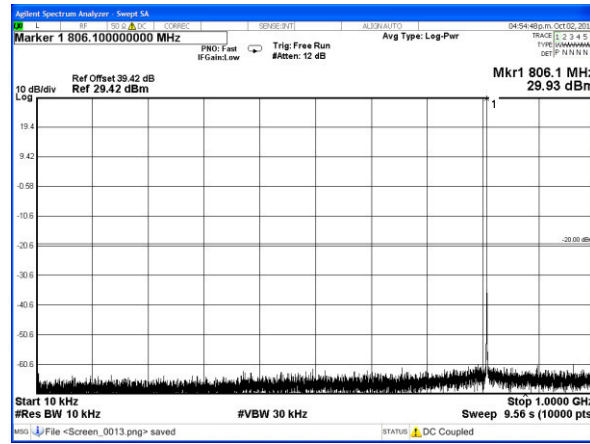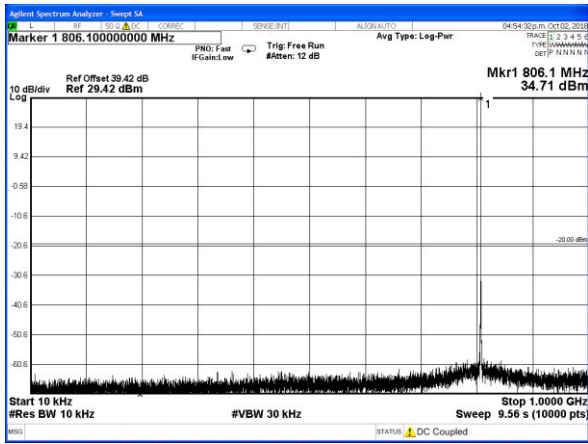

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

816.0 MHz @ 3 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

816.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

816.0MHz

3W

1W

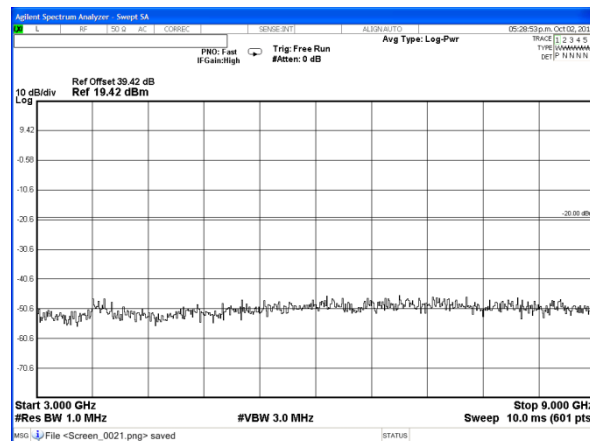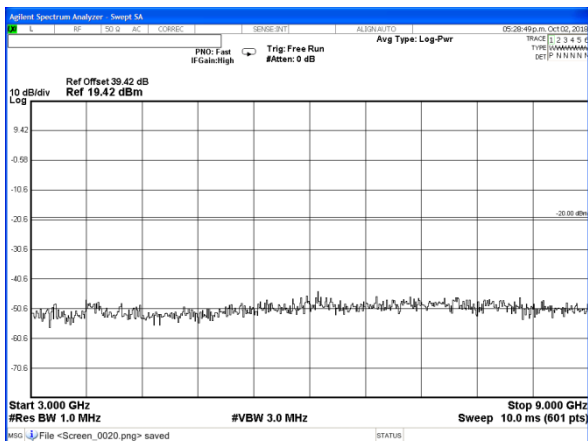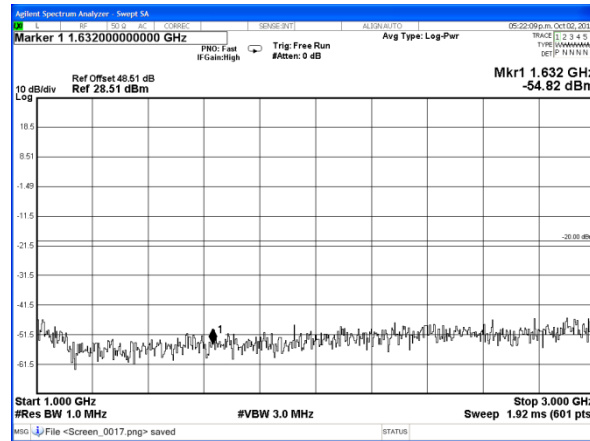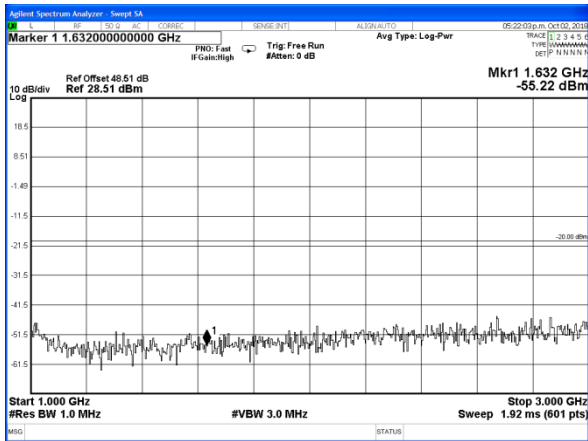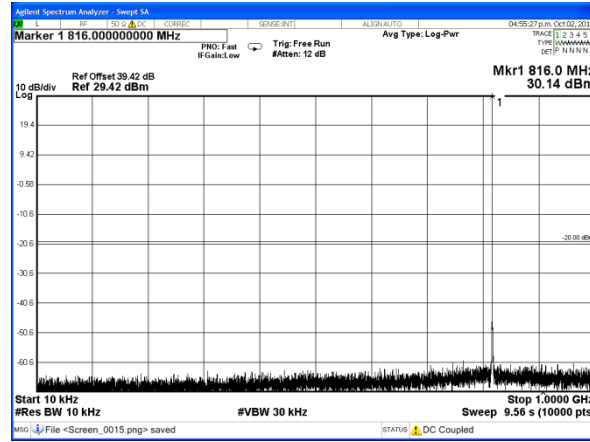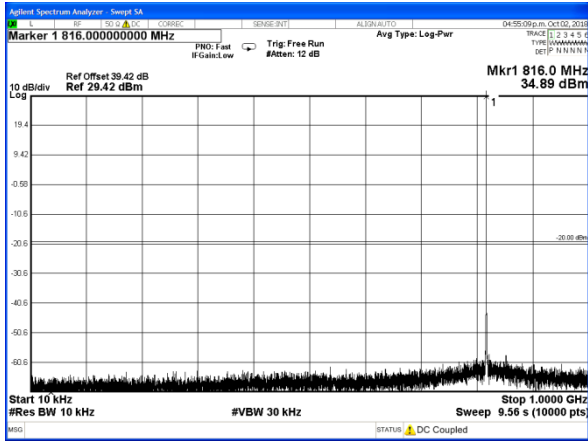

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

852.0 MHz @ 3 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

852.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

852.0MHz

3W

1W

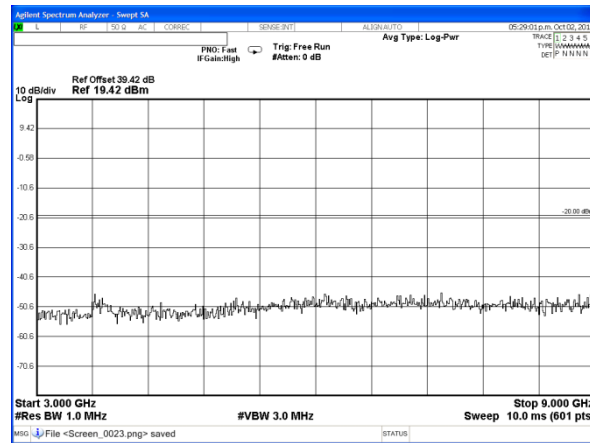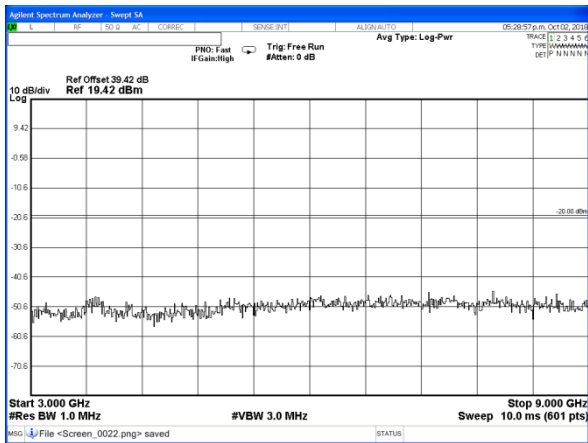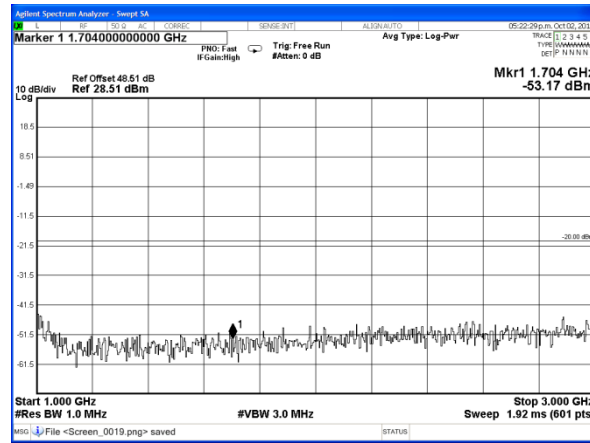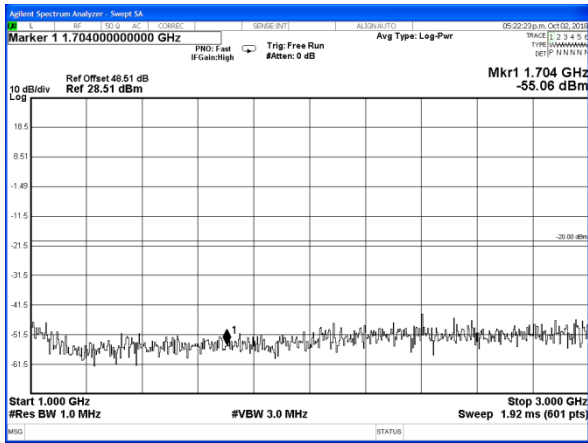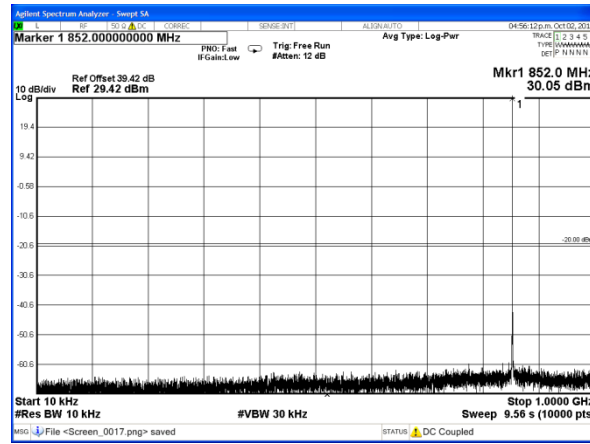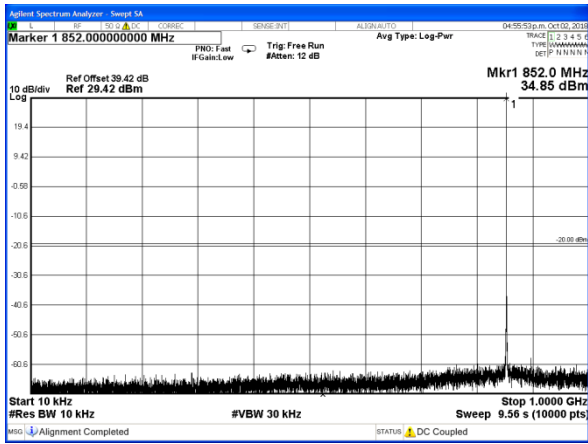

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

869.9 MHz @ 3 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

869.9 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

869.9MHz

3W

1W

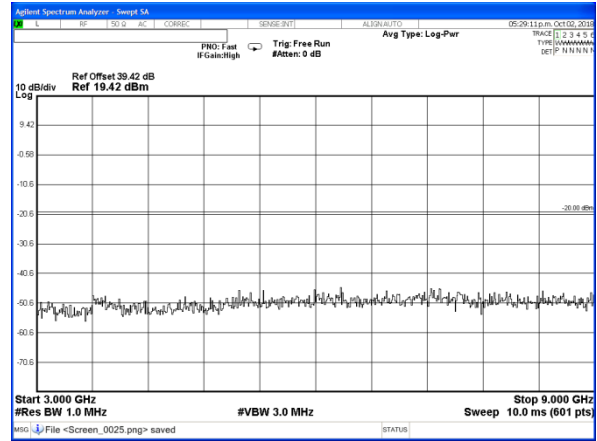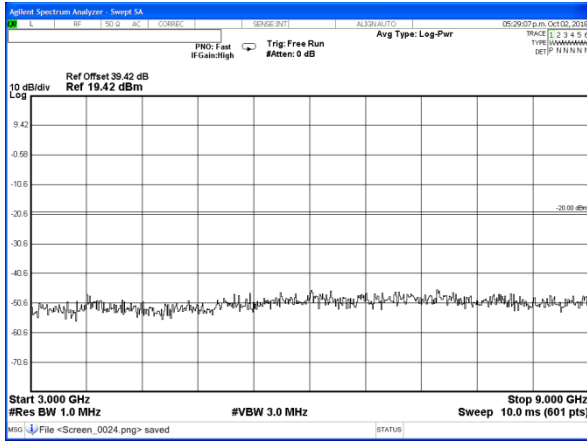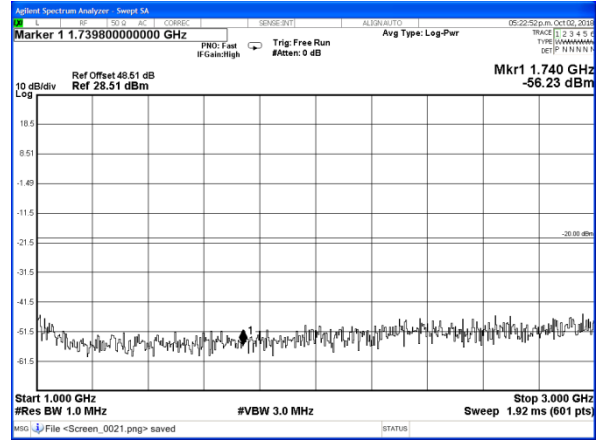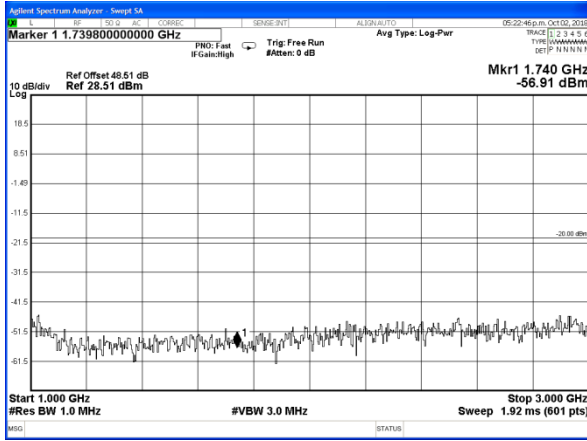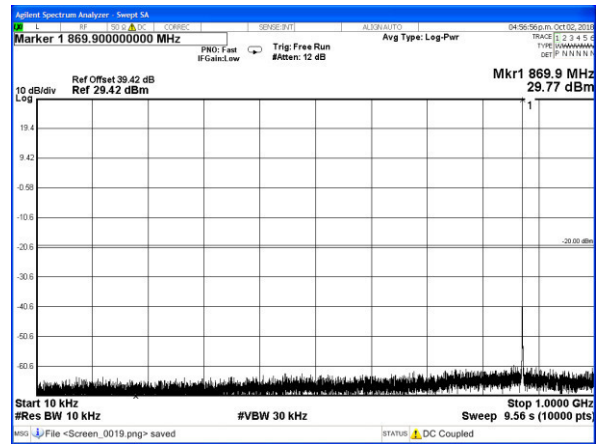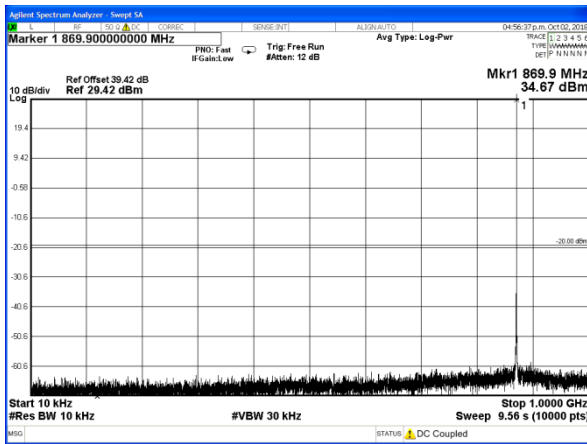

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051 RSS-119 5.8

LIMITS: FCC 47 CFR 90.210 RSS-119 5.8

Carrier Output Power	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \text{ Log}_{10} (P_{\text{Watts}})$	
	3 W	-20 dBm
1 W	-20 dBm	-50 dBc

TRANSMITTER SPURIOUS EMISSIONS (RADIATED)

SPECIFICATION: FCC 47 CFR 2.1053

GUIDE: TIA/EIA-603D 2.2.12

MEASUREMENT PROCEDURE:

Initial Scan:

1. The EUT is placed in the S-Line TEM cell and emissions are measured from 30 MHz to 800 MHz. Any emission within 20 dB of the limit is then re-tested on the OATS.
2. The EUT is placed in the reverberation chamber and emissions are measured from 800 MHz to the upper frequency required. Any emission within 20 dB of the limit is then re-tested on the OATS.
3. The harmonics emissions up to the 6th harmonic of the fundamental frequency are measured on the OATS

OATS Measurement:

1. The EUT is placed on a wooden turntable at a distance of three metres from the test antenna. The output terminal is connected to an RF dummy load.
2. The test antenna is raised from 1 m to 4 m to obtain a maximum reading; the turntable is then rotated through 360° to obtain the maximum response of each spurious emission. Valid emissions are determined by switching the EUT on and off.
3. The EUT is then replaced by a signal generator and substitution antenna to make measurements by the substitution method.

MEASUREMENT RESULTS:

See the tables on the following pages

LIMIT CLAUSE: FCC 47 CFR 90.210

Spurious Emissions (Tx Radiated) - Continued

SPECIFICATION: FCC CFR 2.1053

12.5 kHz Channel Spacing 762.1 MHz @ 3 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 762.1 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing 800.0 MHz @ 3 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 800.0 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing 806.1 MHz @ 3 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 806.1 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Radiated) - Continued

12.5 kHz Channel Spacing 816.0 MHz @ 3 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 816.0 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing 852.0 MHz @ 3 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 852.0 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing 869.9 MHz @ 3 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 869.9 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Radiated) - Continued

LIMITS: FCC CFR 2.1053

Carrier Output Power	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \text{ Log}_{10} (P_{\text{Watts}})$	
3 W	-20 dBm	-55 dBc
1 W	-20 dBm	-50 dBc

Open Area Test Site Results:

12.5 kHz Channel Spacing 762.1 MHz @ 3 W Emission Mask D

Harmonics Emission Frequency (MHz)	Level (dBm)	Level (dBc)
1524.2	-50.8	-85.6
2286.3	-60.5	-95.3
3048.4	-68.3	-103.1
3810.5	-62.4	-97.2
4572.6	-62.2	-97.0
5334.7	-64.3	-99.1
Measurement Uncertainty	$\pm 4.6 \text{ dB}$	

Sample Calculation	Measurement					Result	
	Reference	Substitution				dBm	nW
Emission Frequency (MHz)	Reference Level (dBm)	Sig-gen Level	Cable and Attenuator Gain	Antenna Gain (dBd)	Path and Boresight corrections		
1524.2	-88.83	-37.52	-19.48	6.3	0.12	-50.8	8.28
		A	B	C	D	E	

Result (E) = A+B+C+D

Photo: OATS Setup



TRANSMITTER FREQUENCY STABILITY - TEMPERATURE

SPECIFICATION: FCC 47 CFR 2.1055 (a) (1)

RSS-119 5.3

GUIDE: TIA/EIA-603D 2.2.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The EUT was tested for frequency error from -30° C to +50° C in 10° C increments
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.







Temperature (°C)	Error (ppm)					
	762.1 MHz	800.0 MHz	806.1 MHz	816.0 MHz	852.0 MHz	869.9 MHz
-30	-0.17	-0.16	-0.17	-0.2	-0.21	-0.22
-20	-0.19	-0.17	-0.16	-0.11	-0.11	-0.09
-10	-0.08	-0.07	-0.08	-0.08	-0.1	-0.13
0	-0.15	-0.14	-0.14	-0.12	-0.11	-0.09
10	-0.09	-0.05	-0.03	-0.02	0.00	-0.01
20	-0.02	0.00	-0.01	-0.01	-0.02	-0.02
30	-0.05	-0.04	-0.04	-0.03	-0.03	-0.03
40	-0.05	-0.03	-0.01	0.02	0.04	0.03
50	0.01	0.04	0.27	0.27	0.23	0.20
Measurement Uncertainty			$\pm 7 \times 10^{-8}$			

LIMIT: FCC 47 CFR 90.213

RSS-119 5.3

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	1.5

Transmitter Frequency Stability - Temperature

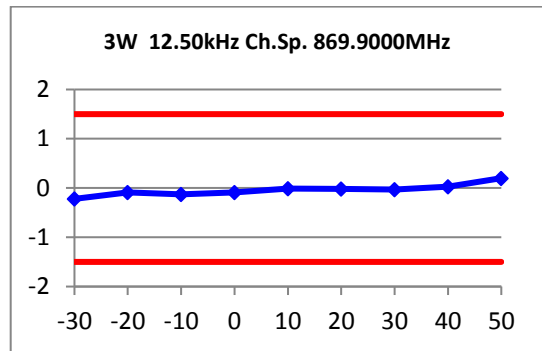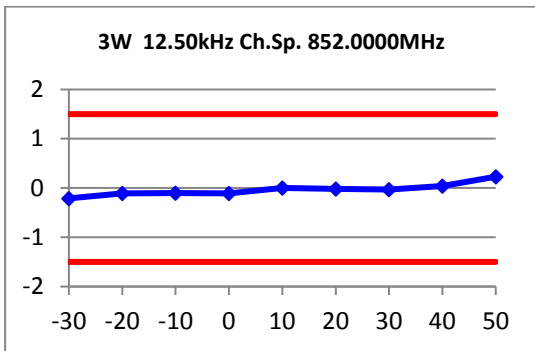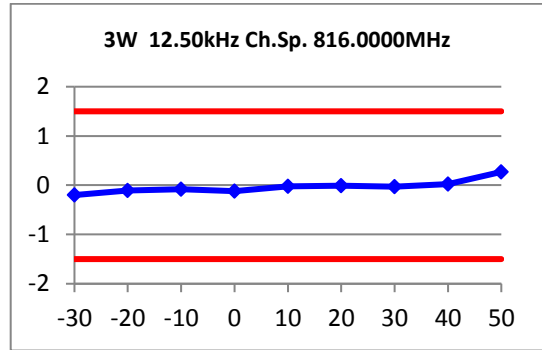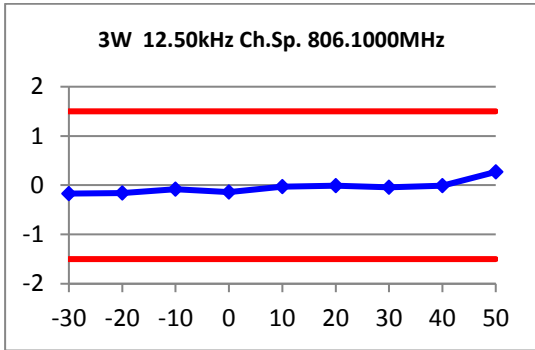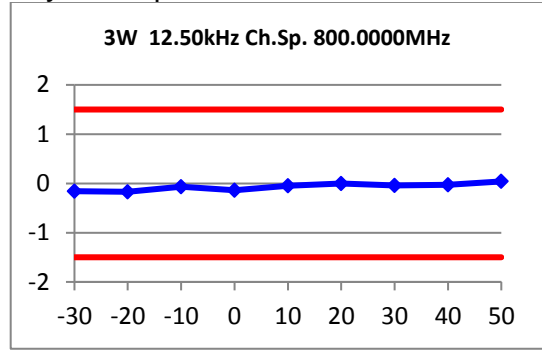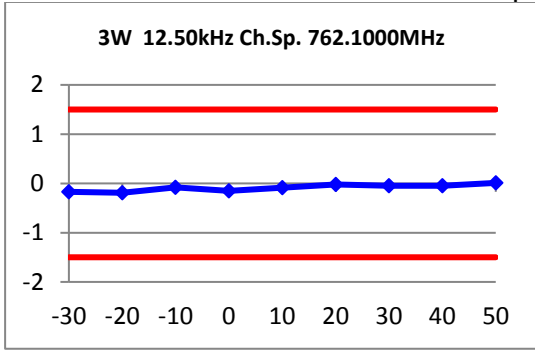

TRANSMITTER FREQUENCY STABILITY - VOLTAGE

SPECIFICATION: FCC 47 CFR 2.1055 (d) (1)

RSS-119 5.3

GUIDE: TIA/EIA-603D 2.2.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The EUT was tested for frequency error at an input voltage to the radio of nominal battery voltage and battery end point.
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS:

	FREQUENCY ERROR (ppm) for 12.5 kHz	
	7.5 V _{DC}	6.375 V _{DC}
762.1 MHz	-0.06	-0.06
800.0 MHz	0.06	0.02
806.1 MHz	-0.10	-0.10
816.0 MHz	0.01	0.01
852.0 MHz	0.26	0.11
869.9 MHz	0.18	0.17
Measurement Uncertainty		$\pm 7 \times 10^{-8}$

LIMIT CLAUSES: FCC 47 CFR 90.213

RSS-119 5.3

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	1.5

RECEIVER SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATION: RSS-119 5.11

GUIDE: TIA/EIA-603D 2.1.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up diagram.
2. The frequency range examined was from 30 MHz to 5 times highest tunable frequency.
3. Spurious emissions which were attenuated more than 20 dB below the limit were not recorded.

769.1 MHz Receive/762.1 MHz Transmit standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

852.5 MHz Receive/800.0 MHz Transmit standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

868.9 MHz Receive/806.1 MHz Transmit standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

769.1 MHz Receive/816.0 MHz Transmit standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

Receiver Spurious Emissions (Conducted) – Continued

769.1 MHz Receive/852.0 MHz Transmit standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

769.1 MHz Receive/869.9 MHz Transmit standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

LIMIT CLAUSE: RSS-Gen 6(b)


LIMIT	30 → 1000 MHz	2 nW	- 57 dBm
		> 1000 MHz	5 nW

TEST EQUIPMENT LIST

Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Antenna	18GHz DRG	Emco	DRG3115	9512-4638	E3560	15-May-20
Audio Analyser	TREVA1	Hewlett Packard	HP8903A	2437A04625	E4986	4-Oct-19
Coax Cable	OATS Turntable Cable 1	Intelcom	RG214	OATS1	E4621	1-Jan-19
Coax Cable	OATS Tower Cable	Intelcom	RG214	OATS2	E4622	1-Jan-19
Coax Cable	OATS Turntable Cable 2	Intelcom	RG215	OATS3	E4995	1-Jan-19
Coax Cable	2.5m Blue	Suhner	Sucoflex 104A	33449/4PEA	E4997	20-Dec-18
Coax Cable	3m Blue	Suhner	Sucoflex 126EA	503429/126EA	E5015	10-May-19
Environ. Chamber	Upright	Contherm	5400 RHLT.M	1416	E4051	23-Apr-19
Modulation Analyser	TREVA1	Hewlett Packard	HP8901B (Opt 002)	2441A00393	E3073	4-Oct-19
OATS	Controller	Electrometrics	EM-4700	119	E4445	
OATS	Turntable	Electrometrics	EM-4704A	105	E4446	
OATS	Antenna Tower	Electrometrics	EM-4720-2	112	E4447	
OATS	FCC Listing Registration			837095		8-May-19
Power Meter	TREVA1 Power Head for HP8901	Hewlett Packard	HP11722A	3111A05573	E7054	5-Oct-19
Power Supply	60V/50A/1000W	Hewlett Packard	HP6012B	2524A00616	E3712	30-Sep-19
RF Attenuator	30dB 350W	Weinschel	67-30-33	BR0531	E4280	20-Dec-18
RF Attenuator	TREVA1 3dB	Weinschel	Model 1	BL9958	E4081	20-Dec-18
RF Attenuator	TREVA 1 20dB 150W	Weinschel	40-20-23	MF817	E4082	20-Dec-18
RF Chamber	S-LINE TEM CELL	Rohde & Schwarz	1089.9296.02	338232/003	E3636	12-Sep-20
RF Chamber	Reverb - 0.5 - 18GHz Reverberation Chamber	Teseq	RVC XS	29765	E4855	
RF Combiner	TREVA1	Minicircuits	ZFSC-4-1	-	E4083	
RF Filter	550-885MHz band stop filter	Tait	-	-	E3785	25-Sep-19
RF Load	50W	Weinschel	F1426	AE2490	E3624	20-Dec-18
Signal Generator	Analog 4GHz	Agilent	E4422B	GB40050320	E3788	27-Sep-19
Signal Generator	TREVA1 Analog 3.2GHz	Agilent	E8663D	MY50420224	E4908	03-Oct-20
Signal Generator	Digital 4GHz	Agilent	E4437B	US39260389	E4764	30-Sep-19
Spectrum Analyser	26.5GHz	Agilent	PXA N9030A	MY49432161	E4907	08-Oct-20
Spectrum Analyser	13.2GHz	Agilent	E4445A	MY42510072	E4139	19-Jul-20
Spectrum Analyser	13.2GHz	Hewlett Packard	HP8562E	3821A00779	E3715	26-Sep-19
Temp & Humidity datalogger		Hobo	U21-011	10134276	E4981	22-Apr-19
Testware	Frequency Vs Temperature		April 2018	-	-	
Testware	Occupied Bandwidth		March 2018	-	-	
Testware	Radiated Emissions		April 2018	-	-	
Testware	Reverb Emissions		June 2018	-	-	
Testware	Sideband Spectrum		February 2017	-	-	
Testware	S-Line Radiated Emissions		April 2018	-	-	
Testware	TREVA		April 2018	-	-	

* NOTE: Items without calibration dates are calibrated immediately before use, or set using calibrated instruments.

ANNEX A – TEST SETUP DETAILS

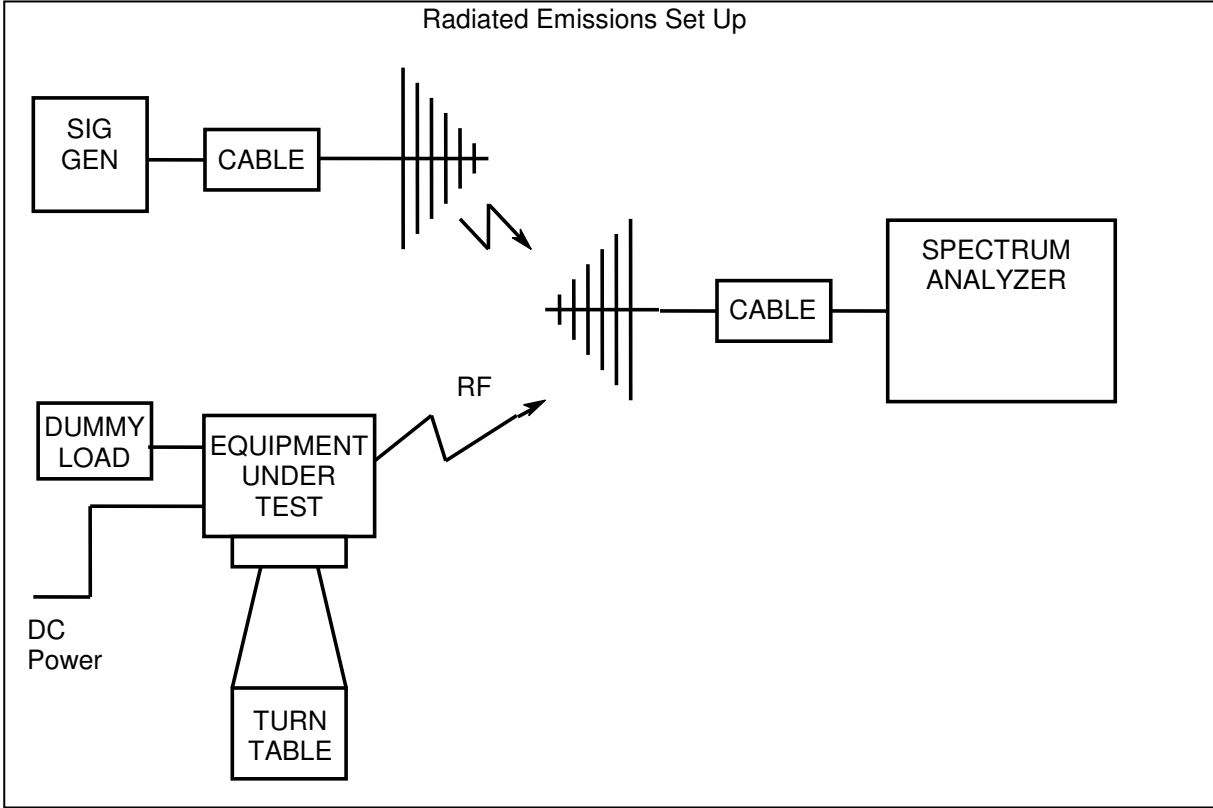

All other testing is performed using the Teltest Radio **EVA**luation system (TREVA), which is configured as shown below. The Spectrum Analyser is connected to the EUT via the attenuator network for Conducted Emissions testing, and Occupied Bandwidth.

