


1	2	LABEL.STOCK 1.1875 X 0.75	TBD	TBD
1	1	PCB ASM.HLV MY13 AFTERMARKET	2510099	2510099
QTY	ITEM	DESCRIPTION	DRAWING NO.	PART NO. (L/F)

NOTES:


- 1. INDIVIDUAL COMPONENTS ON PCB ASSEMBLY ARE FOR REFERENCE ONLY.
- 2. ASSEMBLER IS TO PRINT LABEL WITH THE INFORMATION AS SHOWN USING ADHESIVE LABEL.
- 3. LABEL IS TO BE SHIPPED WITH PCB ASSEMBLY AND NOT BONDED TO THE PCB ASSEMBLY.
- 4. THE PCB ASSEMBLY INSTALLER IS REQUIRED TO PLACE THE LABEL ON THE FINISHED PRODUCT (MIRROR ASSEMBLY).
- 5. LAY OUT PATENT NUMBERS TO FILL SPACE AVAILABLE.
- 6. FOR THE PRODUCTION DATE USE THE FORMAT "MONTH/DAY/YEAR".
- 7. ASSEMBLY MUST COMPLY WITH FMVSS 302 & CMVSS 302.

SPECIFICATIONS PERFORMANCE: TEST SPECIFICATION TDE-ELE-180 MATERIAL: PCBA - FR4 LABEL - ? FINISH: N/A THIRD ANGLE PROJECTION ASME Y14.5M 1994 GENERAL PART STANDARD NOTES UNLESS OTHERWISE SPECIFIED A. DIMENSIONS ARE IN MILLIMETERS. B. ELECTRONIC PART IS DATA MASTER. ELECTRONIC DRAWING IS MASTER FOR REQUIREMENTS, SPECIFICATIONS, AND TOLERANCES ONLY. ·ALL GRAPHIC MEASURED DATA IS TO BE TAKEN FROM THE NOMINAL PART FILE AT ITS LATEST ·UNDIMENSIONED FEATURES ARE TO MATCH THE CAD PART WITHIN: GENERAL MOLDING TOLERANCES PER DIN 16901 AS MEASURED FROM DATUMS C. ANY PERMANENT OR TEMPORARY MATERIALS (LUBRICANTS, CUTTING OILS, MOLD RELEASE, RUST INHIBITORS, FASTENER COATINGS, PVC, ETC) USED ON THIS PART MUST BE COMPATIBLE WITH THE MATERIAL IN THIS COMPONENT AND ITS MATING COMPONENTS. D. SUBSTANCE USE RESTRICTIONS: THE GLOBAL AUTOMOTIVE DECLARABLE SUBSTANCES LIST (SEE http://www.gadsl.org) REGARDING PROHIBITED AND DECLARABLE SUBSTANCES APPLIES TO ALL MATERIALS USED IN THIS PART. CHARACTERISTIC DESIGNATES SIGNIFICANT CHARACTERISTIC TO BE MONITORED PER TO DESIGNATE

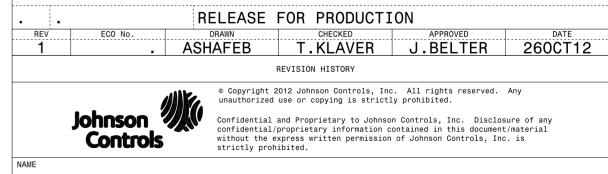

ELEC ASM.HLV MY13 AFTERMARKET

TO ALL MATERIALS USED IN THIS PART.	CPP CODE	MASS 0.01 Kg	۷a	SCALE	PART No.	CHARTED	REV
CHARACTERISTIC SYMBOLS		0.01	Ny	1:1			1
DESIGNATES SIGNIFICANT CHARACTERISTIC TO BE MONITORED PER FOLDS DESIGNATES PART MUST MEET FMVSS 302	•	CATIA V	5				•
A DESIGNATES SIGNIFICANT CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING ATTRIBUTE GAUGING METHODS.	C	PROGRAM No. 1015785	SHEET 1	0F 1	DWG No.		REV
DESIGNATES SIGNIFICANT CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING VARIABLE GAUGING METHODS.		CUSTOMER	OMER		TBD	TBD	1
DESIGNATES CHARACTERISTIC TO BE CHECKED AT INITIAL/ SUBSEQUENT CUSTOMER PART SUBMISSION (ONE TIME CAPABILITY) DESIGNATES CRITICAL CHARACTERISTIC TO BE MONITORED PER CONTROL PLAN USING VARIABLE MEASUREMENT OR GAUGING METHOD		MAGNA					

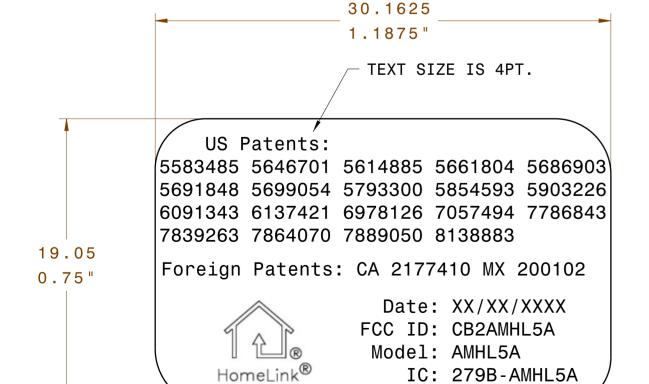

LABEL VIEW

4:1 SCALE