


DWG. NO. V0000

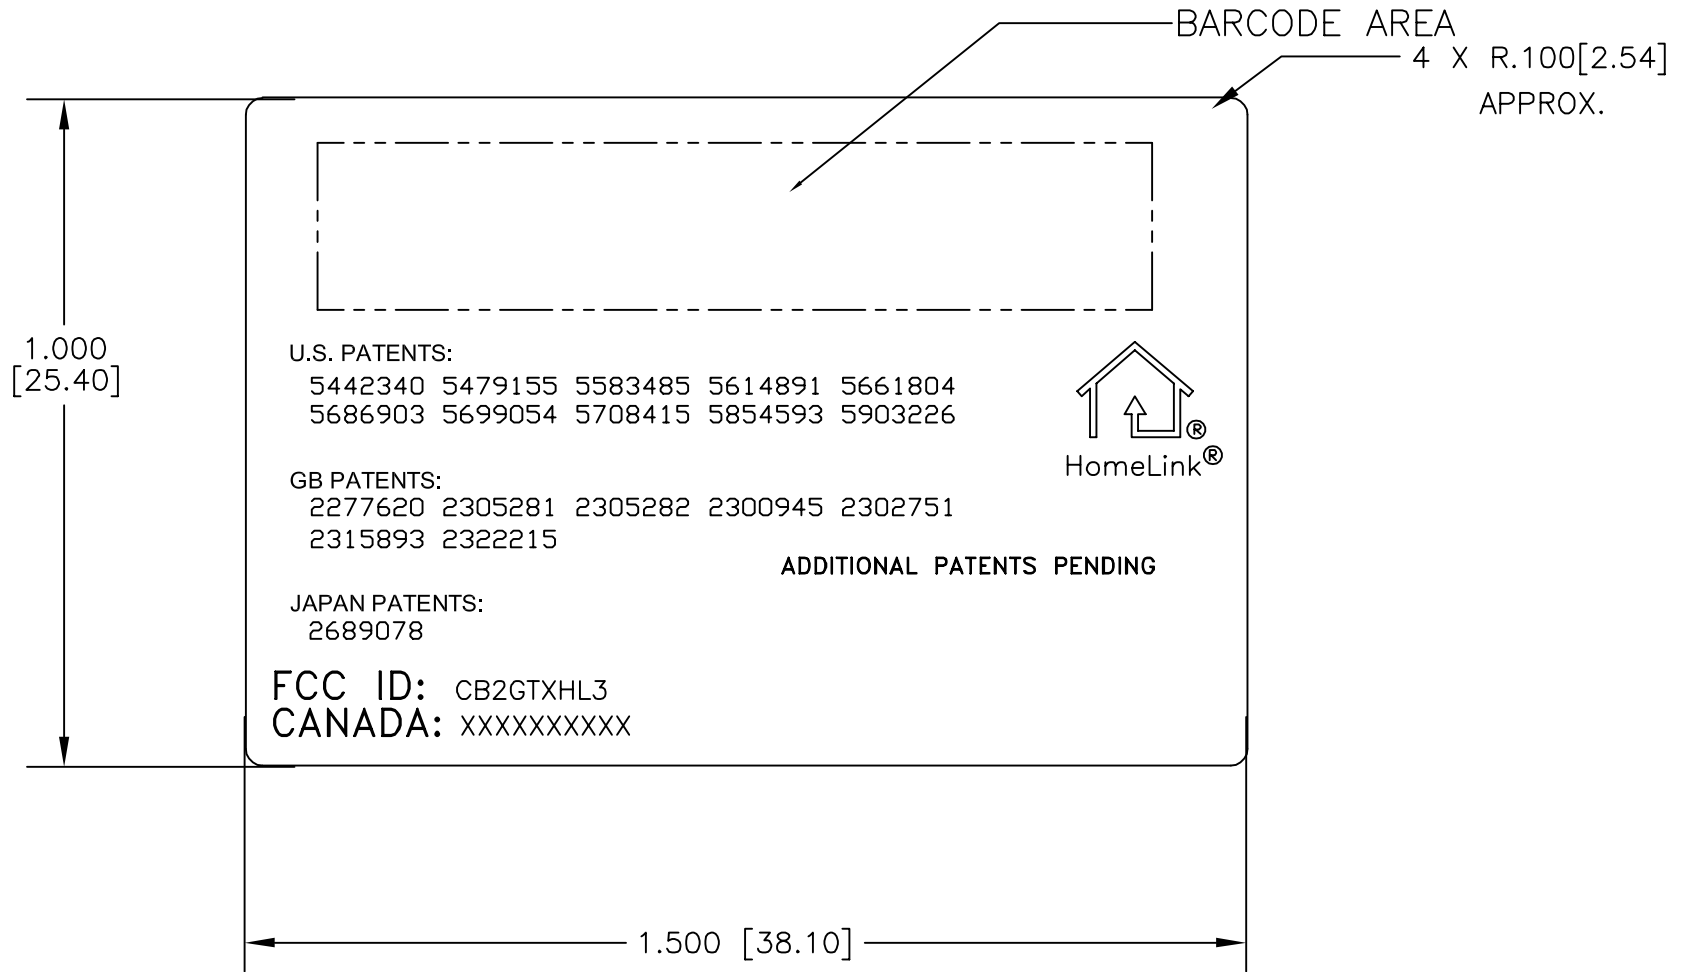

REVISION BLOCK					
REV	SH/ ZONE	DESCRIPTION	P.C.N.	BY	DATE
A		RELEASE FOR PRODUCTION			

ELECTRONICS STD. UNLESS OTHERWISE SPECIFIED

THIRD ANGLE PROJECTION


DO NOT SCALE

X.X DECIMAL TOLER1 ANGULAR ± 2° 0'
 X.XX DECIMAL TOLER2 DRAFT ANGLES NOTED
 X.XXX DECIMAL TOLER3



SPECIFIES FEATURES REQUIRING SPECIAL CONSIDERATIONS.
SEE PRODUCT CONTROL PLAN.

DIMENSIONS ARE INCHES WITH EQUIVALENT MILLIMETERS SHOWN IN BRACKETS.

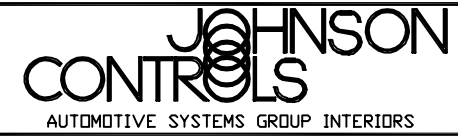

NAME LABEL STOCK 1.0 X 1.5

PROJECT CORPORATE	DRWN. BY	DATE
	CHKD. BY	DATE
CUSTOMER GENTEX	ENGR. APPR	DATE
	SCALE 4/1	SHEET 1 OF 1

SIZE B	TOOL NO. REF.	DWG. NO. V00000	REV. 0
	DATA FORMAT ACAD		

EXHIBIT A: EQUIPMENT LABEL [2.925, 2.926, 2.1033(B2,7), 15.19(A3)]**LABEL EXAMPLE**

For the label print, page 2 of this exhibit, Refer to picture file “EXA_Label.pdf”

The FCC Identifier assigned to the EUT is FCC ID: CB2GTXHL3. This number will be imprinted on the 1.0”x1.5” high temperature polyester matte white label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user’s manual. Refer to Exhibit D for the entire text of the user’s manual.

“This device complies with FCC rules Part 15. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and DOC/MDC rules. Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the device.”

LABEL LOCATION

The label will be placed on the foil side of the CB2GTXHL3 PCB using an acrylic adhesive that will permanently affix the label.

