

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042

Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2404-0037

2. Customer

- Name (FCC) : COMMAX Co., Ltd. / Name (IC) : Commax Co., Ltd
- Address (FCC) : 494 Dunchon-Daero, Jungwon-Gu, Seongnam-si, Gyeonggi-do South Korea 13229
Address (IC) : 513-11, Sangdaewon-dong, Jungwon-gu Seongnam-si, Gyeonggi-do 13229
Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Zigbee Module / CMX-ZG07

FCC ID : CCECMX-ZG07

IC : 22254-CMXZG07

5. FCC Regulation(s): Part 15.247

IC Standard(s): RSS-247 Issue 3, RSS-Gen Issue 5

Test Method used: KDB558074 D01v05r02, ANSI C63.10-2013

6. Date of Test : 2023.11.23 ~ 2024.03.21

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test report is not related to KOLAS accreditation.

Affirmation	Tested by Name : SeungMin Gil 	Technical Manager Name : JaeJin Lee 
-------------	---	---

2024 . 04 . 03 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2404-0037	Apr, 03. 2024	Initial issue	SeungMin Gil	JaeJin Lee

Table of Contents

1. General Information	4
1.1. Description of EUT	4
1.2. Declaration by the applicant / manufacturer	4
1.3. Testing Laboratory	5
1.4. Testing Environment	5
1.5. Measurement Uncertainty	5
1.6. Test Equipment List	6
2. Test Methodology	8
2.1. EUT Configuration	8
2.2. EUT Exercise	8
2.3. General Test Procedures	8
2.4. Instrument Calibration	8
2.5. Description of Test Modes	8
3. Antenna Requirements	9
4. Summary of Test Results	10
5. Test Result	11
5.1. Maximum Peak Conducted Output Power	11
5.1.1. Test Setup	11
5.1.2. Test Procedures	11
5.1.3. Test Results	11
5.2. 6 dB Bandwidth	14
5.2.1. Test Setup	14
5.2.2. Test Procedures	14
5.2.3. Test Results	14
5.3. Power Spectral Density	17
5.3.1. Test Setup	17
5.3.2. Test Procedures	17
5.3.3. Test Results	17
5.4. Unwanted Emissions (Conducted)	20
5.4.1. Test Setup	20
5.4.2. Test Procedures	20
5.4.3. Test Results	21
5.5. Unwanted Emissions (Radiated)	29
5.5.1. Test Setup	31
5.5.2. Test Procedures	31
5.5.3. Test Results	32
5.6. AC Power-Line Conducted Emissions	33
5.6.1. Test Setup	33
5.6.2. Test Procedures	33
5.6.3. Test Results	33
5.7. Occupied Bandwidth	36
5.7.1. Test Setup	36
5.7.2. Test Procedures	36
5.7.3. Test Results	36
APPENDIX I	39
APPENDIX II	40
APPENDIX III	41

1. General Information

1.1. Description of EUT

Equipment Class	Digital Transmission System (DTS)
Product Name	Zigbee Module
Product Marketing Name (PMN)	CMX-ZG07
Model Name	CMX-ZG07
Add Model Name	-
Firmware Version Identification Number (FVIN)	V4.0.0
EUT Serial Number	No Specified
Power Supply	DC 3.3 V
Frequency Range	2 405 MHz ~ 2 480 MHz (16 channels)
Max. RF Output Power	19.35 dBm
Modulation Technique (Data rate)	O-QPSK (250 kbit/s)
Antenna Specification	Antenna Type: PCB ANTENNA Gain: 0.43 dBi (PK)

1.2. Declaration by the applicant / manufacturer

N/A

1.3. Testing Laboratory

Dt&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.

- FCC & IC MRA Designation No. : KR0034
- ISED#: 5740A

www.dtnc.net

Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.4. Testing Environment

Ambient Condition

▪ Temperature	+20 °C ~ +22 °C
▪ Relative Humidity	+30 % ~ +41 %

1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	0.9 dB (The confidence level is about 95 %, $k = 2$)
AC power-line conducted emission	3.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	5.7 dB (The confidence level is about 95 %, $k = 2$)

1.6. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16 23/12/15	23/12/16 24/12/15	MY50410399
Spectrum Analyzer	Agilent Technologies	N9020A	23/06/23	24/06/23	US47360812
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16 23/12/15	23/12/16 24/12/15	MY50110097
Receiver	Rohde Schwarz	ESCI3	23/06/23	24/06/23	100798
DC Power Supply	Agilent Technologies	66332A	22/12/16 23/12/15	23/12/16 24/12/15	GB37470198
DC Power Supply	SM technico	SDP30-5D	23/06/23	24/06/23	305DMG291
DC Power Supply	SM technico	SDP30-5D	23/06/23	24/06/23	305DMG304
Multimeter	FLUKE	17B+	22/12/16 23/12/15	23/12/16 24/12/15	36390701WS
Signal Generator	Rohde Schwarz	SMBV100A	22/12/16 23/12/15	23/12/16 24/12/15	255571
Signal Generator	ANRITSU	MG3695C	22/12/16 23/12/15	23/12/16 24/12/15	173501
Thermohygrometer	BODYCOM	BJ5478	22/12/16 23/12/15	23/12/16 24/12/15	120612-1
Thermohygrometer	BODYCOM	BJ5478	22/12/16 23/12/15	23/12/16 24/12/15	120612-2
Thermohygrometer	BODYCOM	BJ5478	23/06/23	24/06/23	N/A
Loop Antenna	ETS-Lindgren	6502	22/04/22	24/04/22	203480
Hybrid Antenna	Schwarzbeck	VULB 9160	22/12/16 23/12/15	23/12/16 24/12/15	3362
Horn Antenna	ETS-Lindgren	3117	23/06/23	24/06/23	00143278
Horn Antenna	A.H.Systems Inc.	SAS-574	23/06/23	24/06/23	155
PreAmplifier	tsj	MLA-0118-B01-40	22/12/16 23/12/15	23/12/16 24/12/15	1852267
PreAmplifier	tsj	MLA-1840-J02-45	23/06/23	24/06/23	16966-10728
PreAmplifier	H.P	8447D	22/12/16 23/12/15	23/12/16 24/12/15	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	23/06/23	24/06/23	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	23/06/23	24/06/23	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	23/06/23	24/06/23	3
Attenuator	Hefei Shunze	SS5T2.92-10-40	23/06/23	24/06/23	16012202
Attenuator	Aeroflex/Weinschel	56-3	23/06/23	24/06/23	Y2370
Attenuator	SMAJK	SMAJK-2-3	23/06/23	24/06/23	3
Attenuator	SMAJK	SMAJK-2-3	23/06/23	24/06/23	2
Attenuator	Aeroflex/Weinschel	86-10-11	23/06/23	24/06/23	408
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2490A	22/12/16 23/12/15	23/12/16 24/12/15	1338004 1249303
EMI Test Receiver	ROHDE&SCHWARZ	ESCI7	23/01/31 24/01/29	24/01/31 25/01/29	100910
PULSE LIMITER	ROHDE&SCHWARZ	ESH3-Z2	23/08/21	24/08/21	101333
LISN	SCHWARZBECK	NSLK 8128 RC	23/10/26	24/10/26	8128 RC-387
Thermo Hygro Meter	CAS	TE-303N	23/02/22 24/02/07	24/02/22 25/02/07	220502531

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Cable	DT&C	Cable	23/01/04 24/01/03	24/01/04 25/01/03	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	23/01/04 24/01/03	24/01/04 25/01/03	G-3
Cable	DT&C	Cable	23/01/04 24/01/03	24/01/04 25/01/03	G-4
Cable	OMT	YSS21S	23/01/04 24/01/03	24/01/04 25/01/03	G-5
Cable	Junkosha	MWX241	23/01/03 24/01/03	24/01/03 25/01/03	mmW-1
Cable	Junkosha	MWX241	23/01/03 24/01/03	24/01/03 25/01/03	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04 24/01/03	24/01/04 25/01/03	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04 24/01/03	24/01/04 25/01/03	M-2
Cable	JUNKOSHA	MWX241/B	23/01/04 24/01/03	24/01/04 25/01/03	M-3
Cable	JUNKOSHA	J12J101757-00	23/01/04 24/01/03	24/01/04 25/01/03	M-7
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04 24/01/03	24/01/04 25/01/03	M-9
Cable	DT&C	Cable	23/01/04 24/01/03	24/01/04 25/01/03	RFC-46
Cable	Dt&C	Cable	23/01/04 24/01/03	24/01/04 25/01/03	RFC-69
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0185
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0190

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.

2. Test Methodology

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB558074 D01v05r02 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB558074 D01v05r02. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB558074 D01v05r02.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB558074 D01v05r02. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on section 12.1 of the KDB558074 D01v05r02.

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.4. Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting.

Test Mode	Description	Tested Frequency (MHz)			
TM 1	ZIGBEE	2 405	2 440	2 475 <small>Note1</small>	2 480

Note 1: The output power and radiated emissions were tested a CH 15(2475MHz) as well as lowest/middle/highest channels.

EUT Operation test setup

- Test Software: Tera Term_V4.105
- Power setting: 2405MHz: -5.5 / 2440MHz: -5.5 / 2475MHz: -12 / 2480MHz: -30

3. Antenna Requirements

According to Part 15.203

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

The antenna is permanently printed on the PCB. (Refer to Internal Photo file.)

Therefore this E.U.T complies with the requirement of Part 15.203

4. Summary of Test Results

FCC part section(s)	RSS section(s)	Test Description	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247[5.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-247[5.4]	Maximum Peak Output Power	< 1 Watt (conducted), FCC & IC < 4 Watt (e.i.r.p), IC		C
15.247(d)	RSS-247[5.5]	Unwanted Emissions(Conducted)	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-247[5.2]	Power Spectral Density	< 8 dBm / 3 kHz		C
-	RSS-Gen[6.7]	Occupied Bandwidth (99 %)	NA		C
15.247(d) 15.205 15.209	RSS-247[5.5] RSS-Gen[8.9] RSS-Gen[8.10]	Unwanted Emissions(Radiated)	Part 15.209 limits (Refer to section 5.5)	Radiated	C Note 2
15.207	RSS-Gen [8.8]	AC Power-Line Conducted Emissions	Part 15.207 limits (Refer to section 5.6)	AC Line Conducted	C
15.203	-	Antenna Requirements	Part 15.203 (Refer to section 3)	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable
Note 2: This test item was performed in three orthogonal EUT positions and the worst case data was reported.

5. Test Result

5.1. Maximum Peak Conducted Output Power

Test Requirements and limit, Part 15.247(b) & RSS-247 [5.4]

A transmitter antenna terminal of EUT is connected to the input of a spectrum analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of RSS-247.

5.1.1. Test Setup

Refer to the APPENDIX I.

5.1.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.3.1.1
- ANSI C63.10-2013 – Section 11.9.1.1

RBW \geq DTS bandwidth

1. Set the RBW \geq DTS bandwidth. **Actual RBW = 2 MHz or 2.4 MHz**
2. Set VBW \geq 3 x RBW. **Actual VBW = 6 MHz or 8 MHz**
3. Set span \geq 3 x RBW.
4. Sweep time = **auto couple**
5. Detector = **peak**
6. Trace mode = **max hold**
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

5.1.3. Test Results

Test Mode	Tested Frequency (MHz)	Burst Average Output Power (dBm)	Peak Conducted Output Power (dBm)	Antenna Gain(dBi)	e.i.r.p ^{Note3} (dBm)
TM 1	2 405	19.14	19.35	0.43	19.78
	2 440	18.99	19.07	0.43	19.50
	2 475	12.50	12.76	0.43	13.19
	2 480	-9.53	-8.26	0.43	-7.83

Note 1: The average output power was tested using an average power meter for reference only.

Note 2: See next pages for actual measured spectrum plots.


Note 3: $e.i.r.p = P_{cond} + G_{EUT}$

P_{cond} = measured power at feedpoint of the EUT antenna, in dBm (Peak Conducted Output Power)

G_{EUT} = gain of the EUT radiating element (antenna), in dBi


Peak Output Power

TM 1 : 2 405 MHz

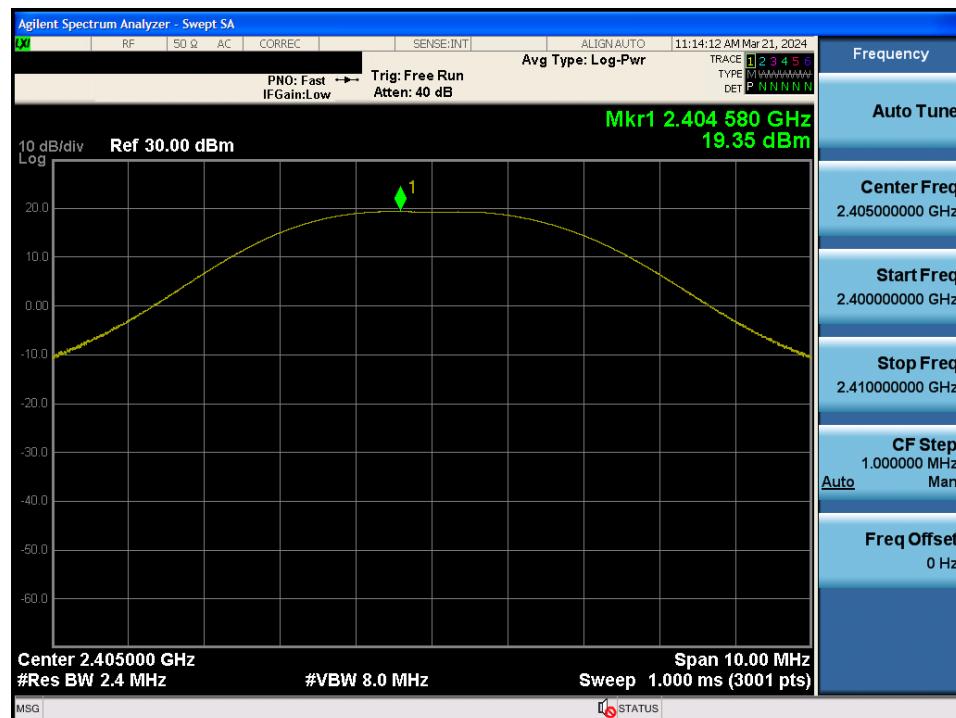


Peak Output Power

TM 1 : 2 440 MHz

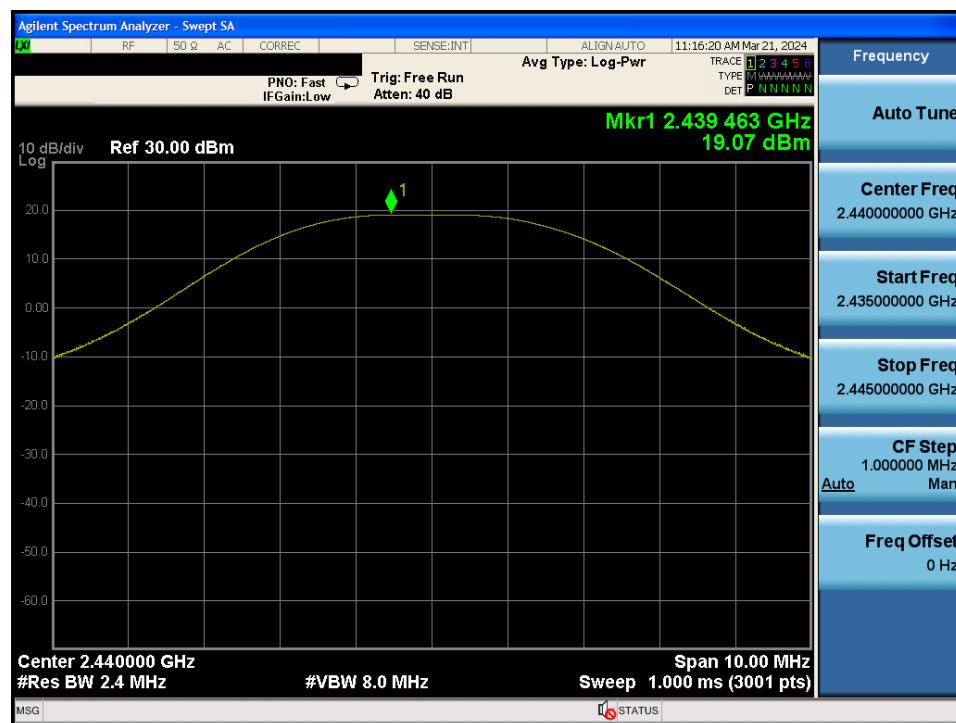


Peak Output Power

TM 1 : 2 475 MHz

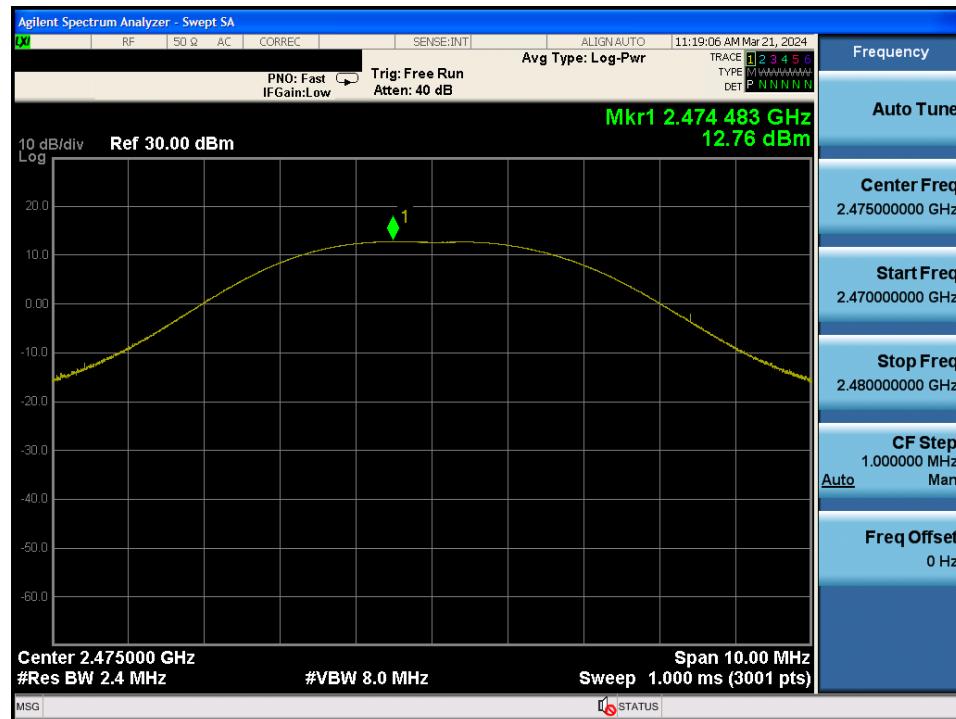

Peak Output Power

TM 1 : 2 480 MHz

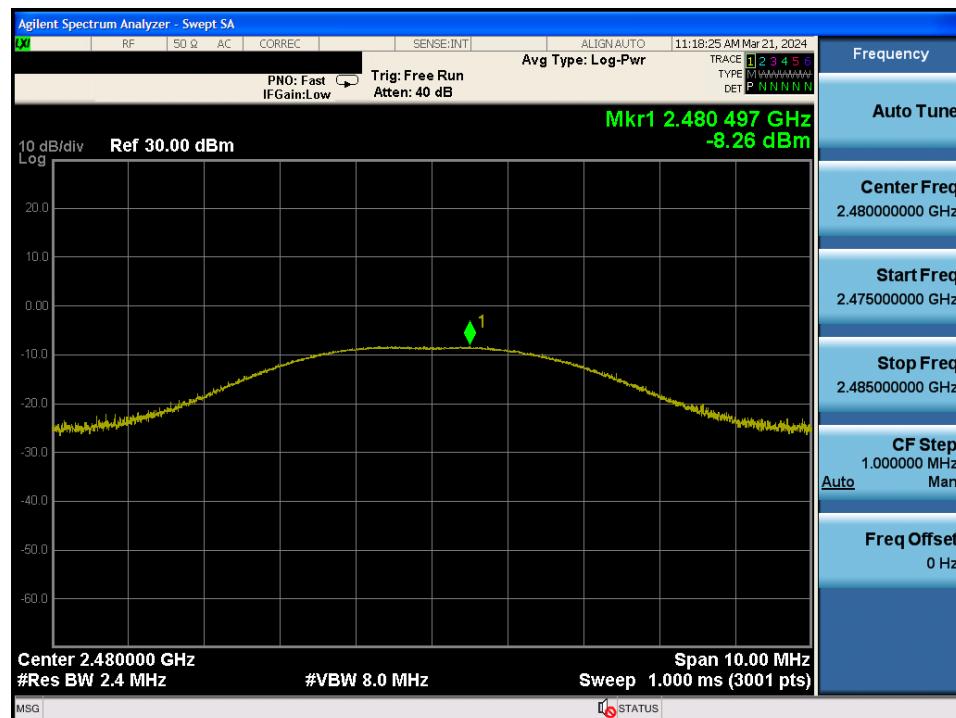

5.2. 6 dB Bandwidth

Test Requirements and limit, Part 15.247(a) & RSS-247 [5.2]

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

5.2.1. Test Setup

Refer to the APPENDIX I.

5.2.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.2
- ANSI C63.10-2013 – Section 11.8.2

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.

7. Option 1 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2 - The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

5.2.3. Test Results

Test Mode	Tested Frequency (MHz)	Test Results (MHz)
TM 1	2 405	1.601
	2 440	1.599
	2 480	1.605

6 dB Bandwidth

TM 1 : 2 405 MHz



6 dB Bandwidth

TM 1 : 2 440 MHz



6 dB Bandwidth

TM 1 : 2 480 MHz



5.3. Power Spectral Density

Test requirements and limit, Part 15.247(e) & RSS-247 [5.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3.1. Test Setup

Refer to the APPENDIX I.

5.3.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.4
- ANSI C63.10-2013 – Section 11.10.2

Method PKPSD (peak PSD)


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3.3. Test Results

Test Mode	Tested Frequency (MHz)	RBW	PKPSD (dBm)	Limit (dBm / 3 kHz)
TM 1	2 405	3 kHz	6.65	8.00
	2 440	3 kHz	7.03	8.00
	2 480	3 kHz	-21.95	8.00

Maximum PKPSD

TM 1 : 2 405 MHz

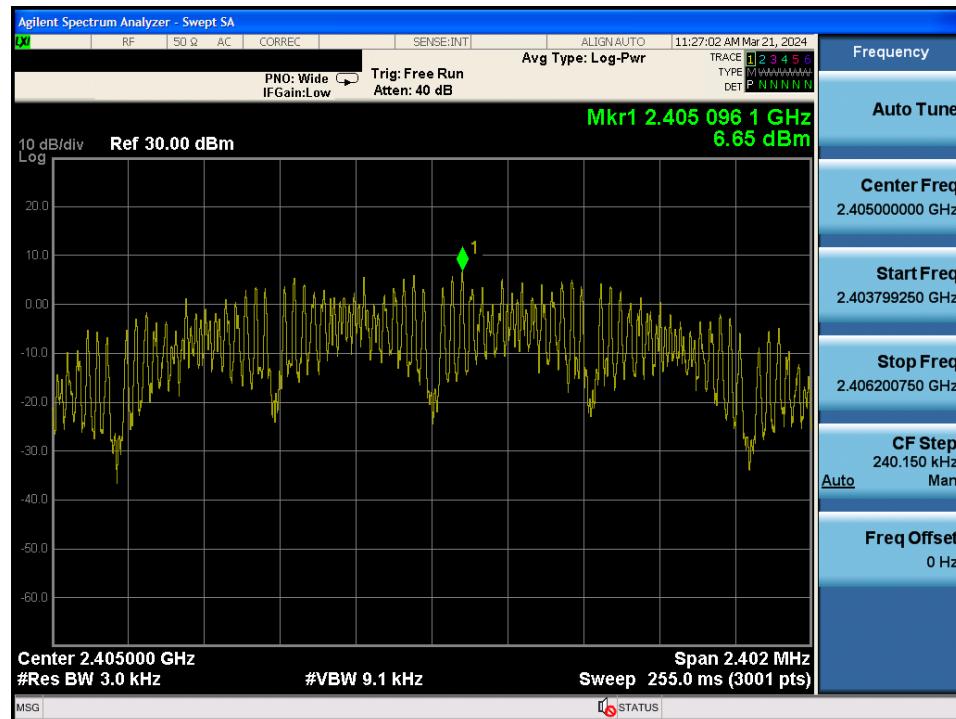

Maximum PKPSD

TM 1 : 2 440 MHz



Maximum PKPSD

TM 1 : 2 480 MHz



5.4. Unwanted Emissions (Conducted)

Test requirements and limit, Part 15.247(d) & RSS-247 [5.5]

In any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions :

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in §15.209(a) is not required.

5.4.1. Test Setup

Refer to the APPENDIX I including path loss

5.4.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.5
- ANSI C63.10-2013 – Section 11.11

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

LIMIT LINE = 20 dB below of the reference level.

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.(Actual 1 MHz , See below note)
3. Set the VBW $\geq 3 \times$ RBW.(Actual 3 MHz, See below note)
4. Detector = peak.
5. Ensure that the number of measurement points \geq span / RBW
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

Note: The unwanted(conducted) emission was tested with below settings.

Frequency range	RBW	VBW	Detector	Trace	Sweep Point
9 kHz ~ 30 MHz	100 kHz	300 kHz	Peak	Max Hold	40 001
30 MHz ~ 10 GHz	1 MHz	3 MHz			
10 GHz ~ 25 GHz	1 MHz	3 MHz			


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.

5.4.3. Test Results


TM 1 Reference (2 405 MHz)



TM 1 Low Band-edge (2 405 MHz)

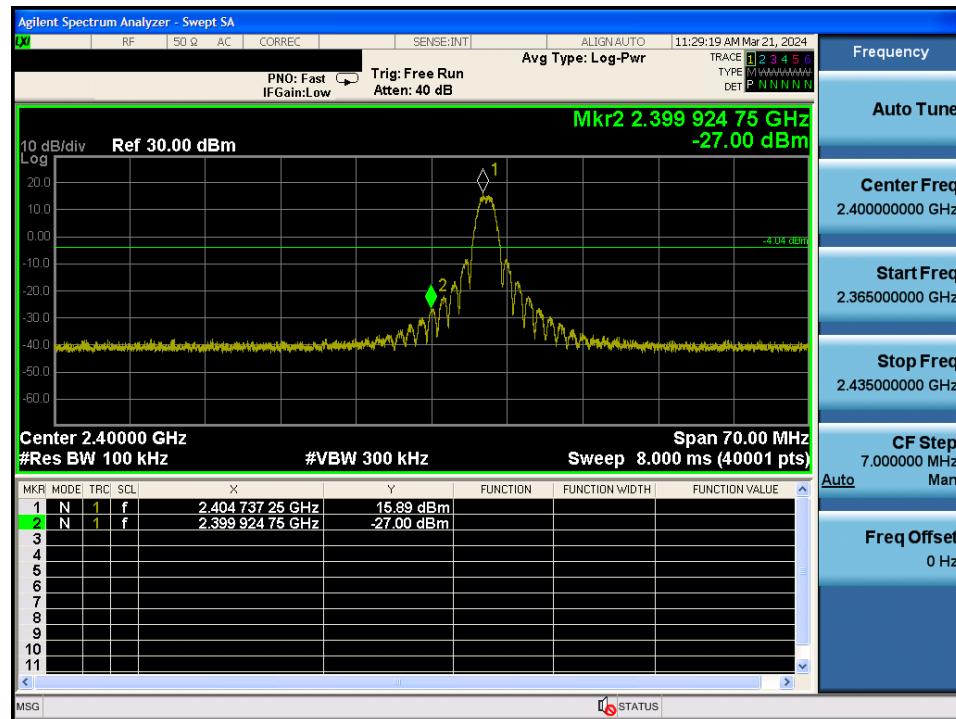

TM 1 Conducted Spurious Emissions 1 (2 405 MHz)

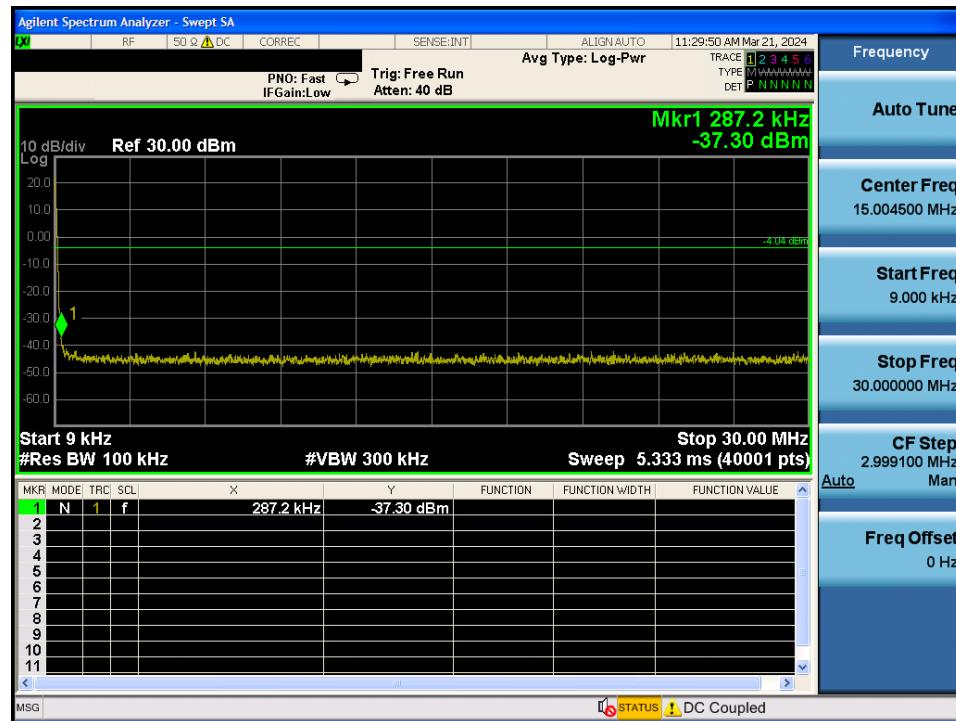

TM 1 Conducted Spurious Emissions 2 (2 405 MHz)




TM 1 Conducted Spurious Emissions 3 (2 405 MHz)




TM 1 Reference (2 440 MHz)




TM 1 Conducted Spurious Emissions 1 (2 440 MHz)

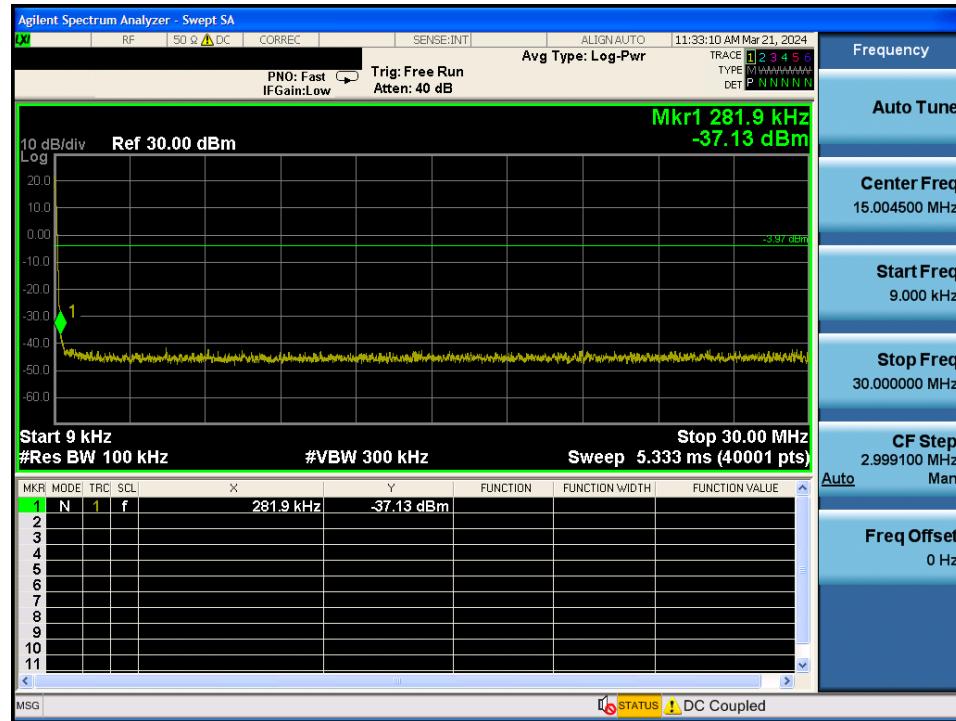

TM 1 Conducted Spurious Emissions 2 (2 440 MHz)

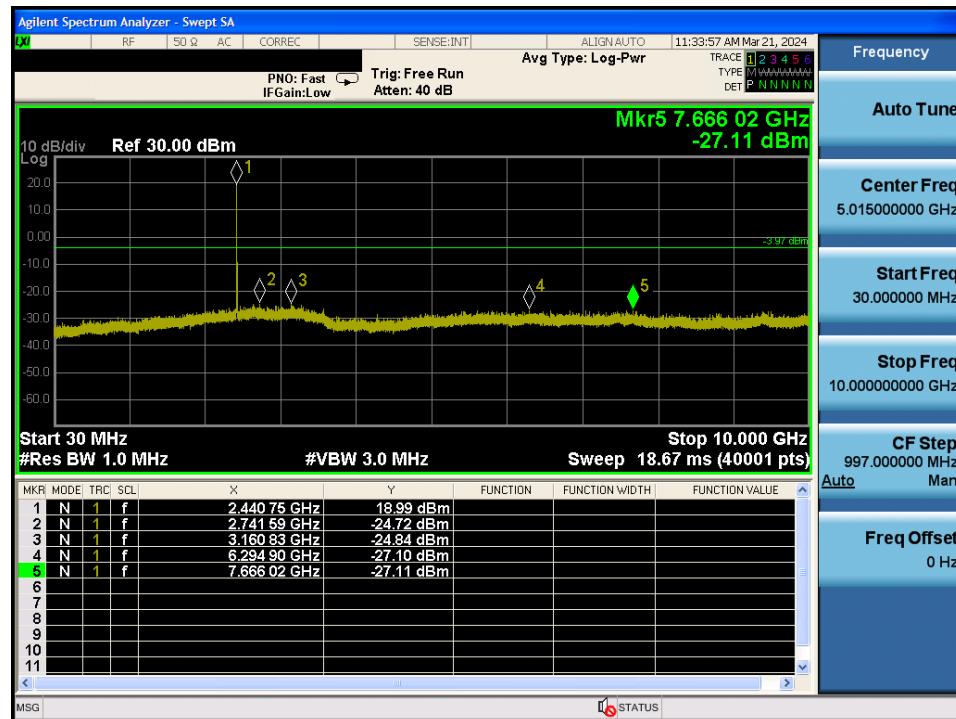


TM 1 Conducted Spurious Emissions 3 (2 440 MHz)

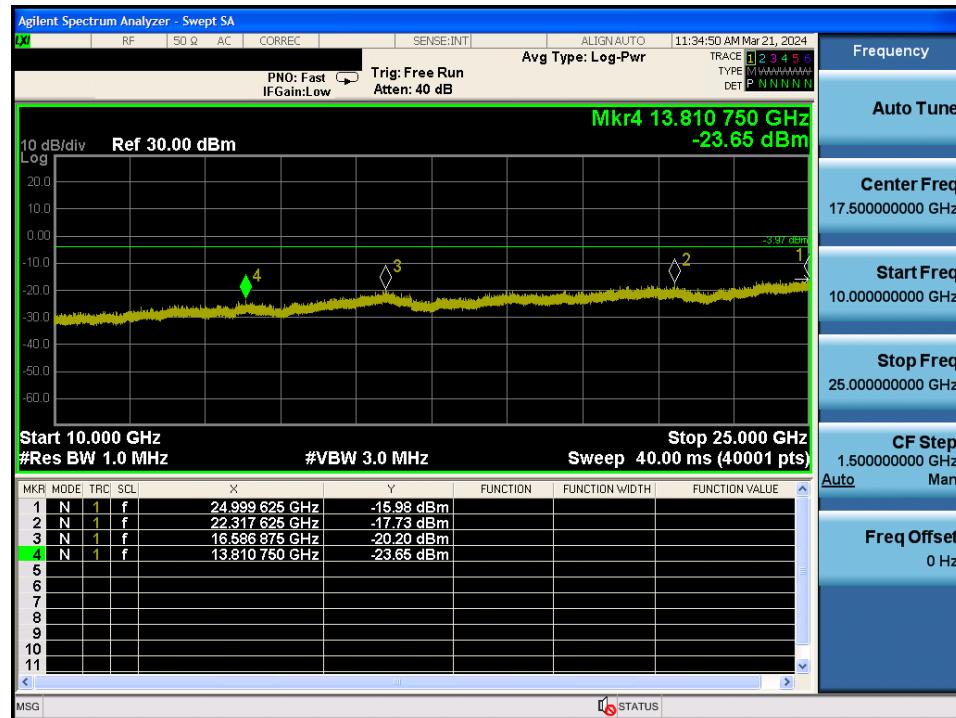


TM 1 Reference (2 480 MHz)



TM 1 High Band-edge (2 480 MHz)

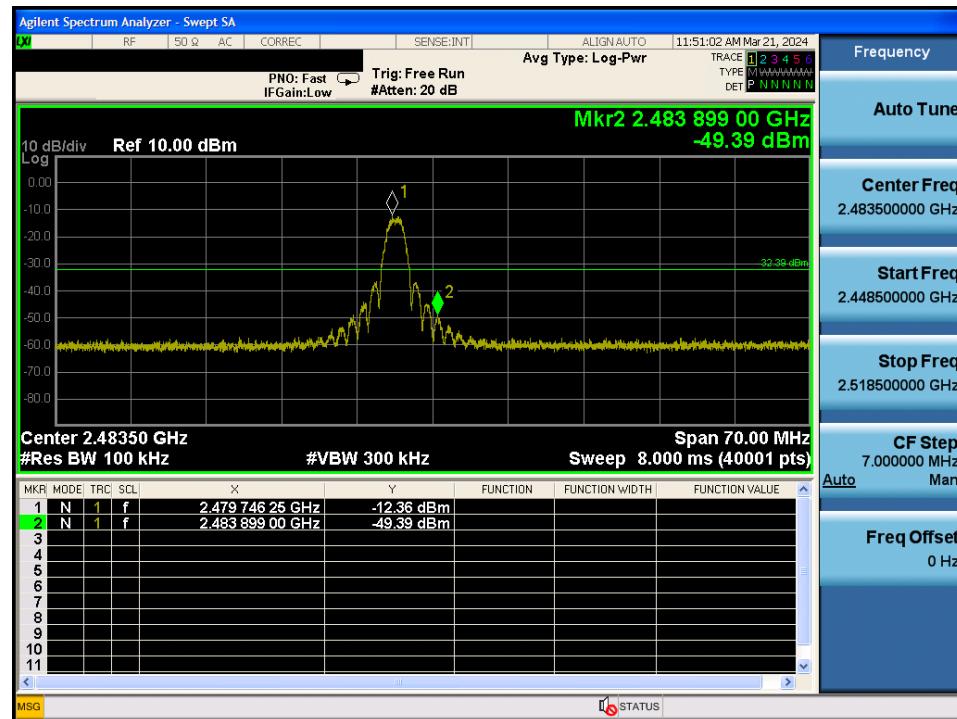

TM 1 Conducted Spurious Emissions 1 (2 480 MHz)

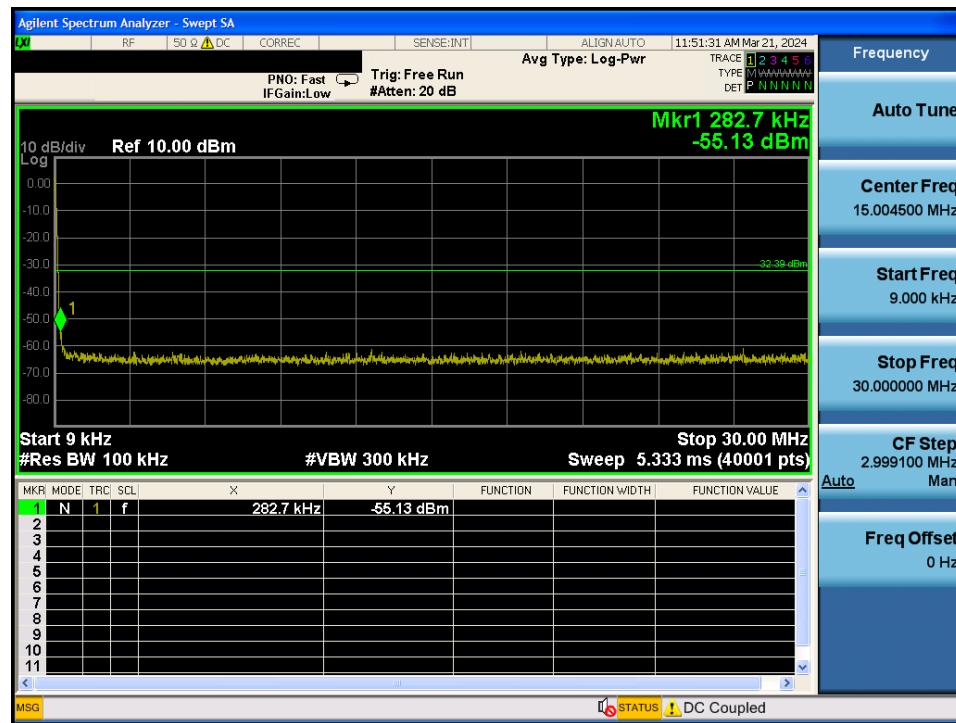

TM 1 Conducted Spurious Emissions 2 (2 480 MHz)



TM 1 Conducted Spurious Emissions 3 (2 480 MHz)



5.5. Unwanted Emissions (Radiated)

Test Requirements and limit,

Part 15.247(d), Part 15.205, Part 15.209 & RSS-247 [5.5], RSS-Gen [8.9], RSS-Gen [8.10]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

- Part 15.209 & RSS-Gen[8.9]: General requirements

Frequency (MHz)	FCC Limit (uV/m)	IC Limit (μ A/m)	Measurement Distance (m)
0.009 – 0.490	2 400 / F (kHz)	6.37/F (F in kHz)	300
0.490 – 1.705	24 000 / F (kHz)	63.7/F (F in kHz)	30
1.705 – 30.0	30	0.08	30

Frequency (MHz)	FCC Limit (uV/m)	IC Limit (uV/m)	Measurement Distance (m)
30 ~ 88	100 **	100	3
88 ~ 216	150 **	150	3
216 ~ 960	200 **	200	3
Above 960	500	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

- Part 15.205(a): Restricted band of operation

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.414 25 ~ 8.414 75	108 ~ 121.94	1 300 ~ 1 427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1 435 ~ 1 626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.173 5 ~ 2.190 5	12.519 75 ~ 12.520 25	149.9 ~ 150.05	1 645.5 ~ 1 646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.576 75 ~ 12.577 25	156.524 75 ~ 156.525 25	1 660 ~ 1 710	8.025 ~ 8.5	22.01 ~ 23.12
4.177 25 ~ 4.177 75	13.36 ~ 13.41	156.7 ~ 156.9	1 718.8 ~ 1 722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.207 25 ~ 4.207 75	16.42 ~ 16.423	162.012 5 ~ 167.17	2 200 ~ 2 300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 310 ~ 2 390	10.6 ~ 12.7	36.43 ~ 36.5
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 483.5 ~ 2 500	13.25 ~ 13.4	Above 38.6
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	2 655 ~ 2 900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 260 ~ 3 267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 332 ~ 3 339		
8.376 25 ~ 8.386 75	74.8 ~ 75.2	1 435 ~ 1 626.5	3 345.8 ~ 3 358	9.0 ~ 9.2	
		1 645.5 ~ 1 646.5	3 500 ~ 4 400	9.3 ~ 9.5	
		4 500 ~ 5 150	4 500 ~ 5 150	10.6 ~ 12.7	
		5 350 ~ 5 460	5 350 ~ 5 460	13.25 ~ 13.4	
		7 250 ~ 7 750	7 250 ~ 7 750	14.47 ~ 14.5	
		8 025 ~ 8 500	8 025 ~ 8 500	15.35 ~ 16.2	
		10.6 ~ 12.7	10.6 ~ 12.7	17.7 ~ 21.4	
		22.01 ~ 23.12	22.01 ~ 23.12	23.6 ~ 24.0	
		31.2 ~ 31.8	31.2 ~ 31.8	36.43 ~ 36.5	
		Above 38.6	Above 38.6		

- RSS-Gen[8.10]: Restricted frequency bands

MHz	MHz	MHz	MHz	MHz	GHz
0.090 ~ 0.110	8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 345.8 ~ 3 358	9.0 ~ 9.2
0.495 ~ 0.505	8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1 427	3 500 ~ 4 400	9.3 ~ 9.5
2.173 5 ~ 2.190 5	8.414 25 ~ 8.414 75	108 ~ 138	1 435 ~ 1 626.5	4 500 ~ 5 150	10.6 ~ 12.7
3.020 ~ 3.026	12.29 ~ 12.293	149.9 ~ 150.05	1 645.5 ~ 1 646.5	5 350 ~ 5 460	13.25 ~ 13.4
4.125 ~ 4.128	12.519 75 ~ 12.520 25	156.524 75 ~	1 660 ~ 1 710	7 250 ~ 7 750	14.47 ~ 14.5
4.177 25 ~ 4.177 75	12.576 75 ~ 12.577 25	156.525 25	1 718.8 ~ 1 722.2	8 025 ~ 8 500	15.35 ~ 16.2
4.207 25 ~ 4.207 75	13.36 ~ 13.41	156.7 ~ 156.9	2 200 ~ 2 300		17.7 ~ 21.4
5.677 ~ 5.683	16.42 ~ 16.423	162.01 25 ~ 167.17	2 310 ~ 2 390		22.01 ~ 23.12
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 483.5 ~ 2 500		23.6 ~ 24.0
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 655 ~ 2 900		31.2 ~ 31.8
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	3 260 ~ 3 267		36.43 ~ 36.5
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 332 ~ 3 339		Above 38.6

5.5.1. Test Setup

Refer to the APPENDIX I.

5.5.2. Test Procedures

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note: Measurement Instrument Setting for Radiated Emission Measurements.

- KDB558074 D01v05r02 - Section 8.6
- ANSI C63.10-2013 – Section 11.12

1. Frequency Range Below 1 GHz

RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

2. Frequency Range > 1 GHz

Peak Measurement > 1 GHz

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement > 1 GHz

1. RBW = 1 MHz (unless otherwise specified).

2. VBW \geq 3 x RBW.

3. Detector = RMS (Number of points \geq 2 x Span / RBW)

Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.

4. Averaging type = power (i.e., RMS).

5. Sweep time = auto.

6. Perform a trace average of at least 100 traces.

Note: The EUT has been tested with the continuously transmitting mode.

5.5.3. Test Results

- Test Notes

- The radiated emissions were investigated up to 25 GHz. And no other spurious and harmonic emissions were found below listed frequencies.
- Information of Distance Correction Factor

For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.

In this case, the distance factor is applied to the result.

- Calculation of distance correction factor

At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$

At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$

When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.

- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} / \text{Result} = \text{Reading} + \text{TF} + \text{DCCF} + \text{DCF} / \text{TF} = \text{AF} + \text{CL} + \text{HL} + \text{AL} - \text{AG}$$

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss, AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

Frequency Range : 9 kHz ~ 25 GHz_TM 1

▪ 2 405 MHz

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 389.67	H	X	PK	53.13	4.48	N/A	N/A	57.61	74.00	16.39
2 389.92	H	X	AV	43.29	4.48	N/A	N/A	47.77	54.00	6.23
4 811.09	H	Z	PK	56.46	1.63	N/A	N/A	58.09	74.00	15.91
4 810.90	H	Z	AV	49.67	1.63	N/A	N/A	51.30	54.00	2.70
7 213.44	H	X	PK	51.01	7.07	N/A	N/A	58.08	74.00	15.92
7 213.54	H	X	AV	43.32	7.07	N/A	N/A	50.39	54.00	3.61

▪ 2 440 MHz

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4 879.05	H	Z	PK	54.43	1.76	N/A	N/A	56.19	74.00	17.81
4 879.10	H	Z	AV	47.05	1.77	N/A	N/A	48.82	54.00	5.18
7 321.22	H	X	PK	49.89	6.64	N/A	N/A	56.53	74.00	17.47
7 321.38	H	X	AV	41.07	6.64	N/A	N/A	47.71	54.00	6.29

▪ 2 475 MHz

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 483.63	H	X	PK	55.94	4.98	N/A	N/A	60.92	74.00	13.08
2 483.59	H	X	AV	46.57	4.98	N/A	N/A	51.55	54.00	2.45
4 949.43	H	Z	PK	51.42	2.47	N/A	N/A	53.89	74.00	20.11
4 949.13	H	Z	AV	40.81	2.47	N/A	N/A	43.28	54.00	10.72
7 425.90	H	X	PK	46.83	7.49	N/A	N/A	54.32	74.00	19.68
7 425.06	H	X	AV	36.69	7.49	N/A	N/A	44.18	54.00	9.82

▪ 2 480 MHz

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 483.54	H	X	PK	52.78	4.98	N/A	N/A	57.76	74.00	16.24
2 483.52	H	X	AV	44.17	4.98	N/A	N/A	49.15	54.00	4.85
4 958.47	H	Z	PK	49.57	2.51	N/A	N/A	52.08	74.00	21.92
4 959.00	H	Z	AV	39.15	2.52	N/A	N/A	41.67	54.00	12.33
7 440.57	H	X	PK	46.91	7.61	N/A	N/A	54.52	74.00	19.48
7 440.27	H	X	AV	36.30	7.61	N/A	N/A	43.91	54.00	10.09

5.6. AC Power-Line Conducted Emissions

■ Test Requirements and limit, Part 15.207 & RSS-Gen [8.8]

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5.0	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

5.6.1. Test Setup

See test photographs for the actual connections between EUT and support equipment.

5.6.2. Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10-2013.

1. The test procedure is performed in a 6.5 m x 3.5 m x 3.5 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) x 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

5.6.3. Test Results

Refer to the next page. (The worst case data was reported. The worst data is TM 1 & Lowest)

AC Power-Line Conducted Emissions (Graph)**Results of Conducted Emission**

Date 2023-11-27


Order No. **CMX-ZG07**
Model No. **CMX-ZG07**
Serial No.
Test Condition **Zigbee**

Reference No.
Power Supply **120V, 60Hz**
Temp/Humi. **21 °C / 30 %**
Operator **S.M.GIL**

Memo

LIMIT : FCC P15.207 AV
FCC P15.207 QP

Lisn Factor
1. NSLK 8128 RC-387_N_23.10.26
2. NSLK 8128 RC-387_L1_23.10.26
Cable Loss
1. C1_LISN TO RECIVER_2023.02.14
Pulse Limiter
1. PULSE LIMITER_ESH3-Z2_101333_2023.08.21

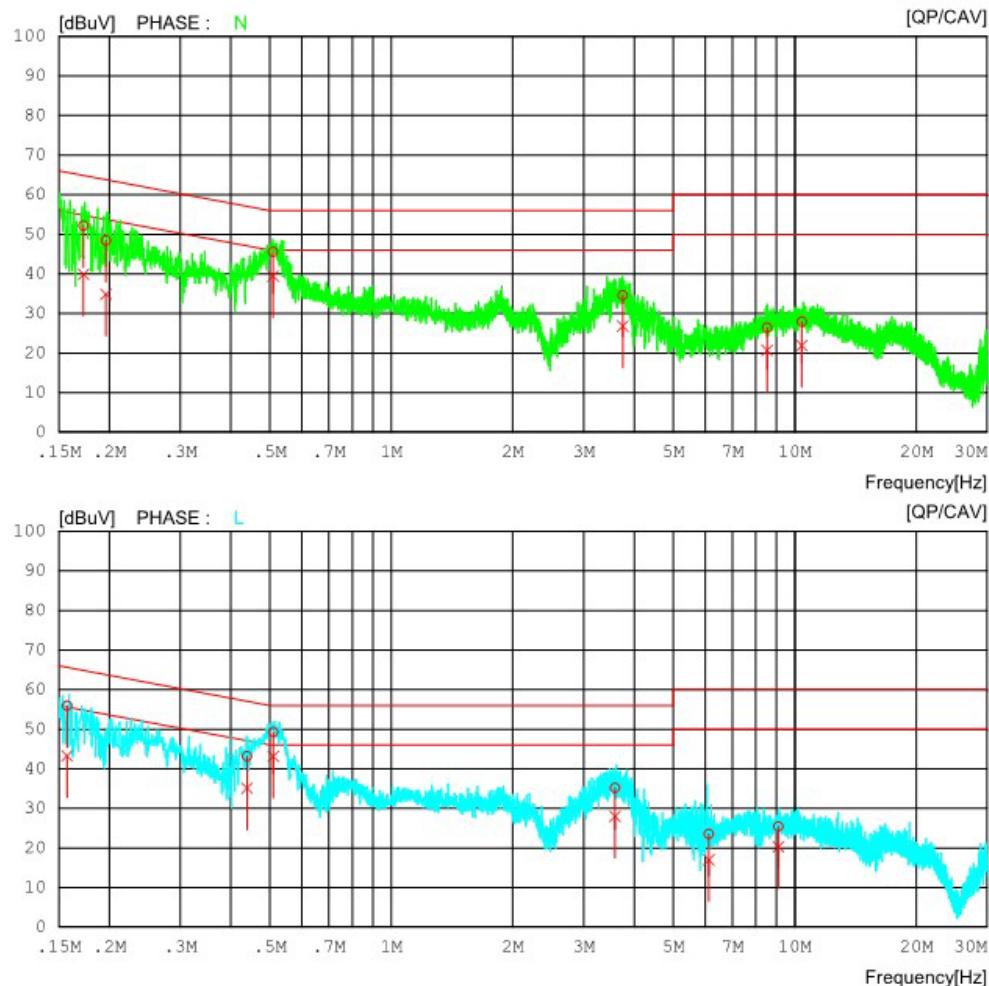

AC Power-Line Conducted Emissions (List)**Results of Conducted Emission**

Date 2023-11-27

Order No.		Reference No.	
Model No.	CMX-ZG07	Power Supply	120V, 60Hz
Serial No.		Temp/Humi.	21 °C / 30 %
Test Condition	Zigbee	Operator	S.M.GIL

Memo

LIMIT : FCC P15.207 AV
FCC P15.207 QP

List Factor

1. NSLK 8128 RC-387_N_23.10.26
2. NSLK 8128 RC-387_L1_23.10.26

Cable Loss

1. C1_LISN TO RECIVER_2023.02.14

Pulse Limiter

1. PULSE LIMITER_ESH3-Z2_101333_2023.08.21

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT [dBuV]		LIMIT [dBuV]		MARGIN [dBuV]	PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]		
1	0.17266	42.29	30.01	9.90	52.19	39.91	64.83	54.83	12.64	14.92
2	0.19613	38.54	24.97	9.88	48.42	34.85	63.77	53.77	15.35	18.92
3	0.50905	35.63	29.55	9.90	45.53	39.45	56.00	46.00	10.47	6.55
4	3.74680	24.61	16.81	9.97	34.58	26.78	56.00	46.00	21.42	19.22
5	8.53840	16.33	10.57	10.08	26.41	20.65	60.00	50.00	33.59	29.35
6	10.40720	17.80	11.77	10.11	27.91	21.88	60.00	50.00	32.09	28.12
7	0.15708	46.02	33.34	9.91	55.93	43.25	65.62	55.62	9.69	12.37
8	0.43857	33.27	25.20	9.90	43.17	35.10	57.09	47.09	13.92	11.99
9	0.50962	39.42	33.27	9.90	49.32	43.17	56.00	46.00	6.68	2.83
10	3.58400	25.23	18.04	9.97	35.20	28.01	56.00	46.00	20.80	17.99
11	6.12180	13.48	6.99	10.03	23.51	17.02	60.00	50.00	36.49	32.98
12	9.11080	15.30	10.20	10.09	25.39	20.29	60.00	50.00	34.61	29.71

5.7. Occupied Bandwidth

Test Requirements, RSS-Gen [6.7]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 % emission bandwidth, as calculated or measured.

5.7.1. Test Setup

Refer to the APPENDIX I.

5.7.2. Test Procedures

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3 \times$ RBW.

5.7.3. Test Results

Test Mode	Tested Frequency (MHz)	Test Results (MHz)
TM 1	2 405	2.330
	2 440	2.321
	2 480	2.334

Occupied Bandwidth

TM 1 : 2 405 MHz



Occupied Bandwidth

TM 1 : 2 440 MHz



Occupied Bandwidth


TM 1 : 2 480 MHz




APPENDIX I

Test set up diagrams

▪ Radiated Measurement

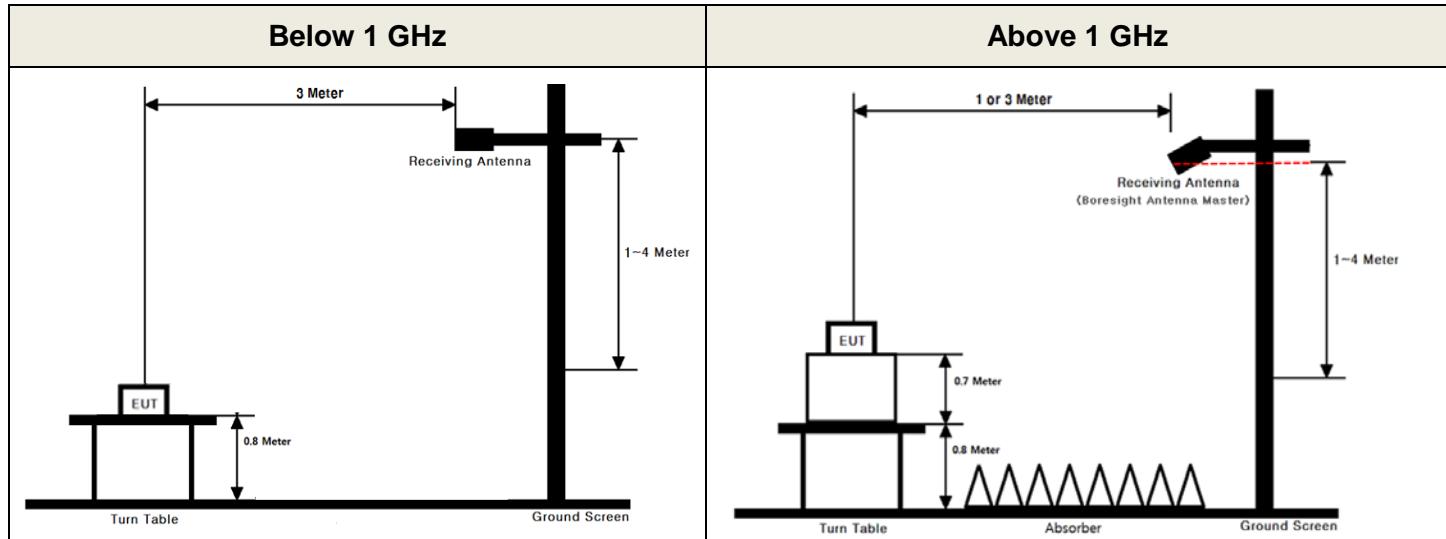

▪ Conducted Measurement

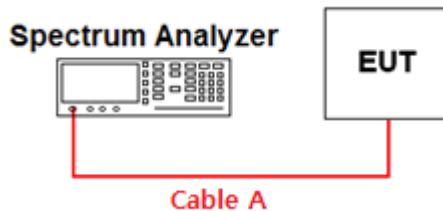

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	9.08	15	11.33
1	9.13	20	12.45
2.402 & 2.440 & 2.480	9.80	25	14.30
5	9.94	-	-
10	10.67	-	-

Note 1 : The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (S/A's correction factor) = Cable A
(Attenuator, Applied only when it was used externally)

APPENDIX II

Duty cycle plots

▪ Test Procedures


- KDB558074 D01v05r02 – Section 6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50 / T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

Duty Cycle

TM 1 : 2 440 MHz

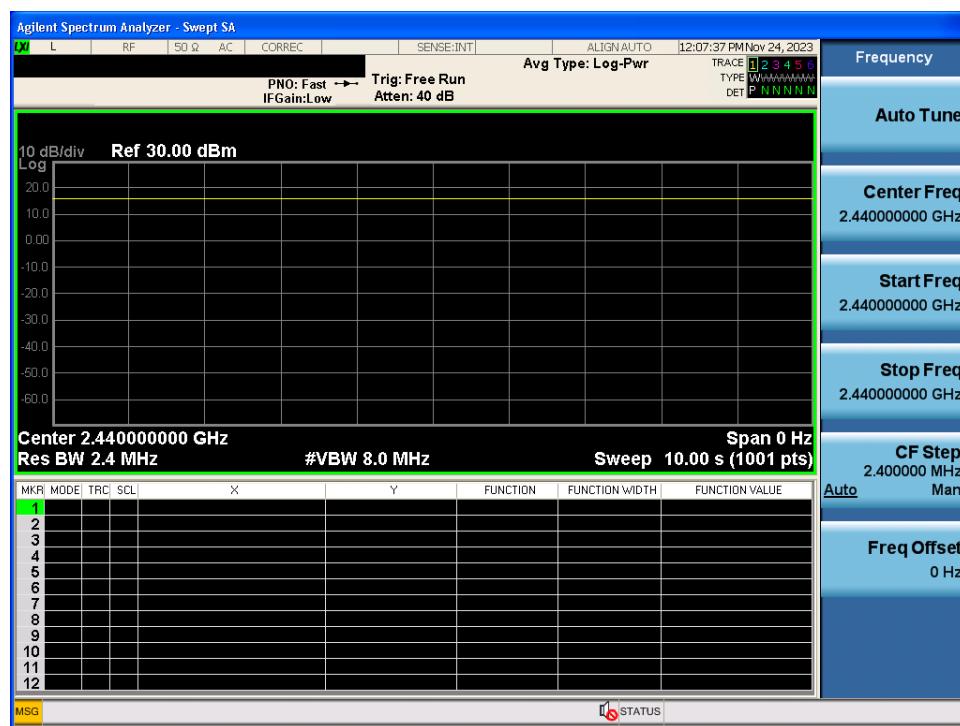


APPENDIX III

Unwanted Emissions (Radiated) Test Plot


TM 1 & 2 405 MHz & X & Hor



Detector Mode : PK

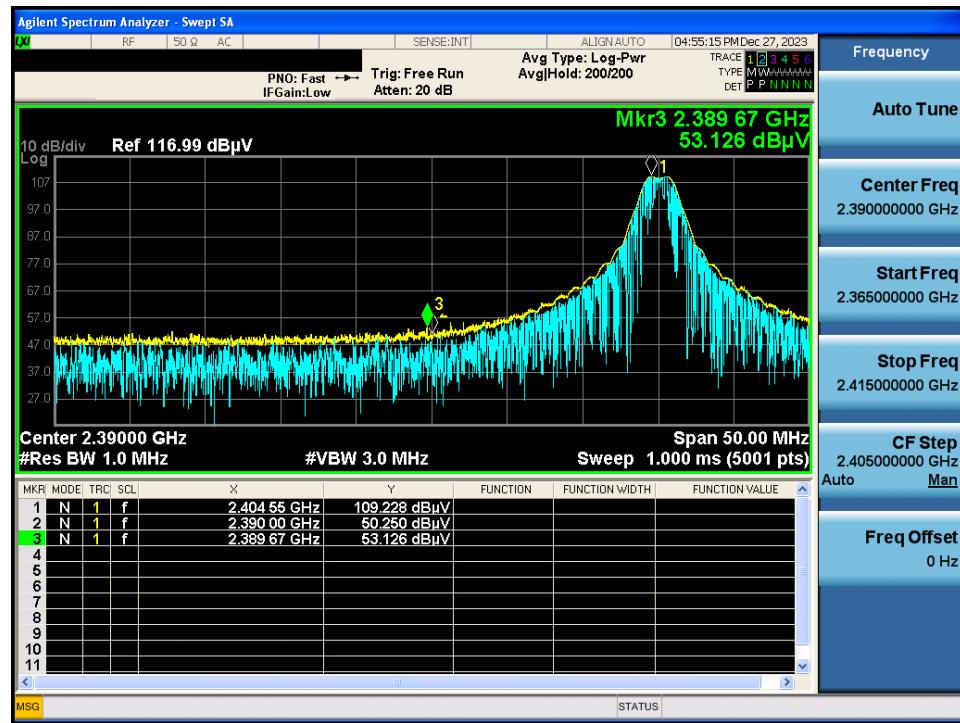

TM 1 & 2 405 MHz & X & Hor

Detector Mode : AV

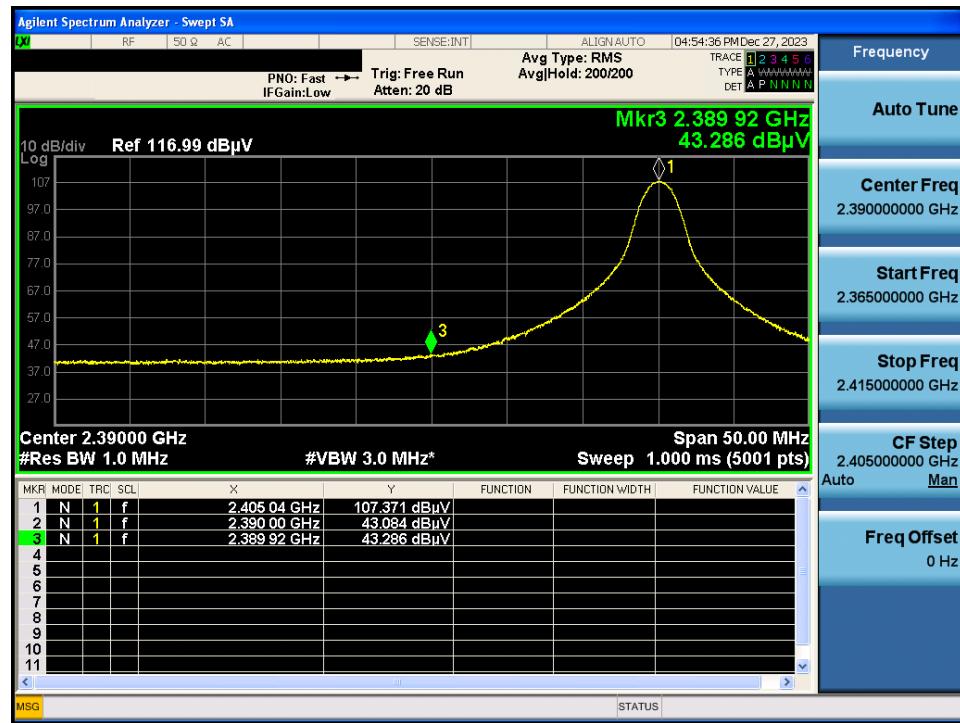

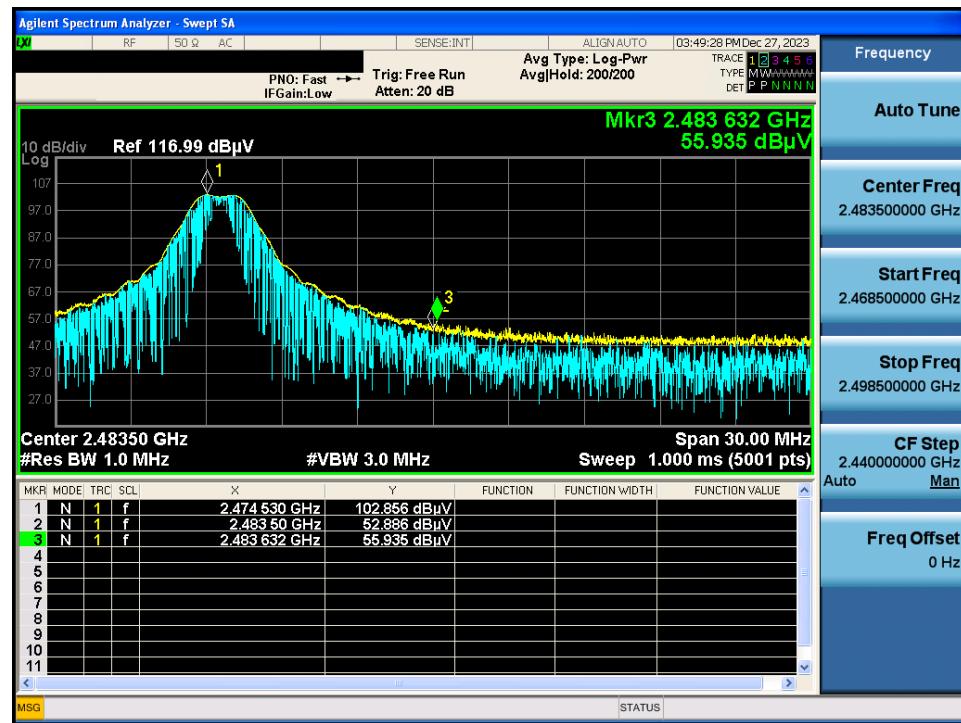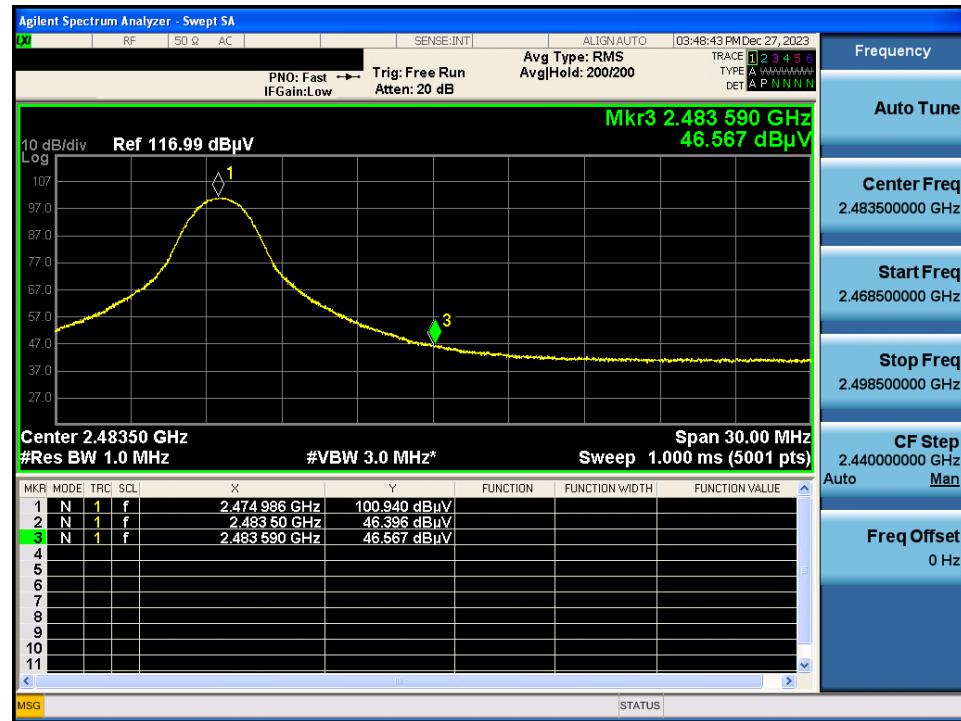TM 1 & 2 475 MHz & X & Hor
Detector Mode : PK

TM 1 & 2 475 MHz & X & Hor
Detector Mode : AV


TM 1 & 2 405 MHz & Z & Hor
Detector Mode : AV
