



849 NW State Road 45
 Newberry, FL 32669 USA
 Ph.: 888.472.2424 or
 352.472.5500
 Fax: 352.472.2030
 Email: info@timcoengr.com
 Website: www.timcoengr.com

**FCC PART 15.249 & IC RSS-210
 UNLICENSED INTENTIONAL RADIATOR
 TEST REPORT**

Applicant	DIGITAL MONITORING PRODUCTS INC.
Address	2500 N. PARTNERSHIP BLVD. SPRINGFIELD MISSOURI 65802 USA
FCC ID	CCKPC0181
IC Certification Number	5251A-PC0181
Model Number	XTLplus
Product Description	Control Panel
Date Sample Received	5/6/2016
Final Test Date	5/18/2016
Tested By	Cory Leverett
Approved By	Tim Royer

Report Number	Version Number	Description	Issue Date
760AUT16TestReport_	Rev1	Initial Issue	5/19/2016
	Rev2	Added test site reg# to page 3, Added Statement to radiated emissions on page 16 & 17	5/23/2016

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
 WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL INFORMATION	4
EUT Specification	4
Test Supporting Equipment	4
RESULTS SUMMARY.....	5
OCCUPIED BANDWIDTH.....	6
Test Data: Mode 1 99% Occupied Bandwidth Measurement Table.....	6
Test Data: Mode 2 99% Occupied Bandwidth Measurement Table.....	6
Test Data: 99% OBW Mode 1 Plot	7
Test Data: 99% OBW Mode 2 Plot	8
BANDEDGE.....	9
Test Data: Mode 1 Bandedge Measurement Table.....	9
Test Data: Mode 2 Bandedge Measurement Table.....	9
Test Data: Mode 1 Lower Band Edge Plot.....	10
Test Data: Mode 1 Upper Band Edge Plot.....	11
Test Data: Mode 2 Lower Band Edge Plot.....	12
Test Data: Mode 2 Upper Band Edge Plot.....	13
RADIATED SPURIOUS EMISSIONS.....	14
Test Data: Mode 1 Field Strength at 3 Meters Measurement Table	16
Test Data: Mode 2 Field Strength at 3 Meters Measurement Table	17
AC POWER LINE CONDUCTED EMISSIONS.....	18
Test Data: Mode 1 Powerline 1 Peak Plot	19
Test Data: Mode 1 Powerline 2 Peak Plot	20
Test Data: Mode 2 Powerline 1 Peak Plot	21
Test Data: Mode 2 Powerline 2 Peak Plot	22
EMC EQUIPMENT LIST	23

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
IC Test Site Registration # : 2056A-3



Tested by: _____

Cory Leverett
Project Manager/Testing Technician

Date: 5/ 19/ 2016



Reviewed and approved by: _____

Tim Royer
Project Manager/Testing Technician

Date: 5/ 19/ 2016

Applicant: DIGITAL MONITORING PRODUCTS INC.
FCC ID: CCKPC0181
IC: 5251A-PC0181
Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

GENERAL INFORMATION

EUT Specification

Regulatory Standards	FCC Title 47 CFR Part 15.249 IC RSS-210 Issue 8 A2.9 & RSS-GEN Issue 4		
FCC ID	CCKPC0181		
IC	5251A-PC0181		
Model	XTLplus		
EUT Description	Control Panel		
Modulation Types	Mode 1: GFSK 9.6 Kbps (Z-Wave)		
	Mode 2: GFSK 40 Kbps (Z-Wave)		
Operating Frequency	TX: 908.4 – 908.4 MHz	RX: 908.4 – 908.4 MHz	
EUT Power Source	<input checked="" type="checkbox"/> 110–120Vac/50– 60Hz		
	<input type="checkbox"/> DC Power		
	<input type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input type="checkbox"/> Pre-Production	<input checked="" type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input type="checkbox"/> Portable
Antenna Connector	None (Temporary Connector Provided for Testing)		
Antenna	Fixed Wire Antenna		
Test Conditions	Temperature: 24-26°C		
	Relative humidity: 50-65%		
Measurement Standard	ANSI C63.10-2013 ANSI C63.4-2014 (Radiated Site Validation)		
Test Exercise	Engineering Software was used to enable the modes of operation, all modes of modulation were tested.		

Test Supporting Equipment

Device	Manufacturer	Model	S/ N	Supplied By	Used For
NA					

RESULTS SUMMARY

FCC Rule Part No.	IC Standard Ref.	Requirement	Test Item	Result
2.1049	RSS-GEN 6.6	Occupied Bandwidth	99% Bandwidth	Pass
15.249(a)(c)	RSS-210 § A2.9(a)	Fundamental and Harmonics	Radiated Spurious Emissions	Pass
15.249(d)(e)	RSS-247 § 5.5	Spurious Emissions	Bandedge	Pass
			Radiated Spurious Emissions	Pass
15.207(a)	RSS-GEN § 8.8	AC Conducted Emissions	AC Powerline Conducted Emissions	Pass

Notes:

OCCUPIED BANDWIDTH


Rules Part No.: FCC 2.1049, IC RSS GEN § 6.6

FCC Requirements: Reporting only

IC Requirements: Reporting Only

Test Method: ANSI C63.10 § 6.9.3 Occupied bandwidth-99% procedure

Setup:

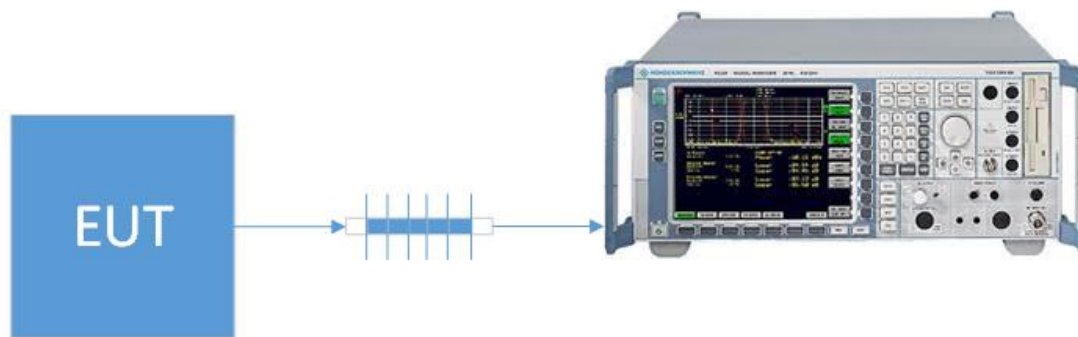

Test Data: Mode 1 99% Occupied Bandwidth Measurement Table

Tuned Frequency (MHz)	BW (KHz)
908.4	89.07

Test Data: Mode 2 99% Occupied Bandwidth Measurement Table

Tuned Frequency (MHz)	BW (KHz)
908.4	86.27


RESULTS: Meets Requirements


Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

OCCUPIED BANDWIDTH

Test Data: 99% OBW Mode 1 Plot

	Marker 1 [T1]	RBW	3 kHz	RF Att	20 dB
	Ref Lvl	-6.45 dBm	VBW	10 kHz	
	4 dBm	908.43130561 MHz	SWT	98 ms	Unit dBm

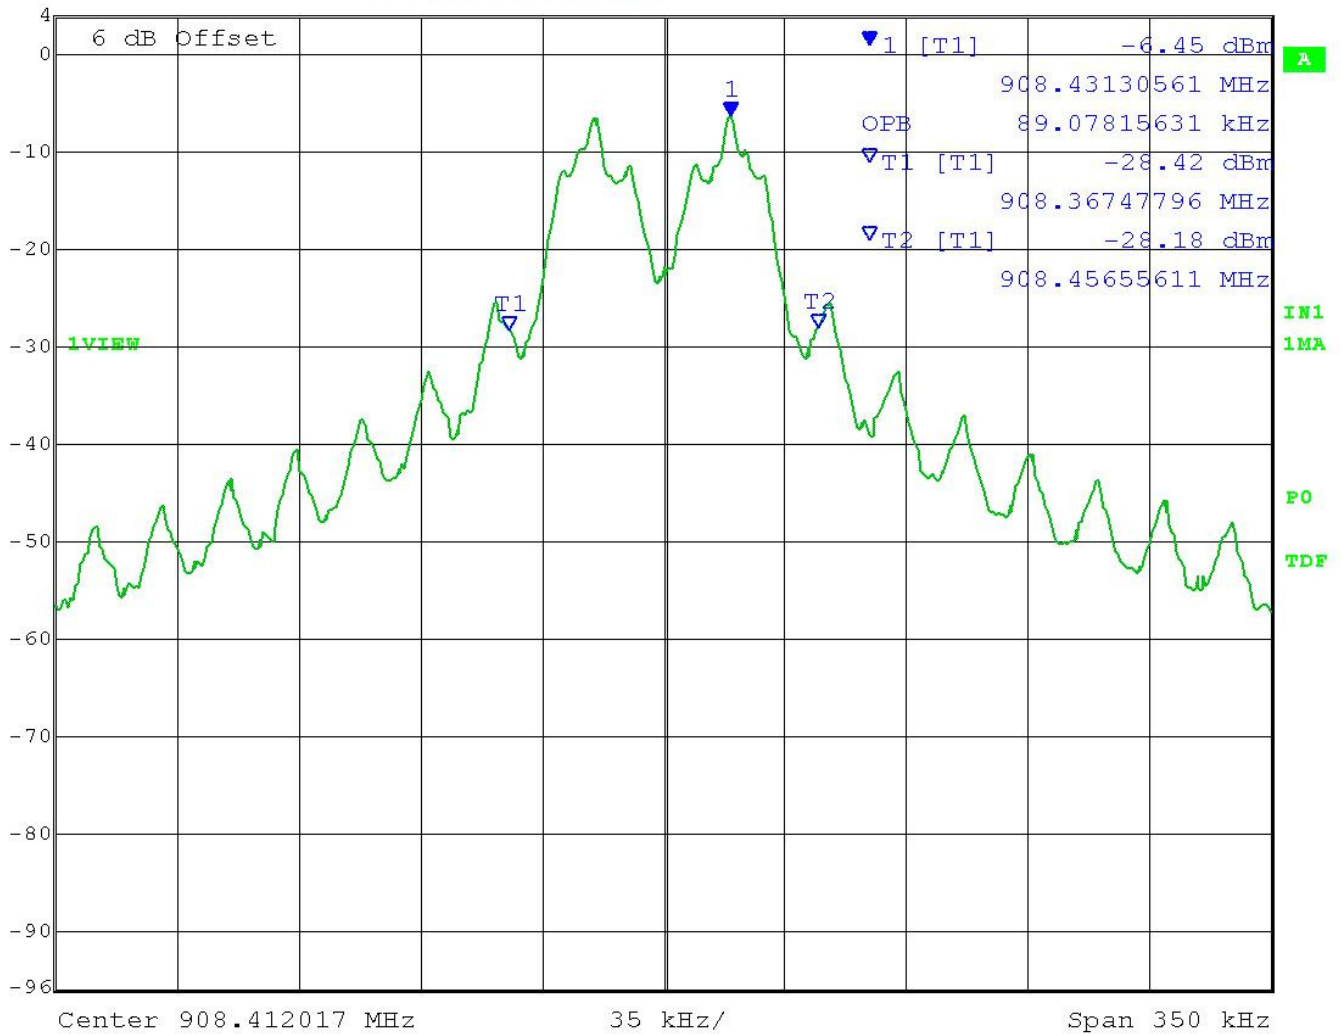

Date: 18.MAY.2016 09:08:11

RESULTS: Meets Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1


[Table of Contents](#)

OCCUPIED BANDWIDTH

Test Data: 99% OBW Mode 2 Plot



Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	20 dB
4 dBm	-4.36 dBm	VBW	10 kHz		
	908.37273848 MHz	SWT	98 ms	Unit	dBm

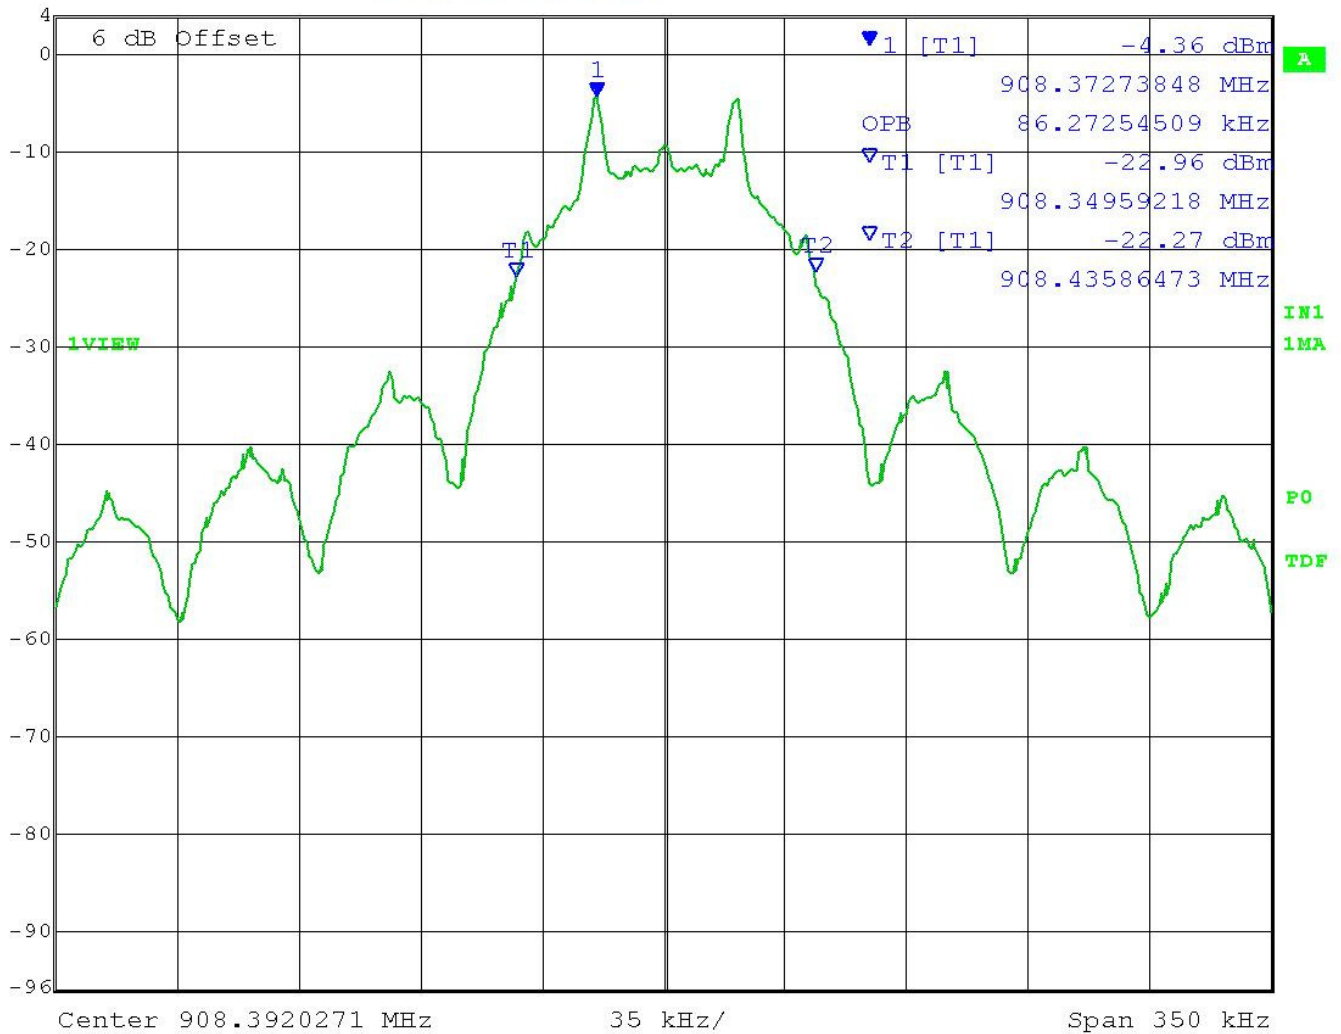

Date: 18.MAY.2016 09:10:34

RESULTS: Meets Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)


BANDEDGE

Rule Part No.: FCC 15.249(d), IC RSS 210 § A2.9(b)

Requirements: Emissions must be at least 50 dB down from the highest emission level Within the authorized band as measured with a 100 kHz RBW

Test Method: ANSI C63.10 § 6.10.4 Authorized band-edge relative method

Setup:

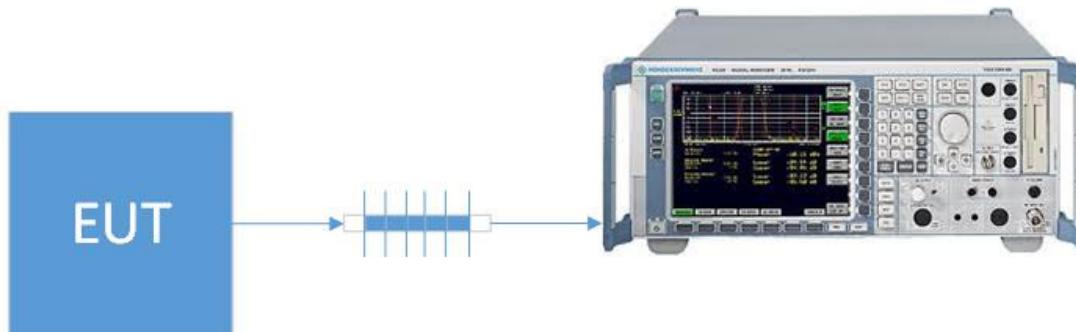

Test Data: Mode 1 Bandedge Measurement Table

Bandedge	Tuned Frequency (MHz)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
Lower	908.4	-57.07	50	7.07
Upper	908.4	-61.14	50	11.14

Test Data: Mode 2 Bandedge Measurement Table

Bandedge	Tuned Frequency (MHz)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
Lower	908.4	-55.60	50	5.60
Upper	908.4	-60.37	50	10.37


Results Meet Requirements

BANDEDGE

Test Data: Mode 1 Lower Band Edge Plot



Ref Lvl	Delta 1 [T1]	RBW	100 kHz	RF Att	10 dB
-5 dBm	-57.07 dB	VBW	300 kHz		
	-7.25450902 MHz	SWT	120 ms	Unit	dBm

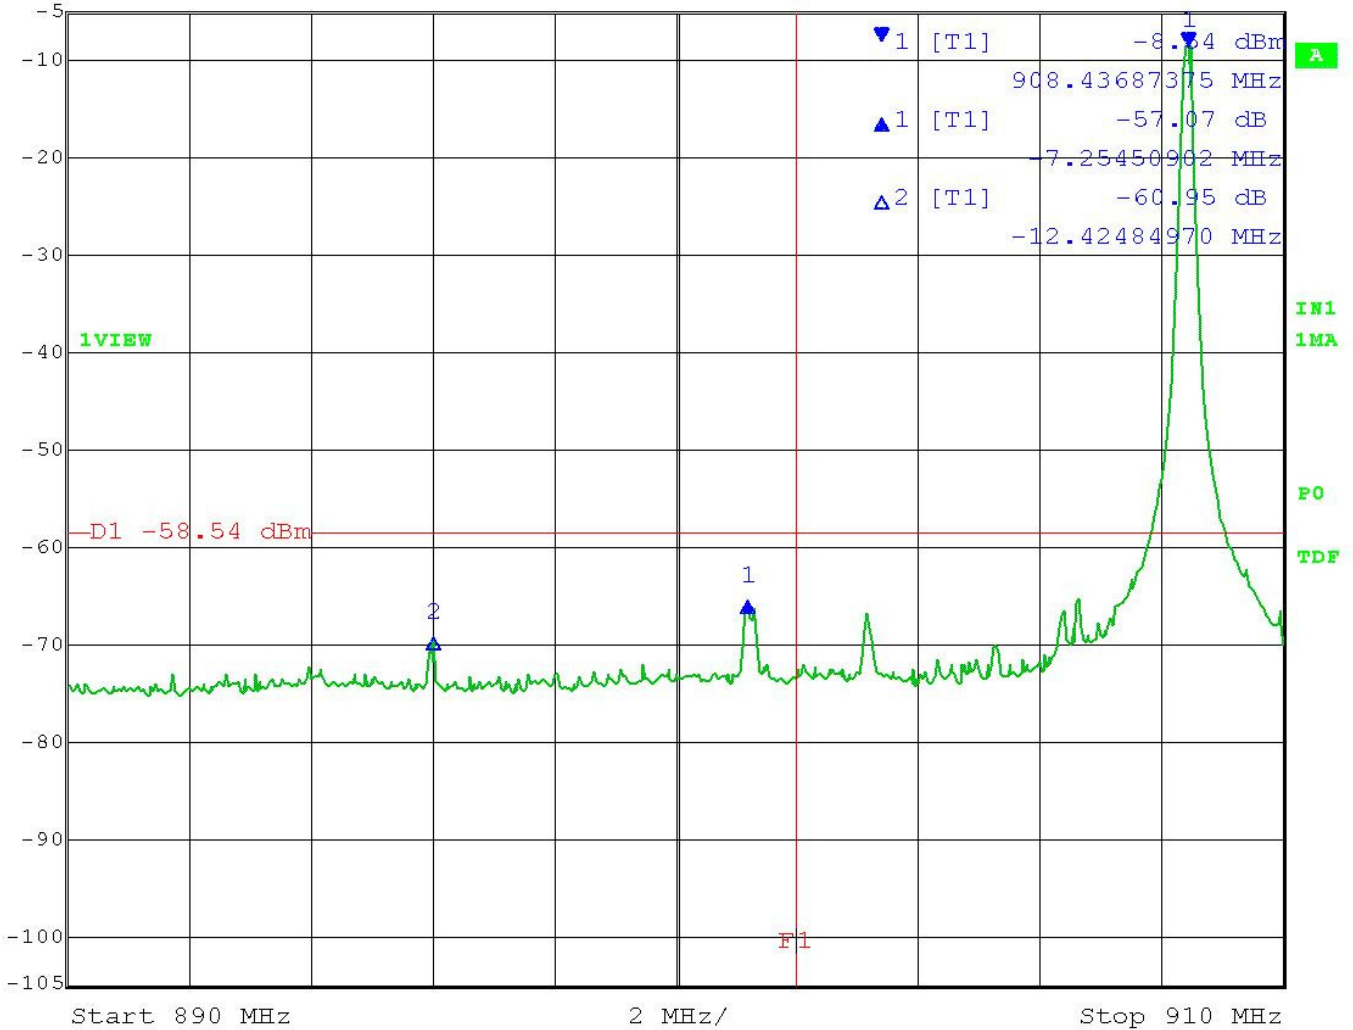

Date: 18.MAY.2016 08:57:17

RESULTS: Meets Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1


[Table of Contents](#)

BANDEDGE

Test Data: Mode 1 Upper Band Edge Plot

Delta 1 [T1]
RBW 100 kHz
RF Att 10 dB
Ref Lvl -5 dBm
-63.64 dB
VBW 300 kHz

19.74749499 MHz
SWT 120 ms
Unit dBm

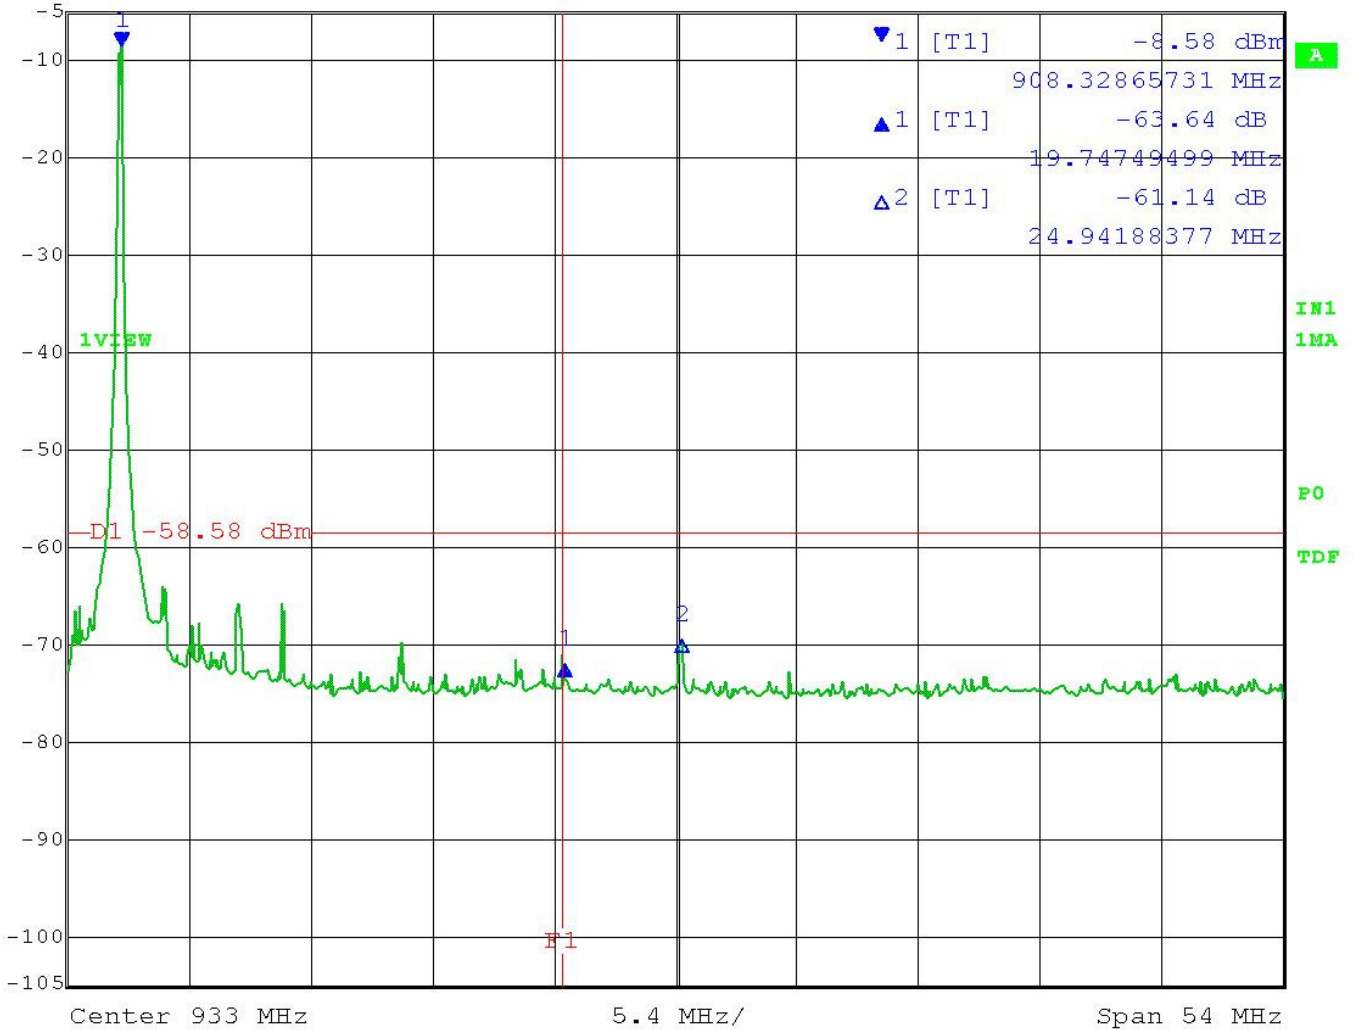

Date: 18.MAY.2016 09:03:16


RESULTS: Meets Requirements


Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

BANDEDGE

Test Data: Mode 2 Lower Band Edge Plot

	Delta 1 [T1]	RBW	100 kHz	RF Att	10 dB
Ref Lvl	-55.60 dB	VBW	300 kHz		
-5 dBm	-7.21442886 MHz	SWT	120 ms	Unit	dBm

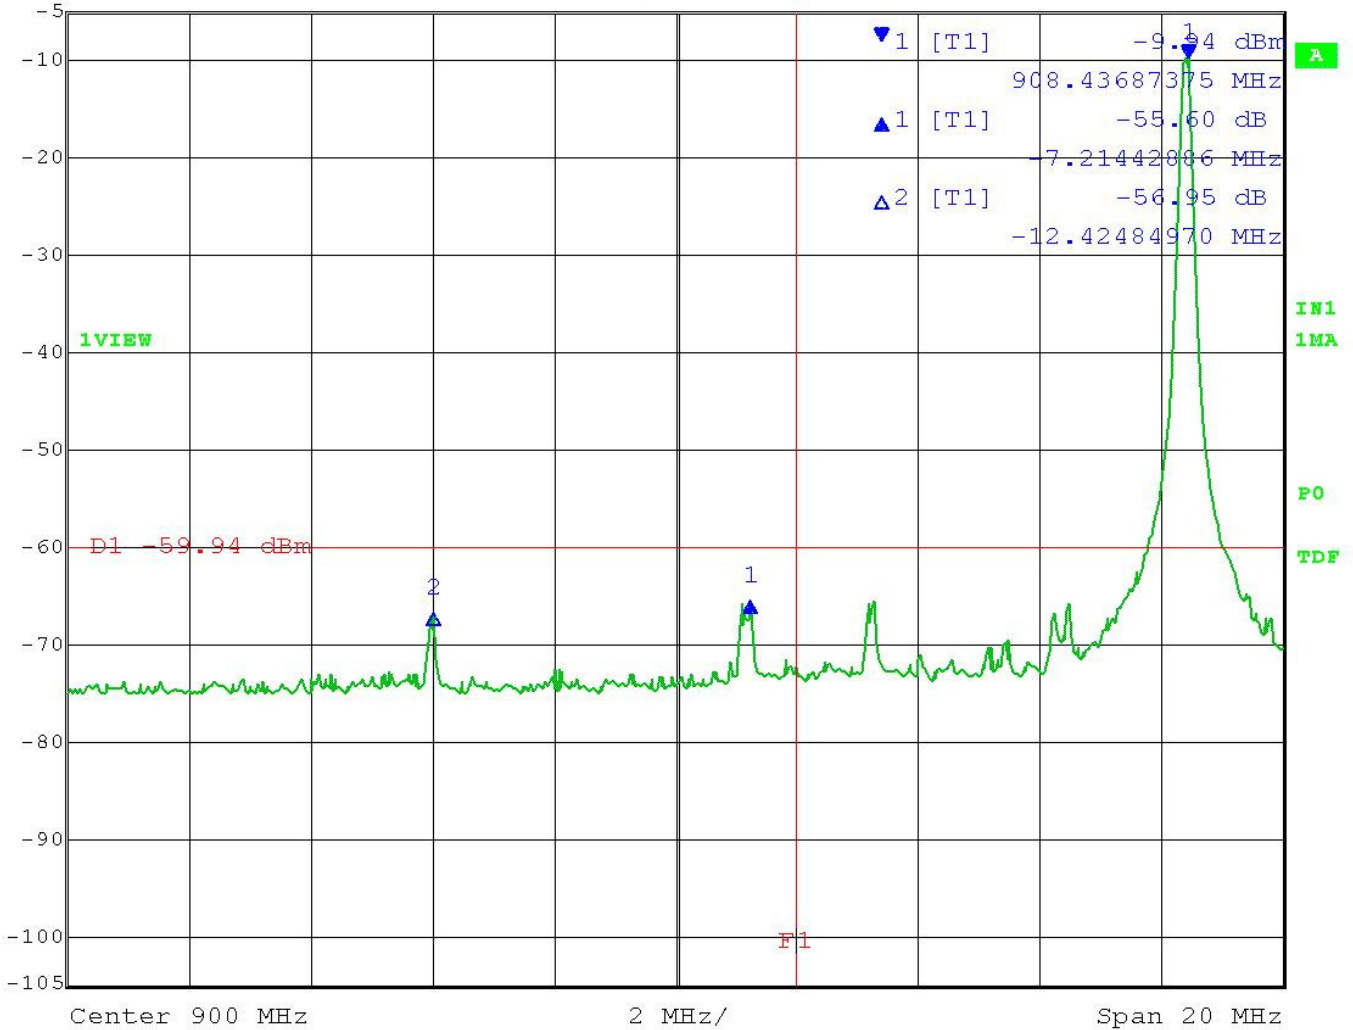

Date: 18.MAY.2016 08:59:35

RESULTS: Meets Requirements


Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

BANDEDGE

Test Data: Mode 2 Upper Band Edge Plot

	Ref Lvl	Delta 1 [T1]	RBW	100 kHz	RF Att	10 dB
	-5 dBm	-60.37 dB	VBW	300 kHz		
		19.74749499 MHz	SWT	120 ms	Unit	dBm

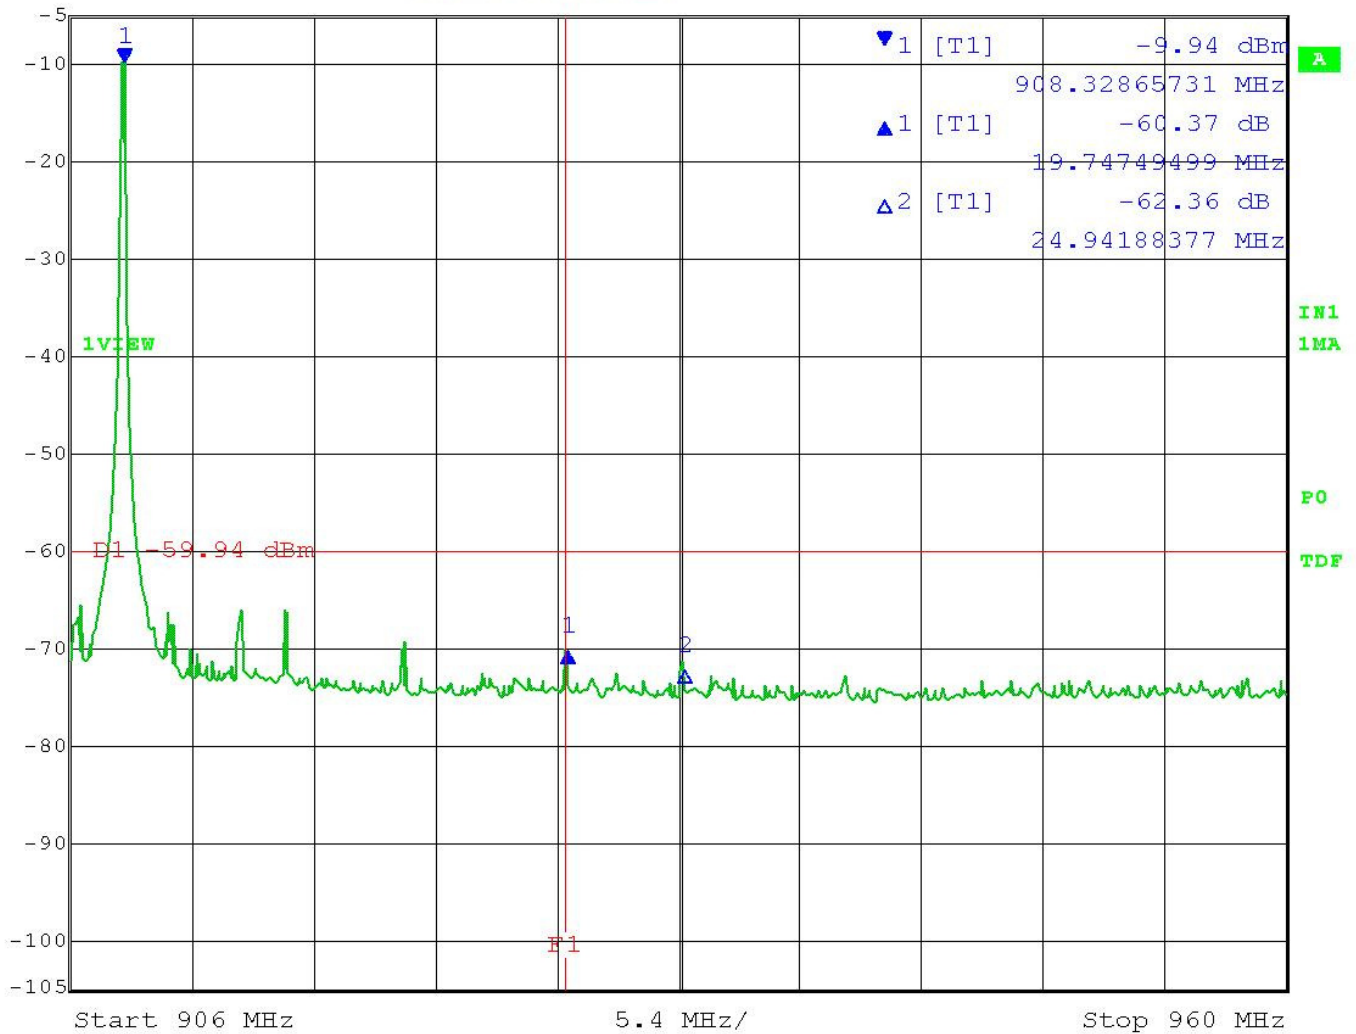

Date: 18.MAY.2016 09:01:40

RESULTS: Meets Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

RADIATED SPURIOUS EMISSIONS

Rules Part No.: FCC part 15.249 (d)(e), IC RSS 210 § A2.9(b)

Requirements: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50 dB below the fundamental output or to the limits of 15.209 whichever is lesser

FCC part 15.209 General Emission Limits

Frequency	Limits
FCC Part 15.209, IC RSS-GEN 8.9	
9 to 490 kHz	2400/F (kHz) μ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB μ V/m @ 30 meters
30 – 88	40.0 dB μ V/m @ 3 meters
80 – 216	43.5 dB μ V/m @ 3 meters
216 – 960	46.0 dB μ V/m @ 3 meters
Above 960	54.0 dB μ V/m @ 3 meters

Test Method: ANSI C63.4 § Annex D Validation of radiated emissions standard test sites
 ANSI C63.10 § 6.3 Common requirements radiated emissions
 ANSI C63.10 § 6.4 Emissions below 30 MHz
 ANSI C63.10 § 6.5 Emissions between 30 & 1000 MHz
 ANSI C63.10 § 6.6 Emissions above 1 GHz

Field Strength Calculation:

The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL = FS
33	20 dB μ V	+ 10.36 dB	+ 0.5 = 30.86 dB μ V/m @ 3m


Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)


RADIATED SPURIOUS EMISSIONS

Setup:


Emissions below 30 MHz

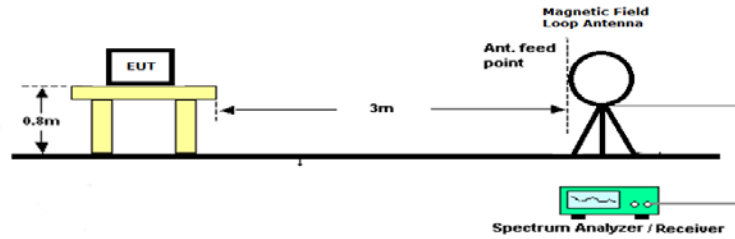

Emissions 30 – 1000 MHz

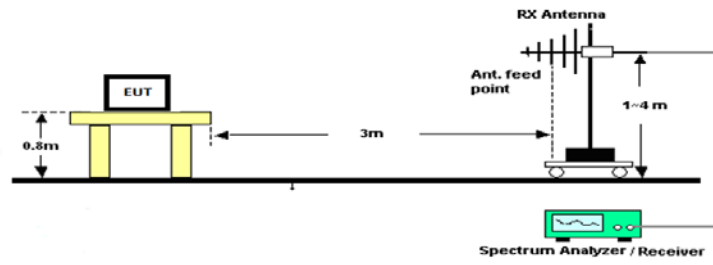

Emissions above 1 GHz

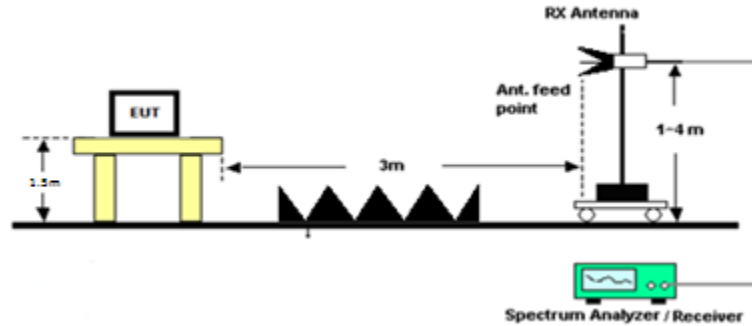

RADIATED SPURIOUS EMISSIONS

Notes: The EUT was checked in three orthogonal planes as required, a setup photo is provided to show the orientation of the worst case position.

The spectrum was measured from 9 KHz to 25 GHz, Only emissions within 20dB of the limit are reported.

* Indicates noise floor only

Test Data: Mode 1 Field Strength at 3 Meters Measurement Table

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector (PK/QP/AV)	Meter Reading (dBUV)	Ant. Polarity (H/V)	Coax Loss (dB)	Correction Factor (dB)	Field Strength (dBUV/m)	Margin (dB)
908.40	64.00	PK	30.83	V	0.9	6.5	38.3	1.7
908.40	96.01	PK	19.74	V	1.2	11.0	31.9	11.6
908.40	109.33	PK	19.53	V	1.2	10.5	31.2	12.3
908.40	128.03	PK	22.88	V	1.3	12.5	36.7	6.8
908.40	224.00	PK	19.93	V	1.7	10.6	32.3	13.8
908.40	256.00	PK	22.72	V	1.9	12.3	36.9	9.1
908.40	259.33	PK	15.63	V	1.9	12.5	30.0	16.0
908.40	259.33	PK	15.63	V	1.9	12.5	30.0	16.0
908.40	384.00	PK	13.26	V	2.2	14.7	30.2	15.8
908.40	908.40	QP	65.81	H	3.5	22.0	91.3	2.7
908.40	1816.8 *	PK	13.63	H	4.9	30.7	49.3	24.7
908.40	1816.8 *	AV	1.67	H	4.9	30.7	37.3	16.7
908.40	2725.20	PK	17.46	V	6.1	32.6	56.1	17.9
908.40	2725.20	AV	8.66	H	6.1	32.6	47.3	6.7
908.40	3633.6 *	PK	13.41	V	7.0	33.6	54.0	20.0
908.40	3633.6 *	AV	-0.85	V	7.0	33.6	39.7	14.3

Results Meet Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

RADIATED SPURIOUS EMISSIONS

Notes: The EUT was checked in three orthogonal planes as required, a setup photo is provided to show the orientation of the worst case position.

The spectrum was measured from 9 KHz to 25 GHz, Only emissions within 20dB of the limit are reported.

* Indicates noise floor only

Test Data: Mode 2 Field Strength at 3 Meters Measurement Table

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector (PK/QP/AV)	Meter Reading (dBuV)	Ant. Polarity (H/V)	Coax Loss (dB)	Correction Factor (dB)	Field Strength (dBuV/m)	Margin (dB)
908.40	36.53	PK	15.14	V	0.7	13.1	28.9	11.1
908.40	73.63	PK	21.08	V	1.0	6.8	28.9	11.1
908.40	80.00	PK	25.60	V	1.1	8.5	35.2	4.8
908.40	128.03	PK	17.17	V	1.3	12.5	31.0	9.0
908.40	320.00	PK	16.31	H	2.1	13.6	32.0	14.0
908.40	416.00	PK	11.89	V	2.3	15.9	30.1	15.9
908.40	908.40	QP	64.81	H	3.5	22.0	90.3	3.7
908.40	1816.80 *	PK	13.60	H	4.9	30.7	49.3	24.7
908.40	1816.80 *	AV	2.47	H	4.9	30.7	38.1	15.9
908.40	2725.20	PK	17.52	V	6.1	32.6	56.1	17.9
908.40	2725.20	AV	8.50	H	6.1	32.6	47.1	6.9
908.40	3633.60 *	PK	13.36	H	7.0	33.6	53.9	20.1
908.40	3633.60 *	AV	-0.64	H	7.0	33.6	39.9	14.1

Results Meet Requirements

AC POWER LINE CONDUCTED EMISSIONS

Rules Part No.: FCC 15.207(a), IC RSS Gen § 8.8


Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50

* Decrease with logarithm of frequency

Test Method: ANSI C63.10 § 6.2 Test Method for AC power-line conducted emissions


Setup:

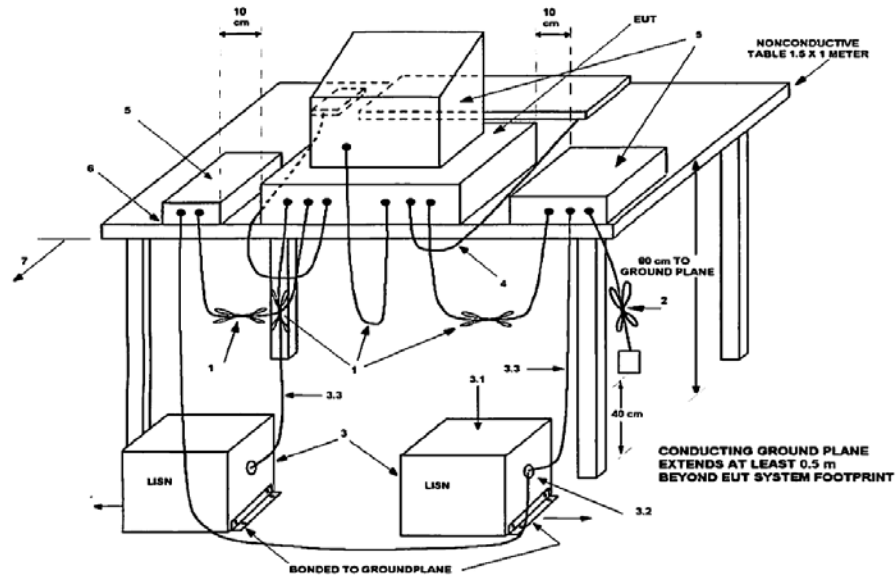

AC POWER LINE CONDUCTED EMISSIONS

Notes: The following plots represent the emissions read for power line Conducted. Both lines were observed.

Test Data: Mode 1 Powerline 1 Peak Plot

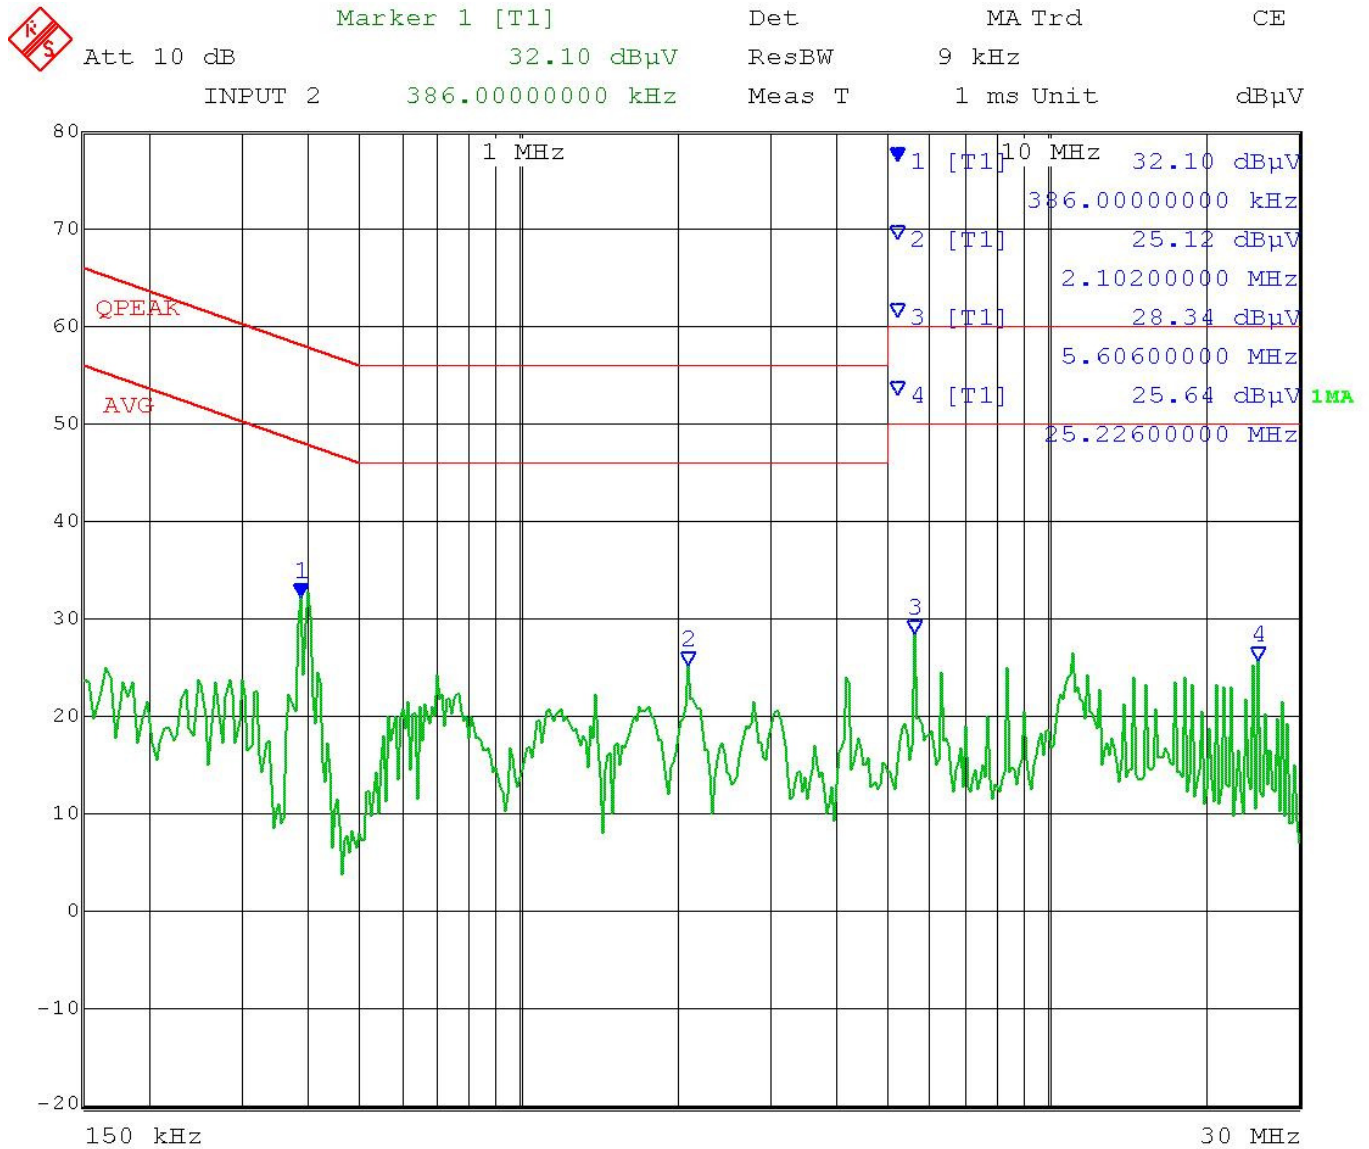

Date: 18.MAY.2016 11:15:09


RESULTS: Meets Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

AC POWER LINE CONDUCTED EMISSIONS

Test Data: Mode 1 Powerline 2 Peak Plot

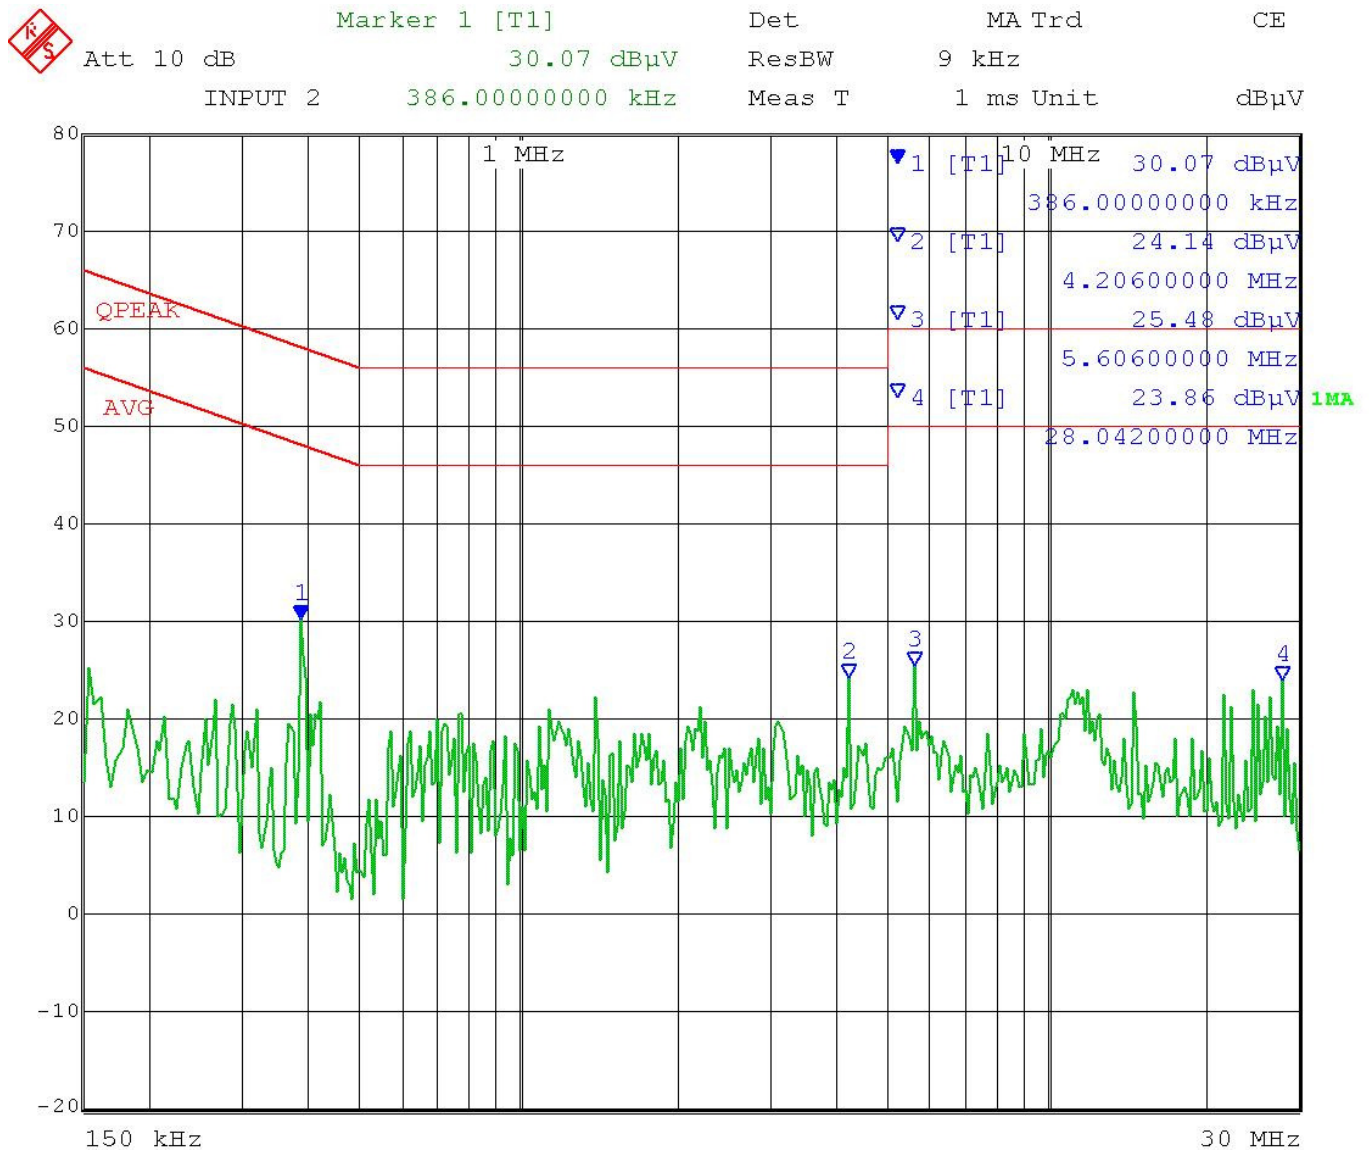

Date: 18.MAY.2016 11:06:54

RESULTS: Meets Requirements


Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

AC POWER LINE CONDUCTED EMISSIONS

Notes: The following plots represent the emissions read for power line Conducted. Both lines were observed.

Test Data: Mode 2 Powerline 1 Peak Plot

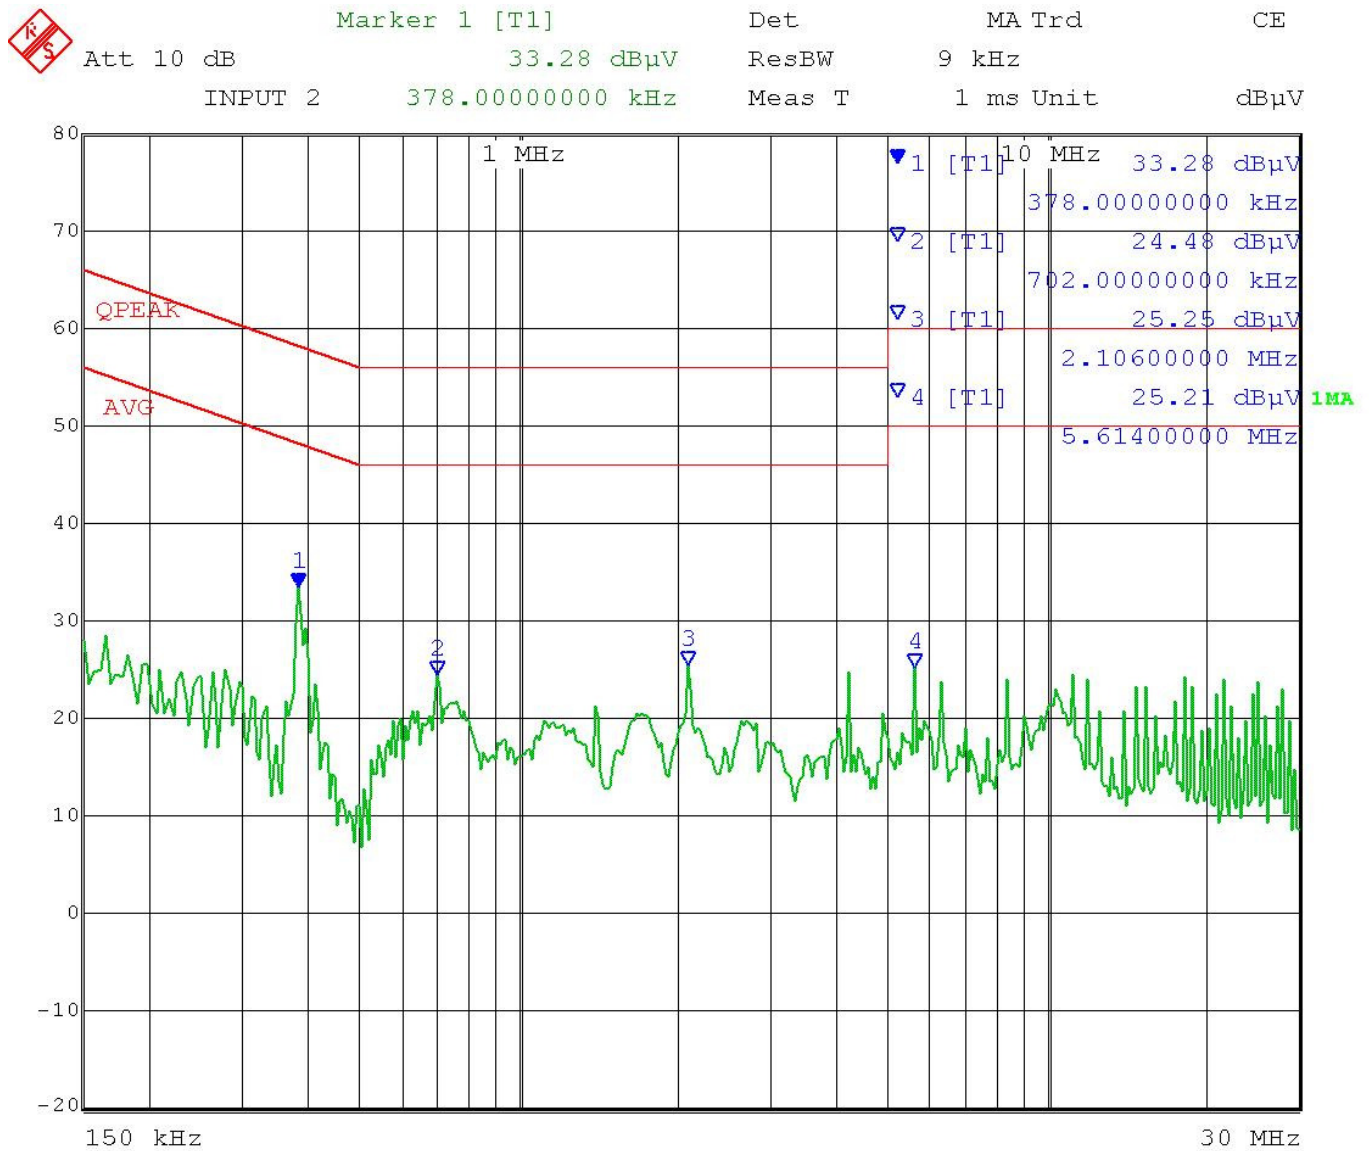

Date: 18.MAY.2016 11:03:15


RESULTS: Meets Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

AC POWER LINE CONDUCTED EMISSIONS

Test Data: Mode 2 Powerline 2 Peak Plot

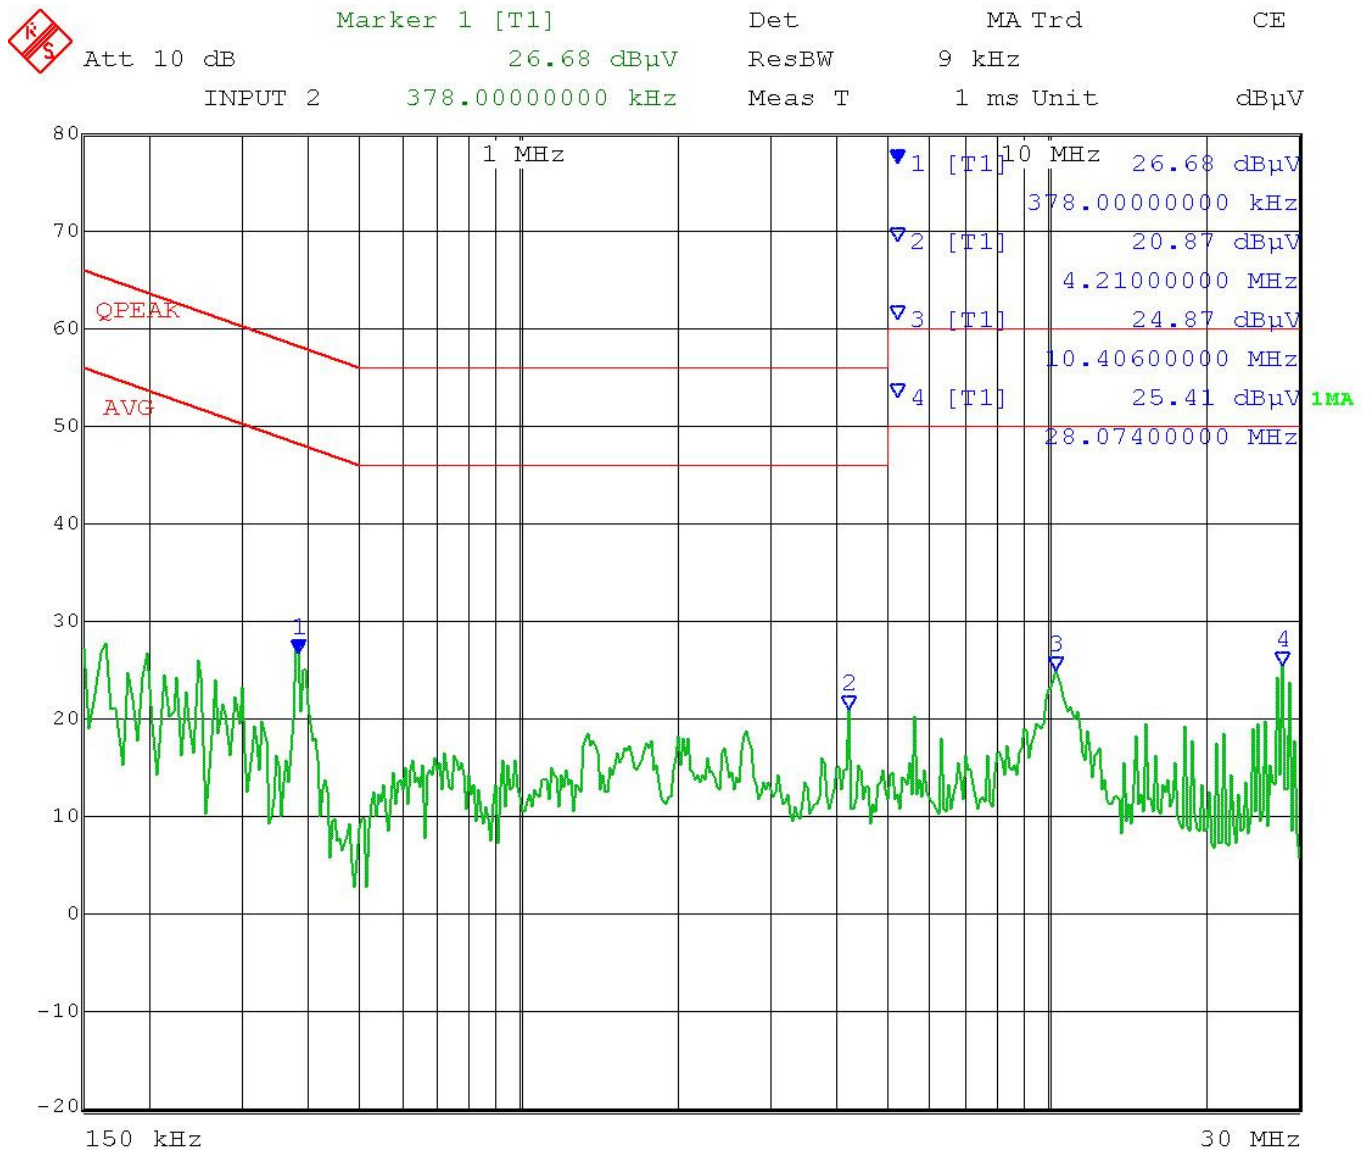

Date: 18.MAY.2016 11:05:32

RESULTS: Meets Requirements

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/ Char Date	Due Date
Antenna: Biconnical 1096	Eaton	94455-1	1096	07/14/15	07/14/17
Antenna: Log- Periodic 1122	Electro-Metrics	LPA-25	1122	07/14/15	07/14/17
LISN (Primary) CHAMBER	Electro-Metrics Panashield	EM-7820 3M	2682 N/A	05/08/15 01/05/16	05/08/17 12/31/17
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren Chamber	3117	00041534	02/25/15	02/25/17
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	NA	NA
Antenna: Active Loop	ETS-Lindgren	6502	00062529	11/18/15	11/18/17
Coaxial Cable # 103 - K MS MS 180cm Aqua	Micro-Coax	UFB142A-0- 0720-200200	225363-002 (# 103)	08/05/15	08/05/17
Attenuator # 27 - K 6dB 2W DC-40	Narda	4768-6	1044-3 (# 27)	06/25/15	06/25/17
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable for LISN	TIMCO LISN	17	NO	01/05/16	01/04/17
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax		Chamber 3 cable set (Primary) .	12/05/15	12/05/17

* EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT

Applicant: DIGITAL MONITORING PRODUCTS INC.
 FCC ID: CCKPC0181
 IC: 5251A-PC0181
 Report: 760AUT16TestReport_Rev1

[Table of Contents](#)