

TEST REPORT

Reference No...... : WTD14S0312263E
FCC ID : CCRXP58
Applicant..... : Samson Technologies Corp
Address..... : 45 Gilpin Avenue, HAUPPAUGE, NY 11788, USA
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Rechargeable Battery Powered Speaker System with Bluetooth
Model No...... : Expedition Escape
Standards..... : FCC CFR47 Part 15 Section 15.247:2012
Date of Receipt sample : Mar.19, 2014
Date of Test : Apr.23 - May 06, 2014
Date of Issue..... : May 08, 2014
Test Result..... : **Pass ***

***Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Testing location: The same as above

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:

Zero Zhou / Project Engineer

Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
4.5 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	8
5.3 TEST EQUIPMENT CALIBRATION	8
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION	9
6.2 EUT SETUP	9
6.3 MEASUREMENT DESCRIPTION	9
6.4 CONDUCTED EMISSION TEST RESULT	10
7 RADIATED SPURIOUS EMISSIONS	12
7.1 EUT OPERATION.....	12
7.2 TEST SETUP	13
7.3 SPECTRUM ANALYZER SETUP	14
7.4 TEST PROCEDURE	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
7.6 SUMMARY OF TEST RESULTS	16
8 BAND EDGE MEASUREMENT	19
8.1 TEST PROCEDURE	19
8.2 TEST RESULT	20
9 20 DB BANDWIDTH MEASUREMENT	26
9.1 TEST PROCEDURE	26
9.2 TEST RESULT	26
10 MAXIMUM PEAK OUTPUT POWER	32
10.1 TEST PROCEDURE.....	32
10.2 TEST RESULT	32
11 HOPPING CHANNEL SEPARATION	38
11.1 TEST PROCEDURE.....	38
11.2 TEST RESULT	38
12 NUMBER OF HOPPING FREQUENCY	44
12.1 TEST PROCEDURE.....	44
12.2 TEST RESULT	44
13 DWELL TIME	46
13.1 TEST PROCEDURE.....	46
13.2 TEST RESULT	46
14 ANTENNA REQUIREMENT	62

15	RF EXPOSURE	63
15.1	REQUIREMENTS.....	63
15.2	THE PROCEDURES / LIMIT.....	63
15.3	MPE CALCULATION METHOD.....	64
16	PHOTOGRAPHS – TEST SETUP	65
16.1	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP.....	65
16.2	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP.....	65
17	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	67
17.1	MODEL EXPEDITION ESCAPE EXTERNAL VIEW.....	67
17.2	MODEL EXPEDITION ESCAPE INTERNAL VIEW.....	71
17.3	RF MODULE PHOTOS.....	73

4 General Information

4.1 General Description of E.U.T.

Product Name	: Rechargeable Battery Powered Speaker System with Bluetooth
Model No.	: Expedition Escape
Bluetooth Version	: 3.0(EDR to 3Mbps)
Operation Frequency	: 2402MHz ~ 2480MHz, 79(EDR) channels in total
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
The lowest oscillator	: 16MHz
Antenna installation	: PCB printed antenna
Antenna Gain	: 1dBi

4.2 Details of E.U.T.

Technical Data	: Input: AC 100-240V, 50-60Hz, 2.5A, 25W Audio output Woofer 7.5W and Tweeter 7.5W Charge output: 5V
----------------	--

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.18,2013	Sep.17,2014
2.	LISN	R&S	ENV216	101215	Nov. 29,2013	Nov. 28,2014
3.	Cable	Top	TYPE16(3.5M)	-	Sep.18,2013	Sep.17,2014
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.18,2013	Sep.17,2014
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2014	Apr.18,2015
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.18,2013	Sep.17,2014
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2014	Apr.18,2015
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2014	Apr.18,2015
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015
RF Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.18,2013	Sep.17,2014
3	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	May 15,2013	May 14,2014

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

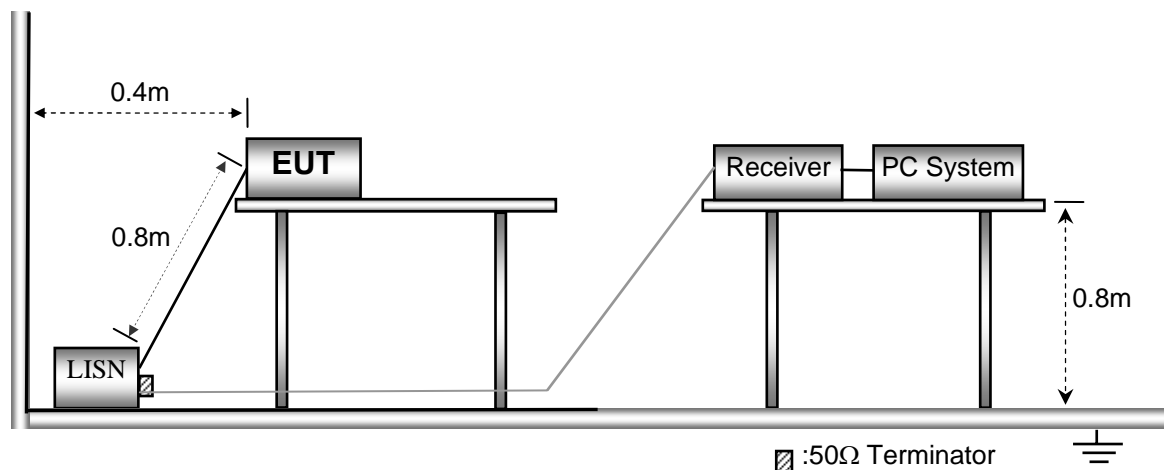


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.4 Conducted Emission Test Result

Live line:

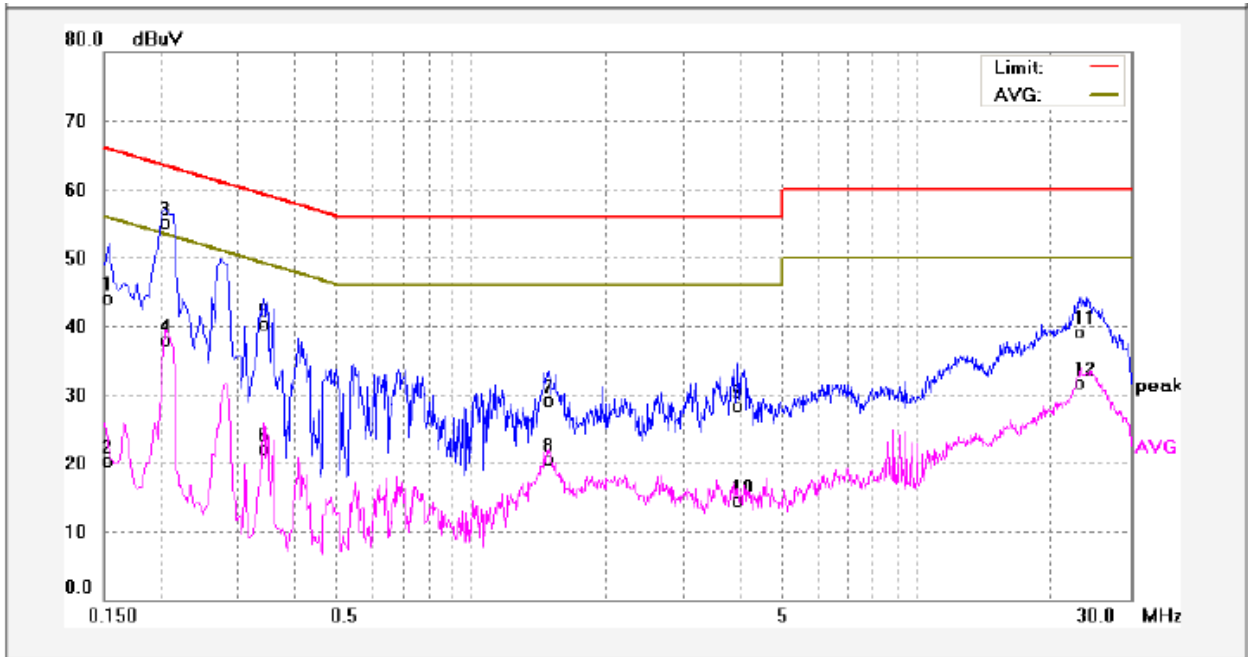

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	33.69	10.48	44.17	65.78	-21.61	QP	
2	0.1539	9.84	10.48	20.32	55.78	-35.46	AVG	
3	0.2060	44.68	10.48	55.16	63.36	-8.20	QP	
4	0.2060	27.36	10.48	37.84	53.36	-15.52	AVG	
5	0.3420	29.89	10.48	40.37	59.15	-18.78	QP	
6	0.3420	11.67	10.48	22.15	49.15	-27.00	AVG	
7	1.4860	18.46	10.62	29.08	56.00	-26.92	QP	
8	1.4860	9.84	10.62	20.46	46.00	-25.54	AVG	
9	3.9500	17.71	10.65	28.36	56.00	-27.64	QP	
10	3.9500	3.90	10.65	14.55	46.00	-31.45	AVG	
11	23.0780	27.43	11.63	39.06	60.00	-20.94	QP	
12	23.0780	20.09	11.63	31.72	50.00	-18.28	AVG	

Neutral line:

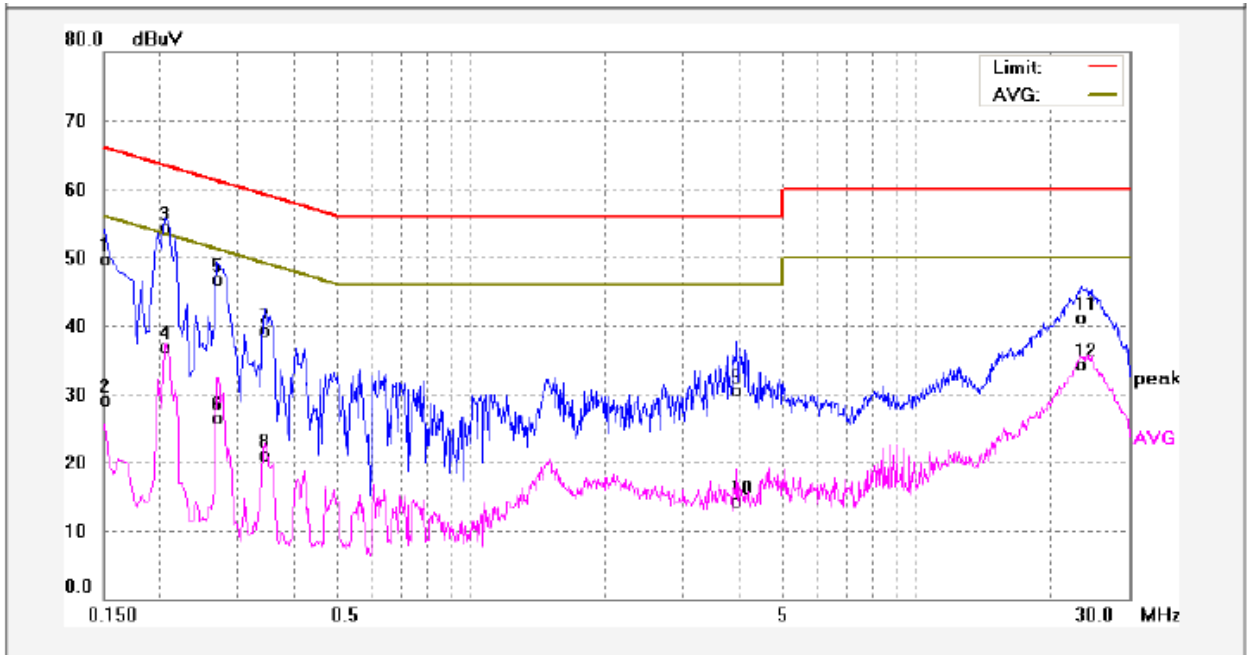

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	39.29	10.48	49.77	65.99	-16.22	QP	
2	0.1500	18.56	10.48	29.04	55.99	-26.95	AVG	
3	0.2060	43.82	10.48	54.30	63.36	-9.06	QP	
4	0.2060	26.49	10.48	36.97	53.36	-16.39	AVG	
5	0.2700	36.30	10.48	46.78	61.12	-14.34	QP	
6	0.2700	15.94	10.48	26.42	51.12	-24.70	AVG	
7	0.3460	28.77	10.48	39.25	59.06	-19.81	QP	
8	0.3460	10.70	10.48	21.18	49.06	-27.88	AVG	
9	3.9500	19.92	10.65	30.57	56.00	-25.43	QP	
10	3.9500	3.67	10.65	14.32	46.00	-31.68	AVG	
11	23.5940	29.55	11.65	41.20	60.00	-18.80	QP	
12	23.5940	22.62	11.65	34.27	50.00	-15.73	AVG	

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

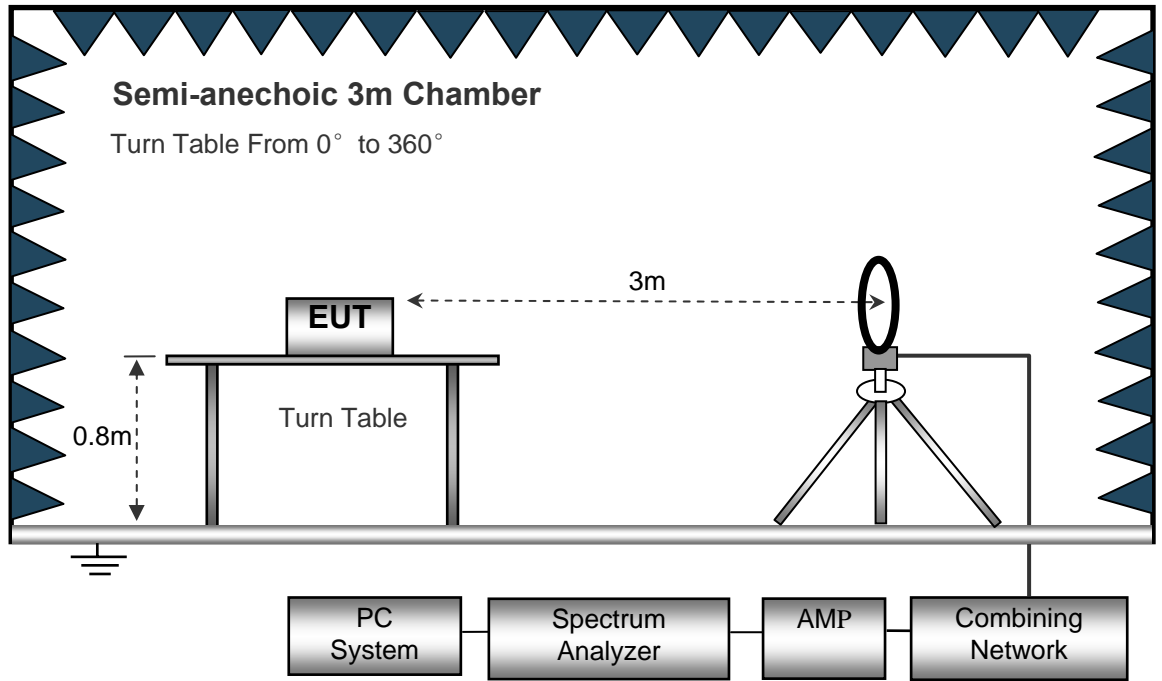

The test setup for emission measurement from 30 MHz to 1 GHz.

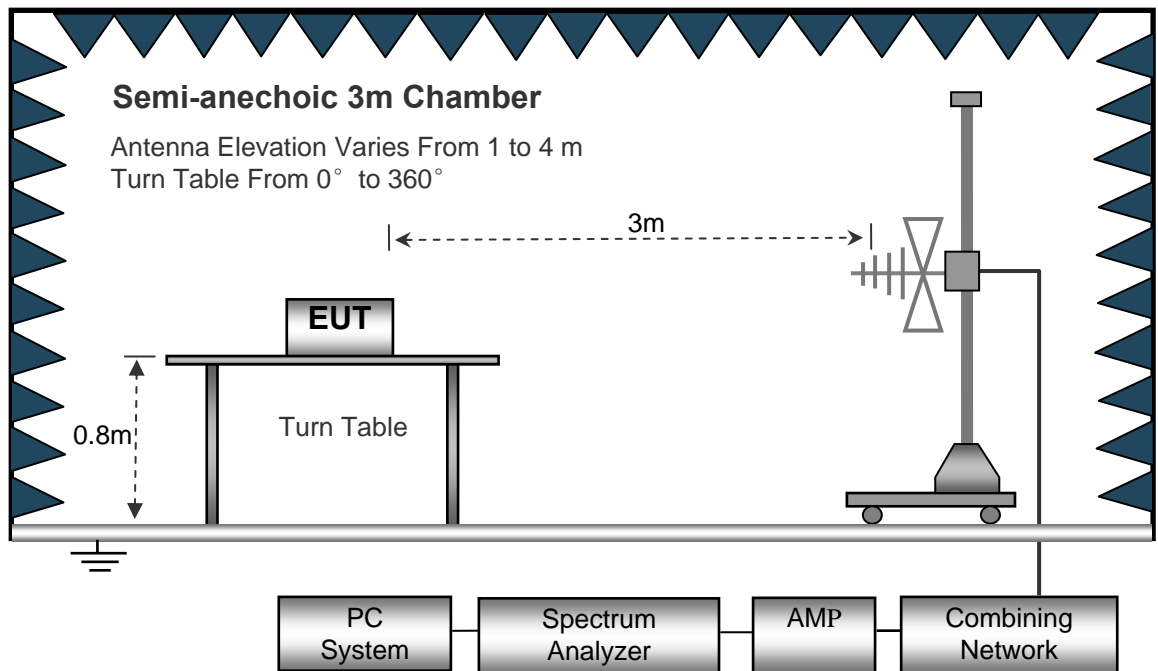

The test setup for emission measurement above 1 GHz.

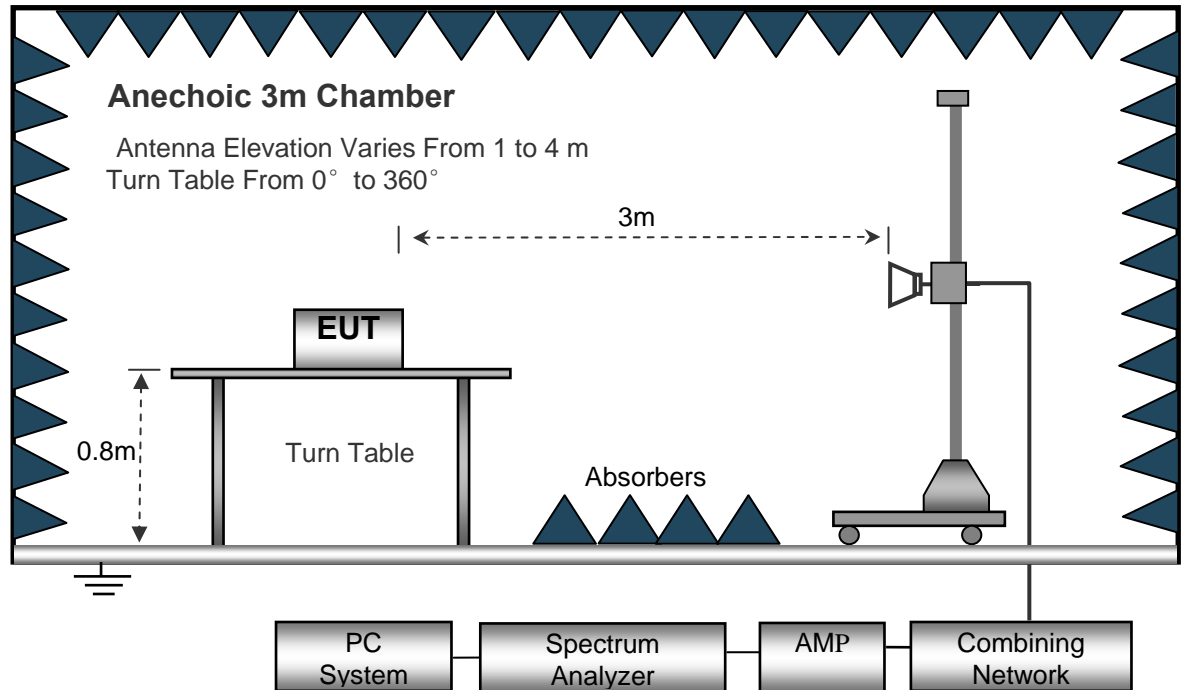

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz
 DetectorAve.
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: 16MHz- 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data(GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Lower Channel 2402MHz									
216.40	19.48	QP	62	1.2	H	12.50	31.98	40.00	-8.02
216.40	16.81	QP	113	1.7	V	12.50	29.31	40.00	-10.69
4804.00	48.78	PK	2	1.2	V	-1.06	47.72	74.00	-26.28
4804.00	40.55	Ave	2	1.2	V	-1.06	39.49	54.00	-14.51
7206.00	41.72	PK	247	2.0	H	1.33	43.05	74.00	-30.95
7206.00	36.30	Ave	247	2.0	H	1.33	37.63	54.00	-16.37
2338.65	46.17	PK	127	2.0	V	-13.19	32.98	74.00	-41.02
2338.65	39.13	Ave	127	2.0	V	-13.19	25.94	54.00	-28.06
2385.35	44.18	PK	293	2.0	H	-13.14	31.04	74.00	-42.96
2385.35	38.93	Ave	293	2.0	H	-13.14	25.79	54.00	-28.21
2491.88	43.26	PK	120	1.8	V	-13.08	30.18	74.00	-43.82
2491.88	37.43	Ave	120	1.8	V	-13.08	24.35	54.00	-29.65

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Center Channel 2441MHz									
216.40	19.71	QP	31	1.1	H	12.50	32.21	40.00	-7.79
216.40	16.72	QP	314	1.4	V	12.50	29.22	40.00	-10.78
4882.00	49.64	PK	319	1.7	V	-0.62	49.02	74.00	-24.98
4882.00	39.37	Ave	319	1.7	V	-0.62	38.75	54.00	-15.25
7323.00	39.64	PK	226	1.5	H	2.21	41.85	74.00	-32.15
7323.00	36.65	Ave	226	1.5	H	2.21	38.86	54.00	-15.14
2333.03	45.69	PK	232	1.1	V	-13.19	32.50	74.00	-41.50
2333.03	37.05	Ave	232	1.1	V	-13.19	23.86	54.00	-30.14
2351.51	43.18	PK	185	1.1	H	-13.14	30.04	74.00	-43.96
2351.51	37.74	Ave	185	1.1	H	-13.14	24.60	54.00	-29.40
2495.63	42.57	PK	321	1.9	V	-13.08	29.49	74.00	-44.51
2495.63	37.66	Ave	321	1.9	V	-13.08	24.58	54.00	-29.42

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Upper Channel 2480MHz									
216.40	20.21	QP	8	1.6	H	12.50	32.71	40.00	-7.29
216.40	16.13	QP	295	1.9	V	12.50	28.63	40.00	-11.37
4960.00	49.55	PK	74	1.5	V	-0.24	49.31	74.00	-24.69
4960.00	40.39	Ave	74	1.5	V	-0.24	40.15	54.00	-13.85
7440.00	38.64	PK	228	1.1	H	2.84	41.48	74.00	-32.52
7440.00	38.12	Ave	228	1.1	H	2.84	40.96	54.00	-13.04
2316.52	45.67	PK	91	1.7	V	-13.19	32.48	74.00	-41.52
2316.52	38.79	Ave	91	1.7	V	-13.19	25.60	54.00	-28.40
2356.94	44.94	PK	220	1.6	H	-13.14	31.80	74.00	-42.20
2356.94	37.69	Ave	220	1.6	H	-13.14	24.55	54.00	-29.45
2497.78	42.65	PK	13	1.7	V	-13.08	29.57	74.00	-44.43
2497.78	38.09	Ave	13	1.7	V	-13.08	25.01	54.00	-28.99

Test Frequency: 18GHz-25GHz

The measurements were more than 20 dB below the limit and not reported

8 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Test Mode:	Transmitting


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


8.2 Test Result

Test plots


GFSK Transmitting Band edge-left side

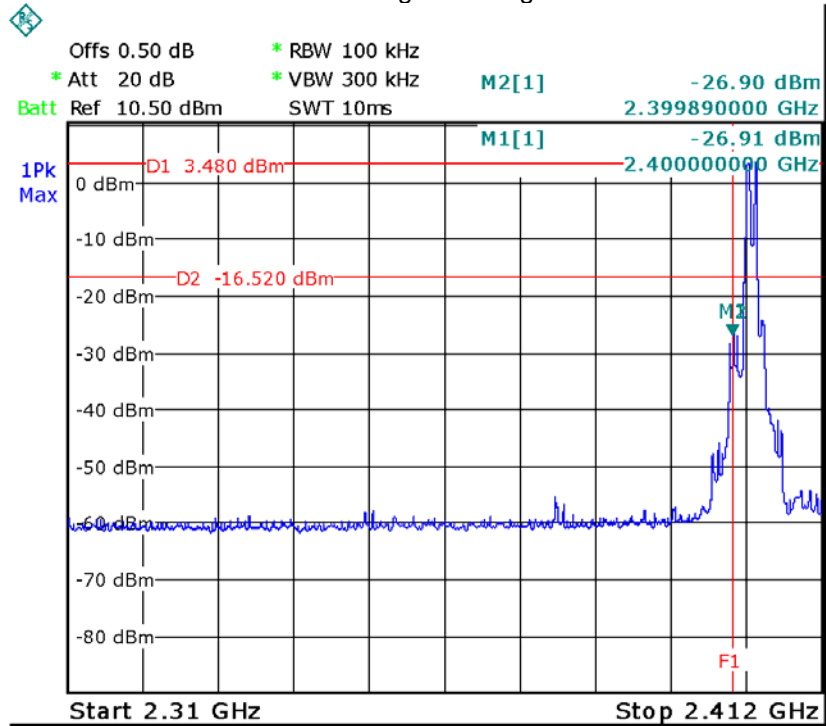


GFSK Hopping Band edge-left side

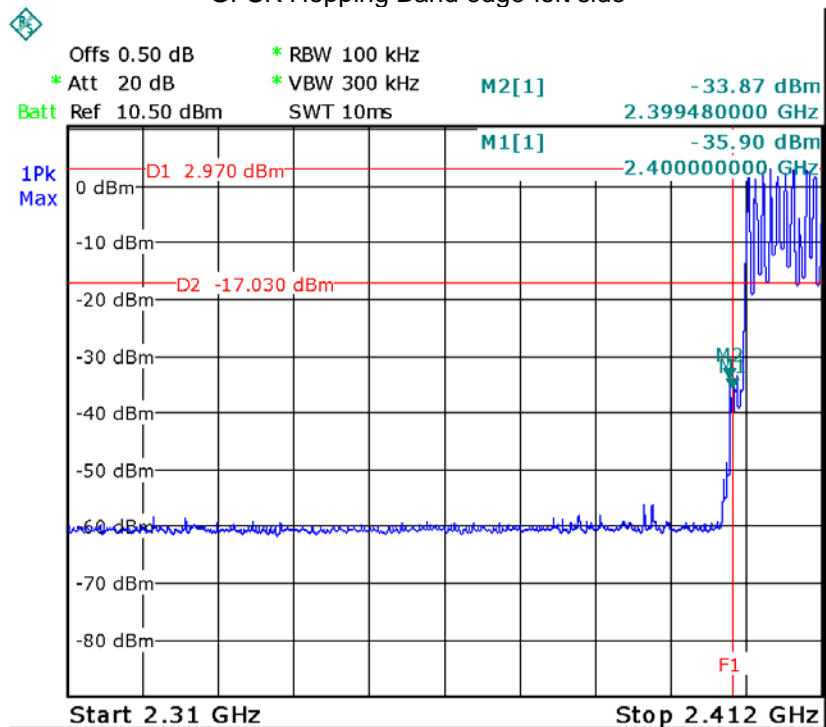


GFSK Transmitting Band edge-right side

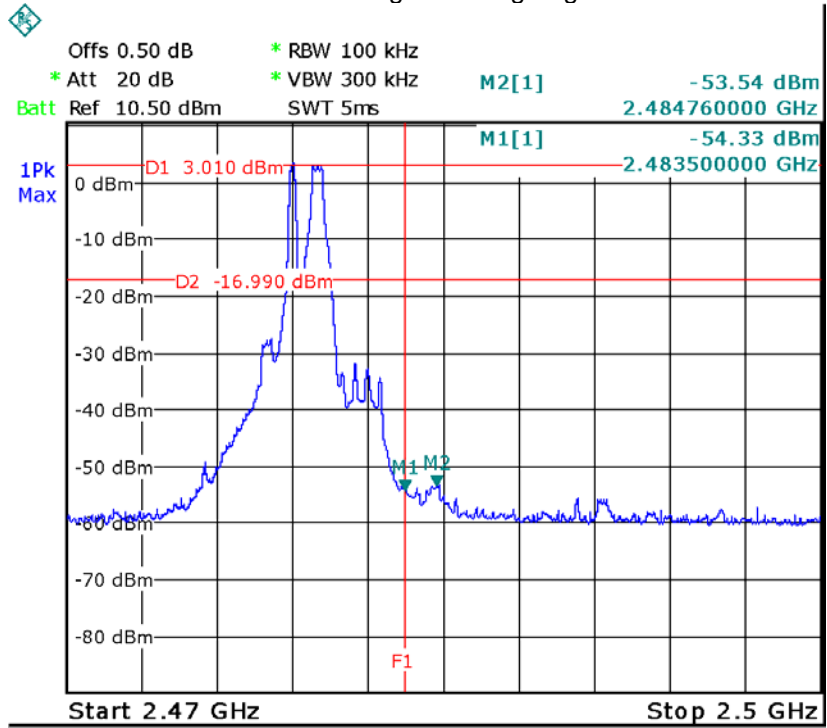


GFSK Hopping Band edge-right side

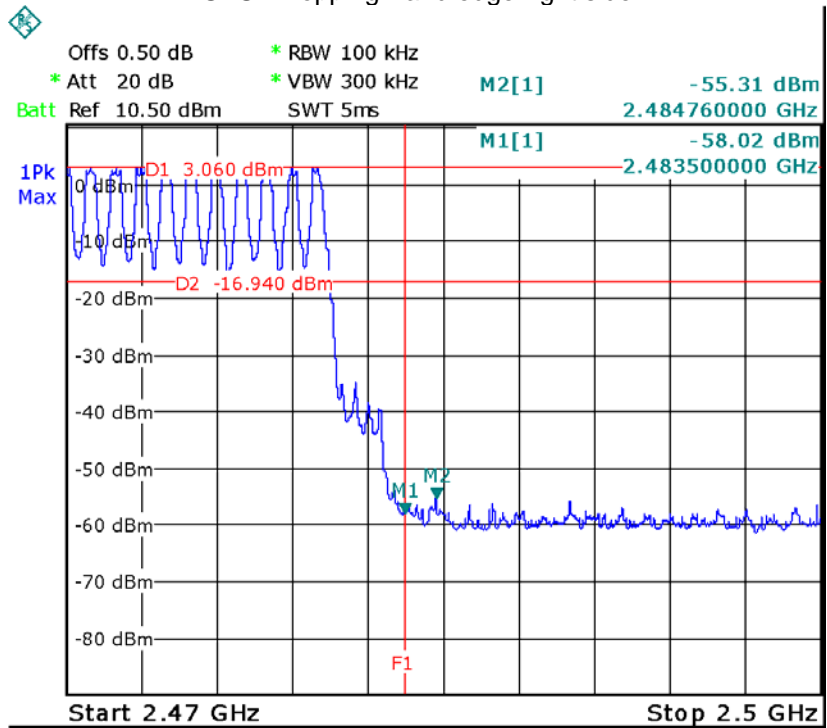


Pi/4 DQPSK Transmitting Band edge-left side

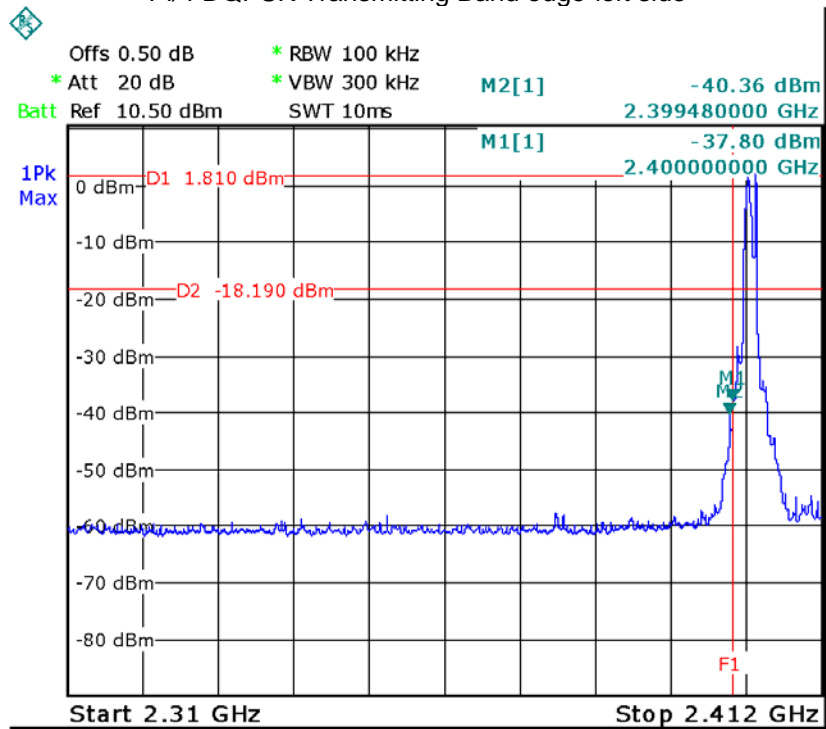


Pi/4 DQPSK Hopping Band edge-left side

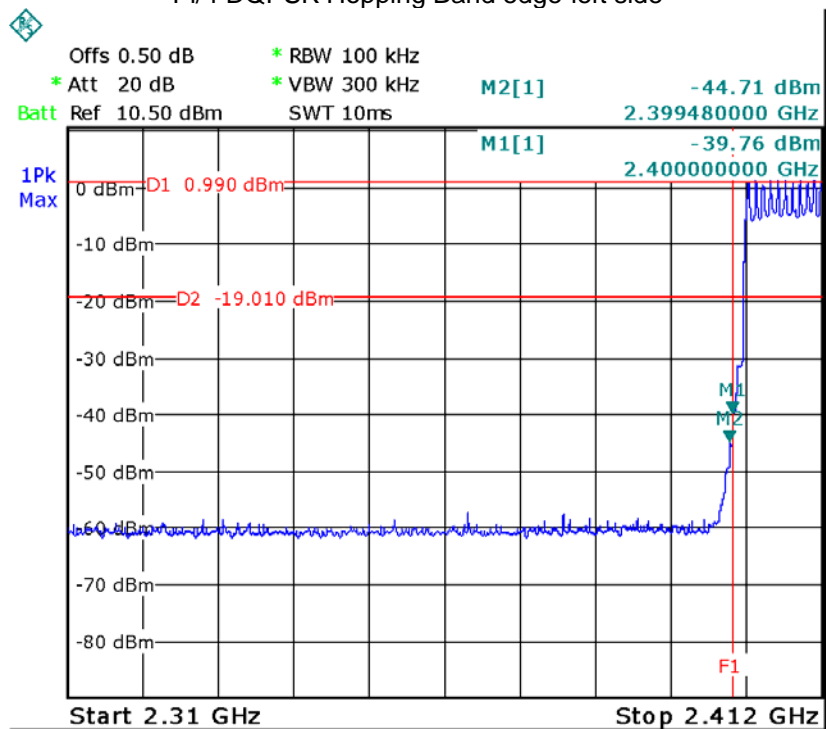


Pi/4 DQPSK Transmitting Band edge-right side

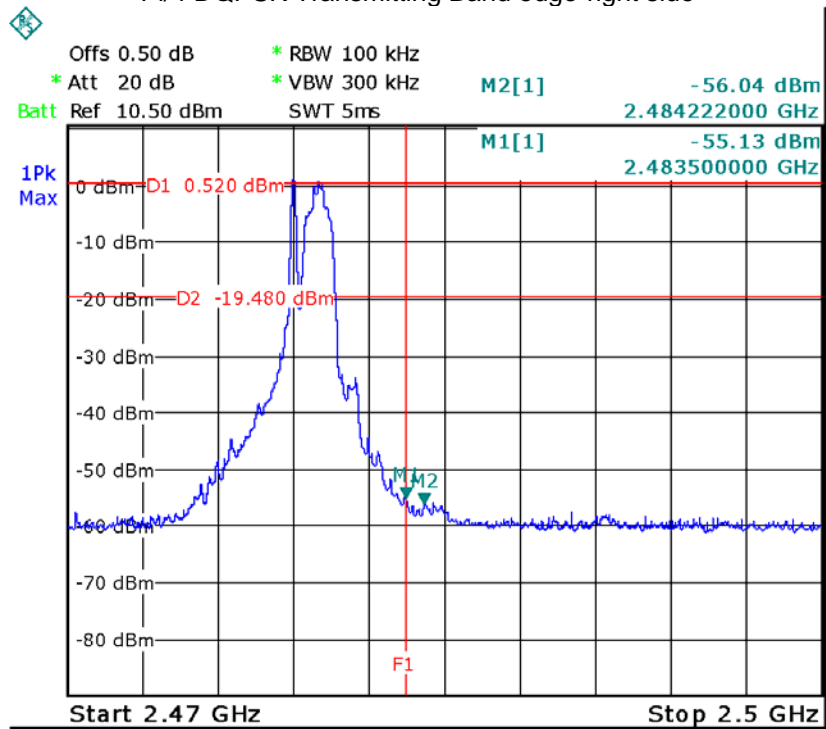


Pi/4 DQPSK Hopping Band edge-right side

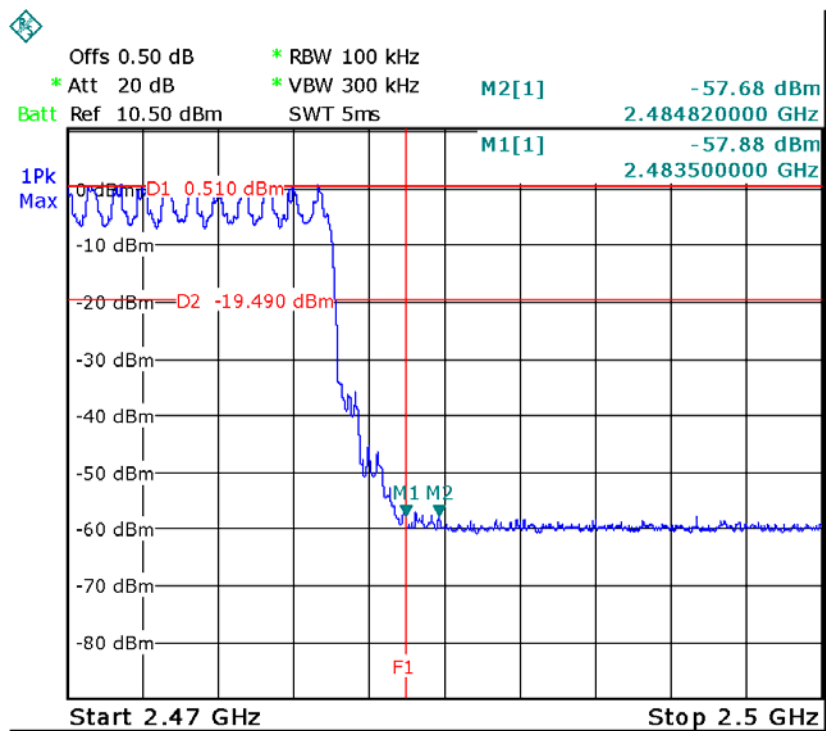


8DPSK Transmitting Band edge-left side

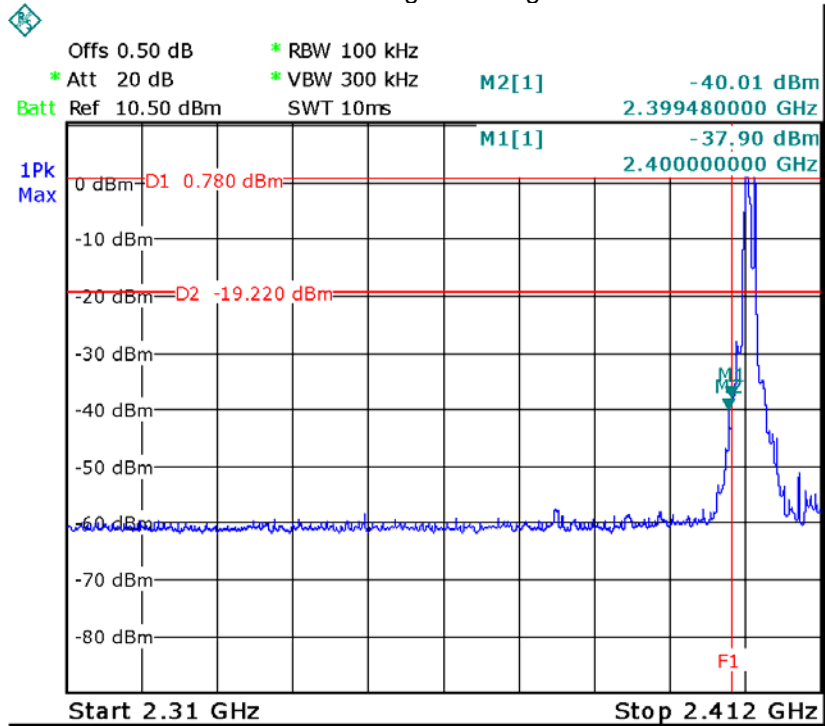


8DPSK Hopping Band edge-left side

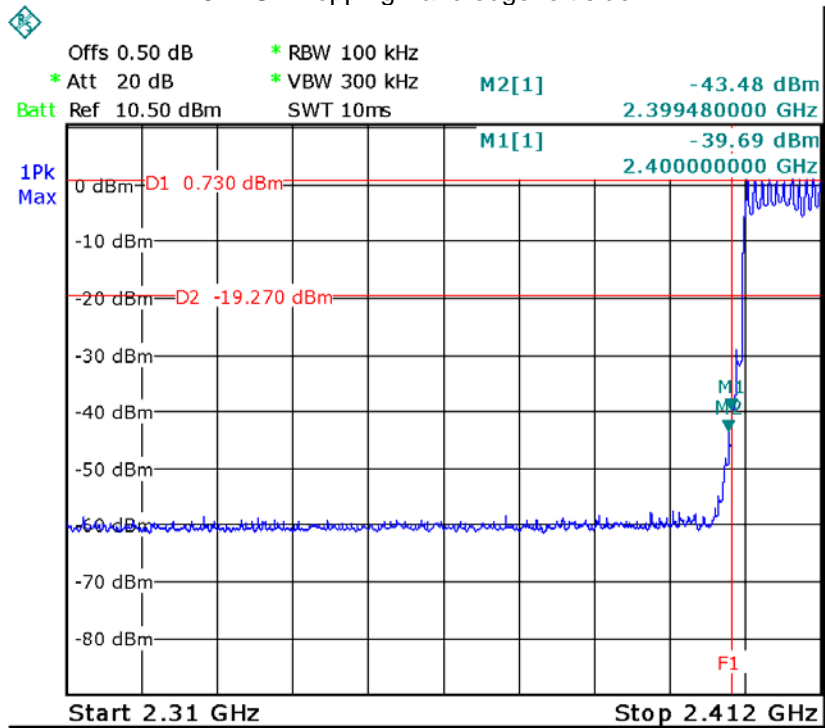

8DPSK Transmitting Band edge-right side

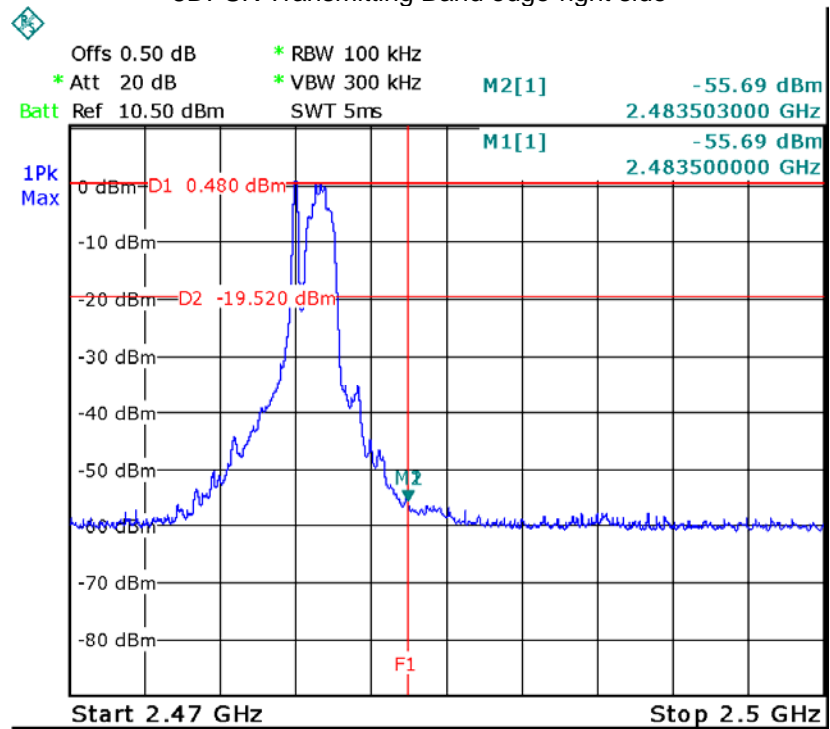

8DPSK Hopping Band edge-right side

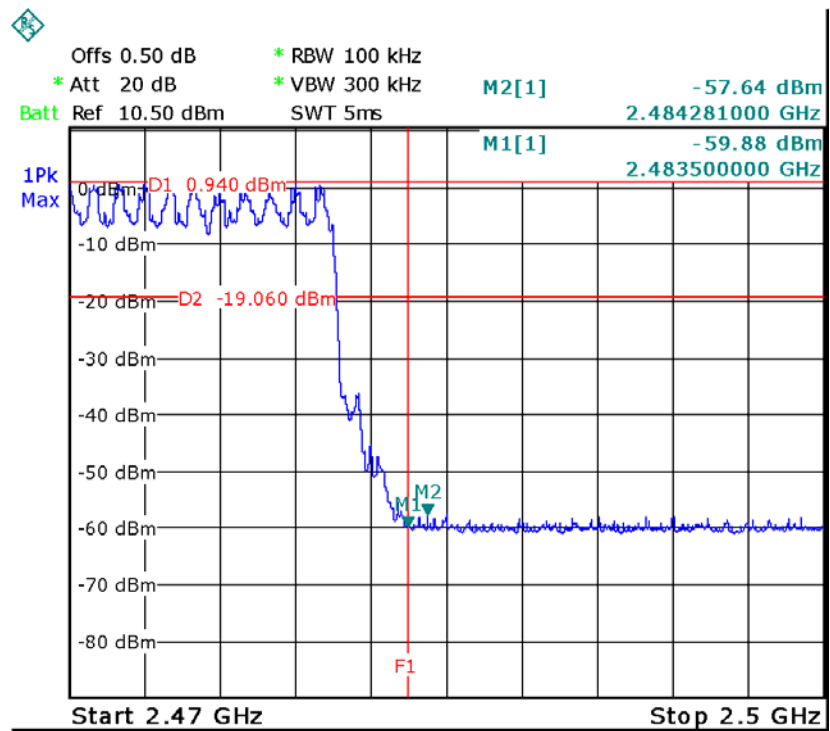

9 20 dB Bandwidth Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Mode:	Test in fixing operating frequency at low, Middle, high channel.

9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyser: RBW = 30kHz, VBW = 100kHz

9.2 Test Result


Modulation	Test Channel	Bandwidth
GFSK	Low	0.856MHz
GFSK	Middle	0.856MHz
GFSK	High	0.850MHz
Pi/4 DQPSK	Low	1.216MHz
Pi/4 DQPSK	Middle	1.228MHz
Pi/4 DQPSK	High	1.228MHz
8DPSK	Low	1.210MHz
8DPSK	Middle	1.222MHz
8DPSK	High	1.222MHz

Test plots


GFSK Low Channel

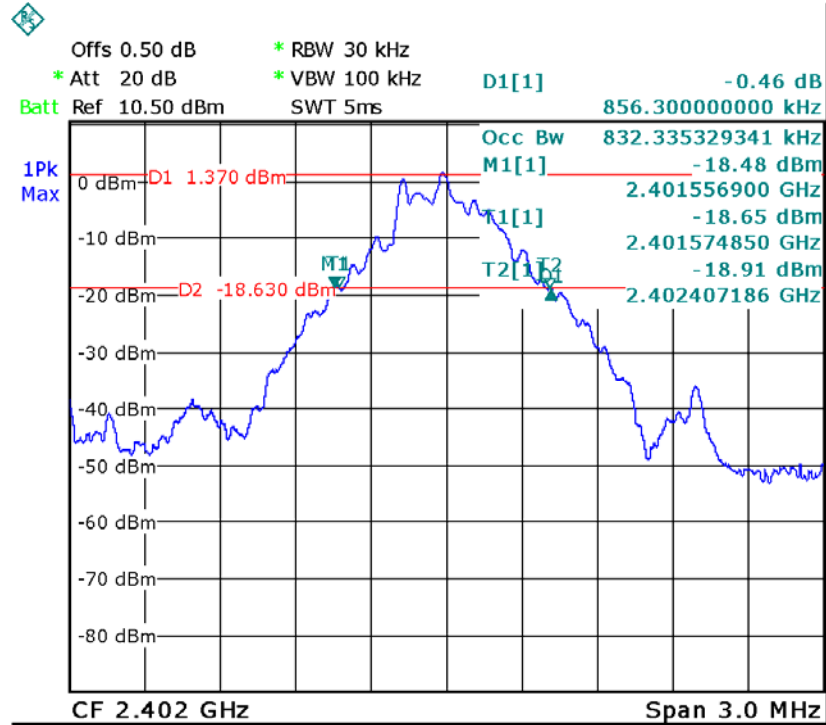


GFSK Middle Channel


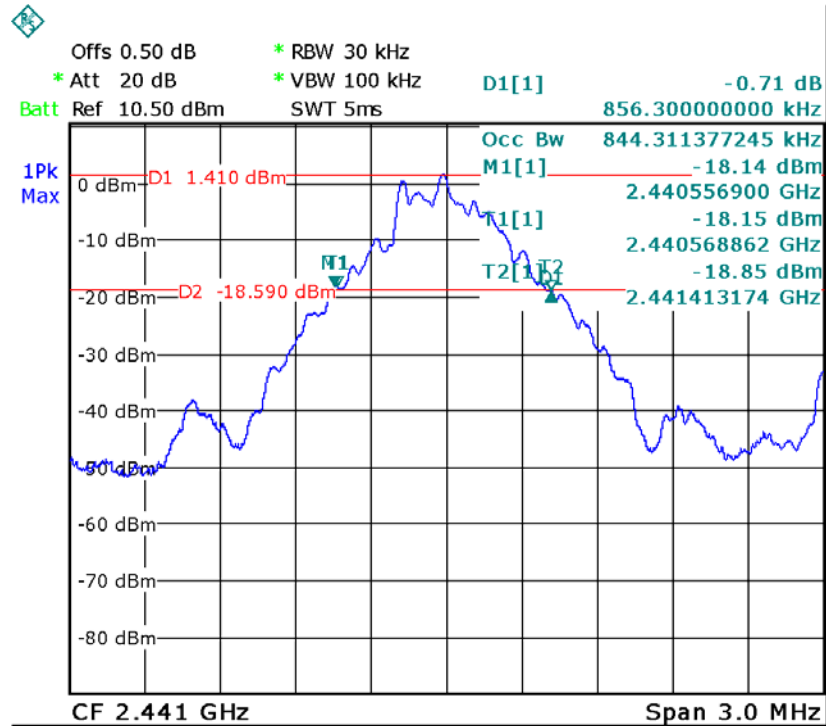


GFSK High Channel

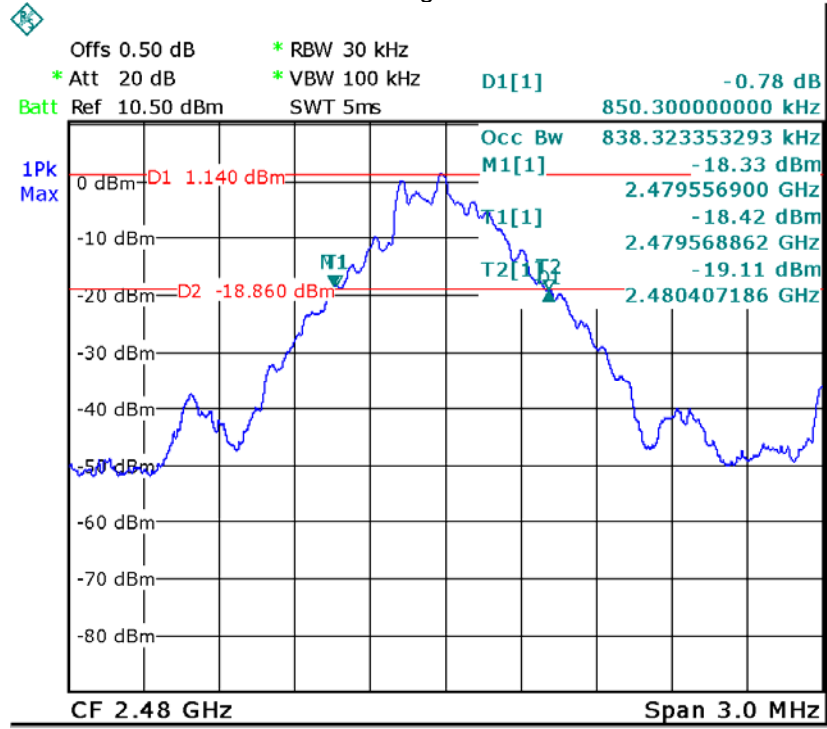


Pi/4 DQPSK Low Channel

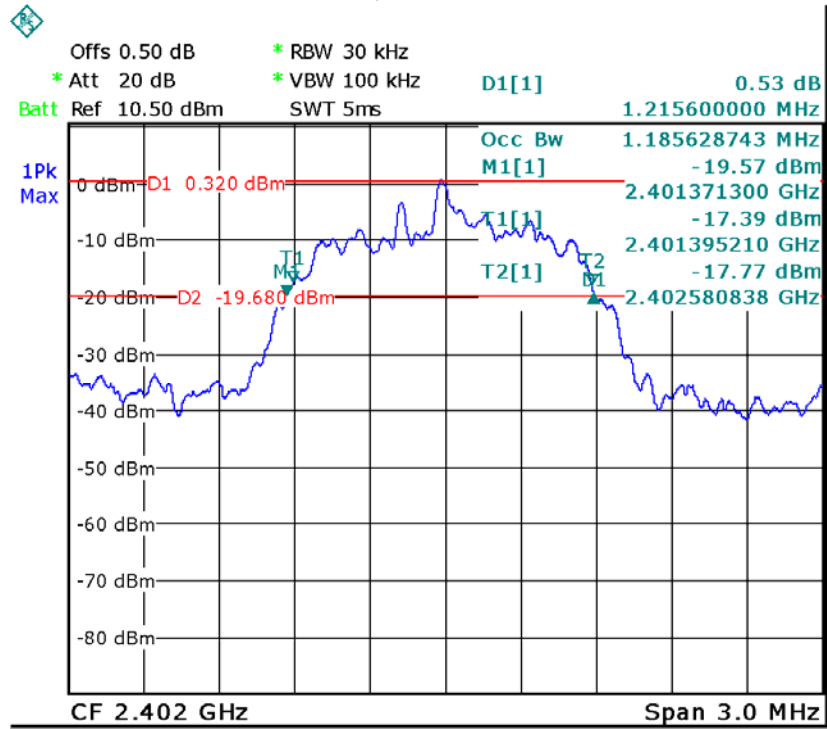


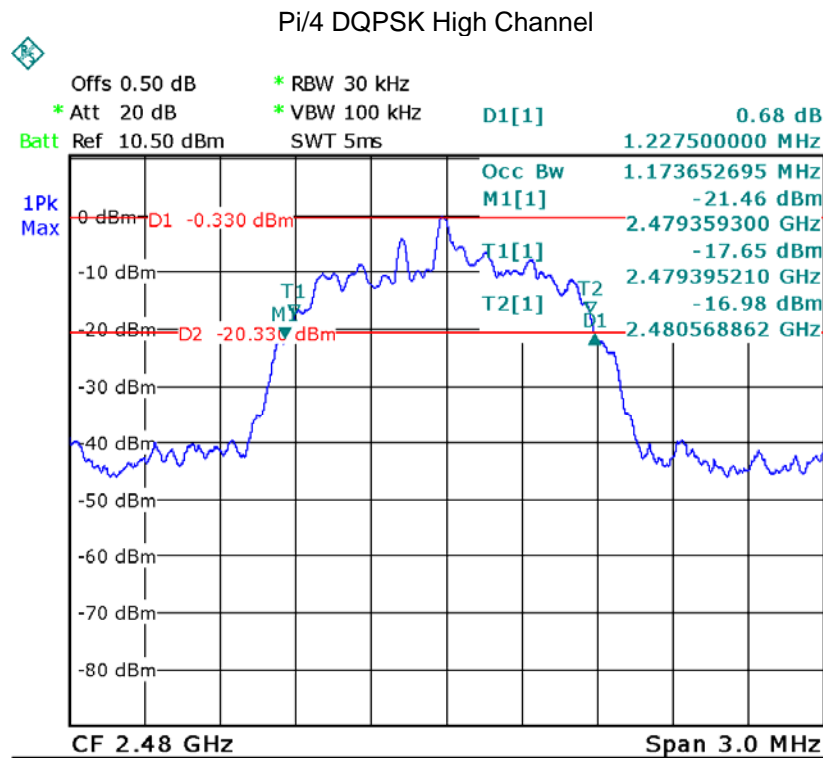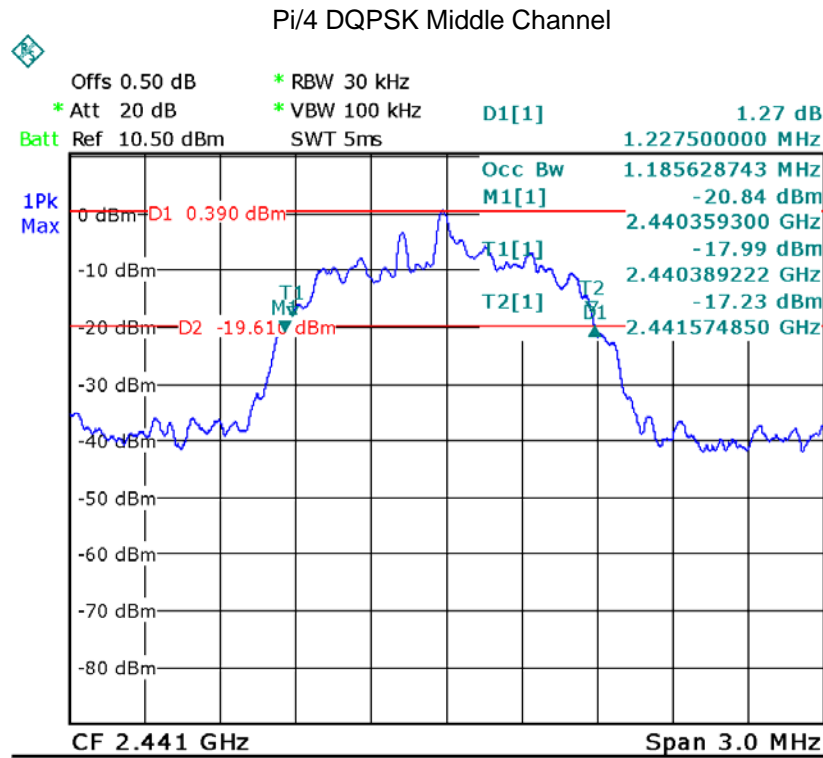


8DPSK Low Channel

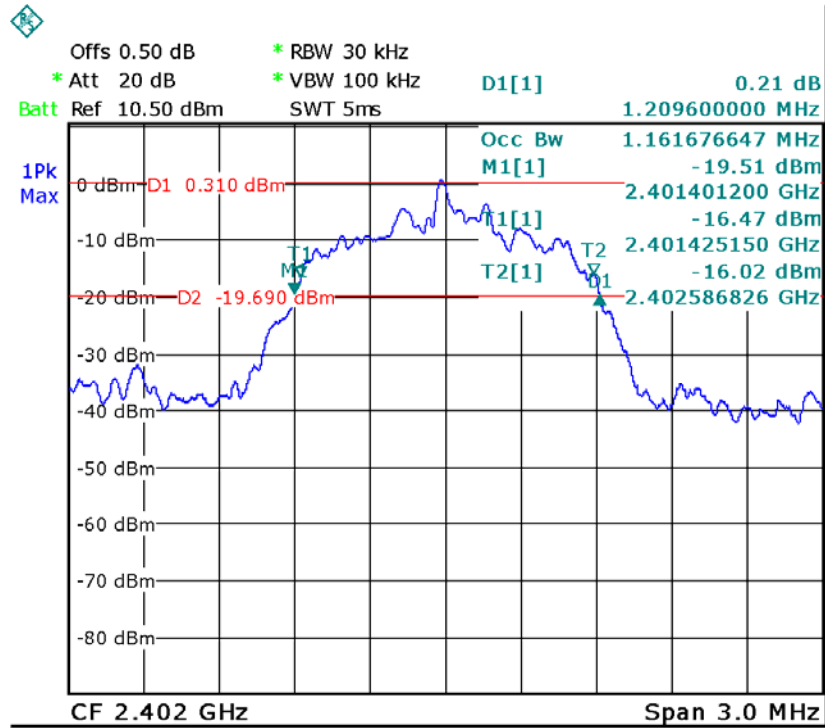

8DPSK Middle Channel

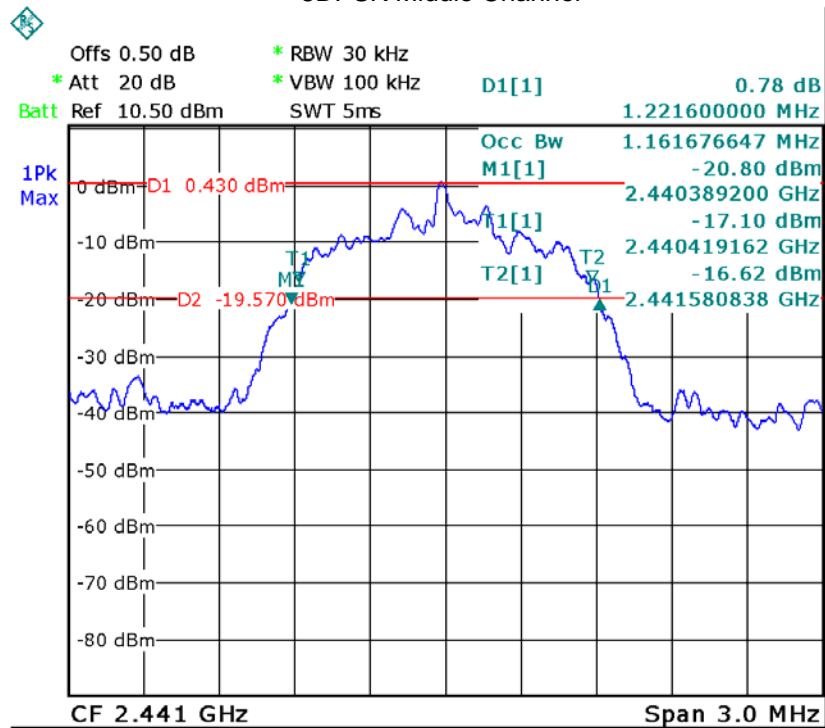

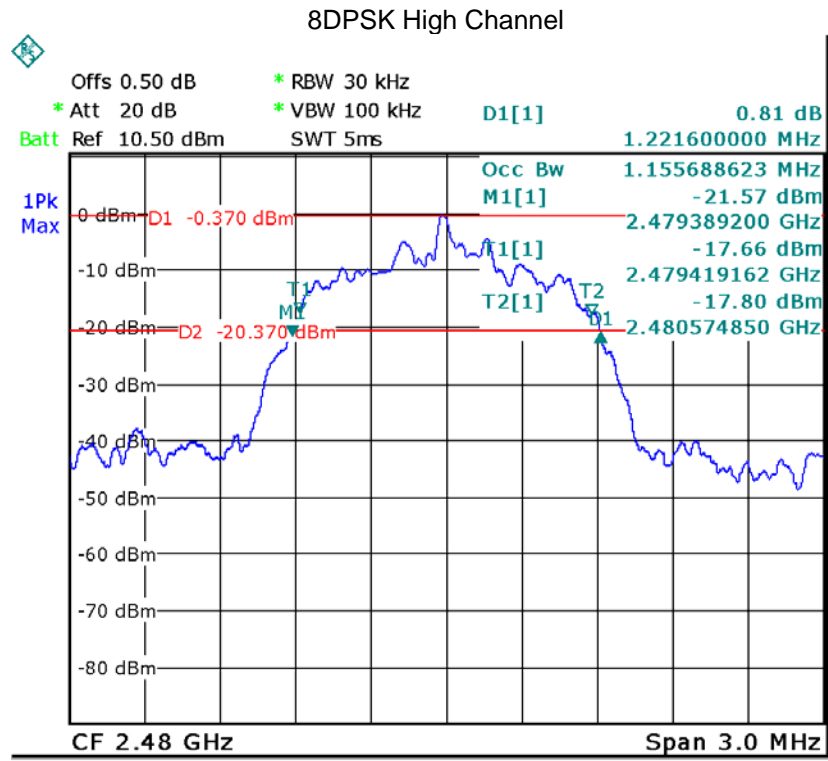

10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Result



Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	1.86	30
GFSK	Middle	2.23	30
GFSK	High	2.17	30
Pi/4 DQPSK	Low	1.63	30
Pi/4 DQPSK	Middle	1.63	30
Pi/4 DQPSK	High	0.77	30
8DPSK	Low	1.90	30
8DPSK	Middle	1.83	30
8DPSK	High	1.33	30



Test plots GFSK Low Channel


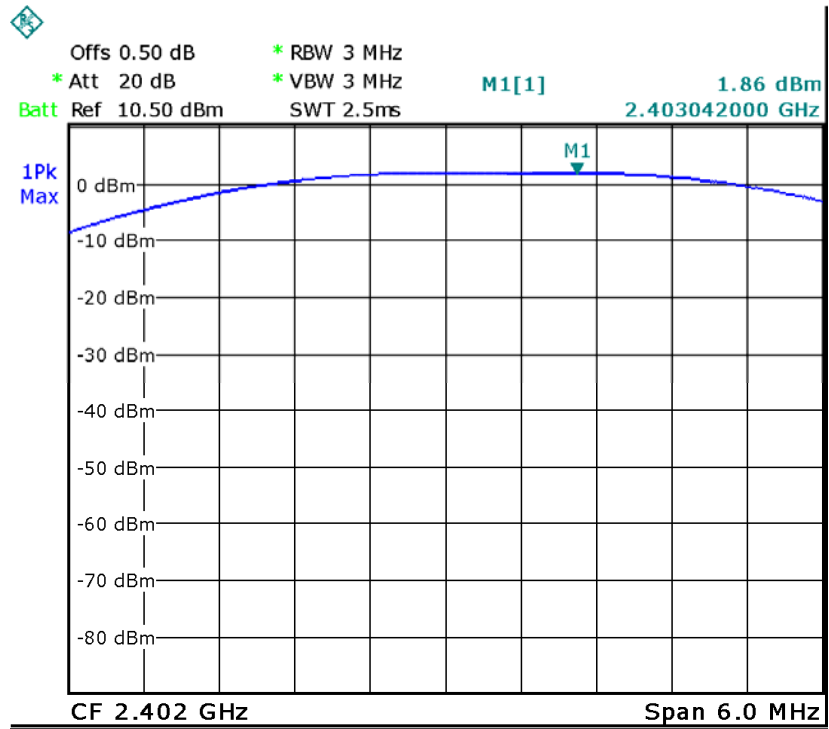



GFSK Channel

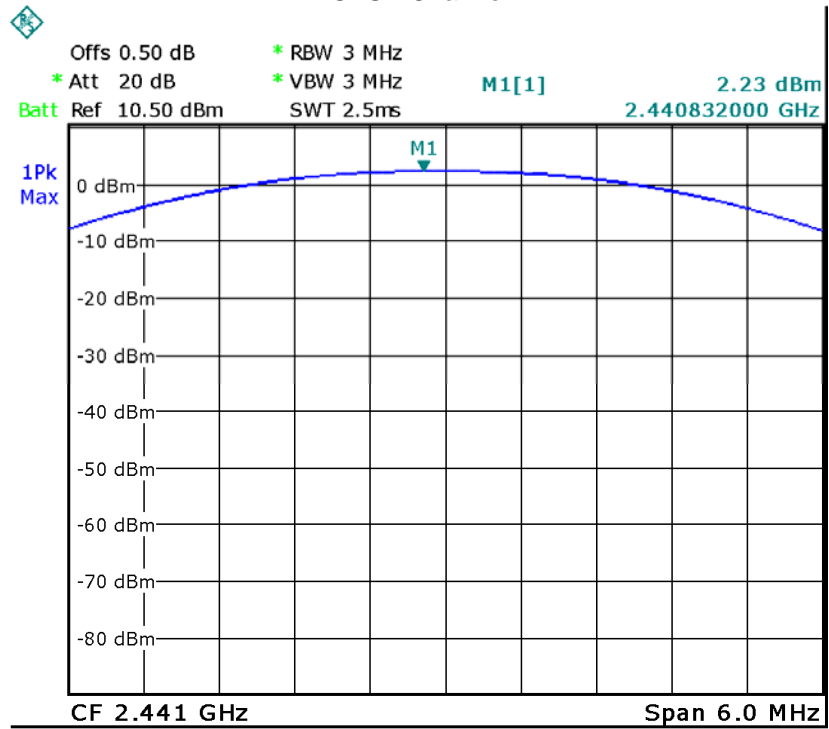

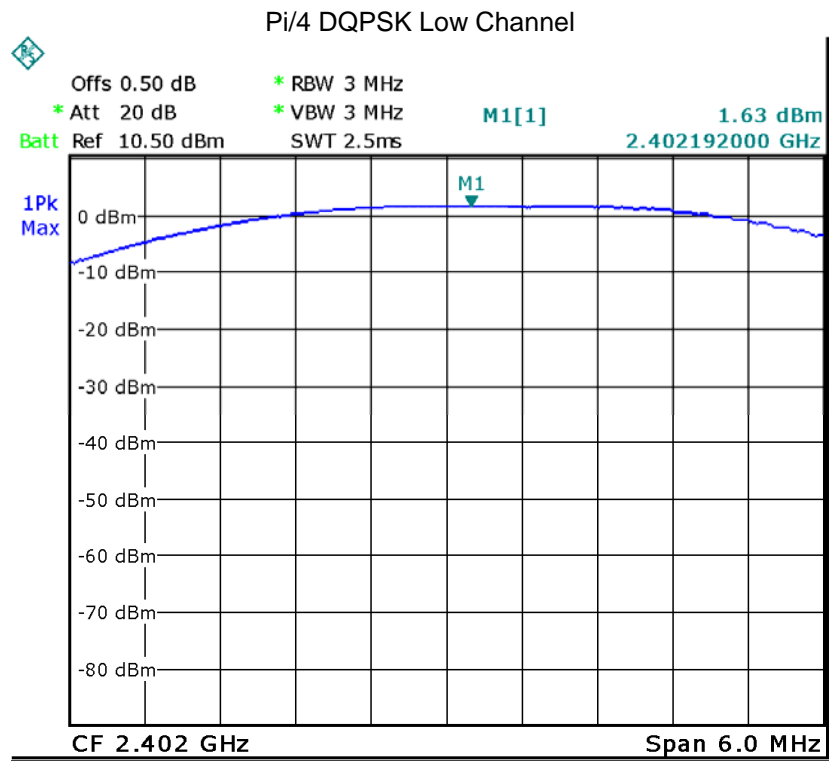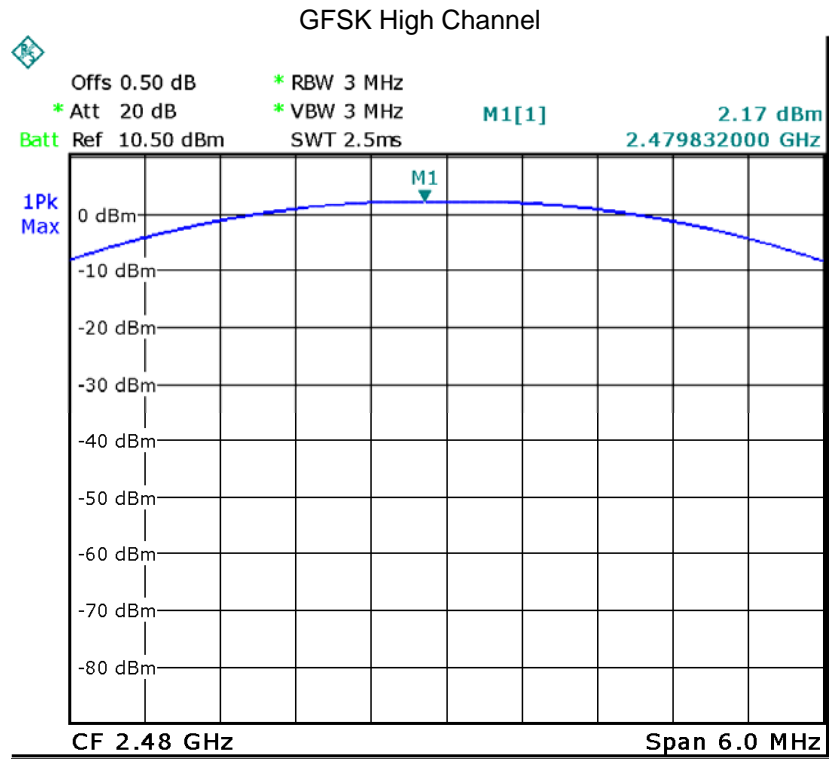

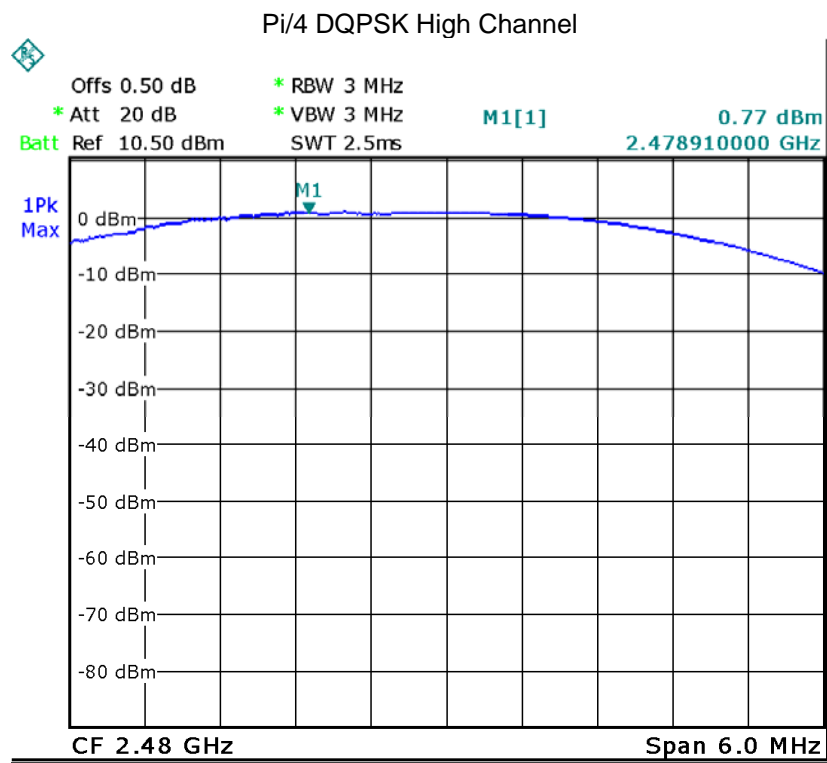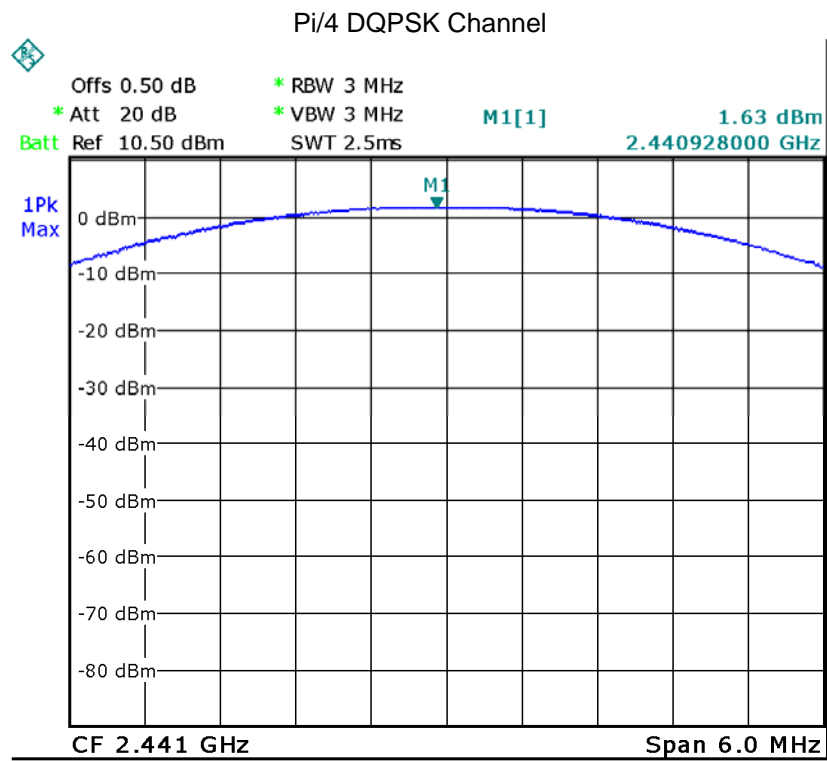

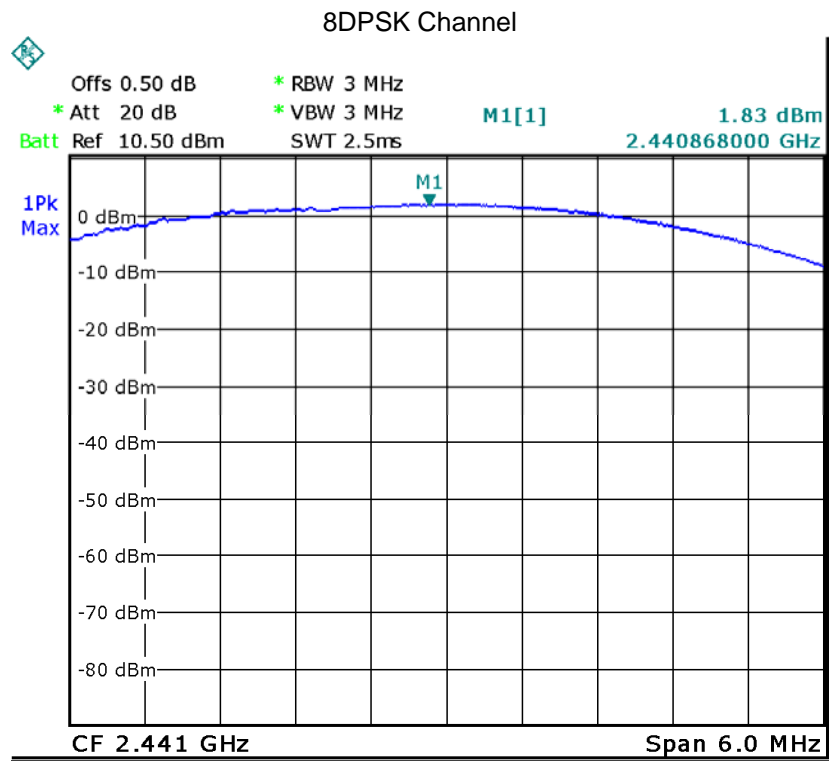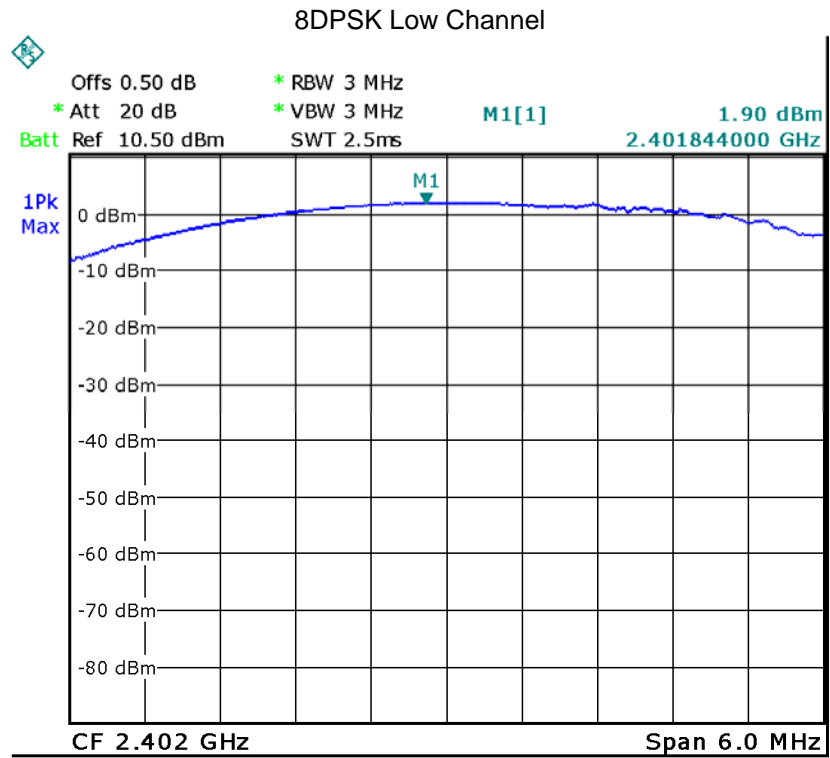

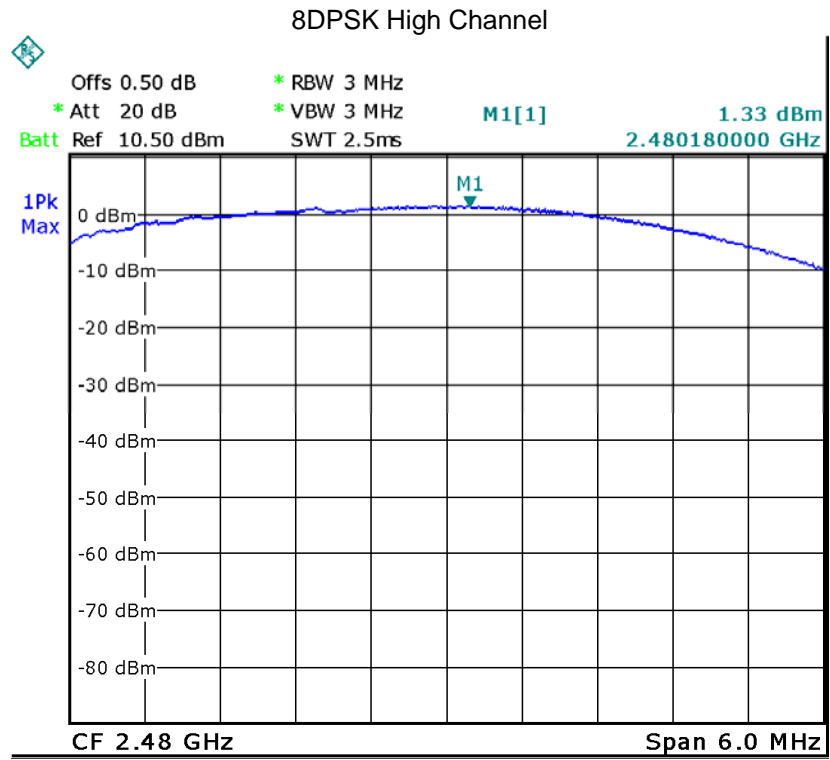

11 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
Pi/4 DQPSK	Low	1.000	PASS
Pi/4 DQPSK	Middle	1.006	PASS
Pi/4 DQPSK	High	1.006	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS



Test plots



GFSK Low Channel


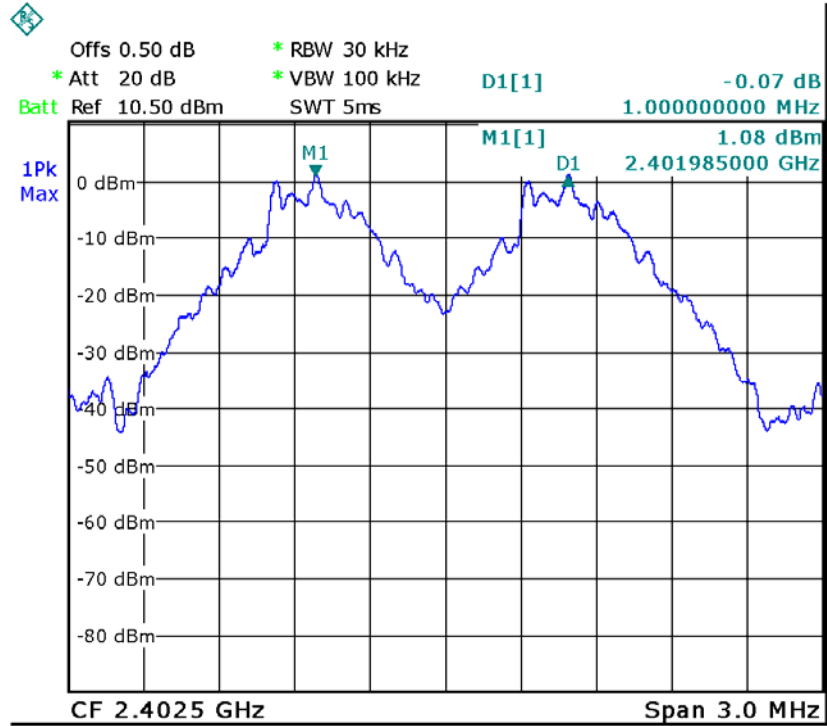



GFSK Middle Channel

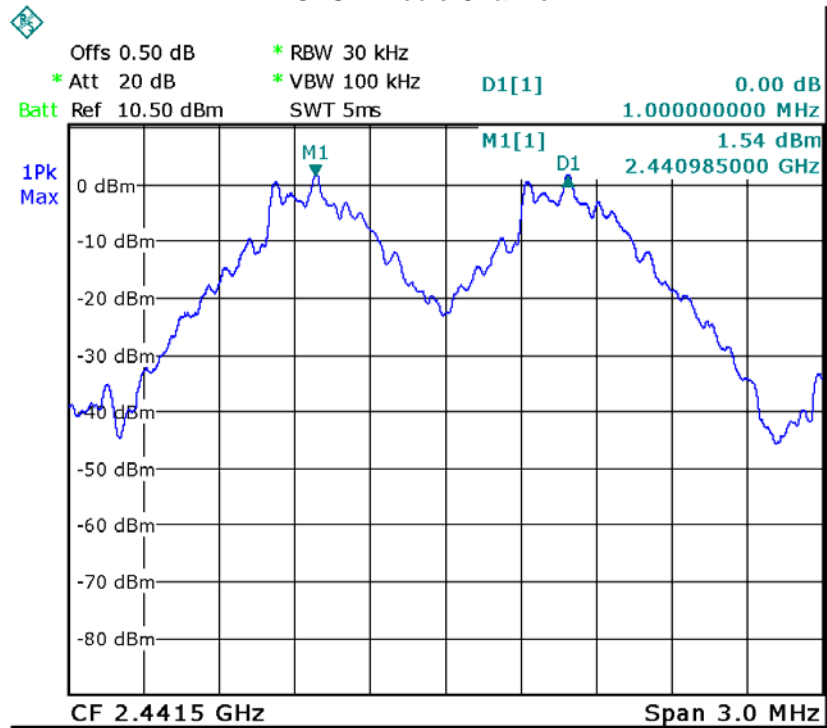

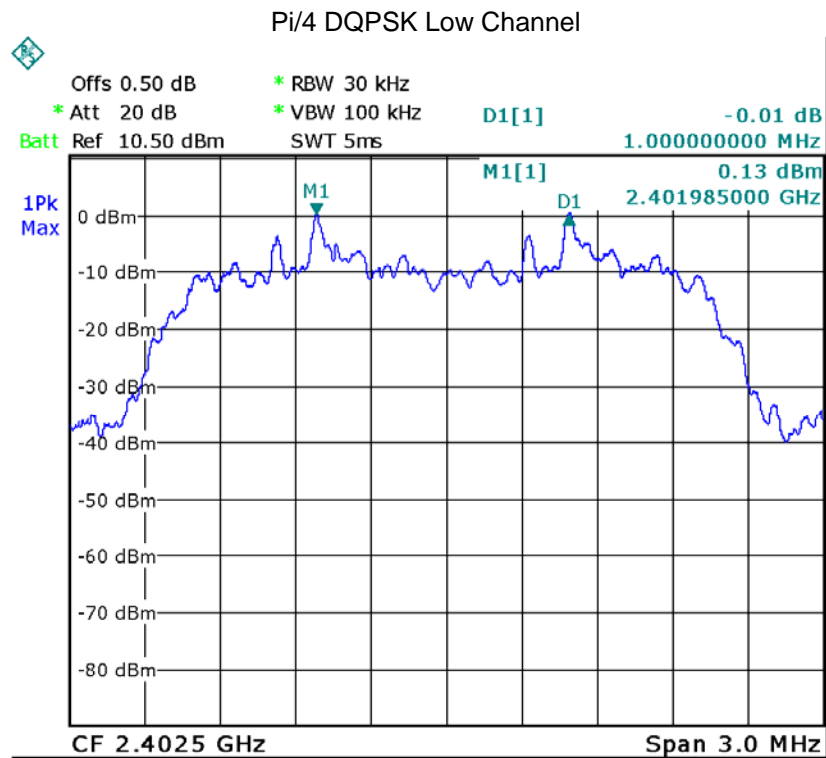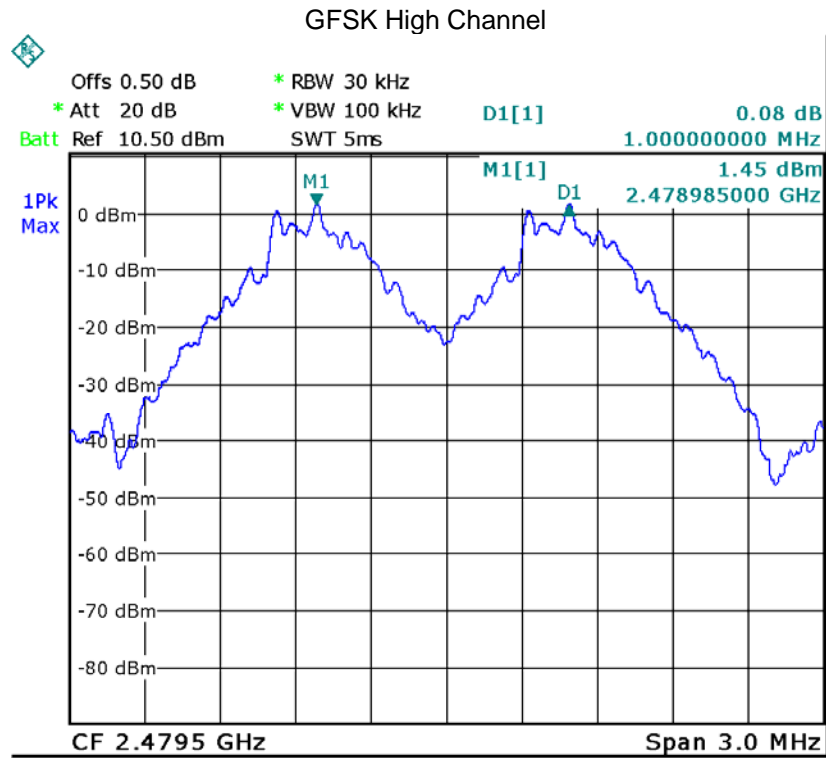

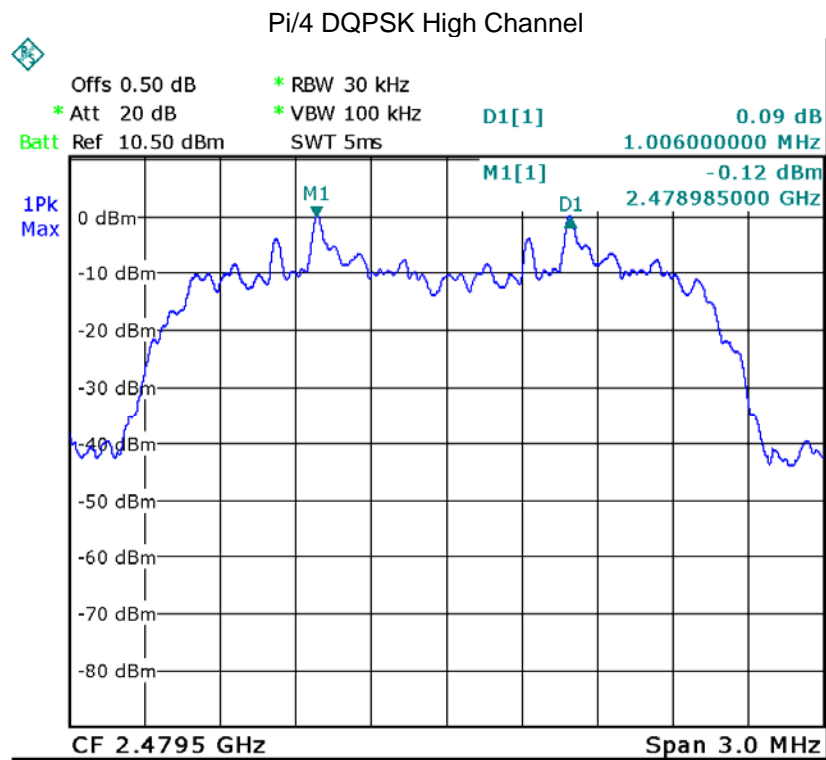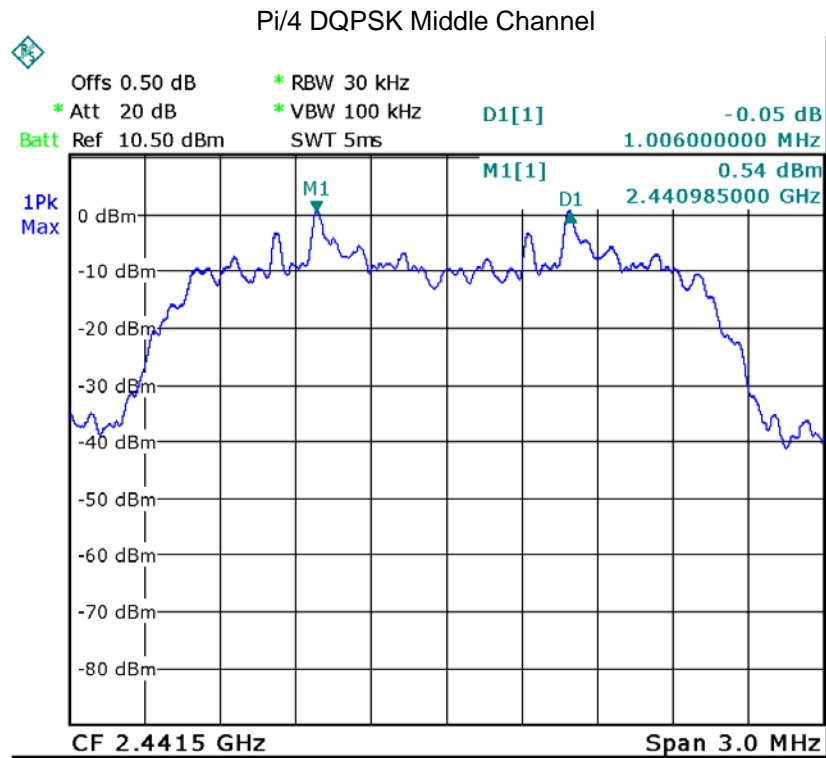

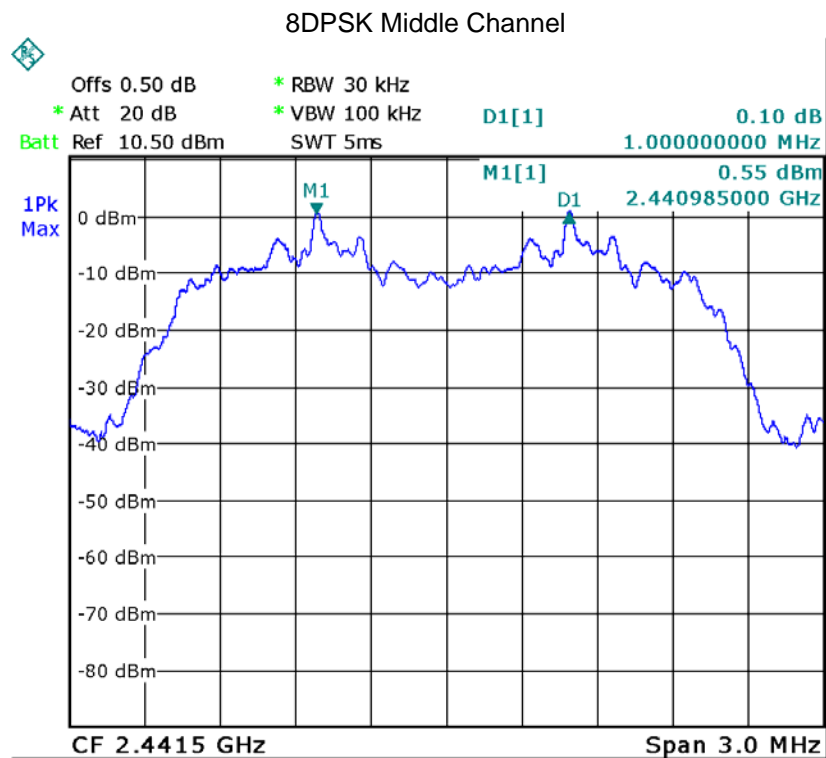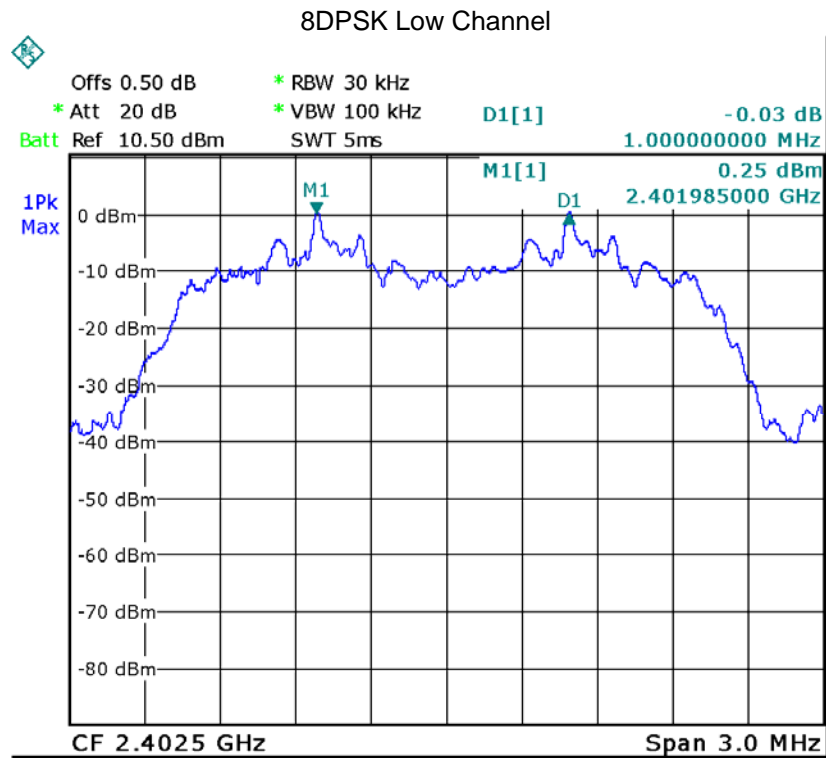

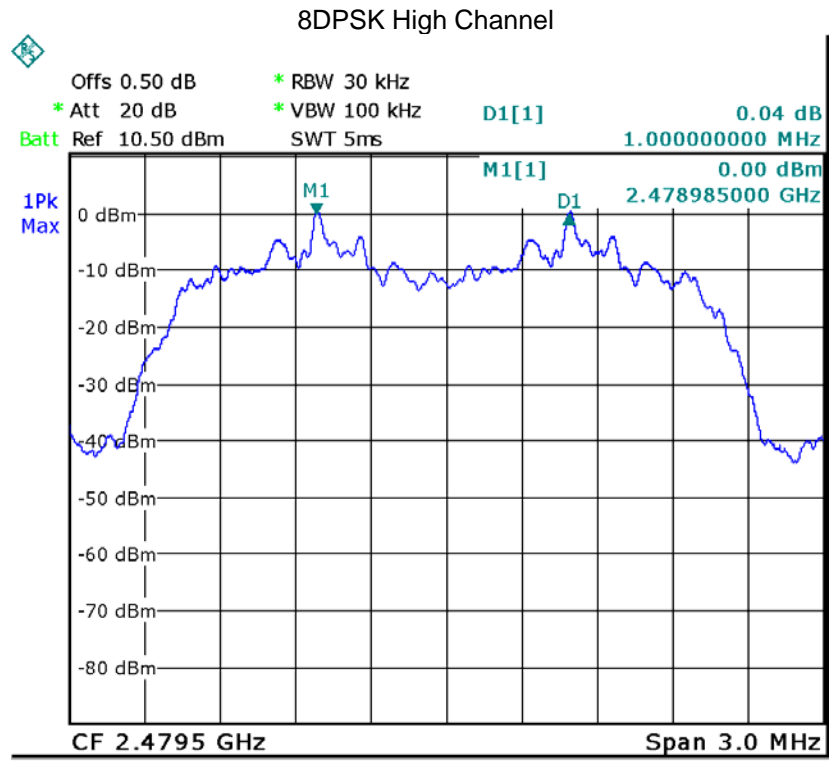


12 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;


12.2 Test Result

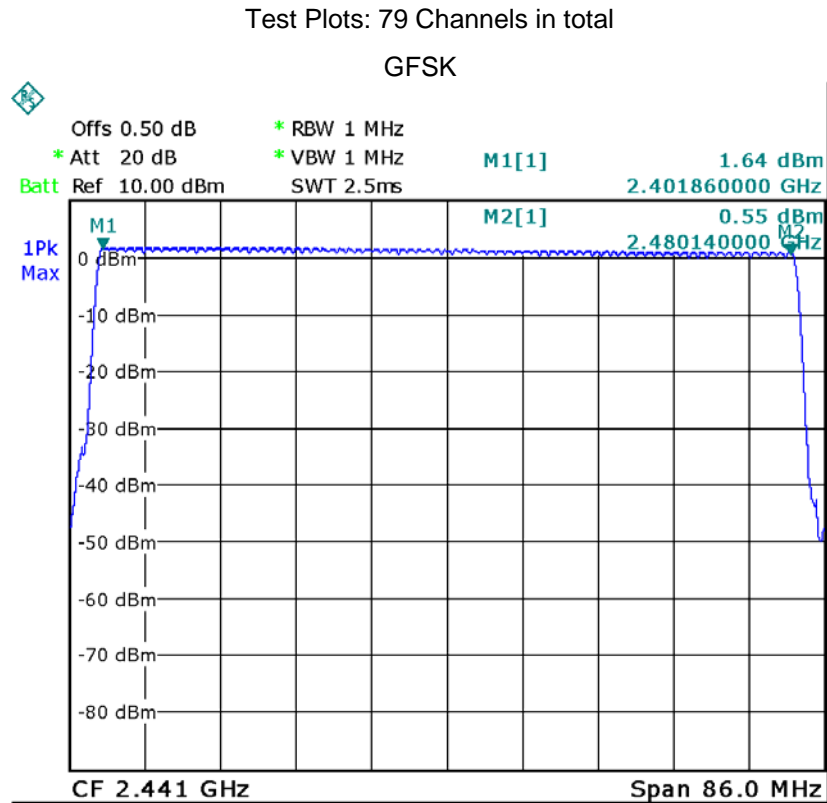

Pi/4 DQPSK

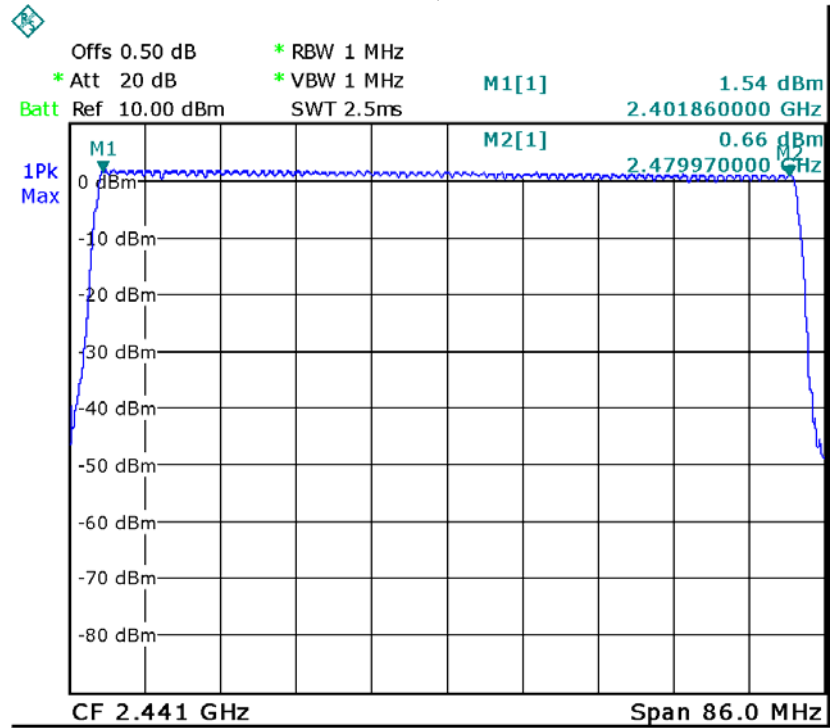

8DPSK

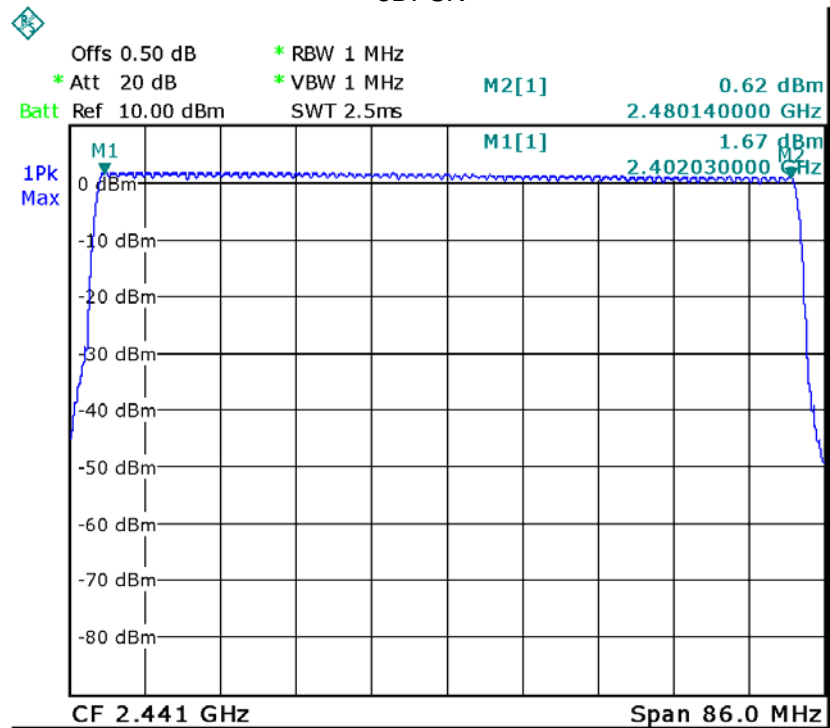

13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	


Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH1	Low	0.422	0.135	0.4
		middle	0.422	0.135	0.4
		High	0.422	0.135	0.4
	DH3	Low	1.692	0.271	0.4
		middle	1.692	0.271	0.4
		High	1.692	0.271	0.4
	DH5	Low	2.957	0.315	0.4
		middle	2.957	0.315	0.4
		High	2.957	0.315	0.4
Pi/4DQPSK	DH1	Low	0.438	0.140	0.4
		middle	0.438	0.140	0.4
		High	0.438	0.140	0.4
	DH3	Low	1.704	0.273	0.4
		middle	1.704	0.273	0.4
		High	1.704	0.273	0.4
	DH5	Low	2.965	0.316	0.4
		middle	2.965	0.316	0.4
		High	2.965	0.316	0.4
8DPSK	DH1	Low	0.438	0.140	0.4
		middle	0.438	0.140	0.4
		High	0.438	0.140	0.4
	DH3	Low	1.704	0.273	0.4
		middle	1.704	0.273	0.4
		High	1.704	0.273	0.4
	DH5	Low	2.965	0.316	0.4
		middle	2.965	0.316	0.4
		High	2.965	0.316	0.4



Modulation: **GFSK**



Data Packet:DH1, Low channel

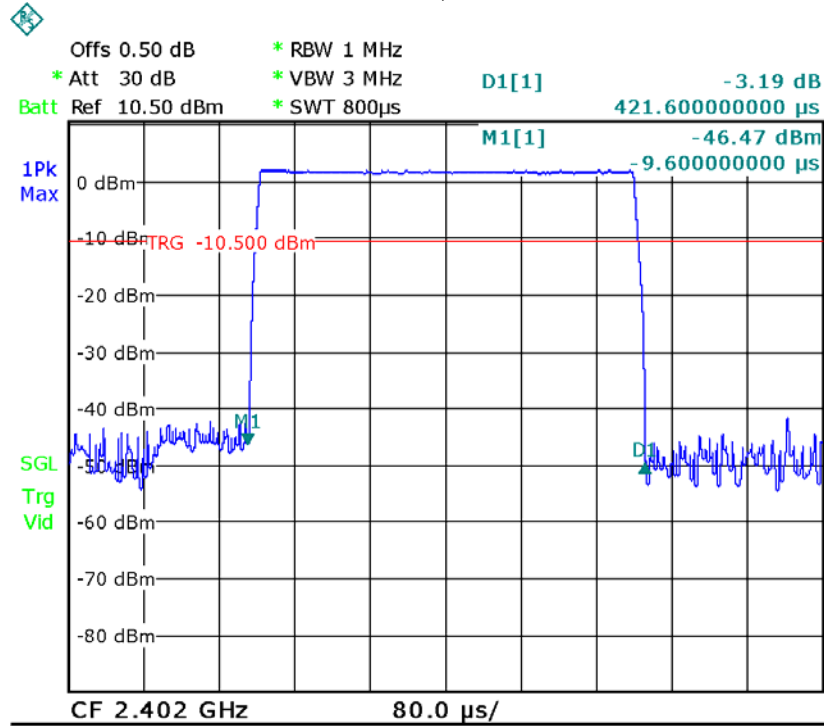


Data Packet:DH1, Middle channel

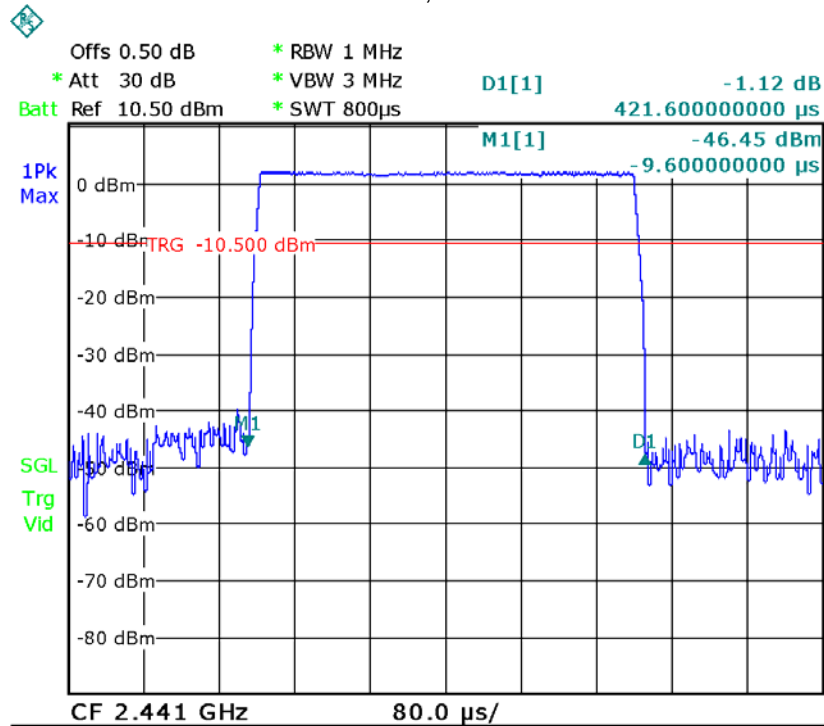

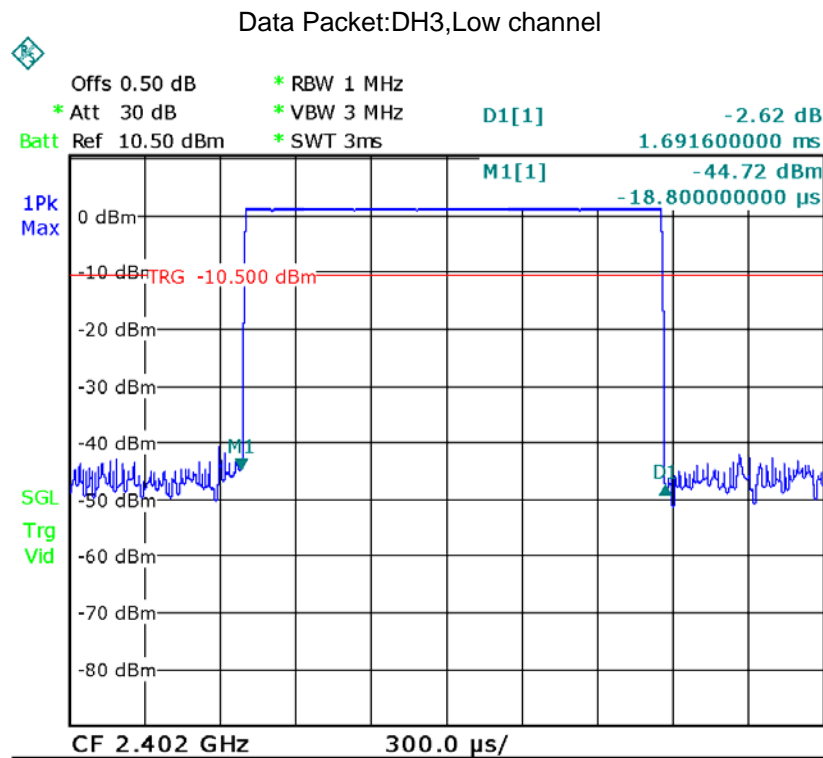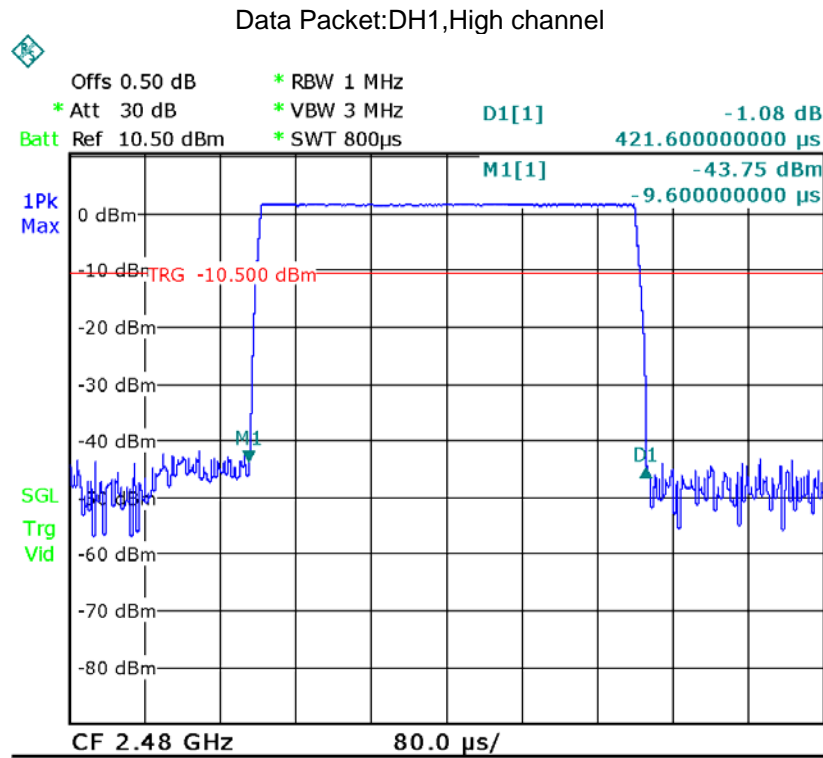


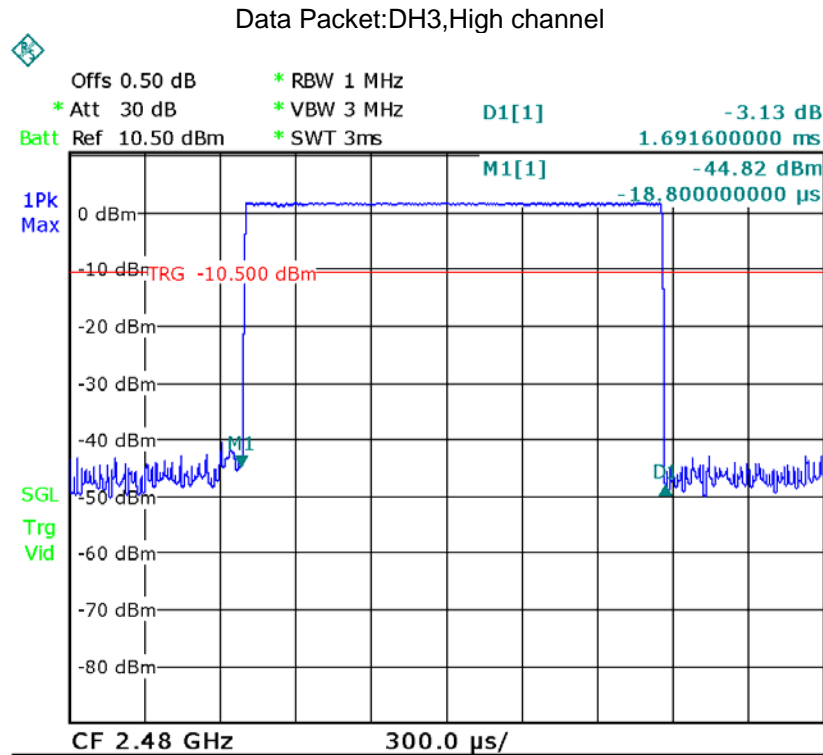
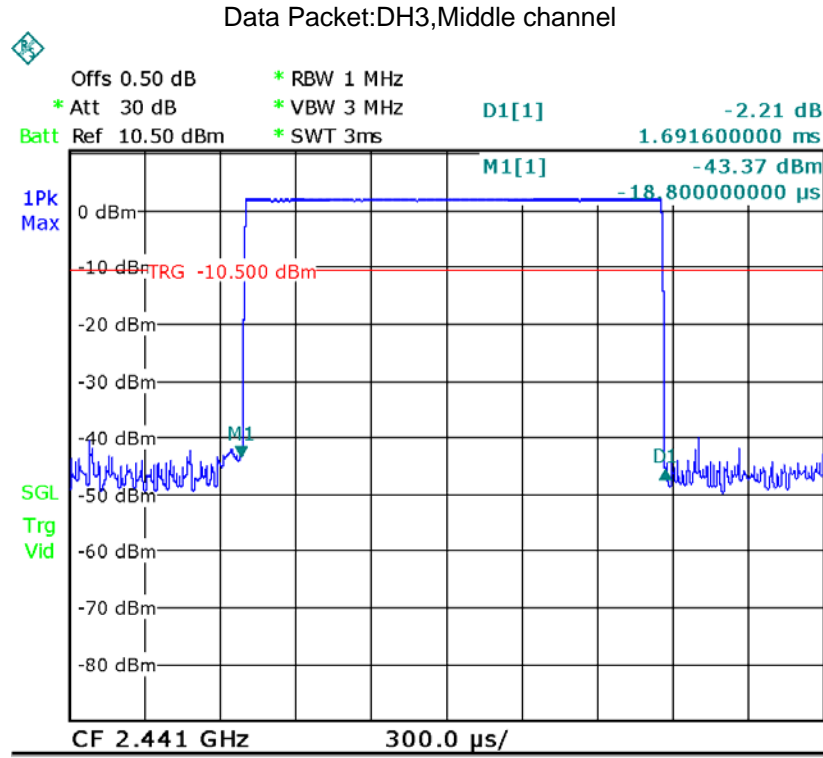




Data Packet:DH5,Low channel


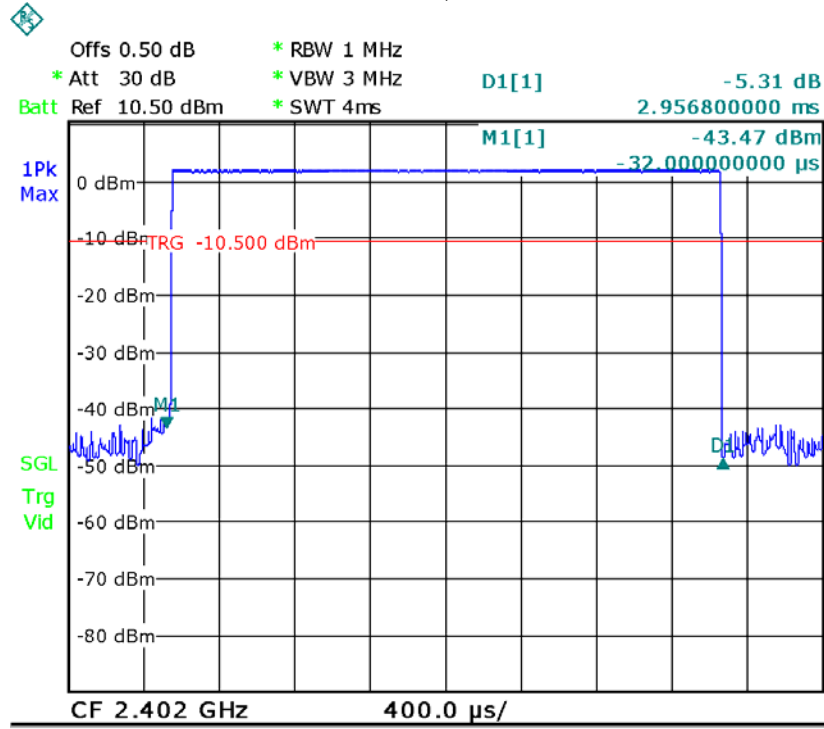




Data Packet:DH5,Middle channel


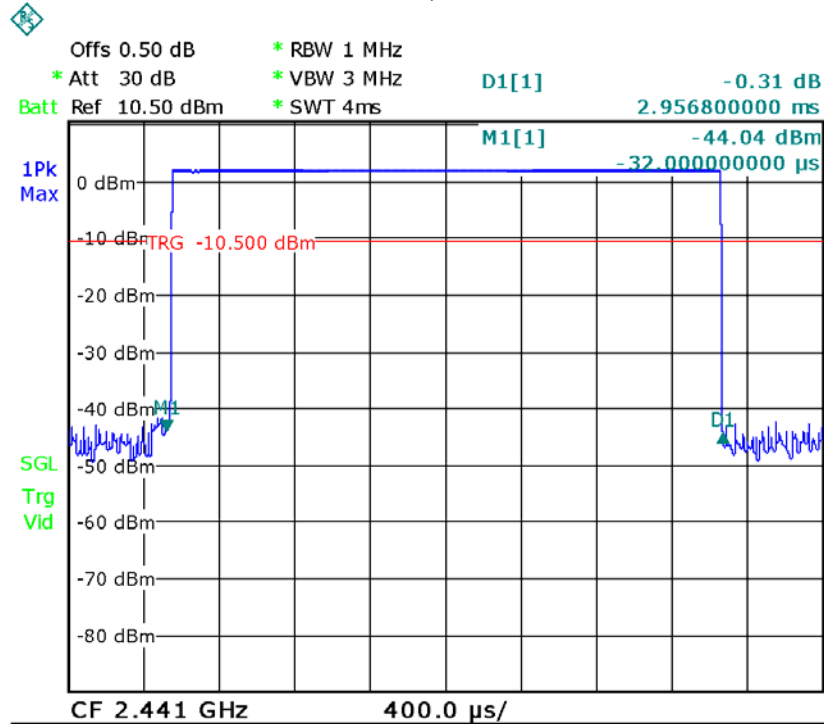


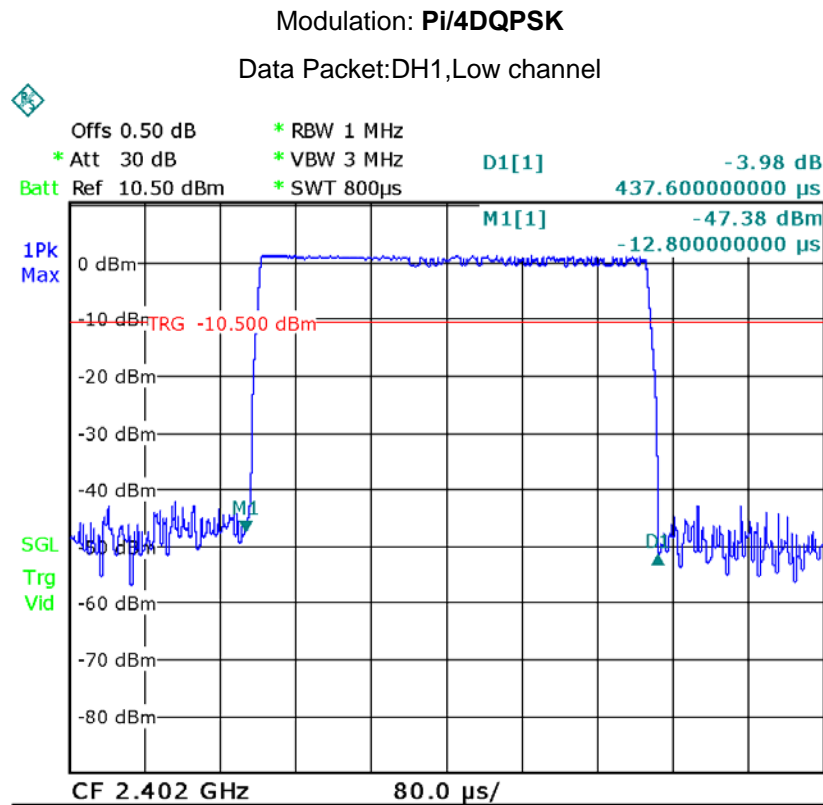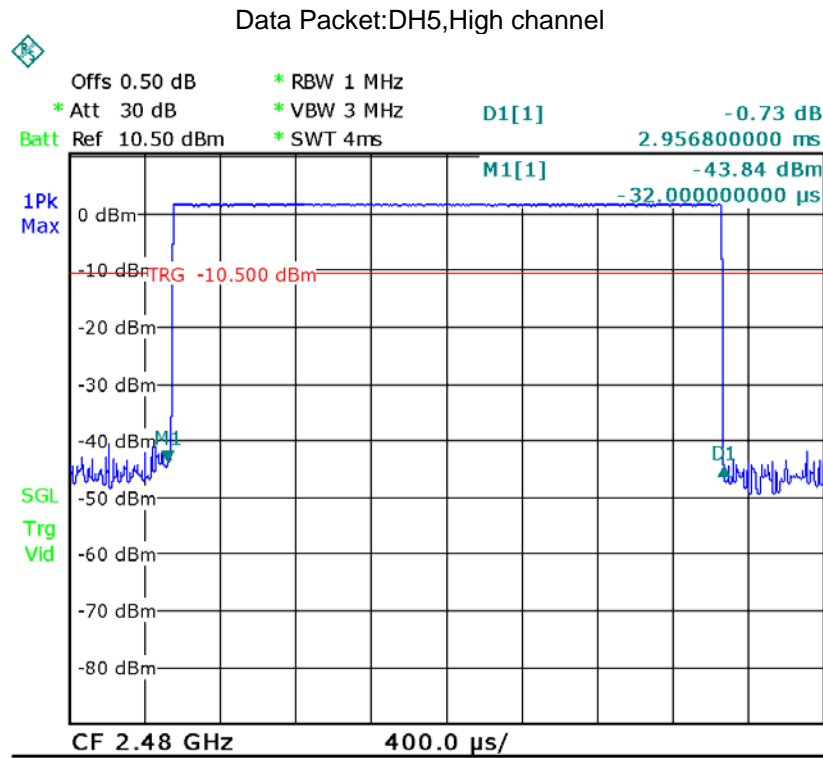

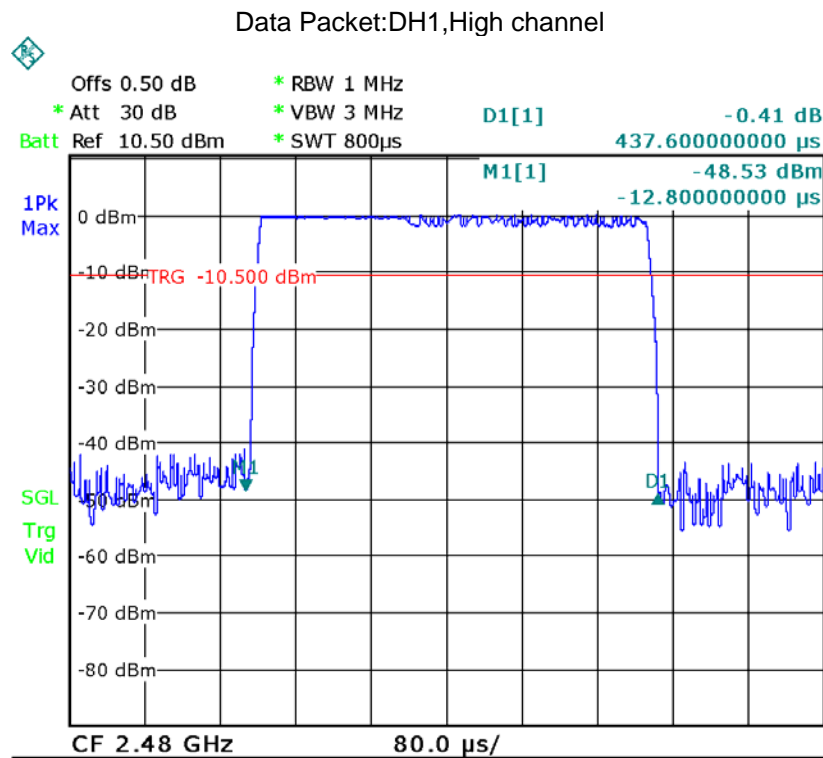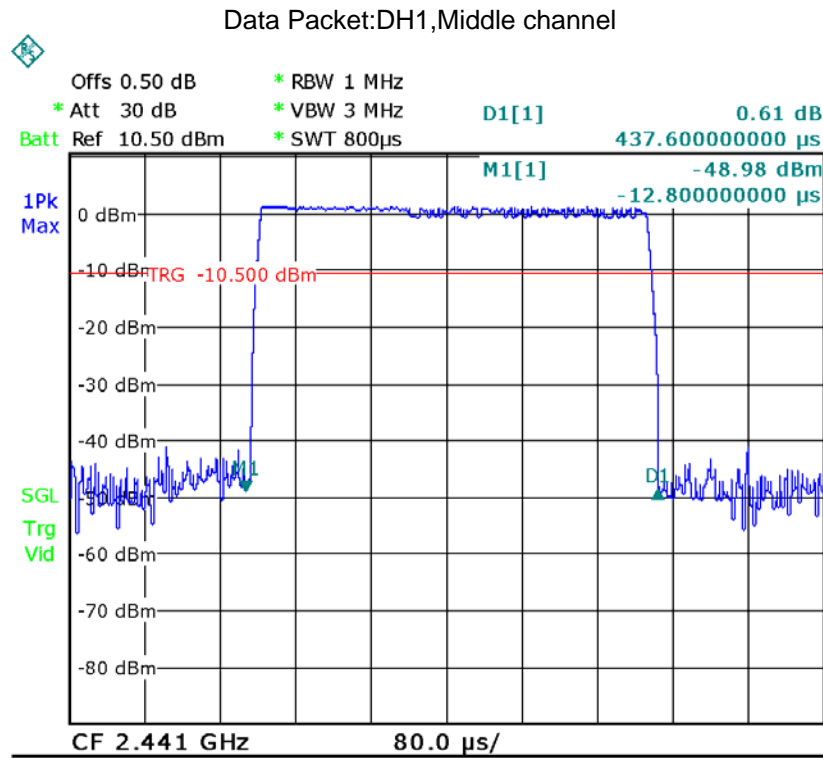

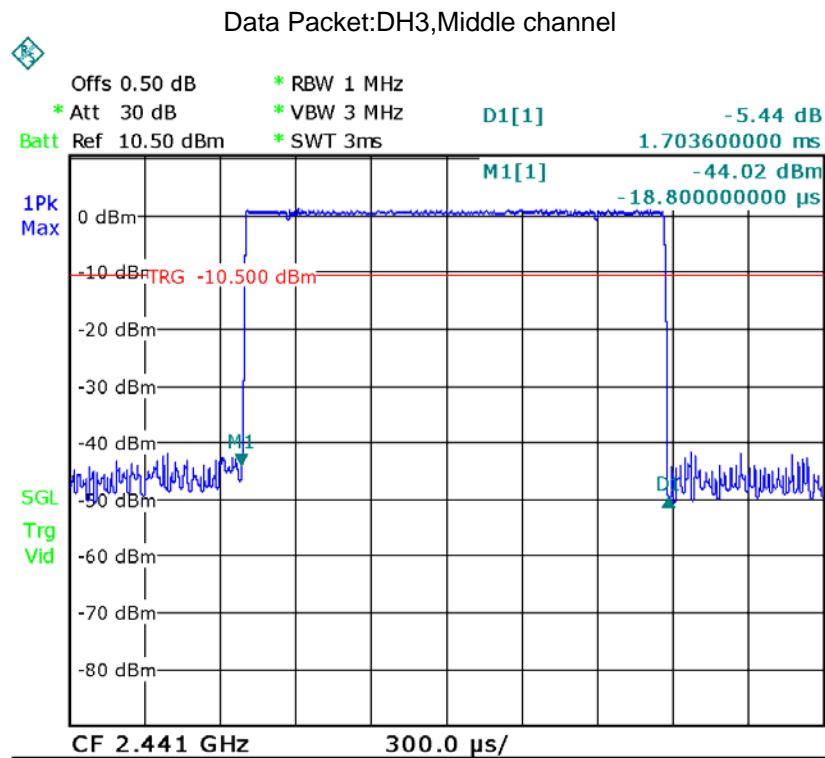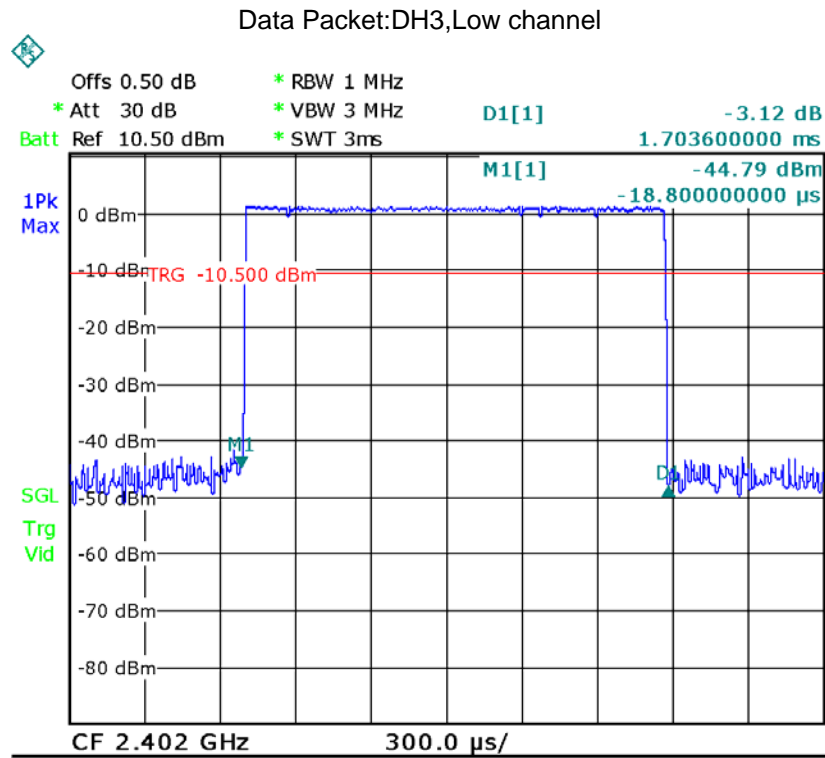


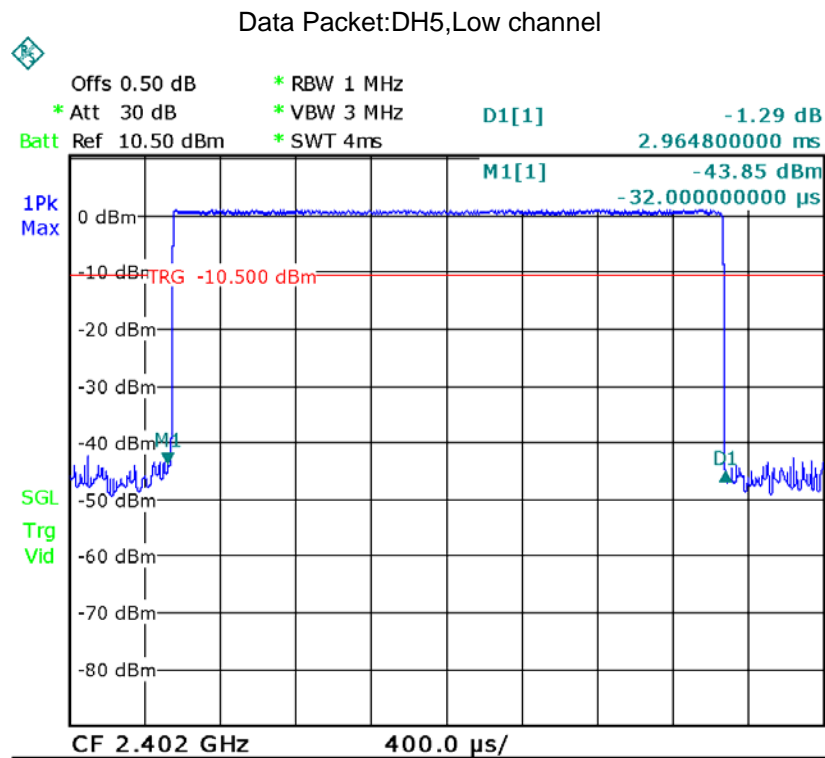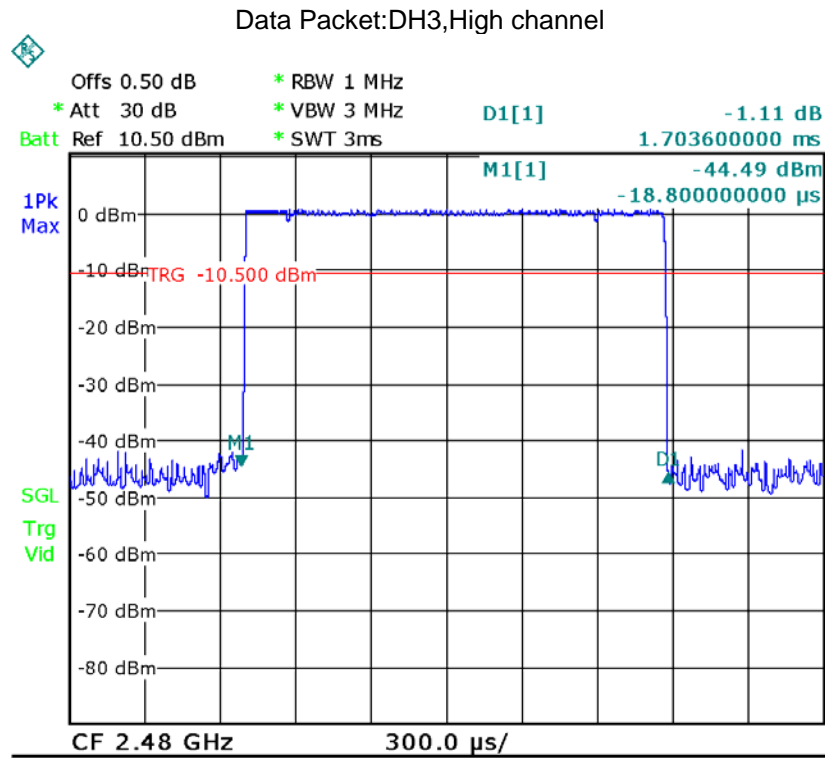

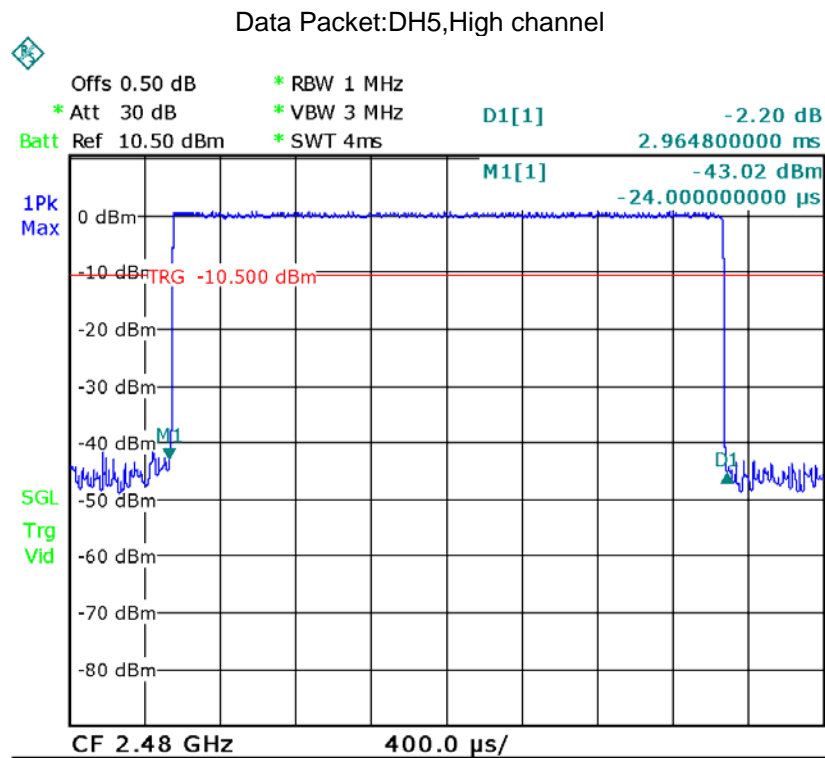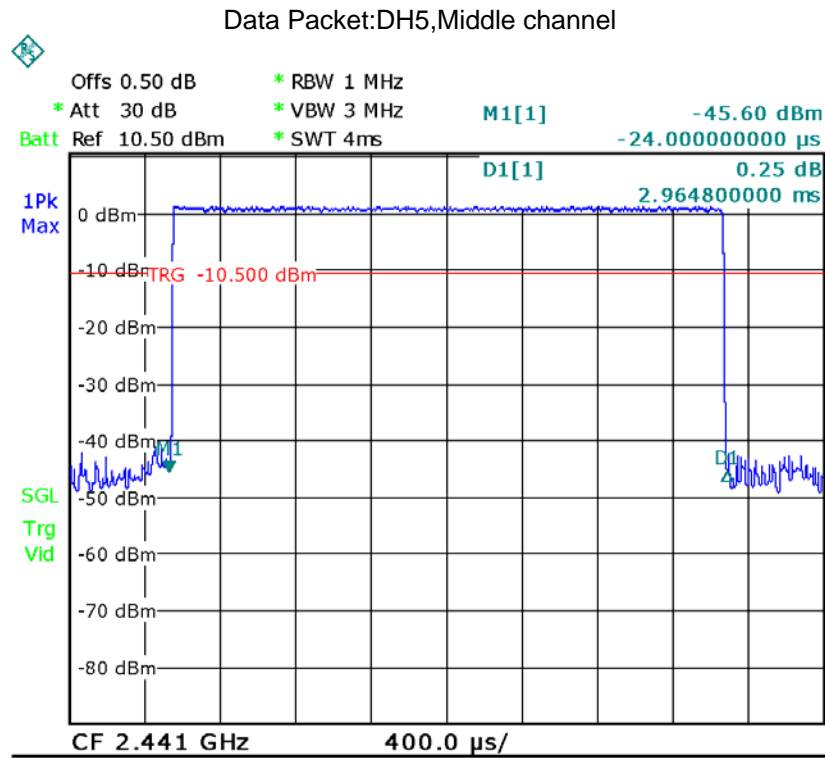


Modulation: **8DPSK**


Data Packet:DH1,Low channel

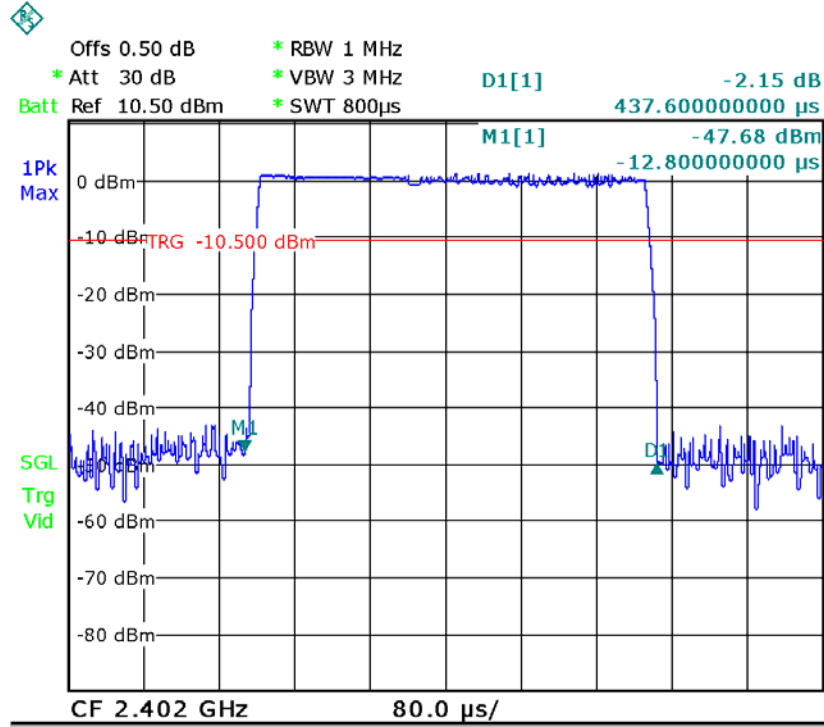


Data Packet:DH1,Middle channel


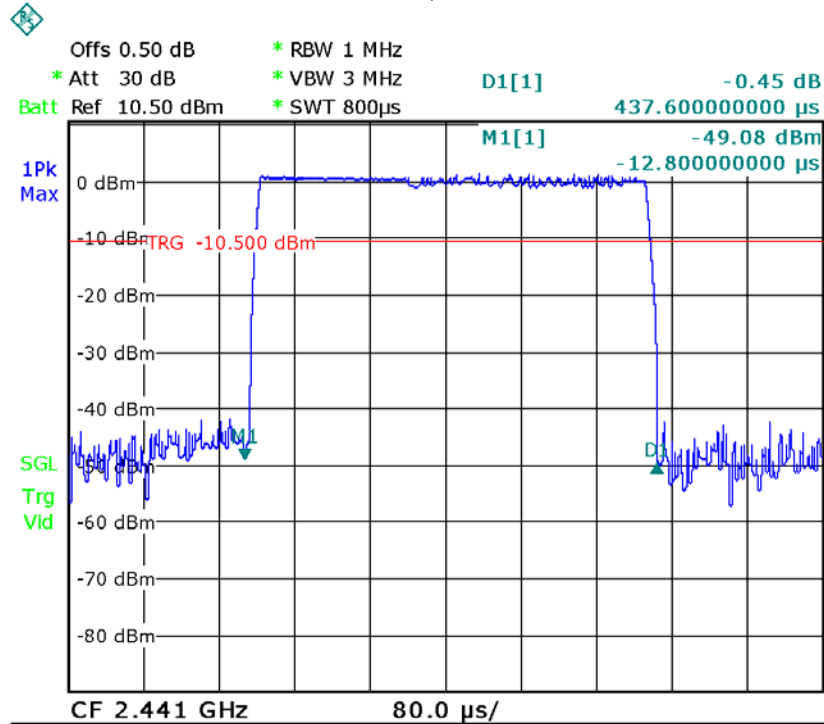


Data Packet:DH1,High channel

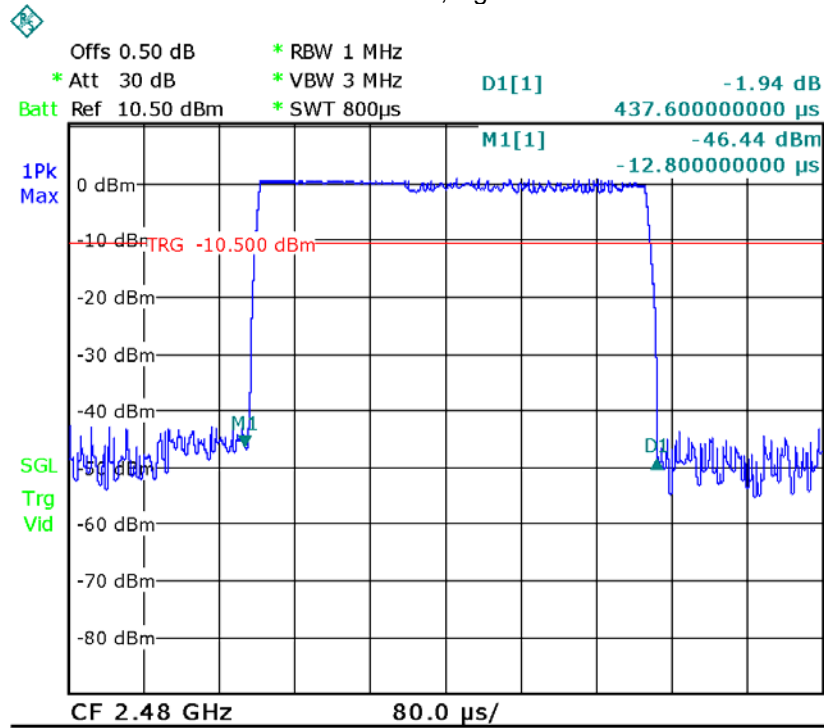


Data Packet:DH3,Low channel

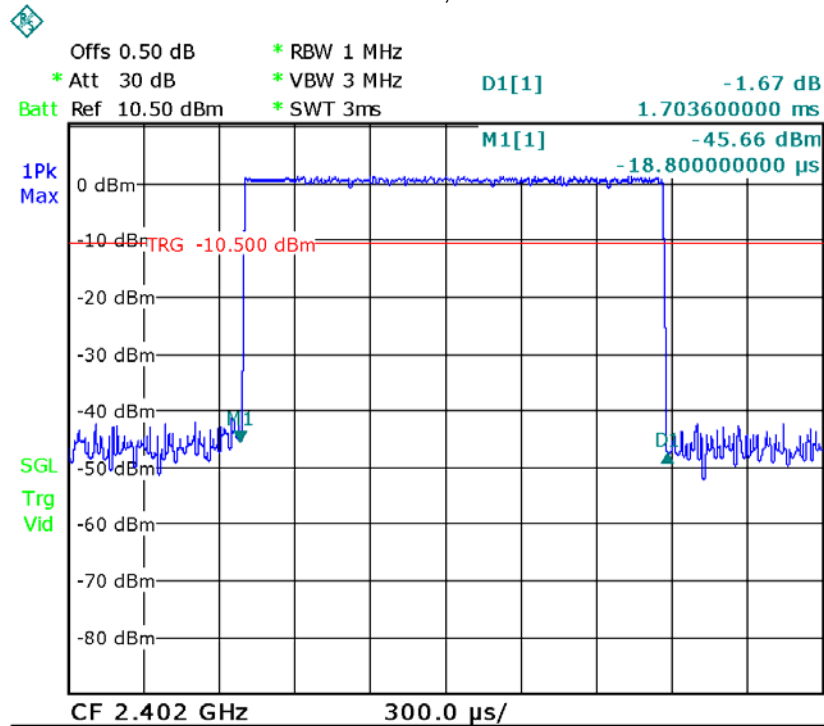


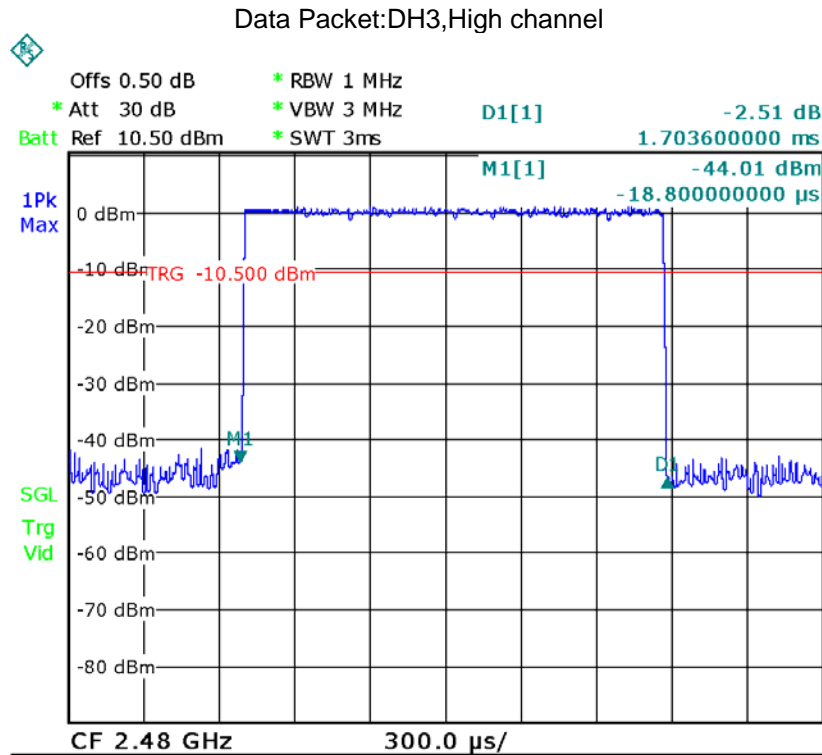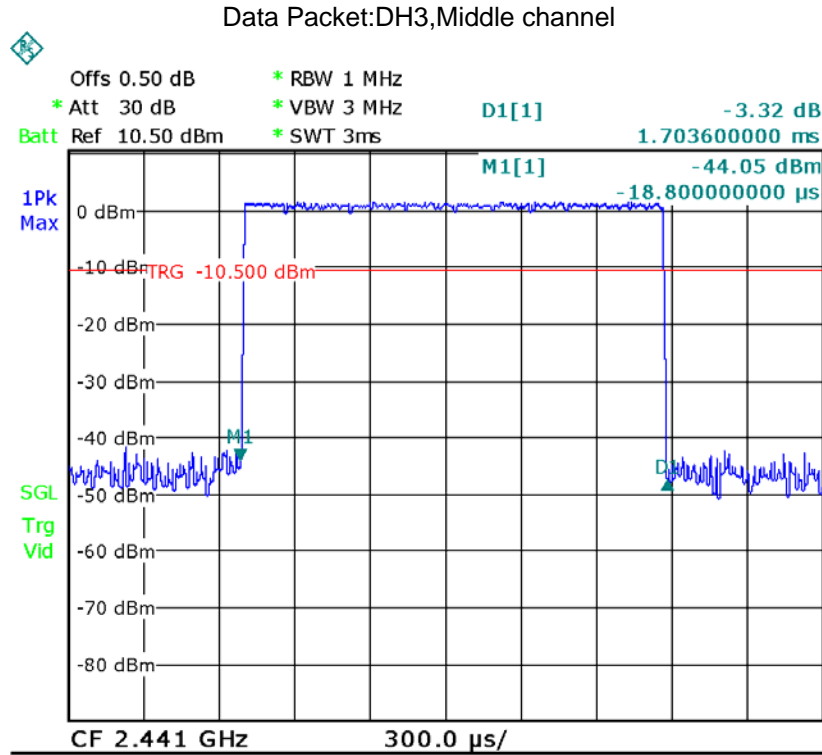


Data Packet:DH5,Low channel

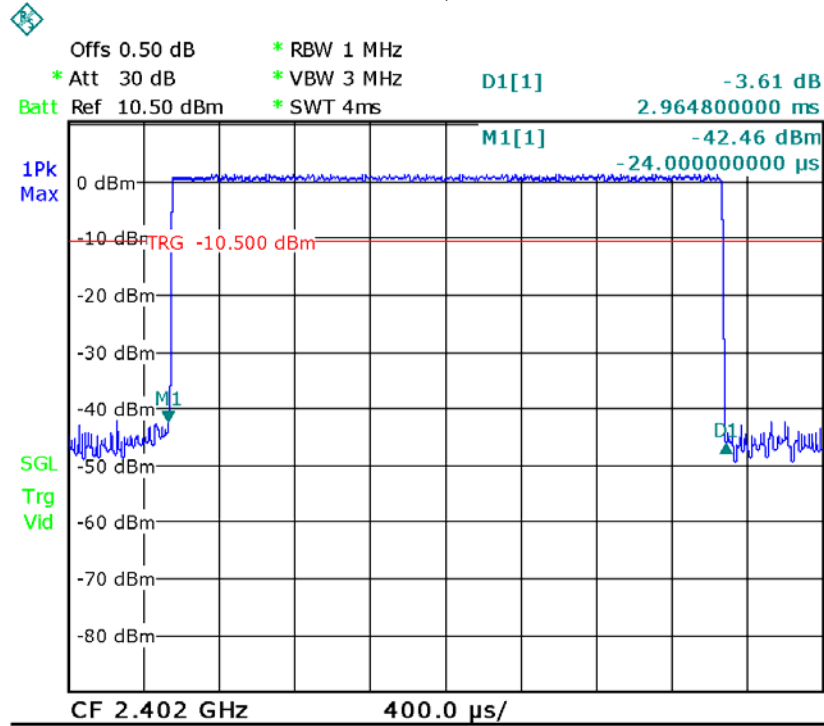

Data Packet:DH5,Middle channel

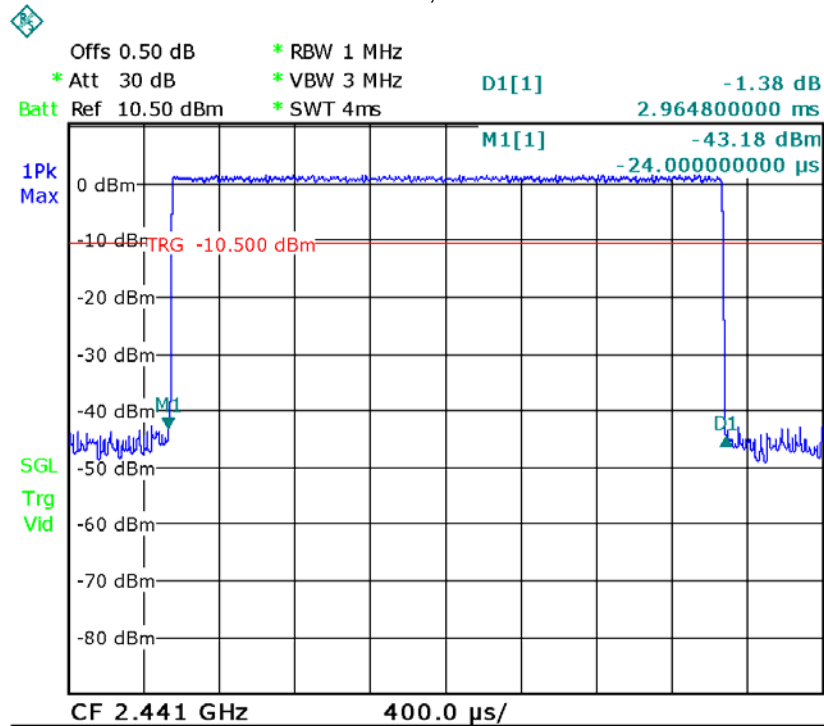

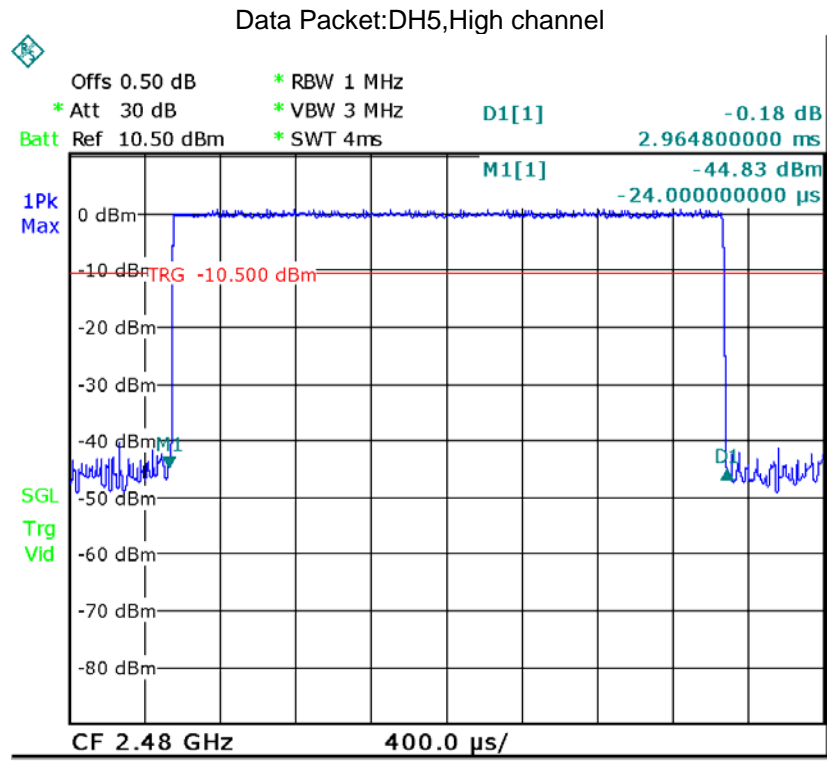

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfil the requirement of this section.

15 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

15.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
1.259	2.23	1.671	0.000399	1

16 Photographs – Test Setup

16.1 Photograph – Conducted Emission Test Setup



16.2 Photograph – Radiation Spurious Emission Test Setup

Below 30MHz



30MHz-1GHz



Above 1GHz



17 Photographs - Constructional Details

17.1 Model Expedition Escape External View














17.2 Model Expedition Escape Internal View

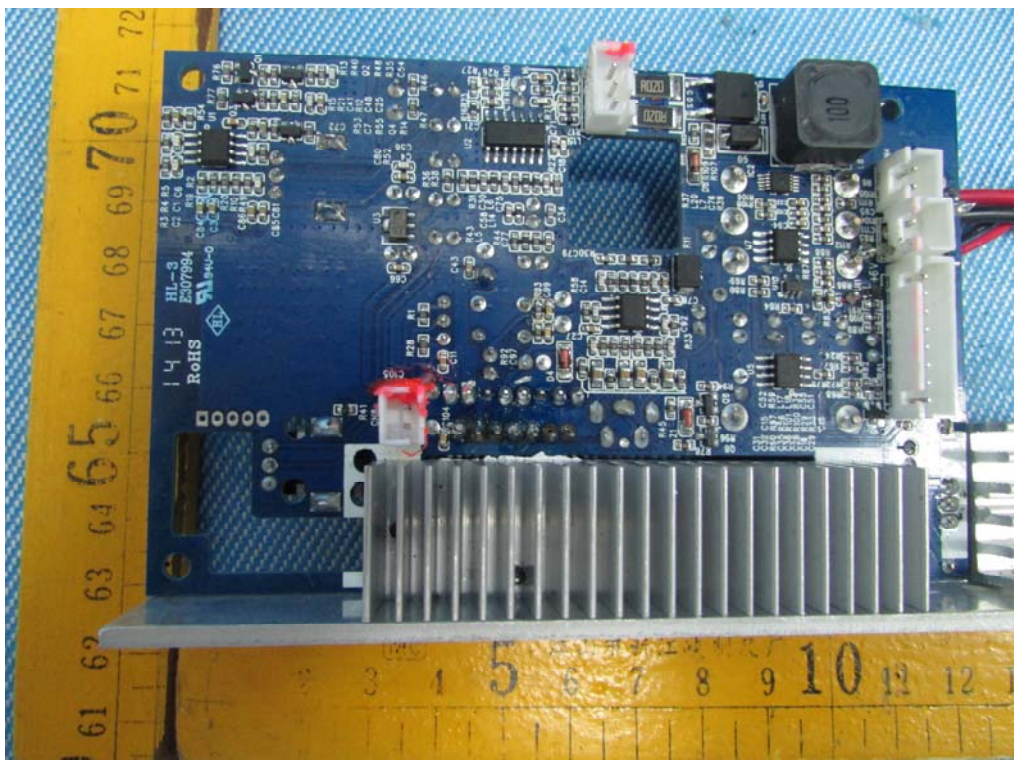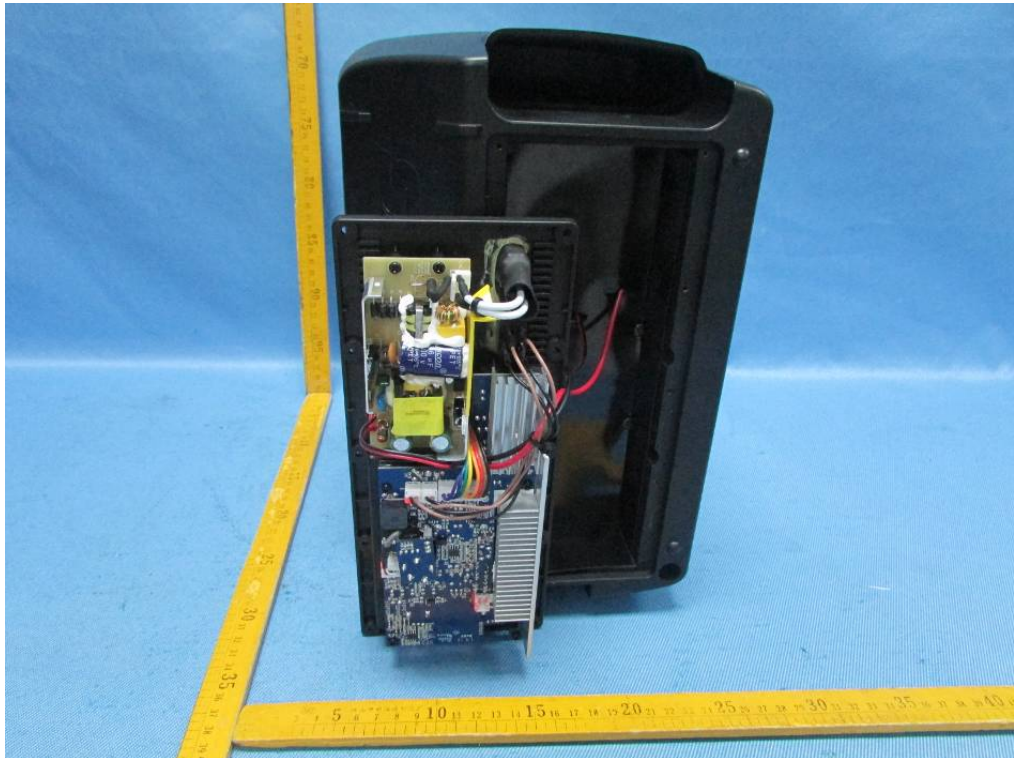

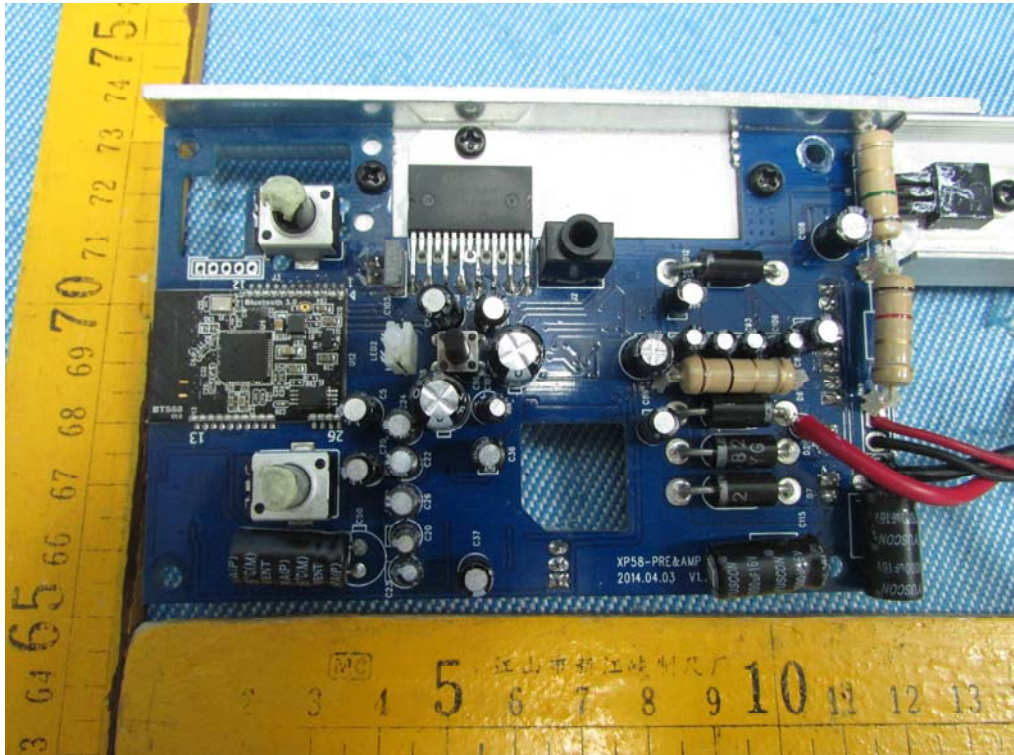

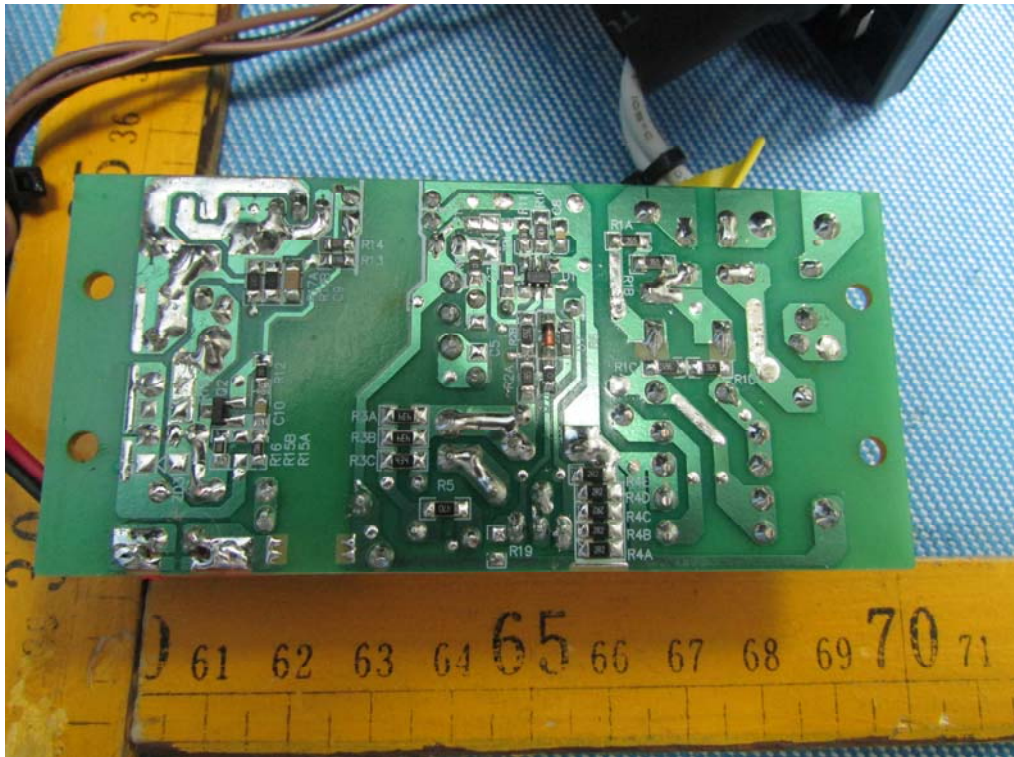

17.3 RF Module Photos

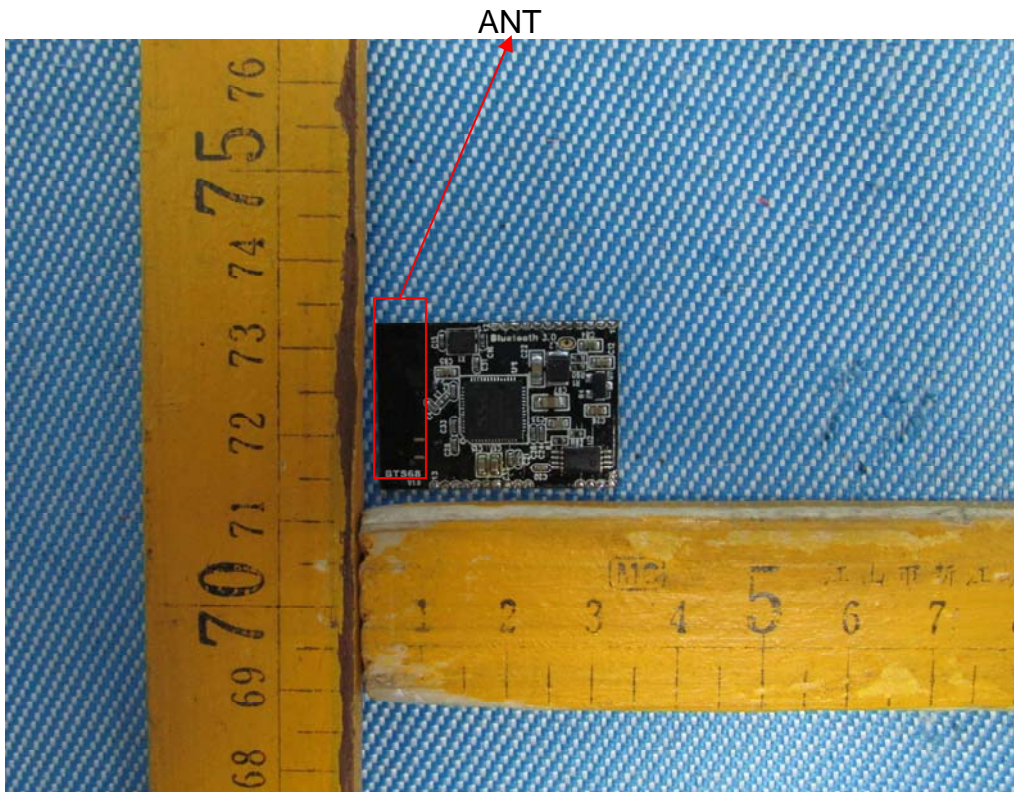



=====
===== End of Report =====
=====