



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

**Bluetooth Module
MODEL NUMBER: HY-254101M**

**FCC ID: CCT-DPV70-01
IC: 4390A-DPV70**

REPORT NUMBER: 4787957947.1-1

ISSUE DATE: May 16, 2017

Prepared for

**Fisher-Price Inc.
636 Girard Avenue, East Aurora, NY 14052, USA.**

Prepared by

**UL-CCIC Company Ltd. Suzhou Branch
No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China**
**Tel: +86-512-6808 6400
Fax: +86-512-6808 4099
Website: www.ul.com**

Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|---------------|------------|
| -- | 05/16/2017 | Initial Issue | |

| Summary of Test Results | | | |
|-------------------------|---|--|--------------|
| Clause | Test Items | FCC/IC Rules | Test Results |
| 1 | 6db DTS Bandwidth | FCC 15.247 (a) (2) IC RSS-247 Clause 5.1 (1) | Complied |
| 2 | Peak Conducted Power | FCC 15.247 (b) (3) IC RSS-247 Clause 5.4 (4) | Complied |
| 3 | Power Spectral Density | FCC 15.247 (3) IC RSS-247 Clause 5.2 (2) | Complied |
| 4 | Conducted Band edge And Spurious emission | FCC 15.247 (d) IC RSS-247 Clause 5.5 | Complied |
| 5 | Radiated Band edges and Spurious emission | FCC 15.247 (d) FCC 15.209 FCC 15.205 IC RSS-247 Clause 5.5 IC RSS-GEN Clause 8.9 | Complied |
| 6 | Conducted Emission Test For AC Power Port | FCC 15.207 RSS-GEN Clause 8.8 | Complied |
| 7 | Antenna Requirement | FCC 15.203 RSS-GEN Clause 8.3 | Complied |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS..... | 6 |
| 2. TEST METHODOLOGY | 7 |
| 3. FACILITIES AND ACCREDITATION..... | 7 |
| 4. CALIBRATION AND UNCERTAINTY | 8 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | <i>8</i> |
| 4.2. <i>MEASUREMENT UNCERTAINTY.....</i> | <i>8</i> |
| 5. EQUIPMENT UNDER TEST | 9 |
| 5.1. <i>DESCRIPTION OF EUT</i> | <i>9</i> |
| 5.2. <i>MAXIMUM OUTPUT POWER.....</i> | <i>9</i> |
| 5.3. <i>CHANNEL LIST.....</i> | <i>9</i> |
| 5.4. <i>TEST CHANNEL CONFIGURATION.....</i> | <i>9</i> |
| 5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i> | <i>10</i> |
| 5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> | <i>10</i> |
| 5.7. <i>WORST-CASE CONFIGURATIONS.....</i> | <i>10</i> |
| 5.8. <i>TEST ENVIRONMENT.....</i> | <i>10</i> |
| 5.9. <i>DESCRIPTION OF TEST SETUP</i> | <i>11</i> |
| 5.10. <i>MEASURING INSTRUMENT AND SOFTWARE USED.....</i> | <i>12</i> |
| 6. ANTENNA PORT TEST RESULTS | 13 |
| 6.1. <i>ON TIME AND DUTY CYCLE</i> | <i>13</i> |
| 6.2. <i>6 dB BANDWIDTH & 99% BANDWIDTH</i> | <i>14</i> |
| 6.2.1. <i>GFSK MODE</i> | <i>15</i> |
| 6.3. <i>PEAK CONDUCTED OUTPUT POWER.....</i> | <i>17</i> |
| 6.4. <i>POWER SPECTRAL DENSITY</i> | <i>20</i> |
| 6.5. <i>CONDUCTED BANDEDGE</i> | <i>23</i> |
| Conducted Spurious Emissions | <i>25</i> |
| 7. RADIATED TEST RESULTS | 32 |
| 7.1. <i>LIMITS AND PROCEDURE</i> | <i>32</i> |
| 7.2. <i>RESTRICTED BANDEDGE</i> | <i>36</i> |
| 7.2.1. <i>GFSK MODE</i> | <i>36</i> |
| 7.3. <i>SPURIOUS EMISSIONS (1~25GHz)</i> | <i>40</i> |
| 7.3.1. <i>GFSK MODE</i> | <i>40</i> |
| 7.4. <i>SPURIOUS EMISSIONS 30M ~ 1 GHz.....</i> | <i>52</i> |
| 7.4.1. <i>GFSK MODE</i> | <i>52</i> |
| 7.5. <i>SPURIOUS EMISSIONS BELOW 30M</i> | <i>54</i> |

8. AC POWER LINE CONDUCTED EMISSIONS 56

9. ANTENNA REQUIREMENTS 59

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Fisher-Price Inc.
Address: 636 Girard Avenue, East Aurora, NY 14052, USA.

Manufacturer Information

Company Name: Shenzhen Shengrun Technology Co.,Ltd
Address: Room 602, B Block of Jingu Pioneer Park, Longzhu 4th Road,Xili Town,Nanshan District,Shenzhen

Factory Information

Company Name: N/A
Address: N/A

EUT Description

Product Name: Bluetooth Module
Brand Name: N/A
Model Name: HY-254101M
Date Tested: April 24, 2017 ~ May 7, 2017

| APPLICABLE STANDARDS | |
|---------------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | PASS |
| INDUSTRY CANADA RSS-247 Issue 2 | PASS |
| INDUSTRY CANADA RSS-GEN Issue 4 | PASS |

Tested By:

Chris Zhong

Chris Zhong
Project Engineer

Check By:

Terry Hou

Terry Hou
Project Engineer

Approved By:

Victor Yan

Victor Yan
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 V04, ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

| | |
|---------------------------|--|
| Test Location | Dongguan Dongdian Testing Service Co., Ltd |
| Address | No. 17, Zongbu Road 2, Songshan Lake Sci&Tech Park, Dongguan City, Guangdong Province, 523808, China |
| Accreditation Certificate | <p>Dongguan Dongdian Testing Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until January 31, 2018.</p> <p>Dongguan Dongdian Testing Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 270092, Renewal date March 11, 2015, valid time is until March 11, 2018.</p> <p>The 3m Alternate Test Site of Dongguan Dongdian Testing Service Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 10288A on April 23, 2015, valid time is until April 23, 2018.</p> |

Note: The test anechoic chamber in Dongguan Dongdian Testing Service Co., Ltd had been calibrated and compared to the open field sites.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Item | Uncertainty |
|--|-------------------------------|
| Uncertainty for Conduction emission test | 3.32dB (150KHz-30MHz) |
| | 3.72dB (9KHz-150KHz) |
| Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz) | 4.70 dB (Antenna Polarize: V) |
| | 4.84 dB (Antenna Polarize: H) |
| Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission) | 4.10dB(1-6GHz) |
| | 4.40dB (6GHz-18Gz) |
| | 3.54dB (18GHz-26Gz) |
| Bandwidth | 1.1% |
| Stop Transmitting Time Test | 0.6% |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

| | | |
|---------------------|---------------------|---------------------|
| Product Description | Operation Frequency | 2402 MHz ~ 2480 MHz |
| | Modulation Type | Data Rate |
| | GFSK | 1Mbps |
| Rated Power Supply | 2.0-3.6V | |
| Bluetooth Version | BT 4.0 | |

5.2. MAXIMUM OUTPUT POWER

| Frequency Range (MHz) | Number of Transmit Chains (NTX) | Bluetooth Mode | Frequency (MHz) | Channel Number | Max PK Conducted Power (dBm) | EIRP (dBm) |
|-----------------------|---------------------------------|----------------|-----------------|----------------|------------------------------|------------|
| 2400-2483.5 | 1 | BLE | 2402-2480 | 0-39[40] | -1.81 | 1.62 |

5.3. CHANNEL LIST

| Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 00 | 2402 | 11 | 2424 | 22 | 2446 | 33 | 2468 |
| 01 | 2404 | 12 | 2426 | 23 | 2448 | 34 | 2470 |
| 02 | 2406 | 13 | 2428 | 24 | 2450 | 35 | 2472 |
| 03 | 2408 | 14 | 2430 | 25 | 2452 | 36 | 2474 |
| 04 | 2410 | 15 | 2432 | 26 | 2454 | 37 | 2476 |
| 05 | 2412 | 16 | 2434 | 27 | 2456 | 38 | 2478 |
| 06 | 2414 | 17 | 2436 | 28 | 2458 | 39 | 2480 |
| 07 | 2416 | 18 | 2438 | 29 | 2460 | | |
| 08 | 2418 | 19 | 2440 | 30 | 2462 | | |
| 09 | 2420 | 20 | 2442 | 31 | 2464 | | |
| 10 | 2422 | 21 | 2444 | 32 | 2466 | | |

5.4. TEST CHANNEL CONFIGURATION

| Test Mode | Test Channel | Frequency |
|-----------|---------------------|---------------------------|
| GFSK | CH 00, CH 19, CH 39 | 2402MHz, 2440MHz, 2480MHz |

5.5. THE WORSE CASE POWER SETTING PARAMETER

| The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band | | | | |
|--|-------------------------|------------------|---------|---------|
| Test Software Version | | SmartRF Studio 7 | | |
| Modulation Type | Transmit Antenna Number | Test Channel | | |
| | | CH 00 | CH 19 | CH 39 |
| GFSK | 1 | Default | Default | Default |

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

| Ant. | Frequency (MHz) | Antenna Type | Antenna Gain (dBi) |
|------|-----------------|--------------|--------------------|
| 1 | 2402-2480 | PCB Antenna | 3.43 |

| Test Mode | Transmit and Receive Mode | Description |
|-----------|--|--|
| GFSK | <input checked="" type="checkbox"/> 1TX, 1RX | Chain 1 can be used as transmitting/receiving antenna. |

5.7. WORST-CASE CONFIGURATIONS

| Bluetooth Mode | Modulation Technology | Modulation Type | Data Rate (Mbps) |
|----------------|-----------------------|-----------------|------------------|
| BLE | DTS | GFSK | 1Mbit/s |

5.8. TEST ENVIRONMENT

| Environment Parameter | Selected Values During Tests | |
|-----------------------|------------------------------|-----------|
| Relative Humidity | 55 ~ 65% | |
| Atmospheric Pressure: | 1025Pa | |
| Temperature | TN | 23 ~ 28°C |
| Voltage : | VL | N/A |
| | VN | DC 3.6V |
| | VH | N/A |

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Item | Equipment | Brand Name | Model Name | FCC ID |
|------|------------------|------------|------------|--------|
| 1 | Laptop | ThinkPad | T410 | N/A |
| 2 | TI Control board | N/A | N/A | N/A |

I/O CABLES

| Cable No | Port | Connector Type | Cable Type | Cable Length(m) | Remarks |
|----------|------|----------------|------------|-----------------|---------|
| 1 | N/A | N/A | N/A | N/A | N/A |


ACCESSORY

| Item | Accessory | Brand Name | Model Name | Description |
|------|-----------|------------|------------|-------------|
| 1 | N/A | N/A | N/A | N/A |

TEST SETUP

The EUT can work in an engineer mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

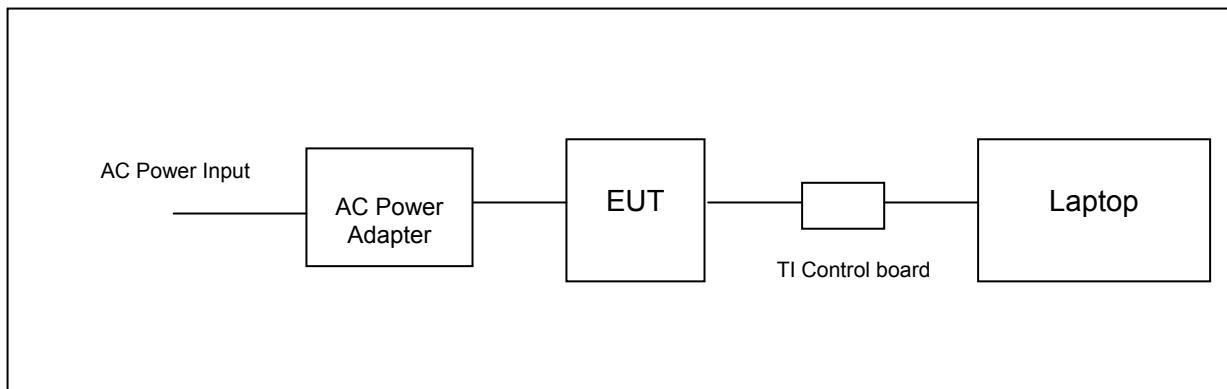

5.10. MEASURING INSTRUMENT AND SOFTWARE USED

| Instrument (Conducted for RF Port) | | | | | | |
|--|----------------------------|------------------------------------|--------------|--------------|------------|---------------|
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
| <input checked="" type="checkbox"/> | Spectrum Analyzer | R&S | FSU26 | 1166.1660.26 | 2016/10/16 | 1 Year |
| Instrument (Radiated Tests) | | | | | | |
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Expired date |
| <input checked="" type="checkbox"/> | EMI Test Receiver | R&S | ESU8 | 100316 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | Spectrum analyzer | R&S | FSU26 | 1166.1660.26 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | Trilog Broadband Antenna | Schwarzbeck | VULB9163 | 9163-462 | 2016/10/27 | 1 Year |
| <input checked="" type="checkbox"/> | Active Loop antenna | Schwarzbeck | FMZB-1519 | 1519-038 | 2016/10/27 | 1 Year |
| <input checked="" type="checkbox"/> | Double Ridged Horn Antenna | R&S | HF907 | 100276 | 2016/10/12 | 1 Year |
| <input checked="" type="checkbox"/> | High Gain Horn Antenna | ETS-LINDGERN | 3160-09 | SEL0076 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | Pre-amplifier | A.H. | PAM-0118 | 360 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | Pre-amplifier | Compliance Directions Systems Inc. | PAP-1G26-48 | 6279.628 | 2016/01/06 | 1 Year |
| <input checked="" type="checkbox"/> | RF Cable | HUBSER | CP-X2 | W11.03 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | RF Cable | HUBSER | CP-X1 | W12.02 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | MI Cable | HUBSER | C10-01-01-1M | 1091629 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | Test software | Audix | E3 | V 6.11111b | N/A | N/A |
| Instrument (Line Conducted Emission (AC Main)) | | | | | | |
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Expired date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESU8 | 100316 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | LISN 1 | R&S | ENV216 | 101109 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | LISN 2 | R&S | ESH2-Z5 | 100309 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | Pulse Limiter | R&S | ESH3-Z2 | 101242 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | CE Cable 1 | HUBSER | ESU8/RF2 | W10.01 | 2016/10/16 | 1 Year |
| <input checked="" type="checkbox"/> | Test software | Audix | E3 | V 6.11111b | N/A | N/A |

6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

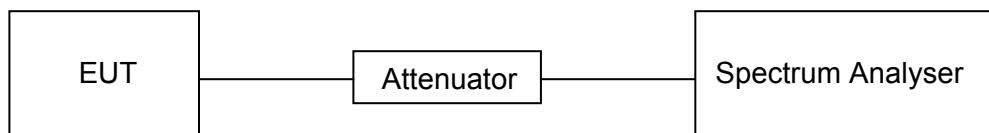


RESULTS

| Mode | On Time (msec) | Period (msec) | Duty Cycle x (Linear) | Duty Cycle (%) | Duty Cycle Correction Factor (db) | 1/B Minimum VBW (KHz) |
|------|----------------|---------------|-----------------------|----------------|-----------------------------------|-----------------------|
| GFSK | 2.93 | 3.76 | 0.779 | 77.7 | 1.08 | 0.341 |

Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle(Linear)

ON TIME AND DUTY CYCLE MID CH

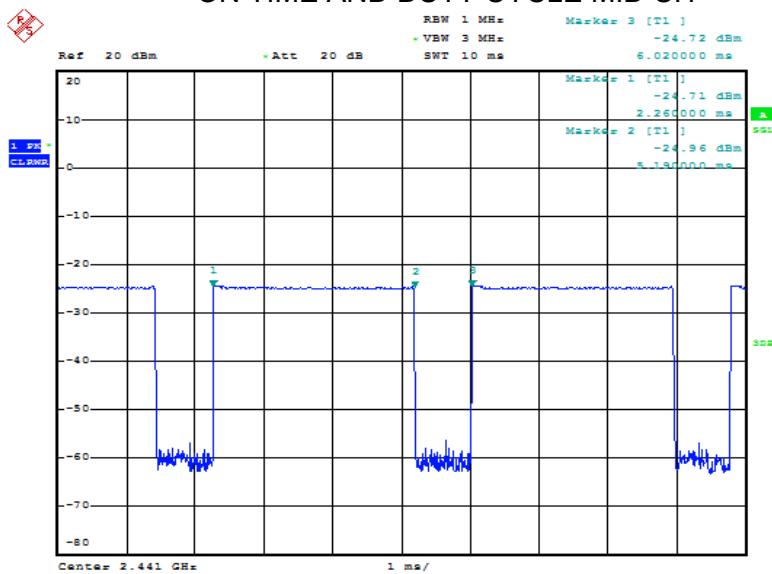

6.2. 6 dB BANDWIDTH & 99% BANDWIDTH

LIMITS

| FCC Part15 (15.247) , Subpart C | | | |
|---------------------------------|---------------|-----------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| FCC 15.247 (a) (1) | 6dB Bandwidth | >= 500KHz | 2400-2483.5 |


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | 100K |
| VBW | $\geq 3 \times$ RBW |
| Trace | Max hold |
| Sweep | Auto couple |

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


TEST SETUP


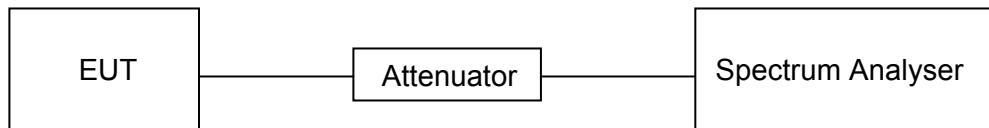


RESULTS

6.2.1. GFSK MODE

| Channel | Frequency (MHz) | 6dB bandwidth (MHz) | 99% Bandwidth (MHz) | Result |
|---------|-----------------|---------------------|---------------------|--------|
| Low | 2402 | 0.686 | 1.072 | Pass |
| Middle | 2441 | 0.684 | 1.074 | Pass |
| High | 2480 | 0.682 | 1.070 | Pass |

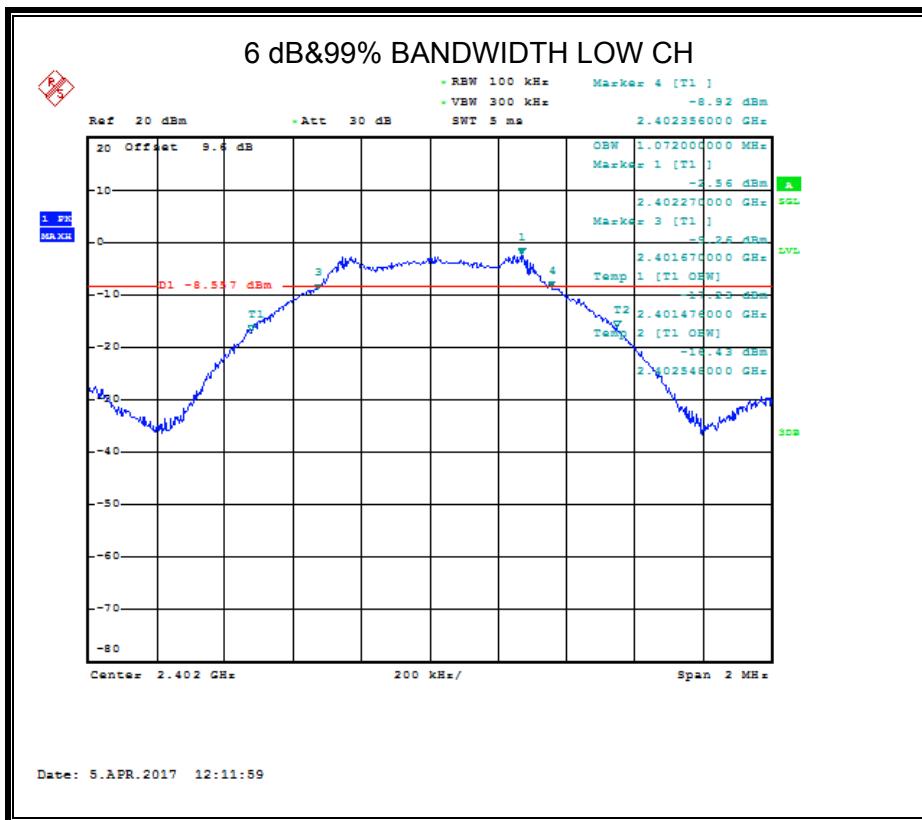

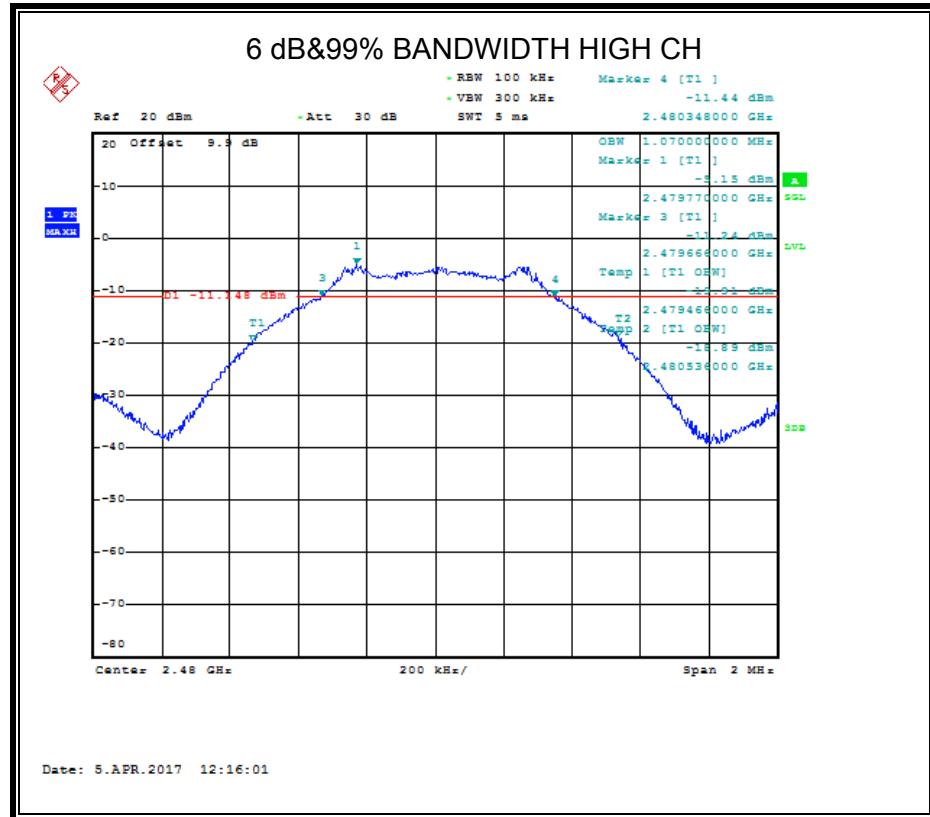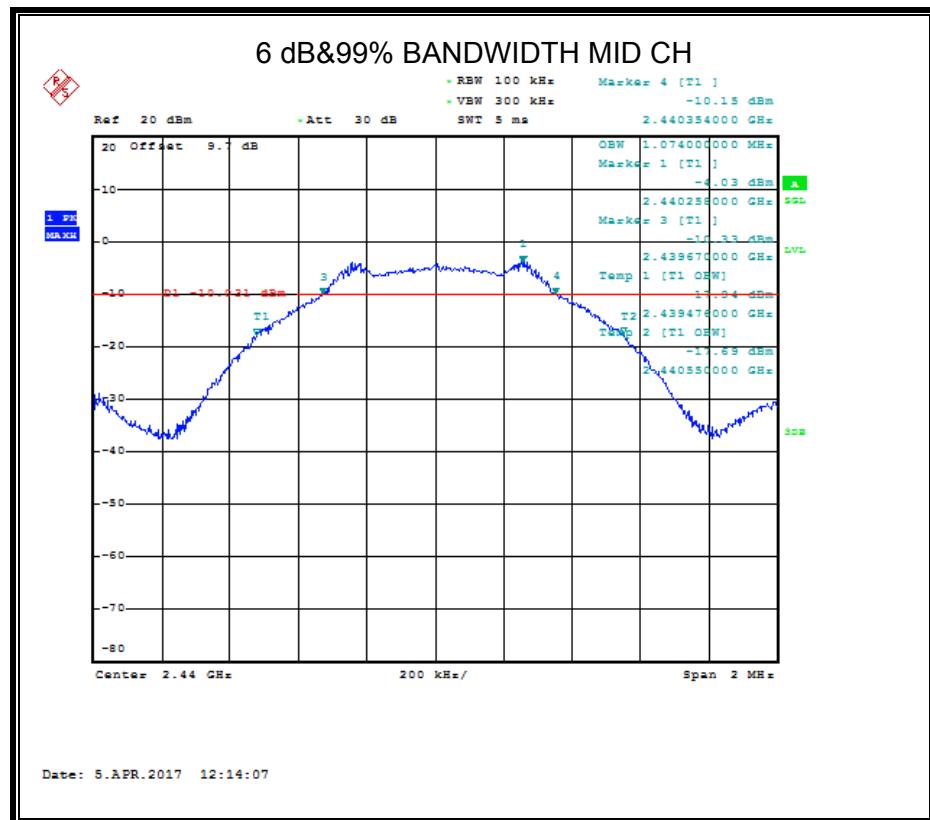

6.3. PEAK CONDUCTED OUTPUT POWER

LIMITS

| FCC Part15 (15.247) , Subpart C IC RSS-247 ISSUE 2 | | | |
|---|-------------------|-----------------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| FCC 15.247(b)(3) IC RSS-247 5.4 (4) | Peak Output Power | 1 watt or 30dBm | 2400-2483.5 |


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | \geq DTS bandwidth(e.g. 1 MHz for BLE) |
| VBW | $\geq 3 \times$ RBW |
| Span | 3 x RBW |
| Trace | Max hold |
| Sweep time | Auto couple. |

Allow trace to fully stabilize and use peak marker function to determine the peak amplitude level.


TEST SETUP


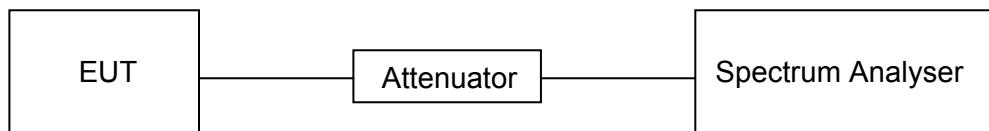


RESULTS

| Test Channel | Frequency | Maximum Conducted Output Power(PK) | EIRP | LIMIT |
|--------------|-----------|------------------------------------|-------------|-------|
| | (MHz) | (dBm) | (dBm) | dBm |
| CH00 | 2402 | -1.810 | 1.62 | 30 |
| CH19 | 2440 | -3.280 | 0.15 | 30 |
| CH39 | 2480 | -4.440 | -1.01 | 30 |

Note: EIRP = Maximum Conducted Output Power (PK) + Antenna Gain

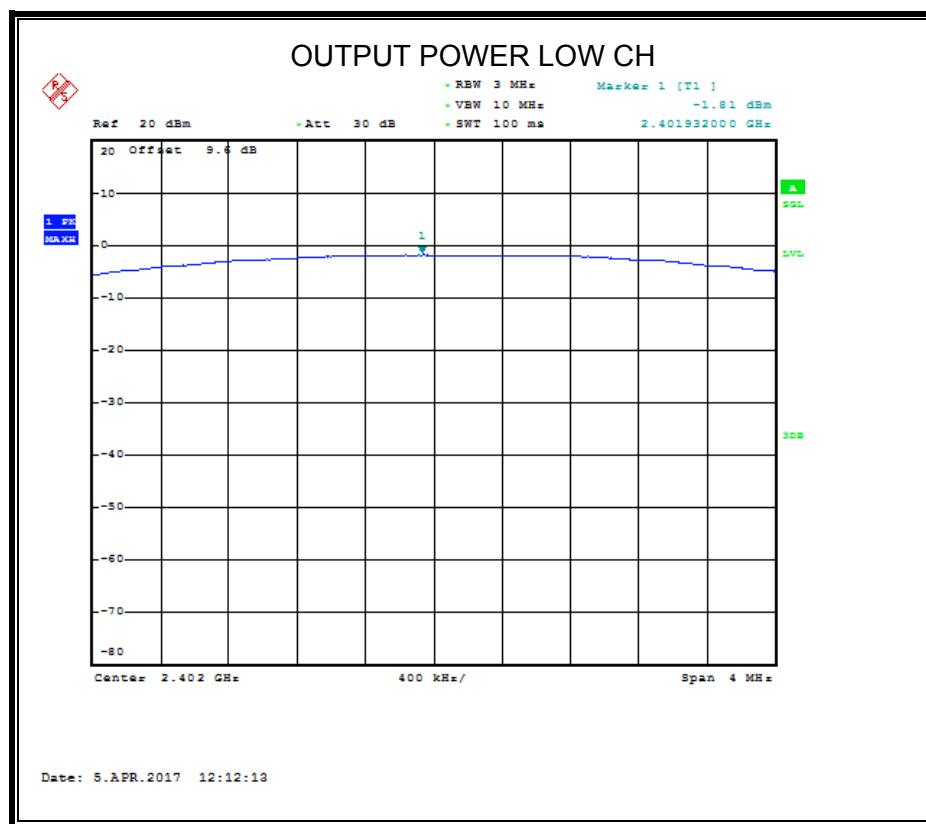

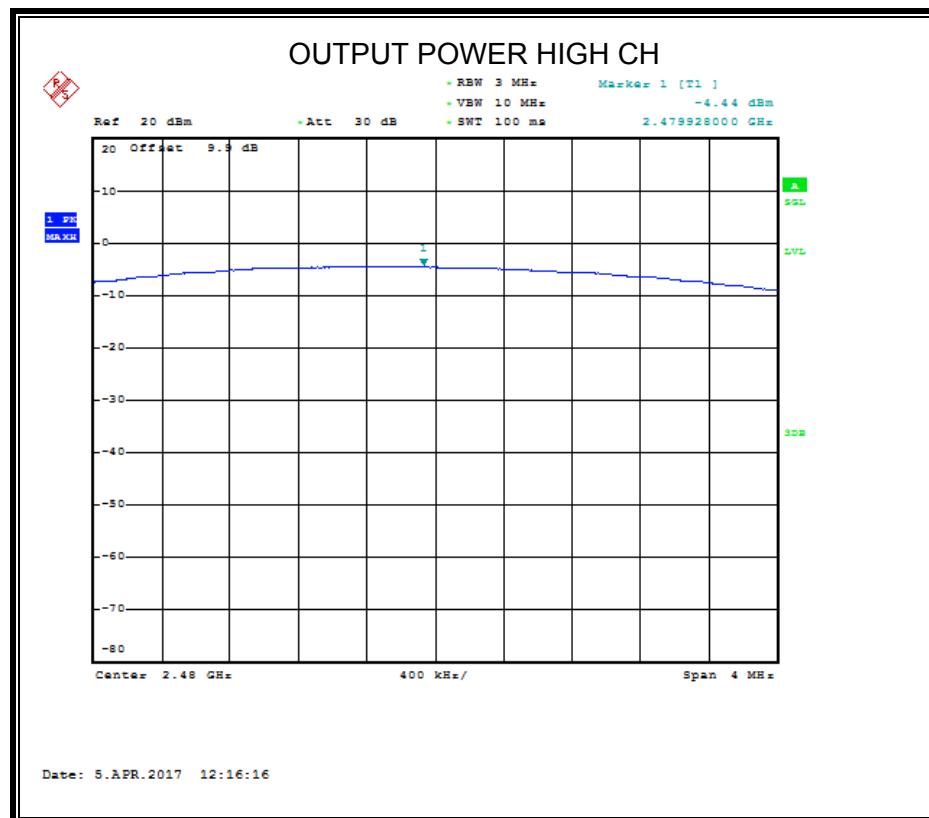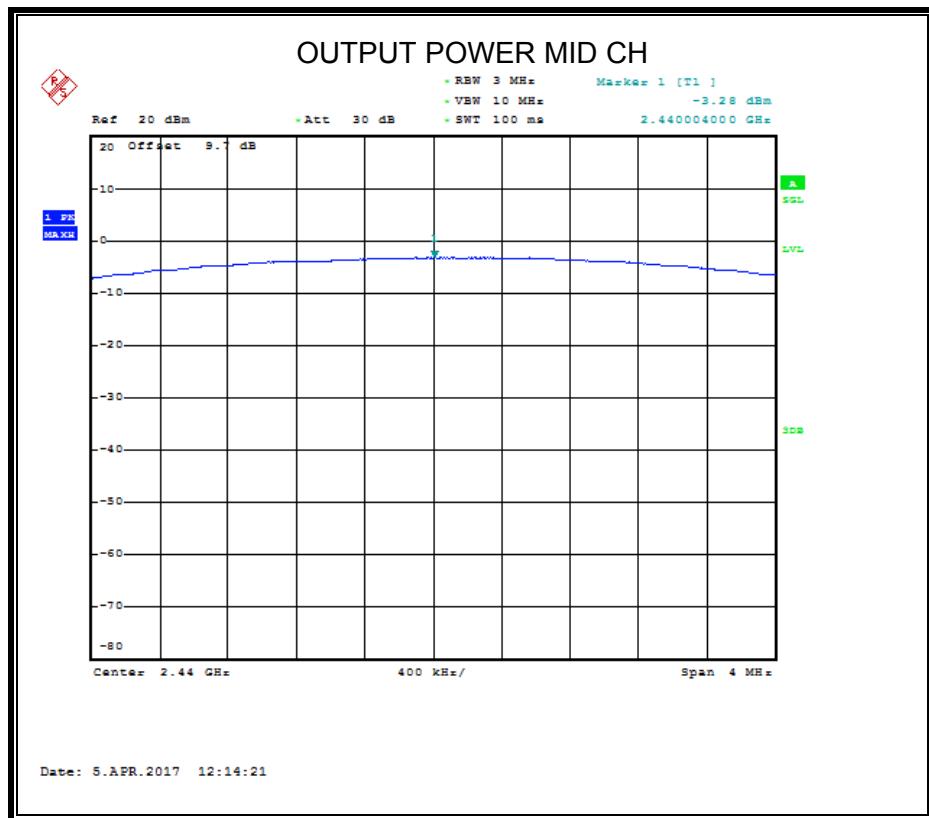

6.4. POWER SPECTRAL DENSITY

LIMITS

| FCC Part15 (15.247) , Subpart C IC RSS-247 ISSUE 2 | | | |
|---|------------------------|-------------------------|-----------------------|
| Section | Test Item | Limit | Frequency Range (MHz) |
| FCC §15.247 (e) IC RSS-247 5.2 (2) | Power Spectral Density | 8 dBm in any 3 kHz band | 2400-2483.5 |

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ |
| VBW | $\geq 3 \times \text{RBW}$ |
| Span | $1.5 \times \text{DTS bandwidth}$ |
| Trace | Max hold |
| Sweep time | Auto couple. |

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



TEST SETUP

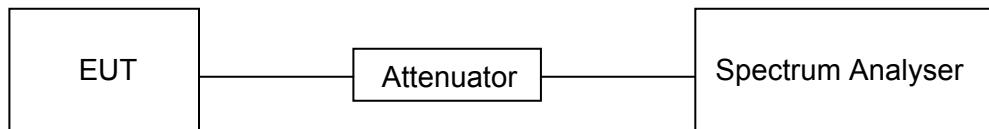

RESULTS

| Frequency | Power Spectral Density (dBm) | Limit (dBm) | Result |
|-----------|------------------------------|-------------|--------|
| 2402 MHz | -2.360 | 8 | PASS |
| 2440 MHz | -3.730 | 8 | PASS |
| 2480 MHz | -5.230 | 8 | PASS |

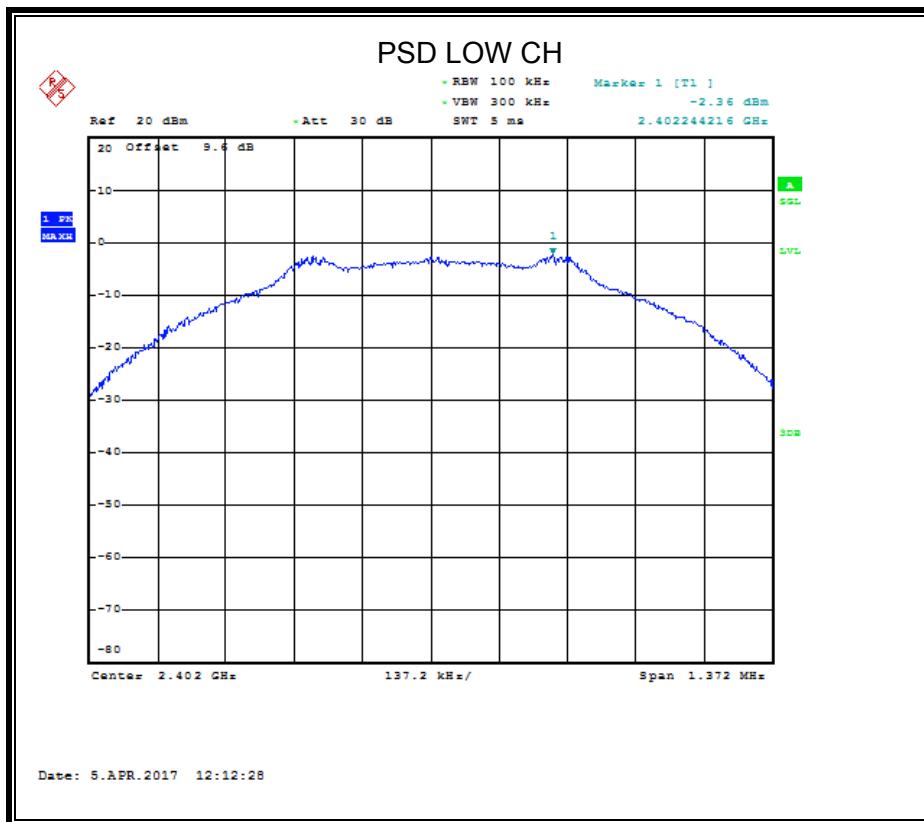

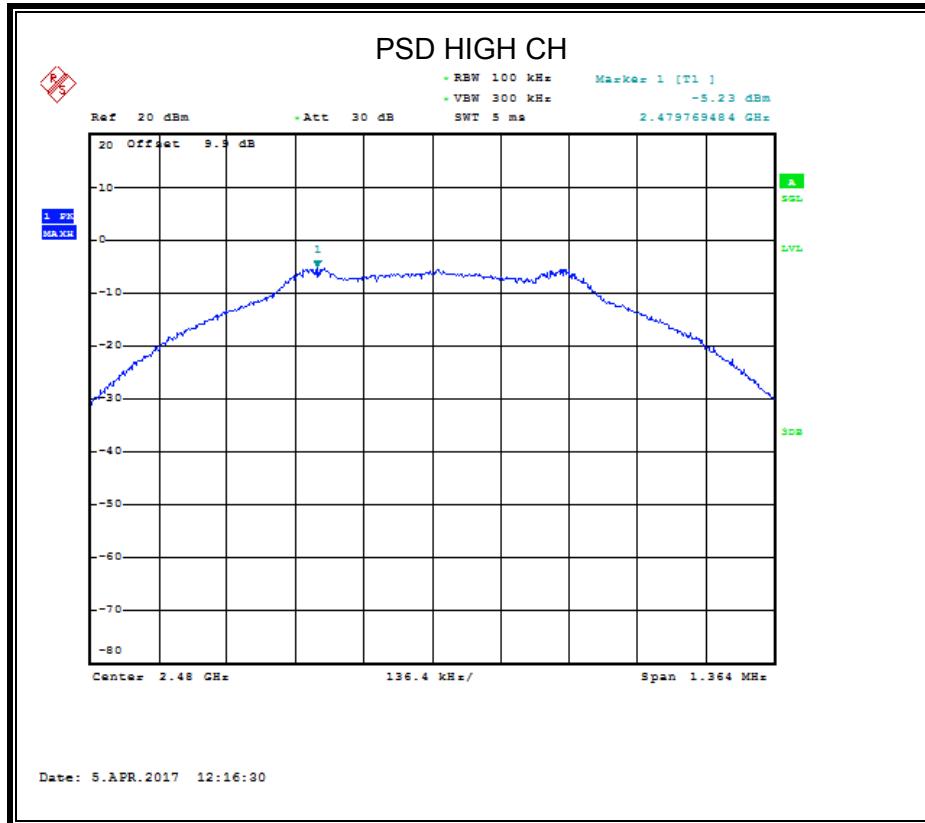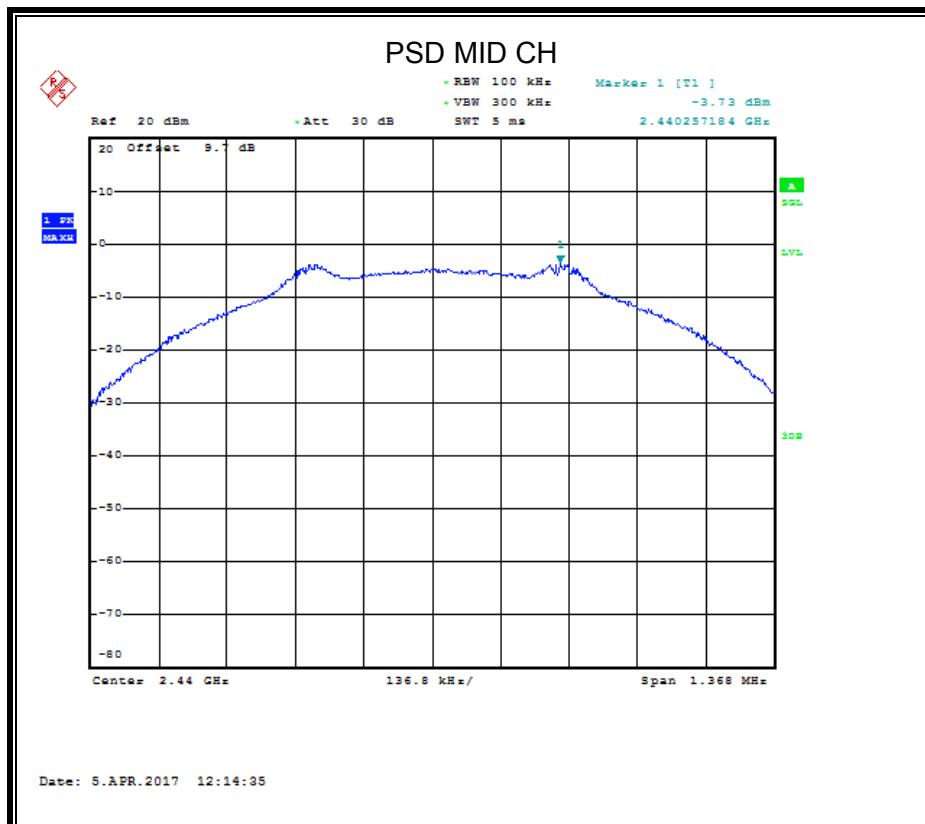

6.5. CONDUCTED BANDEDGE

LIMITS

| FCC Part15 (15.247) , Subpart C IC RSS-247 ISSUE 2 | | |
|---|---|---|
| Section | Test Item | Limit |
| FCC §15.247 (d) IC RSS-247 5.5 | Conducted Bandedge and Spurious Emissions | at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power |

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


| | |
|------------------|--|
| Center Frequency | The centre frequency of the channel under test |
| Detector | Peak |
| RBW | 100K |
| VBW | $\geq 3 \times$ RBW |
| Span | 1.5 x DTS bandwidth |
| Trace | Max hold |
| Sweep time | Auto couple. |

Use the peak marker function to determine the maximum PSD level.

| | |
|--------------------|---|
| Span | Set the center frequency and span to encompass frequency range to be measured |
| Detector | Peak |
| RBW | 100K |
| VBW | $\geq 3 \times$ RBW |
| measurement points | \geq span/RBW |
| Trace | Max hold |
| Sweep time | Auto couple. |


Use the peak marker function to determine the maximum amplitude level.


TEST SETUP

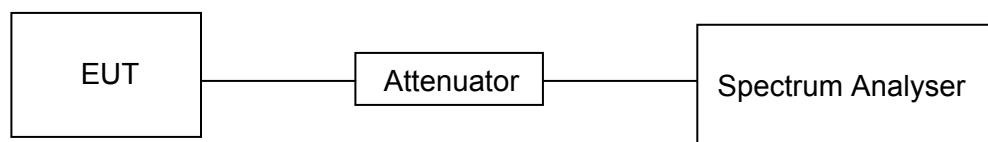

RESULTS

| Channel | Carrier Frequency [MHz] | Carrier Power [dBm] | Max Spurious Level [dBm] | Limit [dBm] | Results |
|---------|----------------------------|------------------------|-----------------------------|----------------|---------|
| LCH | 2402 | -2.800 | -46.562 | -22.8 | PASS |
| HCH | 2480 | -5.740 | -46.291 | -25.74 | PASS |

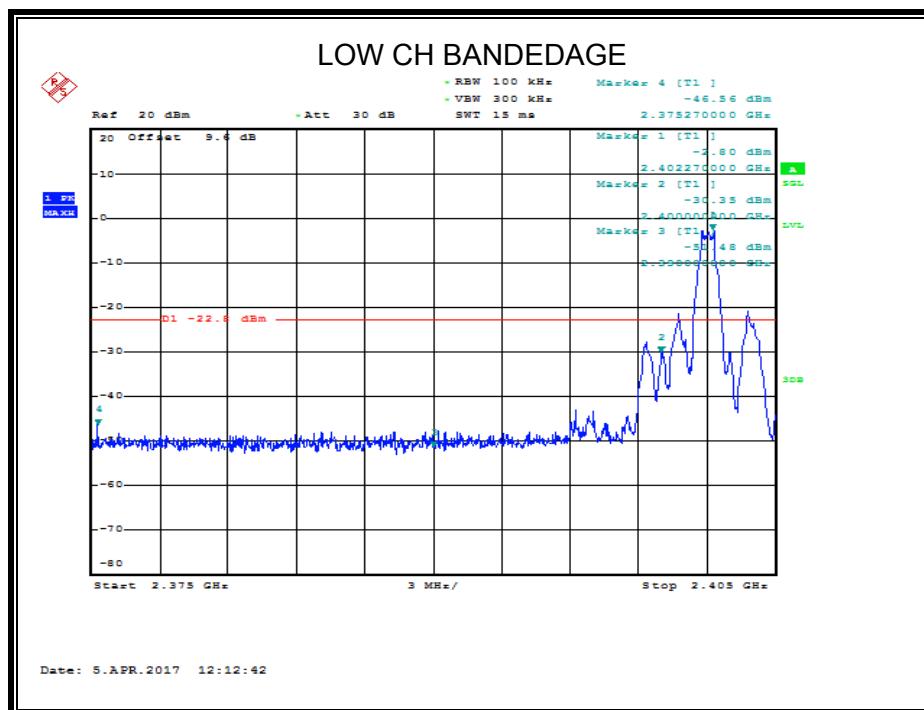

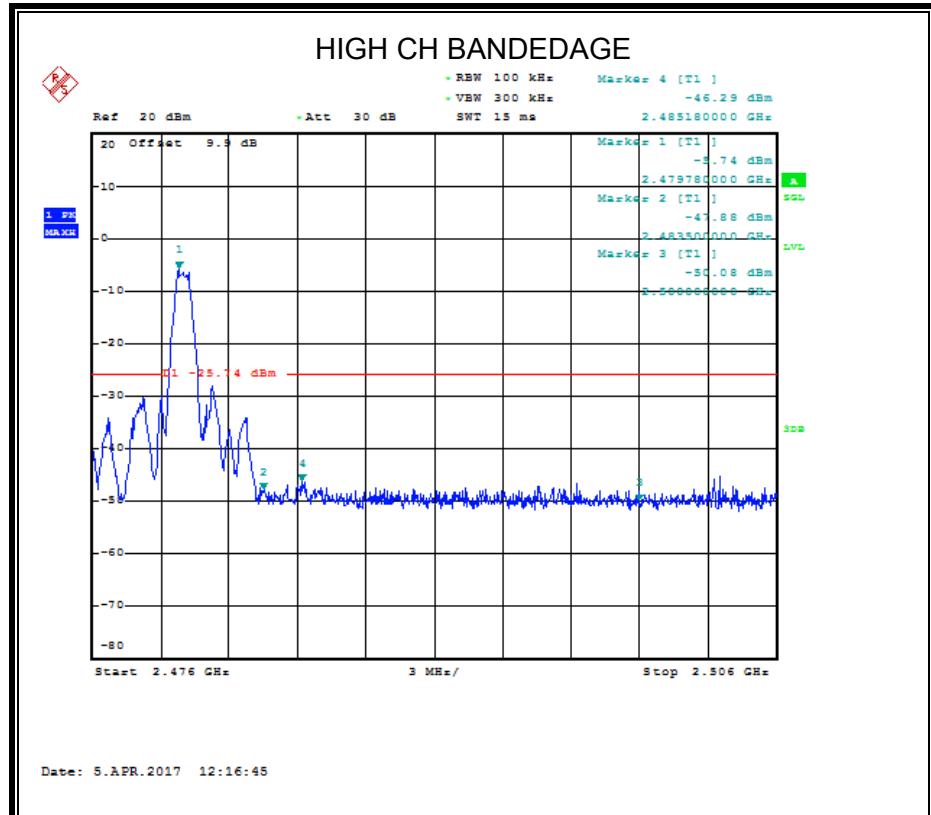



Conducted Spurious Emissions


Result Table


| Mode | Channel | Pref [dBm] | Puw[dBm] | Verdict |
|------|---------|------------|----------|---------|
| BLE | LCH | -2.48 | <Limit | PASS |
| BLE | MCH | -4.05 | <Limit | PASS |
| BLE | HCH | -5.51 | <Limit | PASS |



Test Graphs

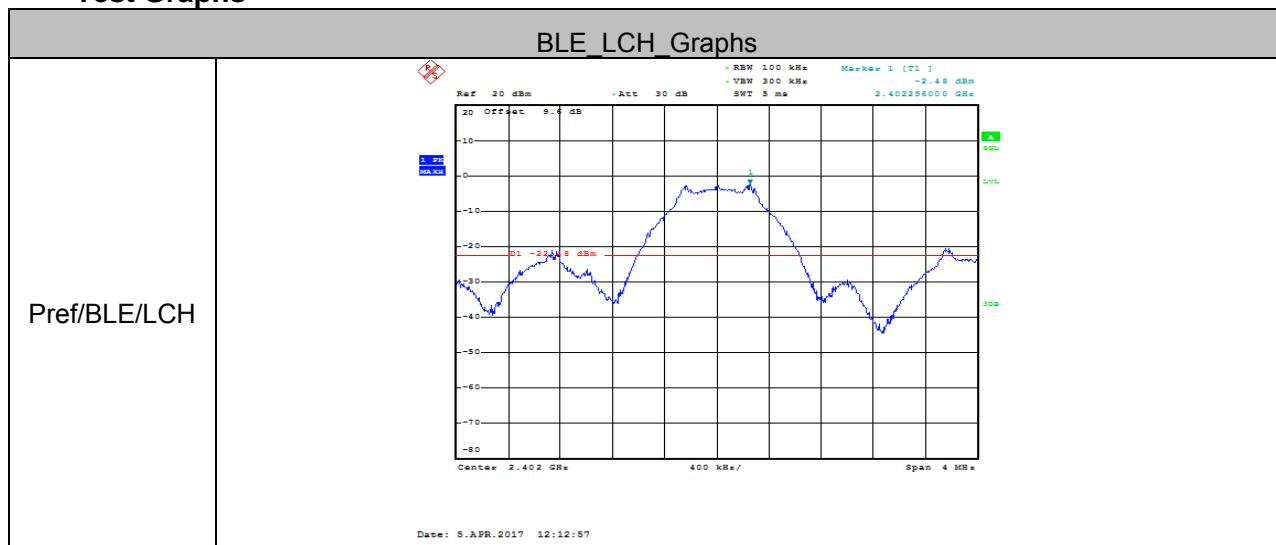



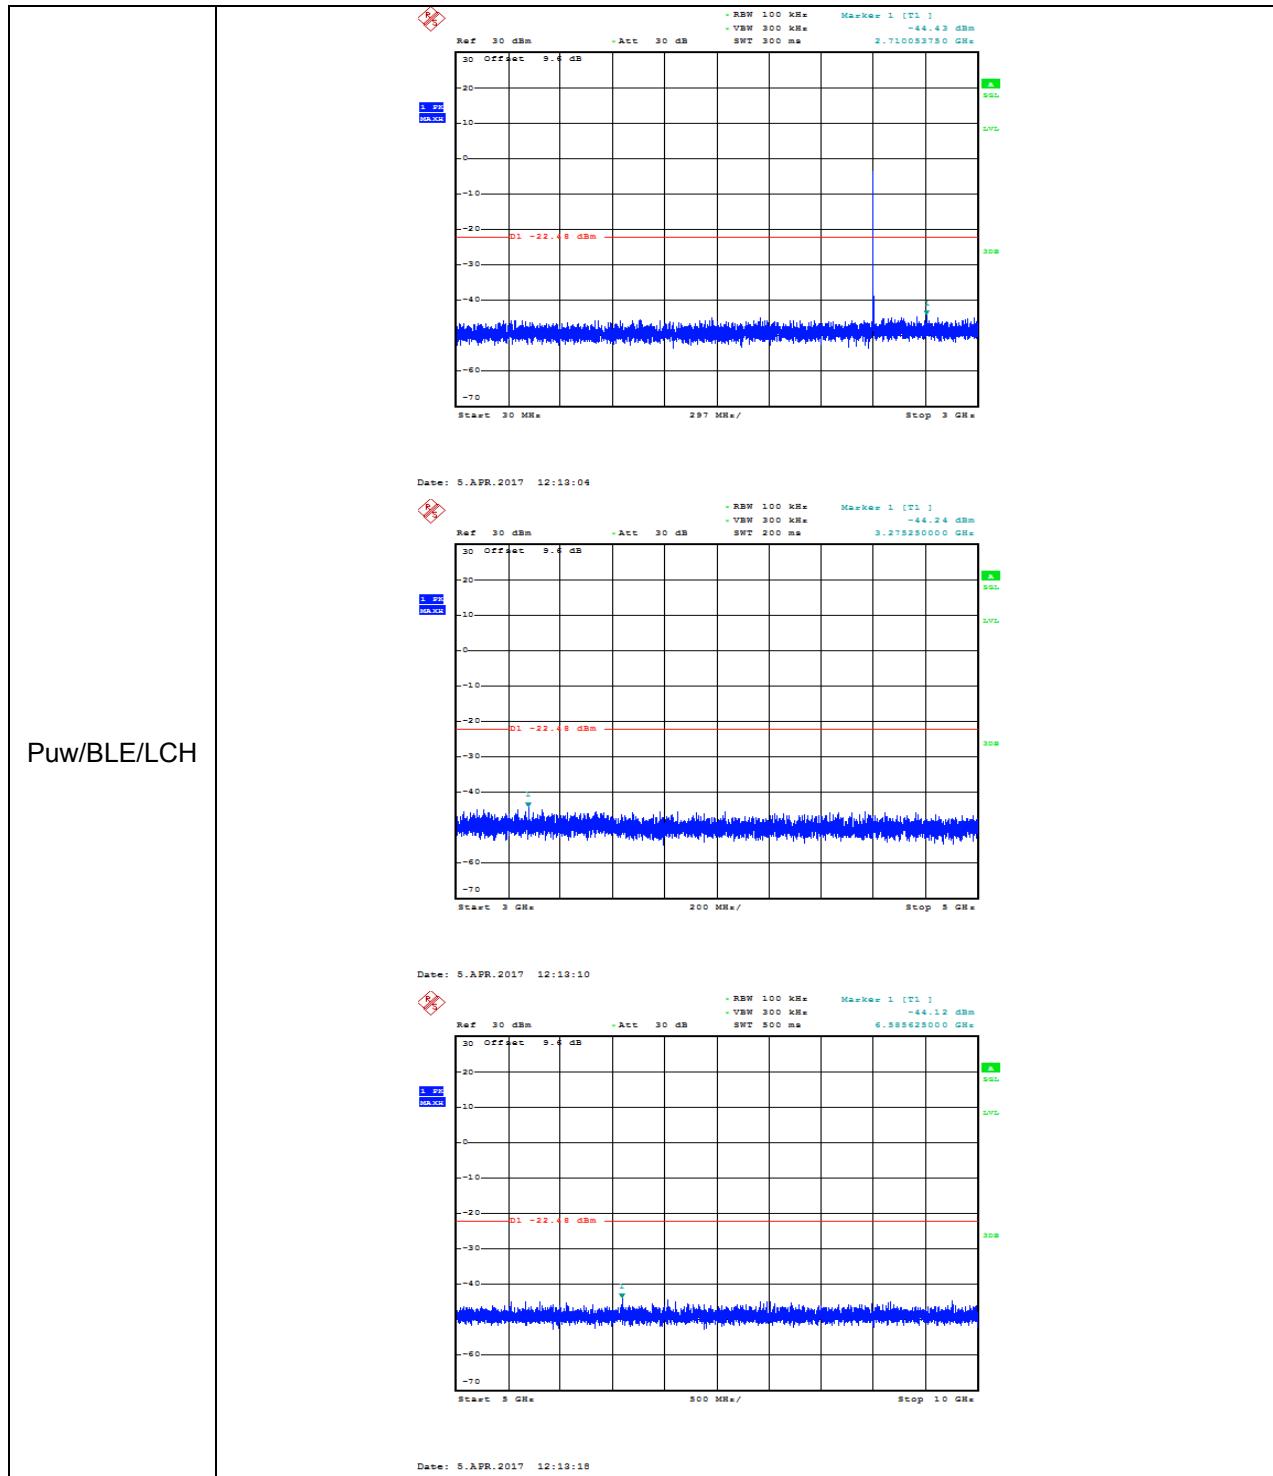


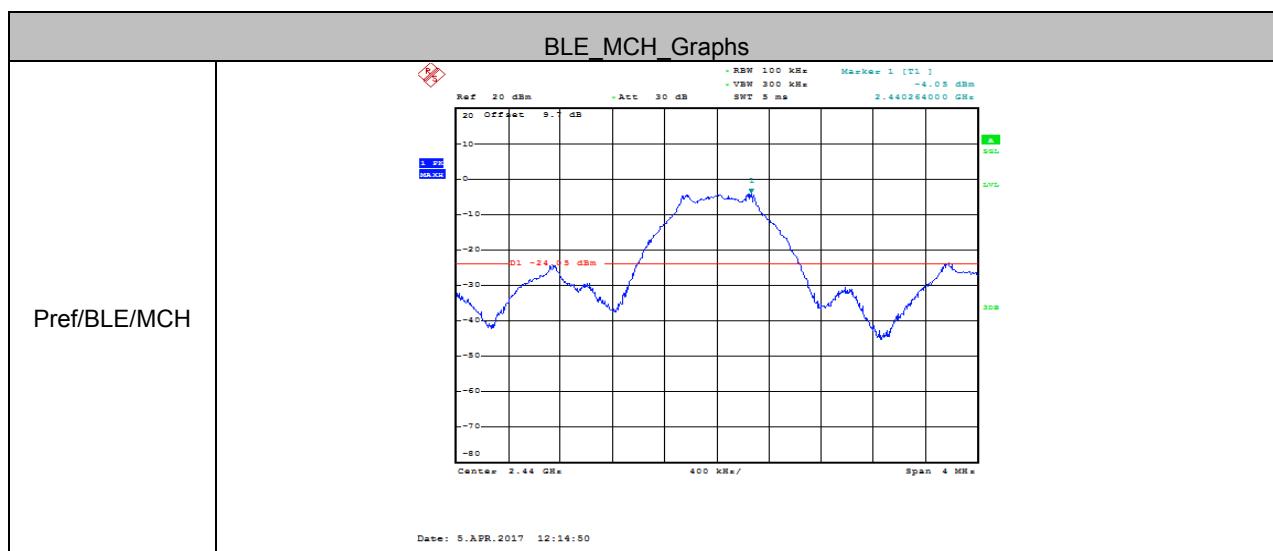

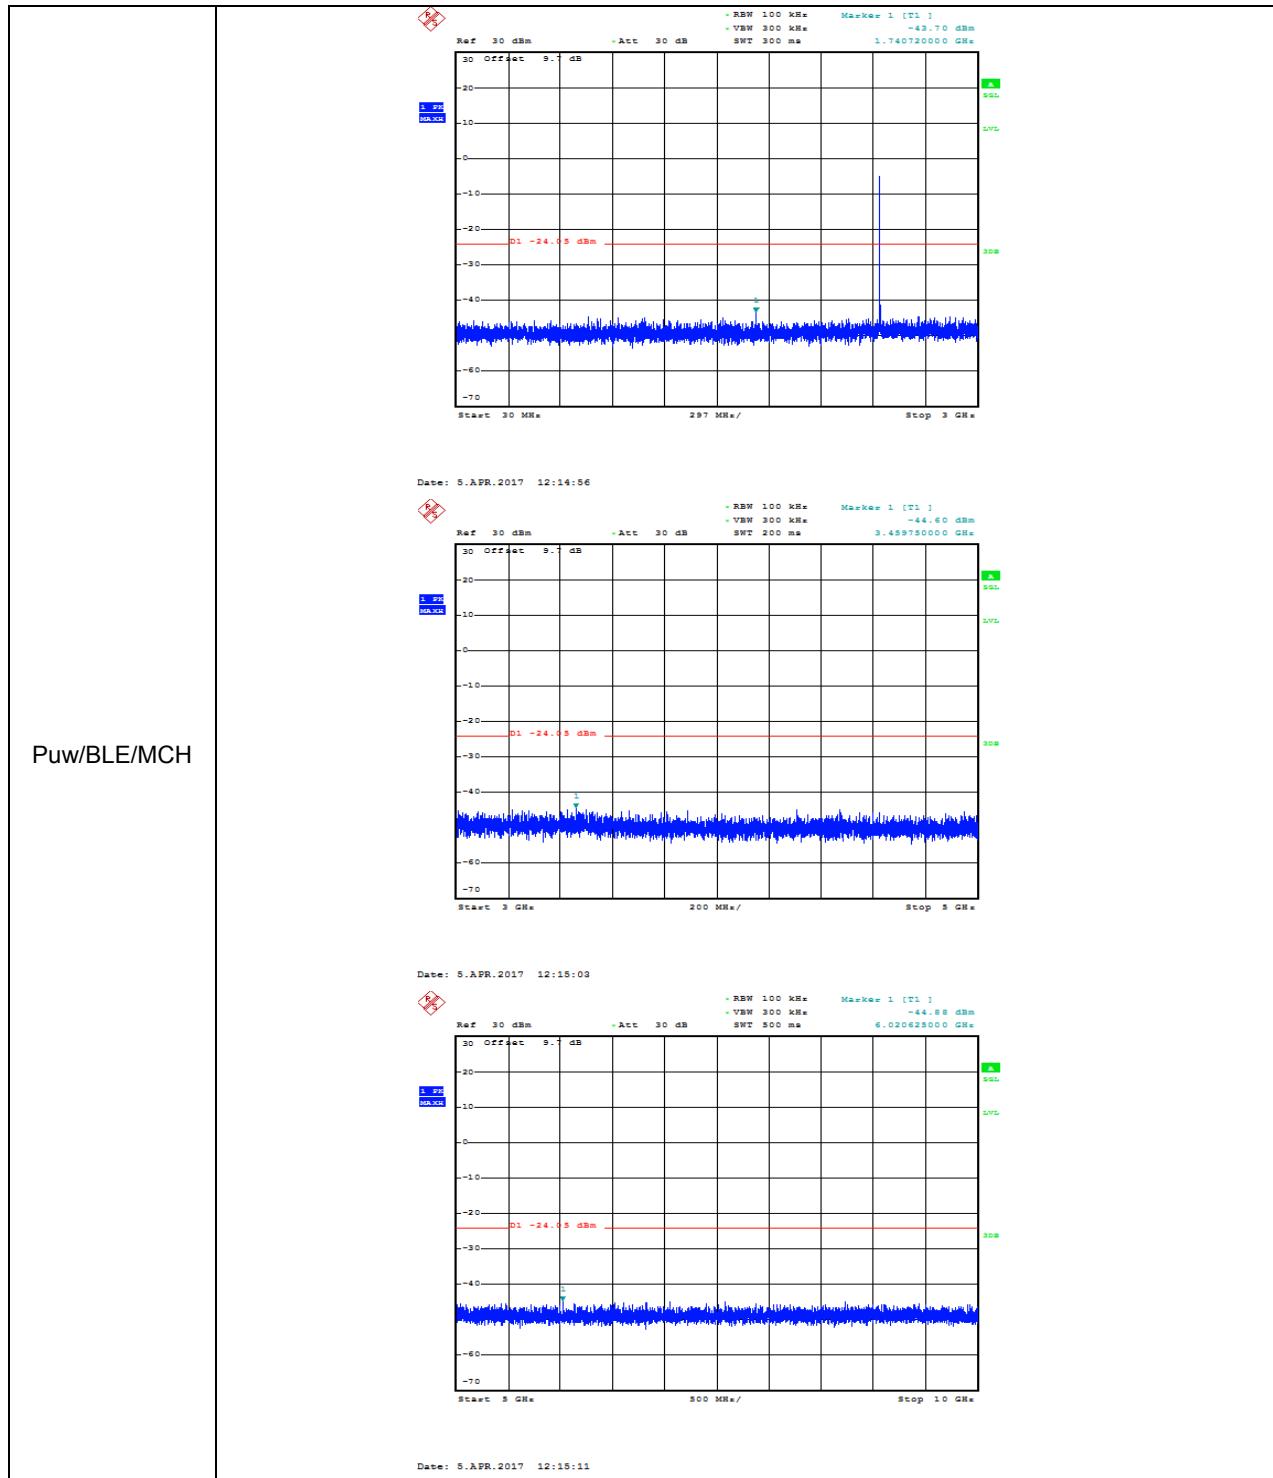

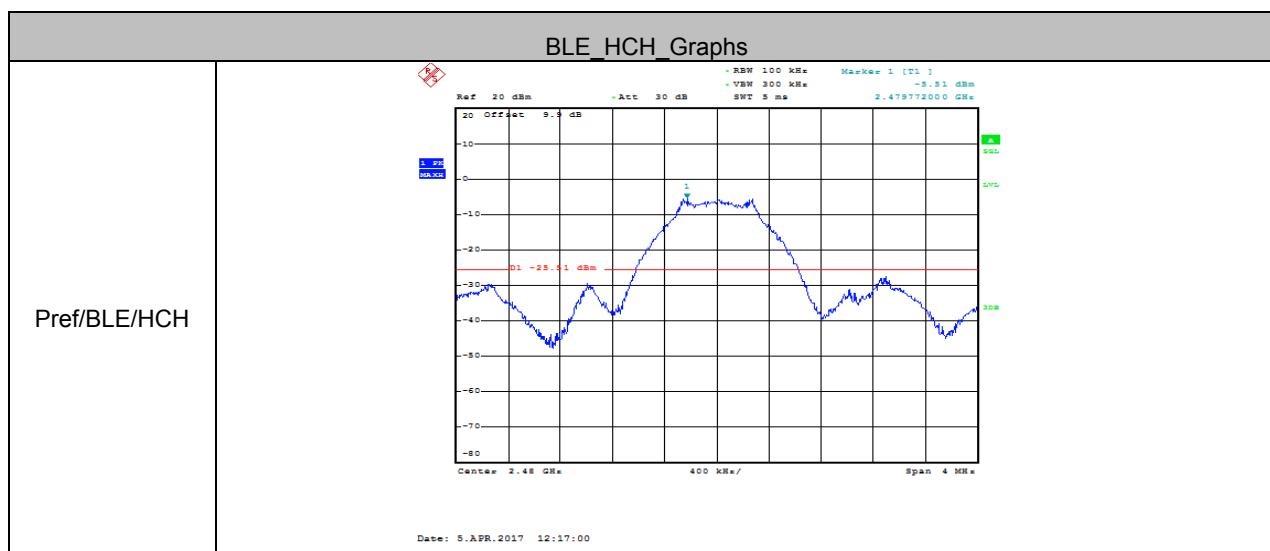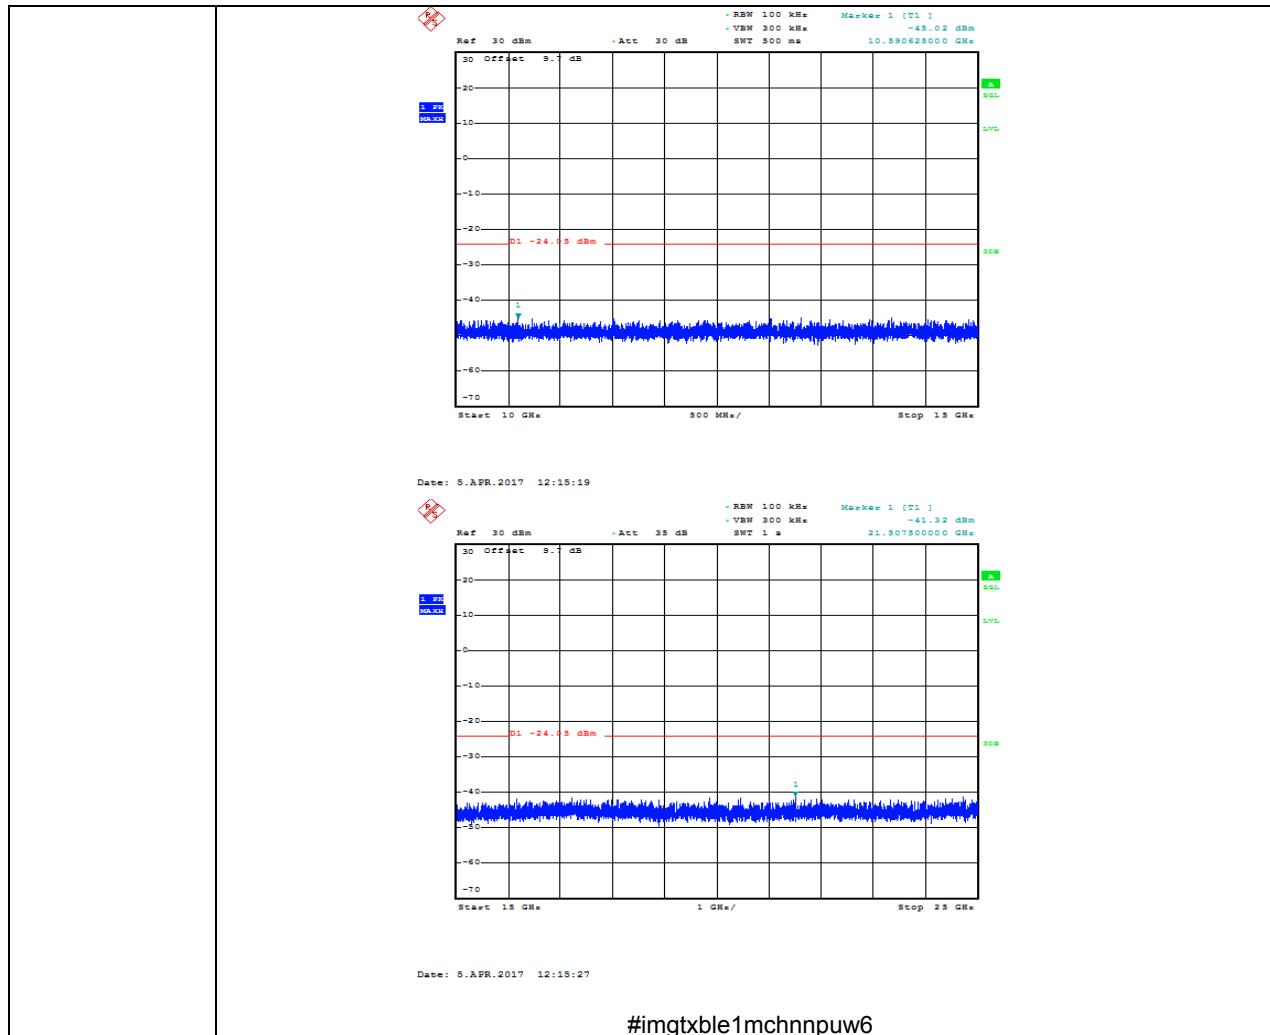

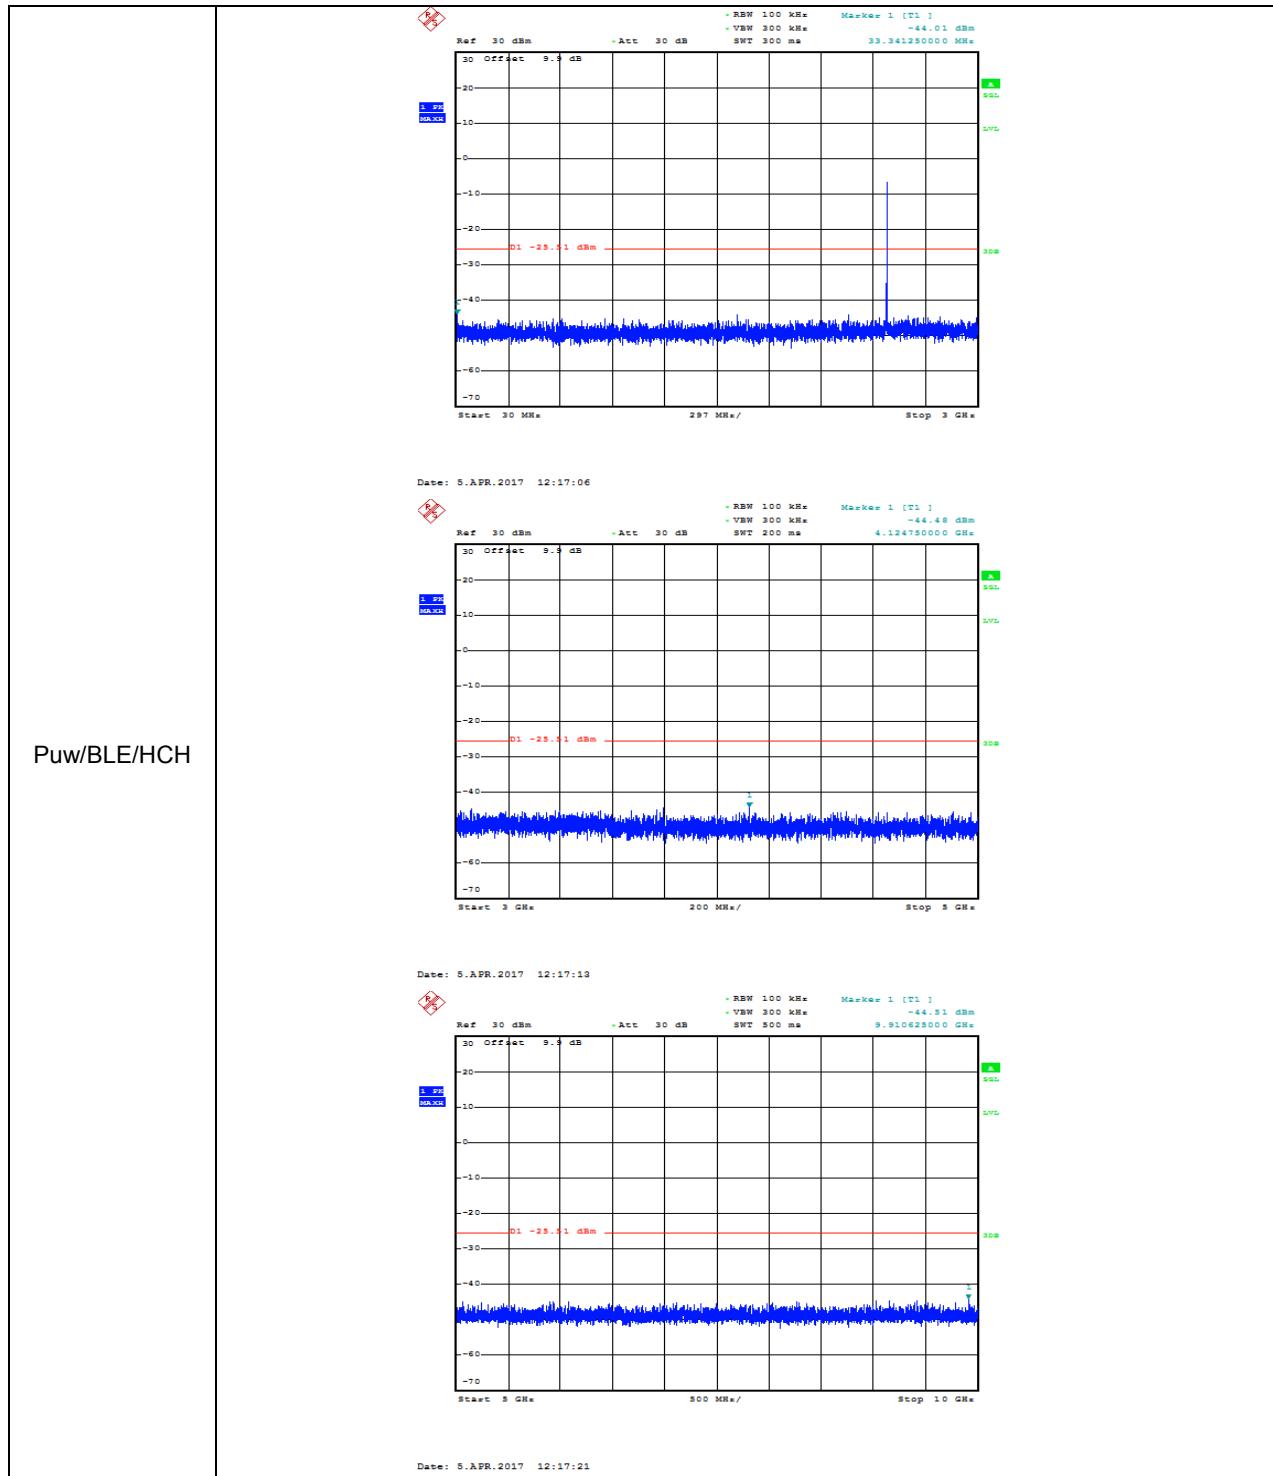

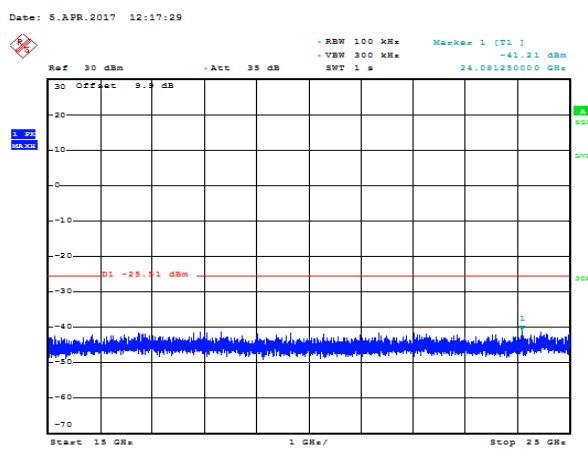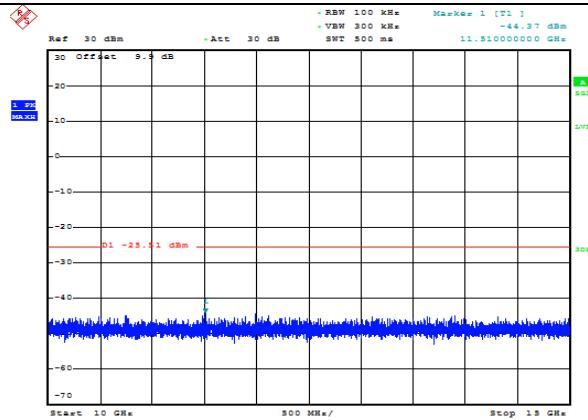

Date: 5.APR.2017 12:17:37

#imgtxble1hchnnpuw6

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to IC RSS-GEN Clause 8.9 (Transmitter)

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)


| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |

Radiation Disturbance Test Limit for FCC (Above 1G)

| Frequency (MHz) | dB(uV/m) (at 3 meters) | |
|-----------------|------------------------|---------|
| | Peak | Average |
| Above 1000 | 74 | 54 |

TEST SETUP AND PROCEDURE


Below 30MHz

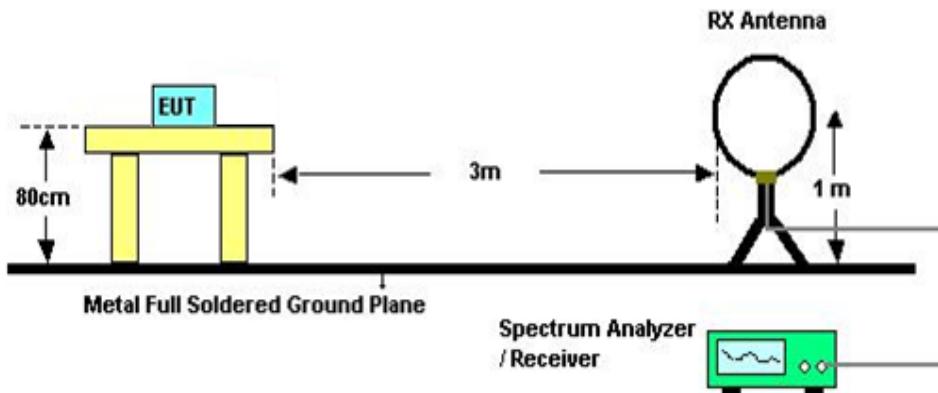

The setting of the spectrum analyser

| | |
|----------|--|
| RBW | 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz) |
| VBW | 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz) |
| Sweep | Auto |
| Detector | Peak/QP/ Average |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

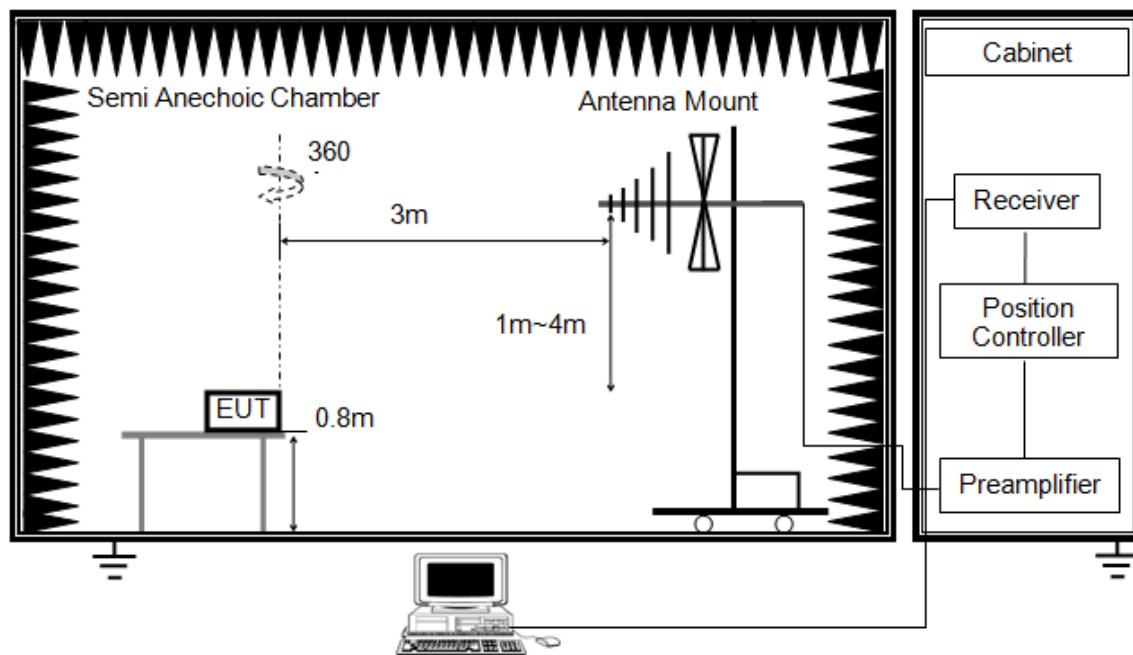


The setting of the spectrum analyser

| | |
|----------|----------|
| RBW | 120K |
| VBW | 300K |
| Sweep | Auto |
| Detector | Peak/QP |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

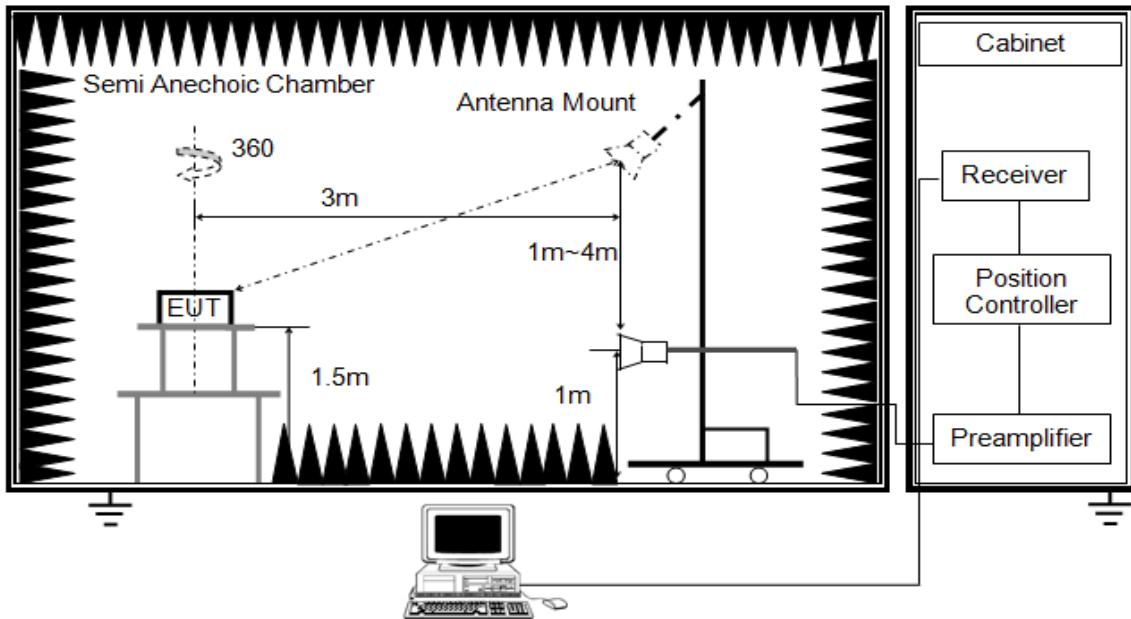

The setting of the spectrum analyser


| | |
|----------|------------------------|
| RBW | 1M |
| VBW | 3M |
| Sweep | Auto |
| Detector | Peak and CISPR Average |
| Trace | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average power measurement, set the VBW to 10 Hz, while maintaining all of the other instrument settings, if the duty cycle of the EUT is less than 98%, the Duty Cycle Correction Factor shall be added to the measured emission levels. For the Duty Cycle and Correction Factor please refer to clause 6.1.ON TIME AND DUTY CYCLE.
8. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

7.2. RESTRICTED BANDEDGE

7.2.1. GFSK MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

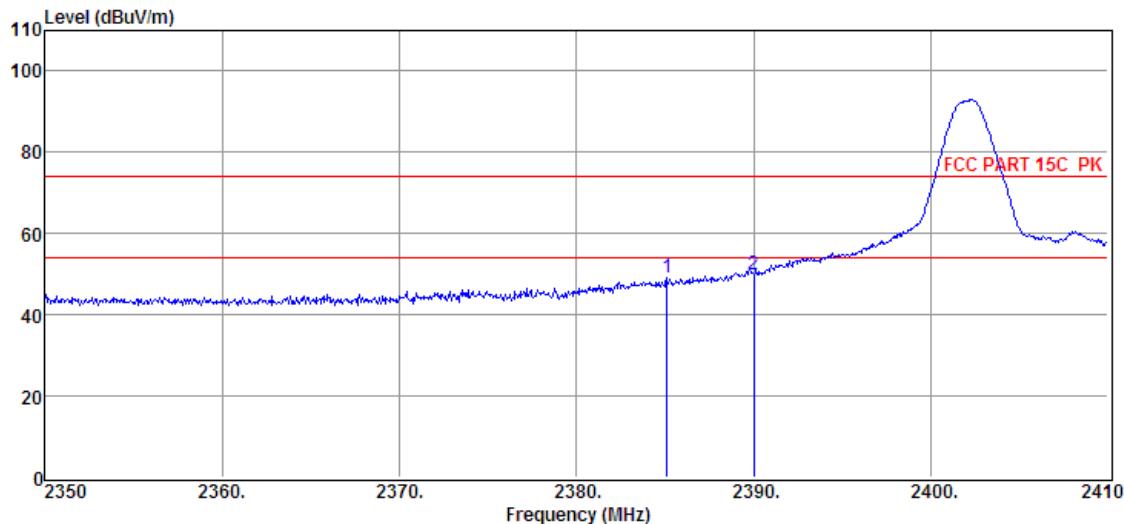

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|-------------|-------------|-------------------------|-----------------------|---------------|---------------|-----------------------------|---------------------------|-----------------|----------|
| 1 | 2385.10 | 42.92 | 29.76 | 29.41 | 6.01 | 49.28 | 74.00 | -24.72 | Peak |
| 2 | 2390.02 | 43.55 | 29.78 | 29.41 | 6.01 | 49.93 | 74.00 | -24.07 | Peak |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

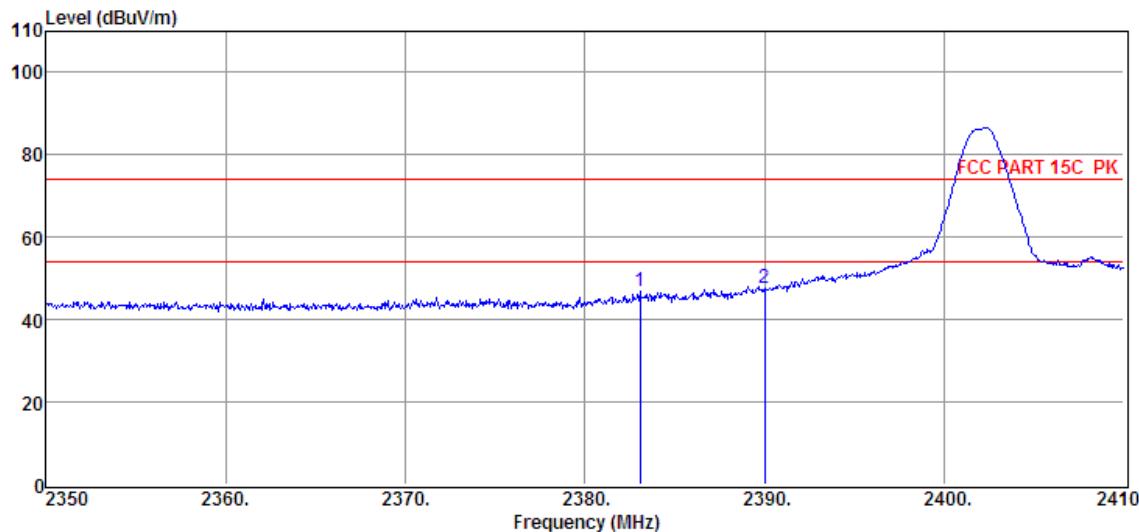

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|-------------|-------------|-------------------------|-----------------------|---------------|---------------|-----------------------------|---------------------------|-----------------|----------|
| 1 | 2383.06 | 40.60 | 29.75 | 29.39 | 6.01 | 46.97 | 74.00 | -27.03 | Peak |
| 2 | 2390.02 | 41.40 | 29.78 | 29.41 | 6.01 | 47.78 | 74.00 | -26.22 | Peak |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

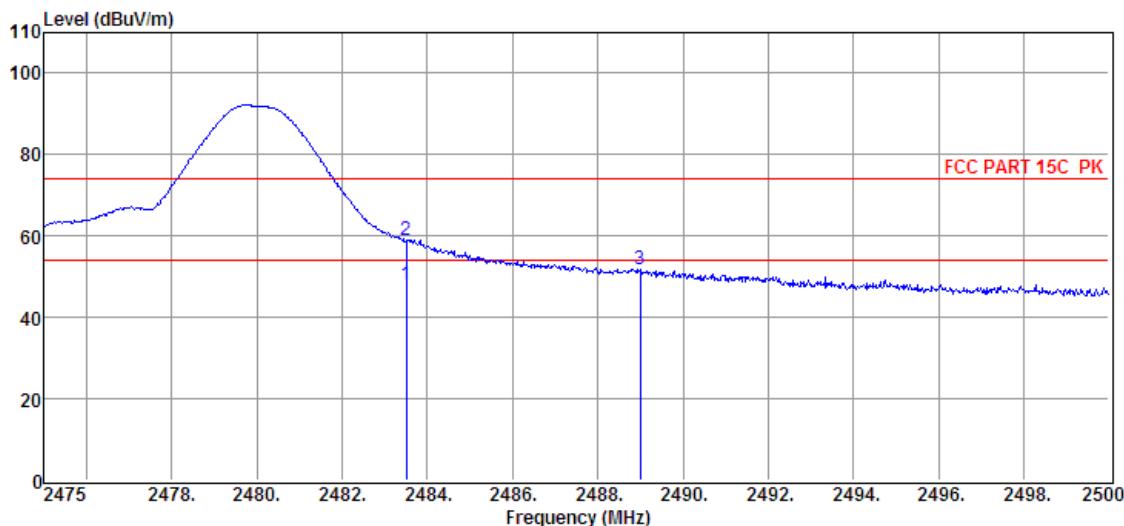

| Item (Mark) | Freq. (MHz) | PK Read Level (dB μ V) | VA1T Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | PK Result Level (dB μ V/m) | DCCF dB | AV Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) |
|----------------|----------------|-------------------------------------|---------------------------------------|-----------------------------|---------------------|---------------------|---|------------|---|---------------------------------|-----------------------|
| 2 | 2483.50 | 52.20 | | 30.14 | 29.71 | 6.15 | 58.78 | | | 74.00 | -15.22 |
| 3 | 2489.00 | 45.27 | | 30.16 | 29.71 | 6.15 | 51.87 | | | 74.00 | -22.13 |
| 1 | 2483.50 | | 41.28 | 30.14 | 29.71 | 6.15 | | 1.08 | 48.94 | 54.00 | -5.06 |

Note: 1. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
2. PK: Peak Detector; VA1T: Linear Voltage Average VBW=10Hz
3. PK Result Level = PK Read Level + Antenna Factor + Cable loss - PRM Factor.
4. DCCF: Duty Cycle Correction Factor=1.08(Please refer to clause 6.1.ON TIME AND DUTY CYCLE).
5. AV Result Level: Average value = VA1T Reading + Antenna Factor + Cable loss - PRM Factor + DCCF
6. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

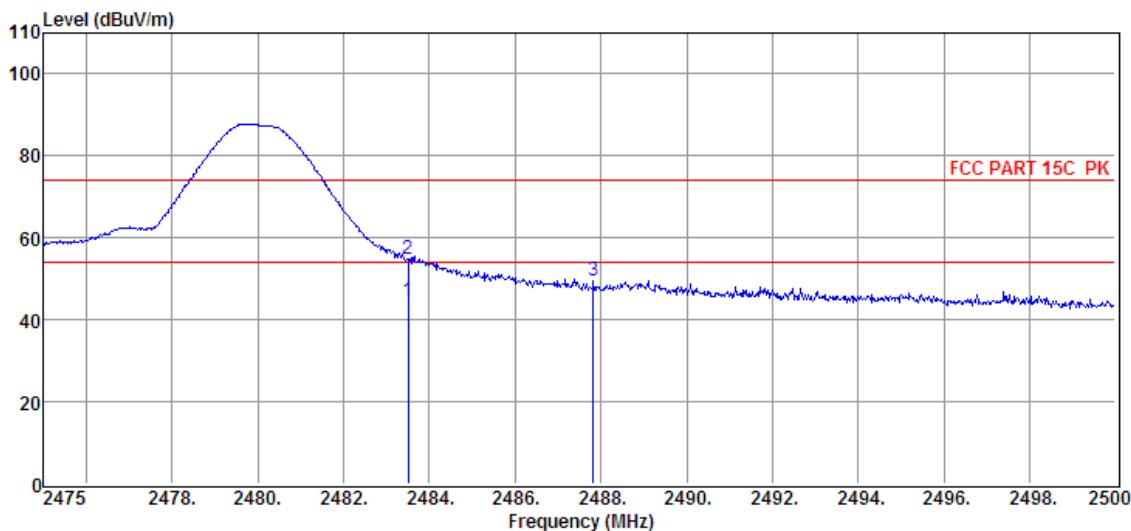

| Item (Mark) | Freq. (MHz) | PK Read Level (dB μ V) | VA1T Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | PK Result Level (dB μ V/m) | DCCF dB | AV Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) |
|----------------|----------------|-------------------------------------|---------------------------------------|-----------------------------|---------------------|---------------------|---|------------|---|---------------------------------|-----------------------|
| 2 | 2483.50 | 48.32 | | 30.14 | 29.71 | 6.15 | 54.90 | | | 74.00 | -19.10 |
| 3 | 2487.83 | 42.86 | | 30.15 | 29.71 | 6.15 | 49.45 | | | 74.00 | -24.55 |
| 1 | 2483.50 | | 37.94 | 30.14 | 29.71 | 6.15 | | 1.08 | 50.53 | 54.00 | -3.47 |

Note: 1. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 2. PK: Peak Detector; VA1T: Linear Voltage Average VBW=10Hz
 3. PK Result Level = PK Read Level + Antenna Factor + Cable loss - PRM Factor.
 4. DCCF: Duty Cycle Correction Factor=1.08(Please refer to clause 6.1.ON TIME AND DUTY CYCLE).
 5. AV Result Level: Average value = VA1T Reading + Antenna Factor + Cable loss - PRM Factor + DCCF
 6. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


Note: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

7.3. SPURIOUS EMISSIONS (1~25GHz)

7.3.1. GFSK MODE


HARMONICS AND SPURIOUS EMISSIONS

| | | | |
|------------|----------------------|----------------|------------|
| EUT: | Bluetooth Module | Polarization : | Horizontal |
| Test Mode: | GFSK Mode Low Chanel | | |

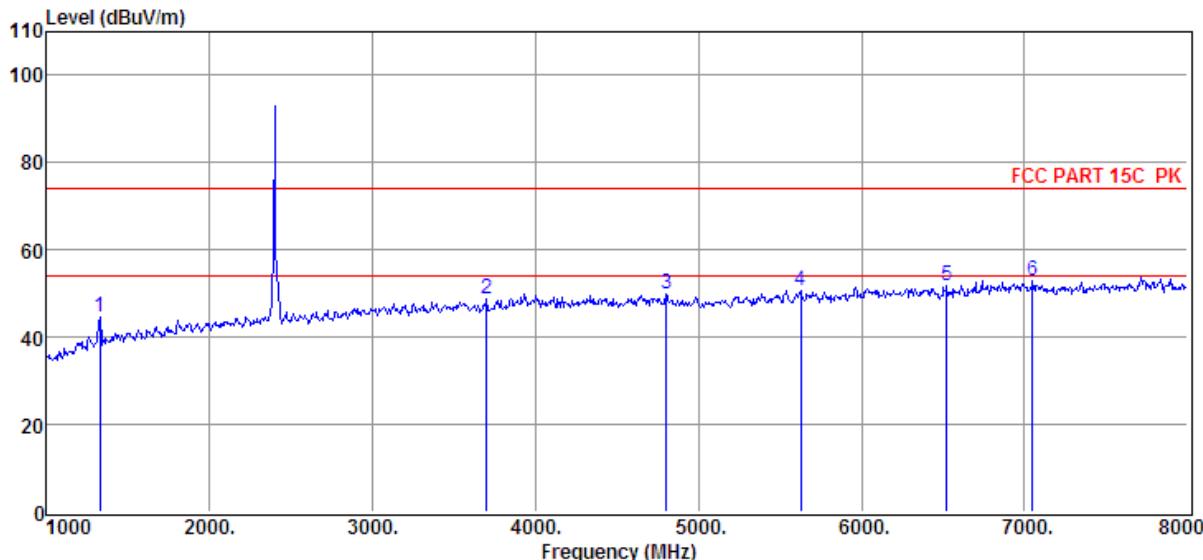

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 1329.00 | 44.76 | 24.73 | 29.37 | 4.49 | 44.61 | 74.00 | -29.39 | Peak |
| 2 | 3702.00 | 37.88 | 32.53 | 29.23 | 7.42 | 48.60 | 74.00 | -25.40 | Peak |
| 3 | 4801.00 | 37.05 | 33.74 | 29.32 | 8.46 | 49.93 | 74.00 | -24.07 | Peak |
| 4 | 5627.00 | 35.83 | 34.78 | 29.23 | 9.31 | 50.69 | 74.00 | -23.31 | Peak |
| 5 | 6523.00 | 36.01 | 35.82 | 29.90 | 9.96 | 51.89 | 74.00 | -22.11 | Peak |
| 6 | 7048.00 | 36.46 | 36.24 | 30.41 | 10.48 | 52.77 | 74.00 | -21.23 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

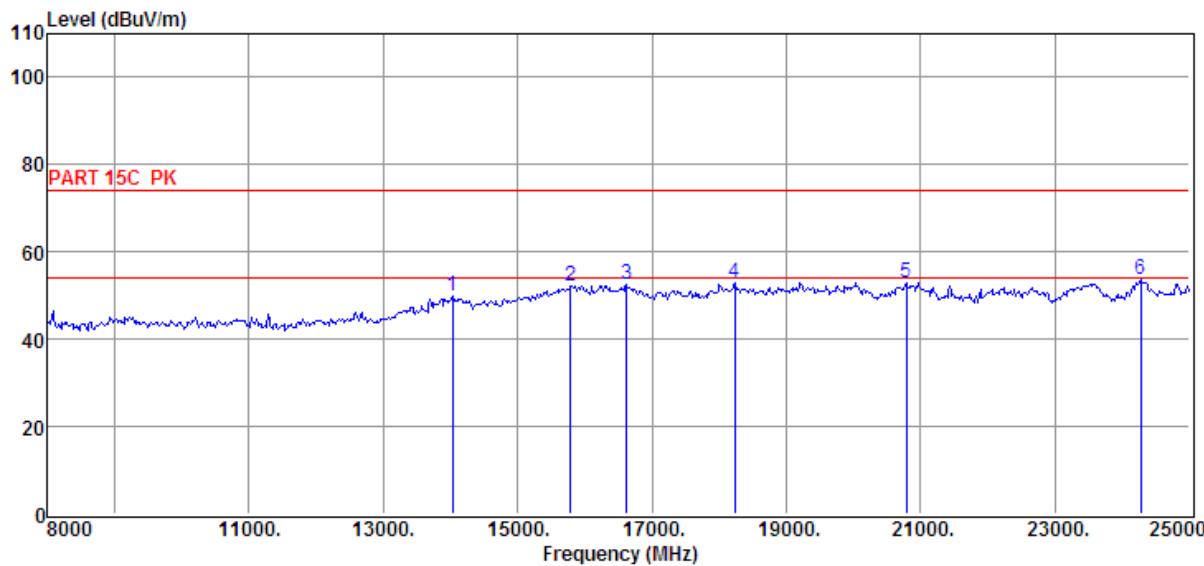

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 14035.00 | 29.77 | 39.87 | 34.76 | 15.07 | 49.95 | 74.00 | -24.05 | Peak |
| 2 | 15786.00 | 27.49 | 43.52 | 35.56 | 16.82 | 52.27 | 74.00 | -21.73 | Peak |
| 3 | 16619.00 | 26.57 | 44.51 | 36.21 | 17.71 | 52.58 | 74.00 | -21.42 | Peak |
| 4 | 18234.00 | 26.10 | 44.70 | 37.71 | 19.72 | 52.81 | 74.00 | -21.19 | Peak |
| 5 | 20784.00 | 26.18 | 44.70 | 37.71 | 19.72 | 52.89 | 74.00 | -21.11 | Peak |
| 6 | 24269.00 | 26.78 | 44.70 | 37.71 | 19.72 | 53.49 | 74.00 | -20.51 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

| | | | |
|------------|----------------------|----------------|----------|
| EUT: | Bluetooth Module | Polarization : | Vertical |
| Test Mode: | GFSK Mode Low Chanel | | |

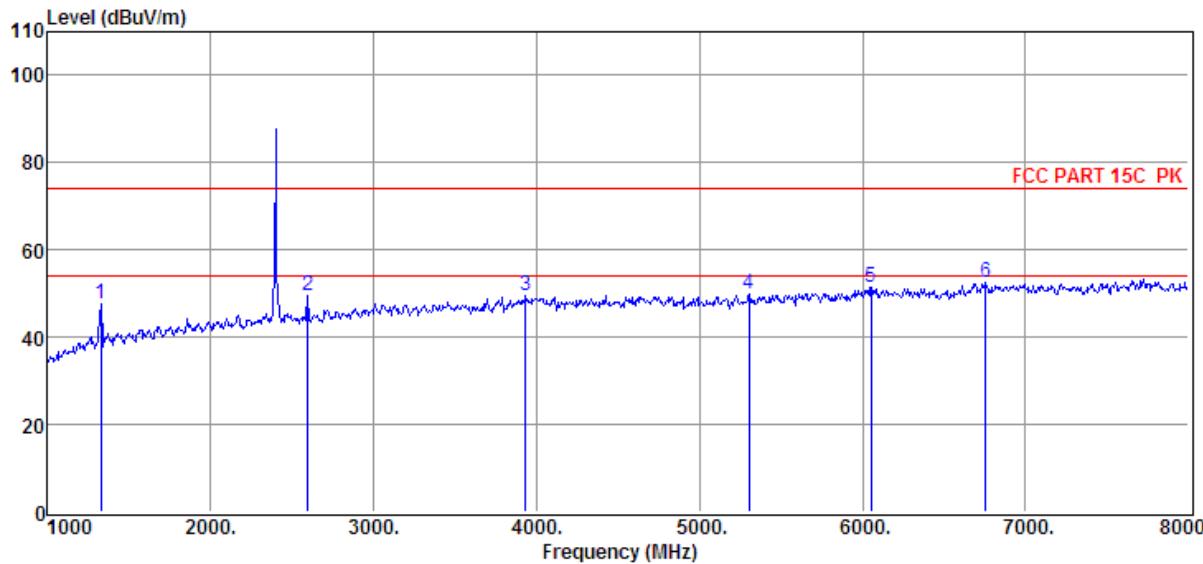

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 1329.00 | 47.78 | 24.73 | 29.37 | 4.49 | 47.63 | 74.00 | -26.37 | Peak |
| 2 | 2596.00 | 42.71 | 30.51 | 29.91 | 6.28 | 49.59 | 74.00 | -24.41 | Peak |
| 3 | 3933.00 | 37.95 | 33.21 | 29.07 | 7.57 | 49.66 | 74.00 | -24.34 | Peak |
| 4 | 5305.00 | 35.86 | 34.32 | 29.31 | 9.00 | 49.87 | 74.00 | -24.13 | Peak |
| 5 | 6054.00 | 35.86 | 35.09 | 29.23 | 9.71 | 51.43 | 74.00 | -22.57 | Peak |
| 6 | 6754.00 | 36.36 | 36.01 | 30.20 | 10.19 | 52.36 | 74.00 | -21.64 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

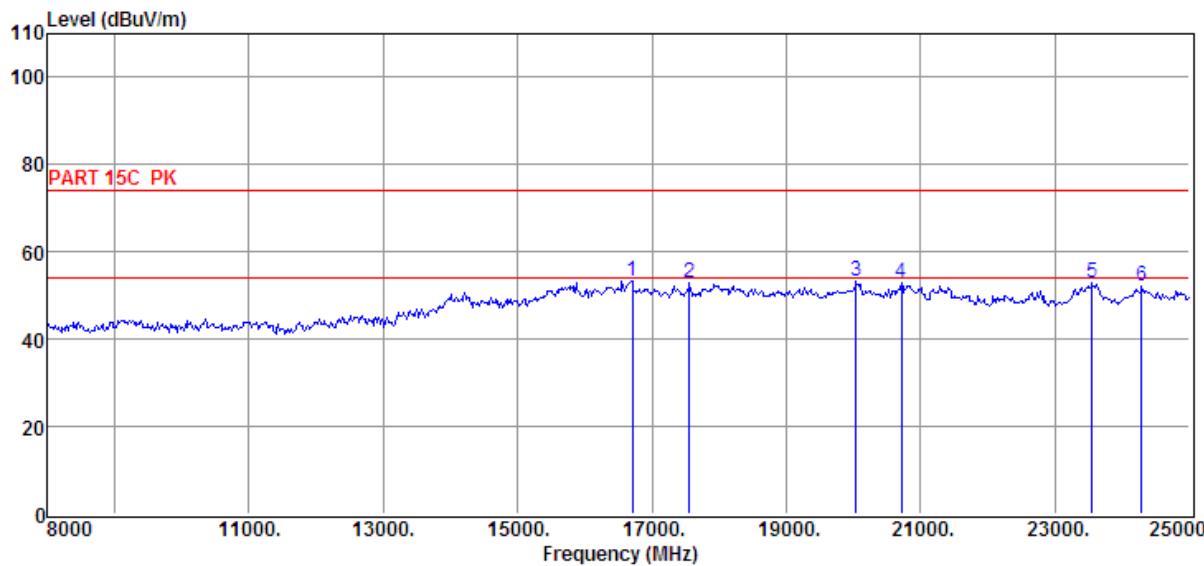

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 16704.00 | 27.38 | 44.37 | 36.34 | 17.87 | 53.28 | 74.00 | -20.72 | Peak |
| 2 | 17554.00 | 28.26 | 43.19 | 37.24 | 18.86 | 53.07 | 74.00 | -20.93 | Peak |
| 3 | 20036.00 | 26.45 | 44.70 | 37.71 | 19.72 | 53.16 | 74.00 | -20.84 | Peak |
| 4 | 20716.00 | 26.17 | 44.70 | 37.71 | 19.72 | 52.88 | 74.00 | -21.12 | Peak |
| 5 | 23555.00 | 26.21 | 44.70 | 37.71 | 19.72 | 52.92 | 74.00 | -21.08 | Peak |
| 6 | 24286.00 | 25.43 | 44.70 | 37.71 | 19.72 | 52.14 | 74.00 | -21.86 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

| | | | |
|------------|------------------------------|----------------|------------|
| EUT: | Bluetooth Module | Polarization : | Horizontal |
| Test Mode: | GFSK(DH5) Mode Middle Chanel | | |

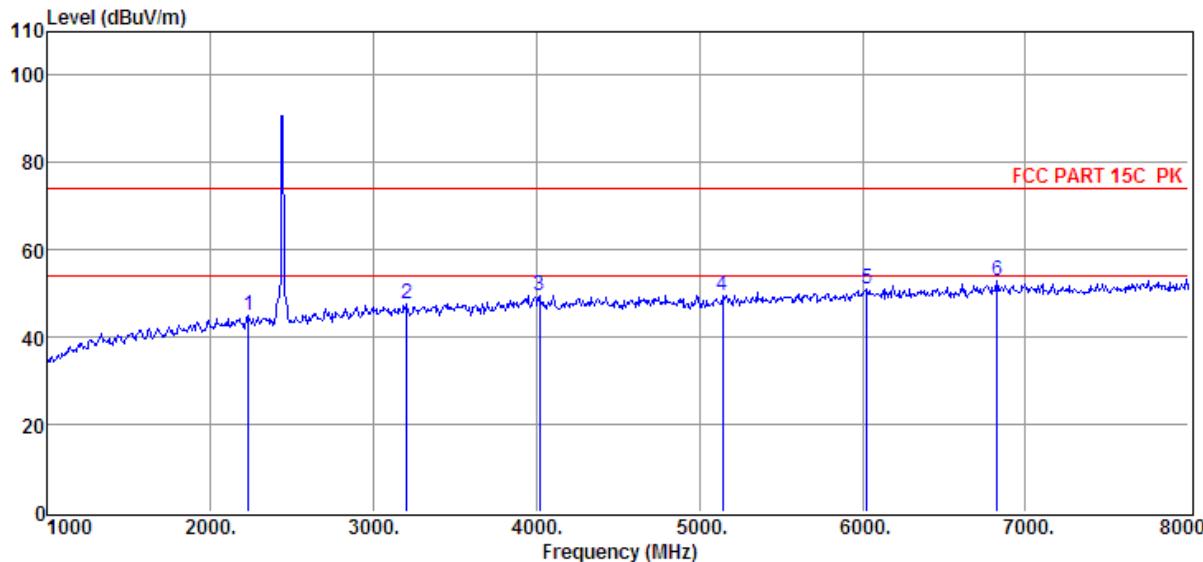

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 2232.00 | 39.20 | 29.13 | 29.18 | 5.82 | 44.97 | 74.00 | -29.03 | Peak |
| 2 | 3205.00 | 38.83 | 31.79 | 30.04 | 7.00 | 47.58 | 74.00 | -26.42 | Peak |
| 3 | 4017.00 | 37.58 | 33.41 | 29.04 | 7.63 | 49.58 | 74.00 | -24.42 | Peak |
| 4 | 5144.00 | 36.06 | 34.00 | 29.33 | 8.84 | 49.57 | 74.00 | -24.43 | Peak |
| 5 | 6026.00 | 35.56 | 35.04 | 29.20 | 9.70 | 51.10 | 74.00 | -22.90 | Peak |
| 6 | 6824.00 | 36.67 | 36.06 | 30.25 | 10.26 | 52.74 | 74.00 | -21.26 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

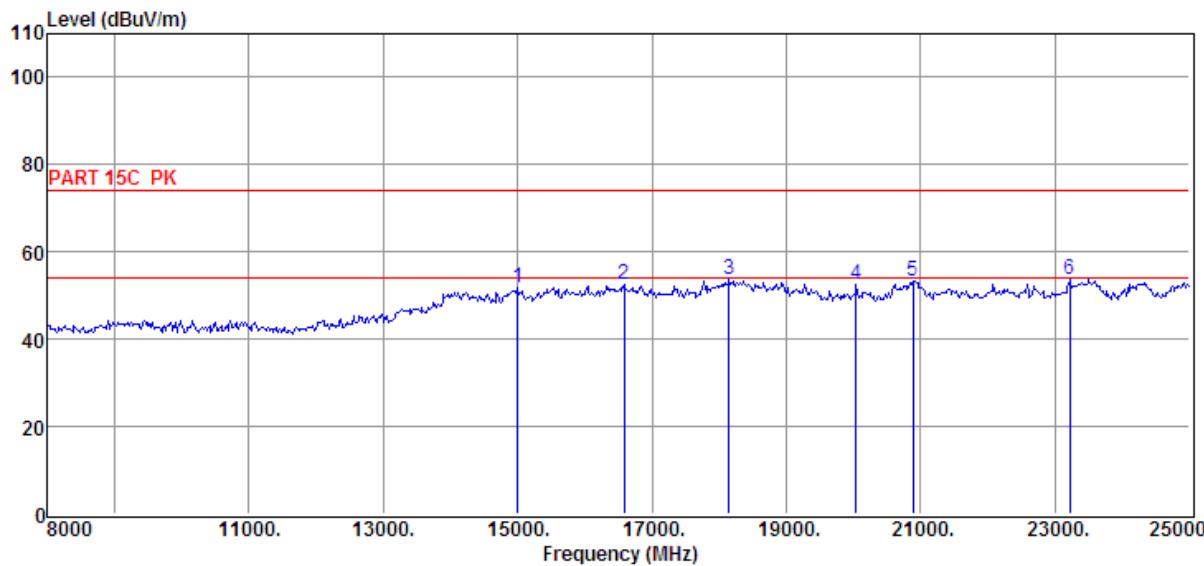

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 15004.00 | 29.88 | 41.51 | 35.89 | 16.40 | 51.90 | 74.00 | -22.10 | Peak |
| 2 | 16585.00 | 26.38 | 44.56 | 36.21 | 17.64 | 52.37 | 74.00 | -21.63 | Peak |
| 3 | 18149.00 | 26.81 | 44.70 | 37.71 | 19.72 | 53.52 | 74.00 | -20.48 | Peak |
| 4 | 20036.00 | 26.00 | 44.70 | 37.71 | 19.72 | 52.71 | 74.00 | -21.29 | Peak |
| 5 | 20886.00 | 26.76 | 44.70 | 37.71 | 19.72 | 53.47 | 74.00 | -20.53 | Peak |
| 6 | 23215.00 | 26.87 | 44.70 | 37.71 | 19.72 | 53.58 | 74.00 | -20.42 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

| | | | |
|------------|-------------------------|----------------|----------|
| EUT: | Bluetooth Module | Polarization : | Vertical |
| Test Mode: | GFSK Mode Middle Chanel | | |

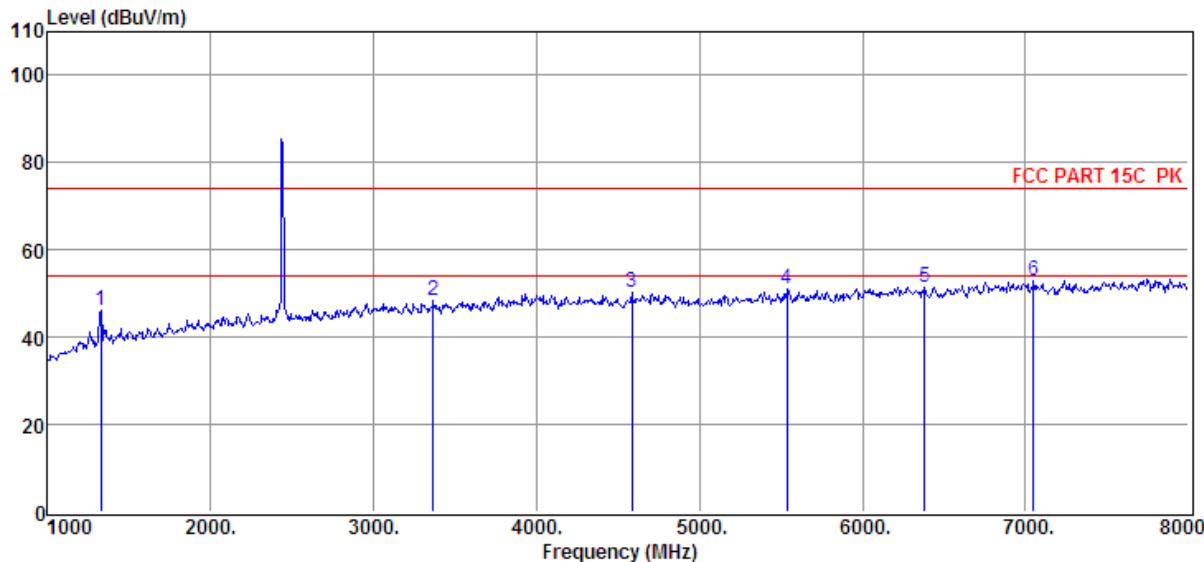

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 1329.00 | 46.45 | 24.73 | 29.37 | 4.49 | 46.30 | 74.00 | -27.70 | Peak |
| 2 | 3366.00 | 39.06 | 31.85 | 29.84 | 7.17 | 48.24 | 74.00 | -25.76 | Peak |
| 3 | 4584.00 | 37.44 | 33.78 | 29.26 | 8.24 | 50.20 | 74.00 | -23.80 | Peak |
| 4 | 5536.00 | 36.51 | 34.72 | 29.25 | 9.22 | 51.20 | 74.00 | -22.80 | Peak |
| 5 | 6383.00 | 35.59 | 35.62 | 29.60 | 9.88 | 51.49 | 74.00 | -22.51 | Peak |
| 6 | 7048.00 | 36.74 | 36.24 | 30.41 | 10.48 | 53.05 | 74.00 | -20.95 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

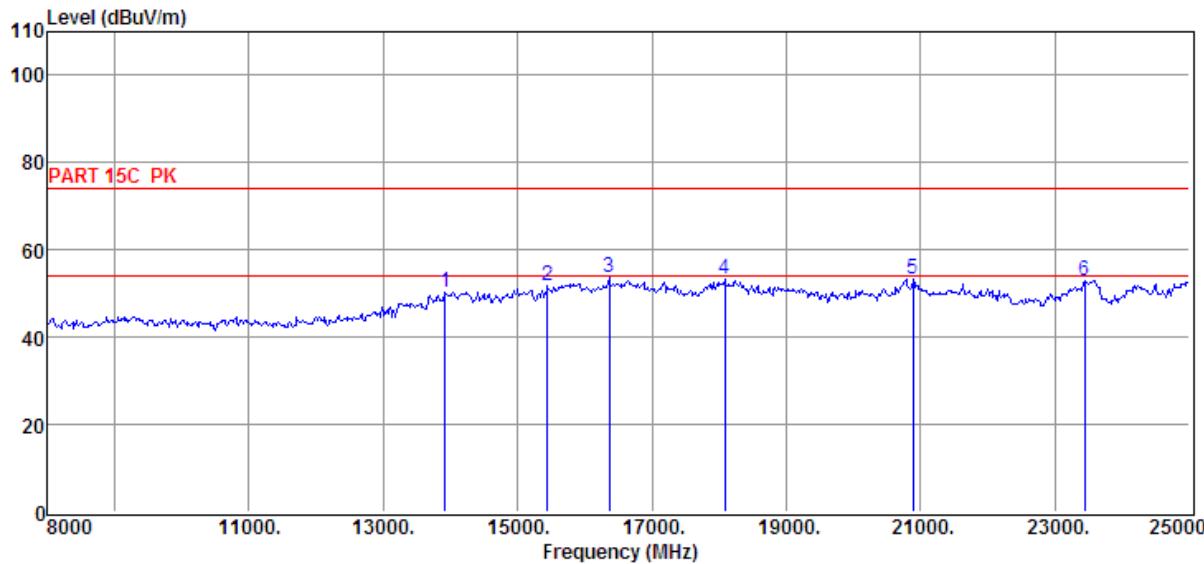

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 13916.00 | 30.47 | 39.72 | 34.78 | 14.95 | 50.36 | 74.00 | -23.64 | Peak |
| 2 | 15446.00 | 28.02 | 42.84 | 35.74 | 16.49 | 51.61 | 74.00 | -22.39 | Peak |
| 3 | 16364.00 | 27.56 | 44.48 | 35.86 | 17.38 | 53.56 | 74.00 | -20.44 | Peak |
| 4 | 18081.00 | 26.67 | 44.70 | 37.71 | 19.72 | 53.38 | 74.00 | -20.62 | Peak |
| 5 | 20886.00 | 26.70 | 44.70 | 37.71 | 19.72 | 53.41 | 74.00 | -20.59 | Peak |
| 6 | 23436.00 | 26.26 | 44.70 | 37.71 | 19.72 | 52.97 | 74.00 | -21.03 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

| | | | |
|------------|-----------------------|----------------|------------|
| EUT: | Bluetooth Module | Polarization : | Horizontal |
| Test Mode: | GFSK Mode High Chanel | | |

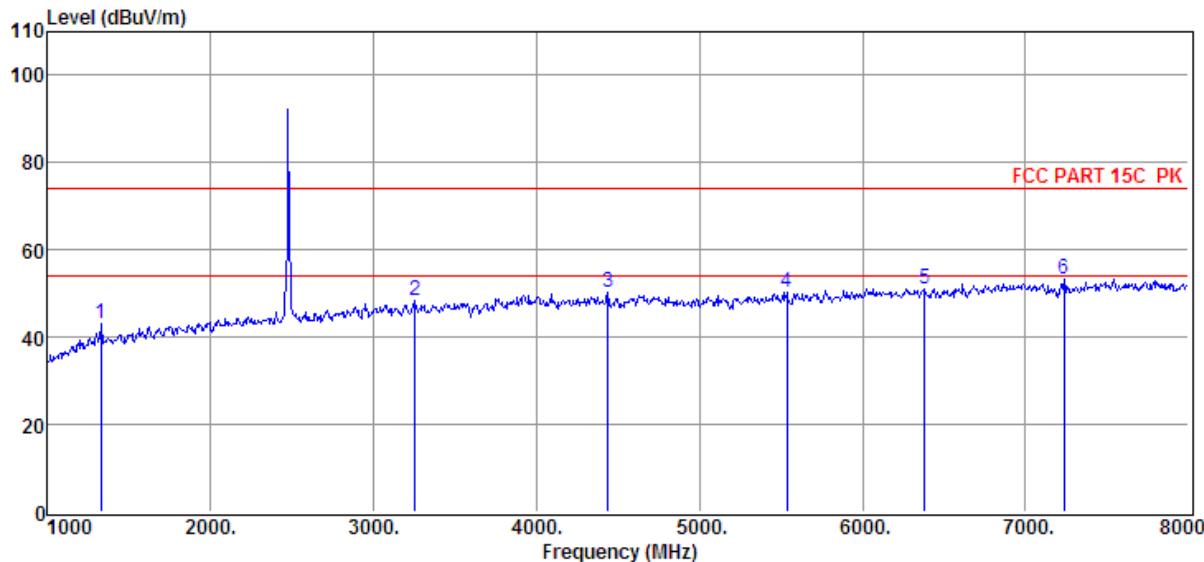

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 1329.00 | 43.14 | 24.73 | 29.37 | 4.49 | 42.99 | 74.00 | -31.01 | Peak |
| 2 | 3254.00 | 39.41 | 31.81 | 30.00 | 7.03 | 48.25 | 74.00 | -25.75 | Peak |
| 3 | 4437.00 | 37.52 | 33.75 | 29.17 | 8.08 | 50.18 | 74.00 | -23.82 | Peak |
| 4 | 5536.00 | 35.73 | 34.72 | 29.25 | 9.22 | 50.42 | 74.00 | -23.58 | Peak |
| 5 | 6383.00 | 35.16 | 35.62 | 29.60 | 9.88 | 51.06 | 74.00 | -22.94 | Peak |
| 6 | 7237.00 | 36.98 | 36.39 | 30.52 | 10.63 | 53.48 | 74.00 | -20.52 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

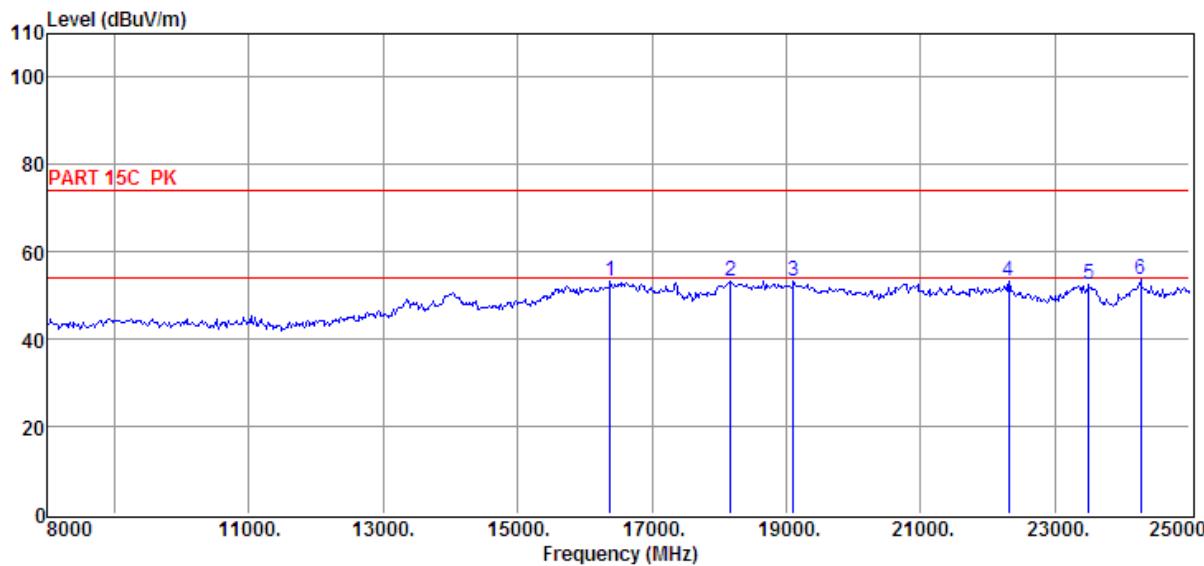

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 16381.00 | 27.43 | 44.51 | 35.92 | 17.40 | 53.42 | 74.00 | -20.58 | Peak |
| 2 | 18166.00 | 26.69 | 44.70 | 37.71 | 19.72 | 53.40 | 74.00 | -20.60 | Peak |
| 3 | 19101.00 | 26.65 | 44.70 | 37.71 | 19.72 | 53.36 | 74.00 | -20.64 | Peak |
| 4 | 22314.00 | 26.71 | 44.70 | 37.71 | 19.72 | 53.42 | 74.00 | -20.58 | Peak |
| 5 | 23504.00 | 25.70 | 44.70 | 37.71 | 19.72 | 52.41 | 74.00 | -21.59 | Peak |
| 6 | 24269.00 | 26.87 | 44.70 | 37.71 | 19.72 | 53.58 | 74.00 | -20.42 | Peak |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

| | | | |
|------------|-----------------------|----------------|----------|
| EUT: | Bluetooth Module | Polarization : | Vertical |
| Test Mode: | GFSK Mode High Chanel | | |

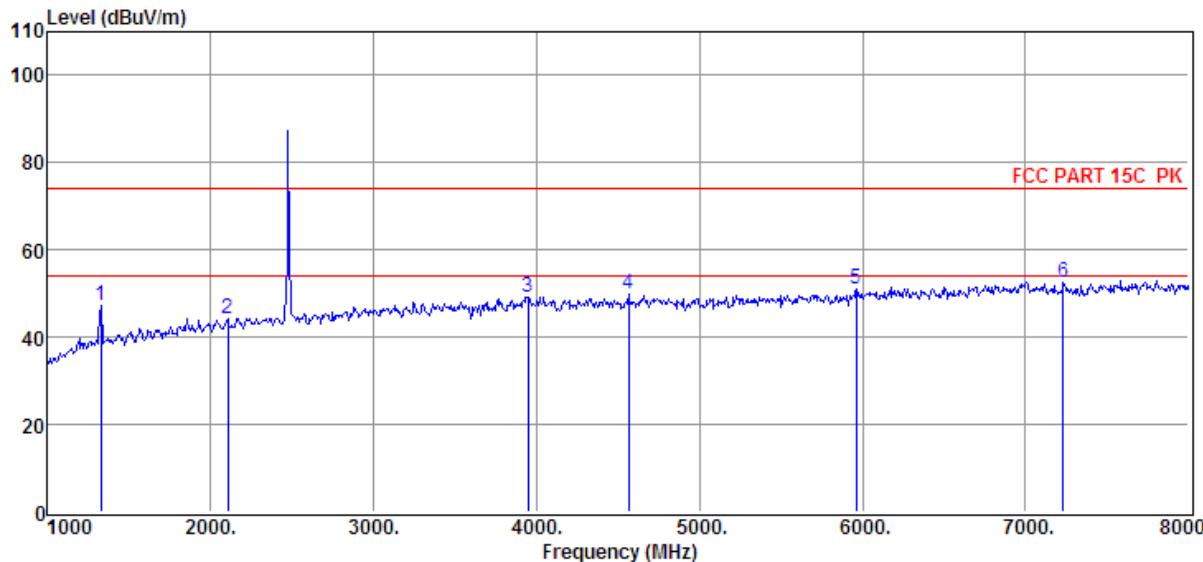

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 1329.00 | 47.24 | 24.73 | 29.37 | 4.49 | 47.09 | 74.00 | -26.91 | Peak |
| 2 | 2106.00 | 39.22 | 28.59 | 29.06 | 5.65 | 44.40 | 74.00 | -29.60 | Peak |
| 3 | 3947.00 | 37.56 | 33.25 | 29.07 | 7.58 | 49.32 | 74.00 | -24.68 | Peak |
| 4 | 4563.00 | 37.29 | 33.79 | 29.25 | 8.22 | 50.05 | 74.00 | -23.95 | Peak |
| 5 | 5963.00 | 35.42 | 34.98 | 29.19 | 9.64 | 50.85 | 74.00 | -23.15 | Peak |
| 6 | 7230.00 | 36.04 | 36.39 | 30.51 | 10.63 | 52.55 | 74.00 | -21.45 | Peak |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

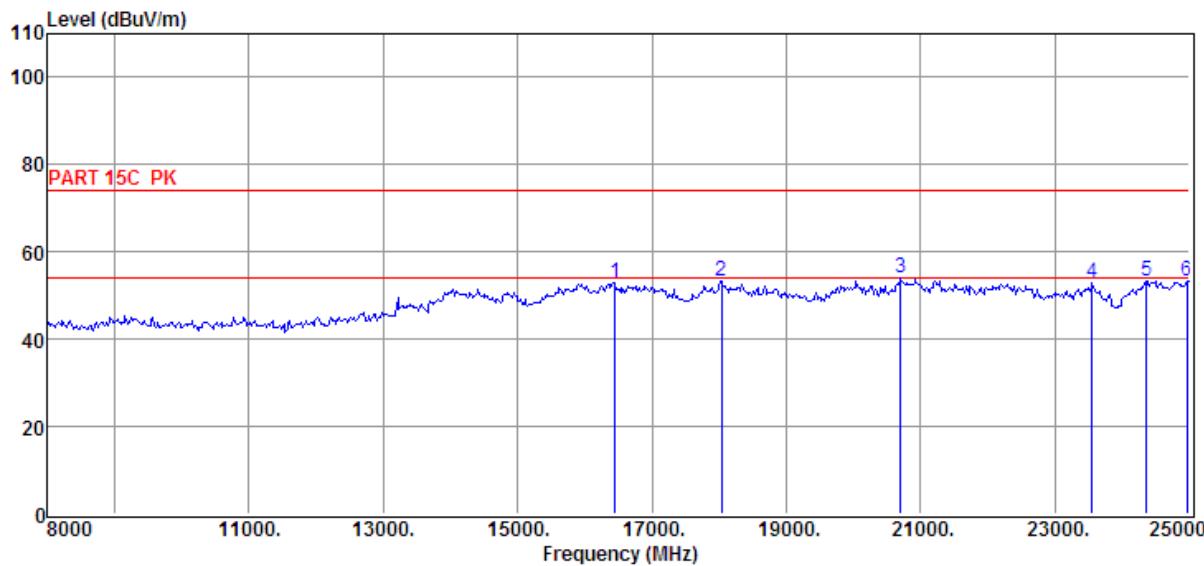

| Item (Mark) | Freq. (MHz) | Read Level (dB μ V) | Antenna Factor (dB/m) | PRM Factor dB | Cable Loss dB | Result Level (dB μ V/m) | Limit Line (dB μ V/m) | Over Limit (dB) | Detector |
|----------------|----------------|-------------------------------|-----------------------------|---------------------|---------------------|-----------------------------------|---------------------------------|-----------------------|----------|
| 1 | 16449.00 | 26.99 | 44.62 | 35.99 | 17.46 | 53.08 | 74.00 | -20.92 | Peak |
| 2 | 18030.00 | 26.77 | 44.70 | 37.71 | 19.72 | 53.48 | 74.00 | -20.52 | Peak |
| 3 | 20699.00 | 27.16 | 44.70 | 37.71 | 19.72 | 53.87 | 74.00 | -20.13 | Peak |
| 4 | 23555.00 | 26.13 | 44.70 | 37.71 | 19.72 | 52.84 | 74.00 | -21.16 | Peak |
| 5 | 24354.00 | 26.63 | 44.70 | 37.71 | 19.72 | 53.34 | 74.00 | -20.66 | Peak |
| 6 | 24966.00 | 26.75 | 44.70 | 37.71 | 19.72 | 53.46 | 74.00 | -20.54 | Peak |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


Note: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

7.4. SPURIOUS EMISSIONS 30M ~ 1 GHz

7.4.1. GFSK MODE

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)


| | | | |
|------------|--------------------------|----------------|------------|
| EUT: | Bluetooth Module | Polarization : | Horizontal |
| Test Mode: | GFSK Mode Middle Channel | | |

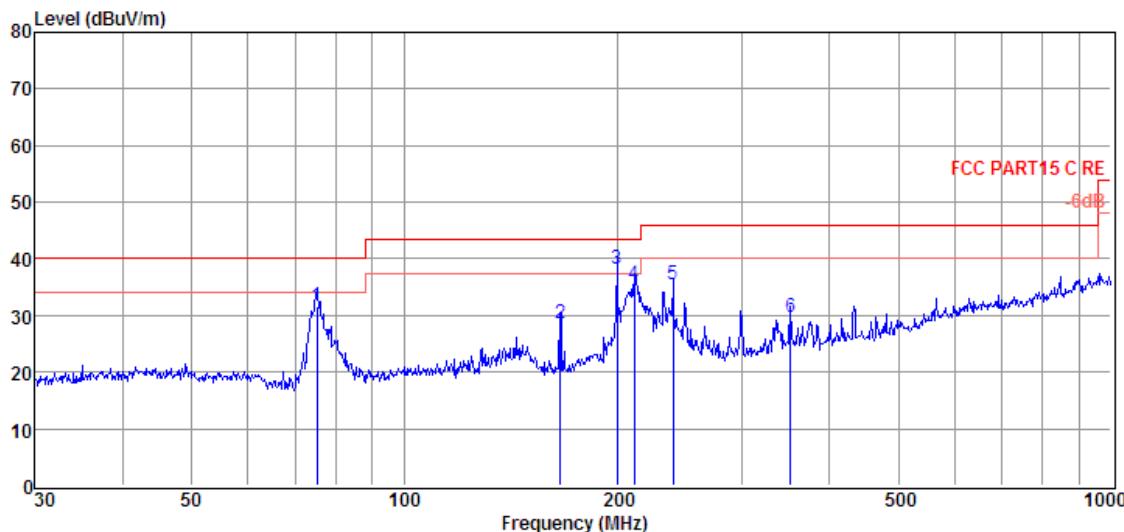

| Item | Freq. | Read Level | Antenna Factor | Cable Loss | Result Level | Limit Line | Over Limit | Detector |
|--------|--------|--------------|----------------|------------|----------------|----------------|------------|----------|
| (Mark) | (MHz) | (dB μ V) | (dB/m) | dB | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 1 | 75.18 | 21.09 | 6.53 | 4.11 | 31.73 | 40.00 | -8.27 | QP |
| 2 | 166.07 | 15.62 | 8.24 | 4.70 | 28.56 | 43.50 | -14.94 | QP |
| 3 | 199.99 | 22.90 | 10.30 | 4.90 | 38.10 | 43.50 | -5.40 | QP |
| 4 | 211.53 | 19.64 | 10.86 | 4.96 | 35.46 | 43.50 | -8.04 | QP |
| 5 | 239.99 | 18.36 | 11.90 | 5.09 | 35.35 | 46.00 | -10.65 | QP |
| 6 | 351.71 | 9.40 | 14.75 | 5.60 | 29.75 | 46.00 | -16.25 | QP |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

| | | | |
|------------|--------------------------|----------------|----------|
| EUT: | Bluetooth Module | Polarization : | Vertical |
| Test Mode: | GFSK Mode Middle Channel | | |

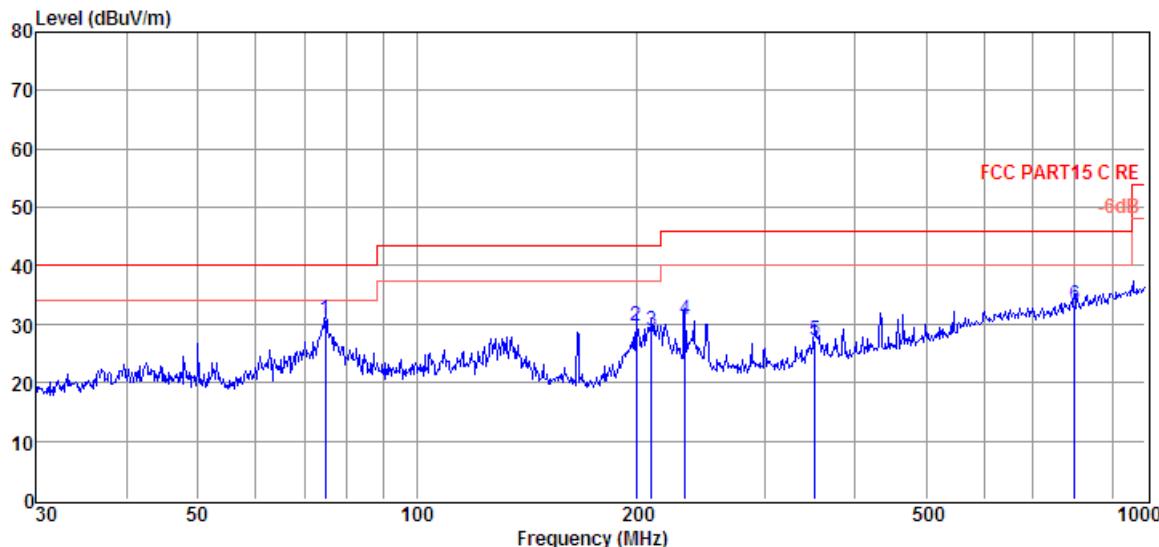

| Item | Freq. | Read Level | Antenna Factor | Cable Loss | Result Level | Limit Line | Over Limit | Detector |
|--------|--------|--------------|----------------|------------|----------------|----------------|------------|----------|
| (Mark) | (MHz) | (dB μ V) | (dB/m) | dB | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 1 | 74.92 | 20.18 | 6.52 | 4.11 | 30.81 | 40.00 | -9.19 | QP |
| 2 | 199.99 | 14.36 | 10.30 | 4.90 | 29.56 | 43.50 | -13.94 | QP |
| 3 | 210.05 | 13.03 | 10.80 | 4.95 | 28.78 | 43.50 | -14.72 | QP |
| 4 | 233.35 | 13.95 | 11.67 | 5.06 | 30.68 | 46.00 | -15.32 | QP |
| 5 | 351.71 | 6.75 | 14.75 | 5.60 | 27.10 | 46.00 | -18.90 | QP |
| 6 | 798.98 | 5.01 | 21.17 | 7.12 | 33.30 | 46.00 | -12.70 | QP |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note 1: All the channels had been tested, but only the worst data recorded in the report.


Note 2: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

7.5. SPURIOUS EMISSIONS BELOW 30M

7.5.1. GFSK MODE

SPURIOUS EMISSIONS Below 30MHz (WORST-CASE CONFIGURATION)

| | | | |
|------------|--------------------------|----------------|------------|
| EUT: | Bluetooth Module | Polarization : | Horizontal |
| Test Mode: | GFSK Mode Middle Channel | | |

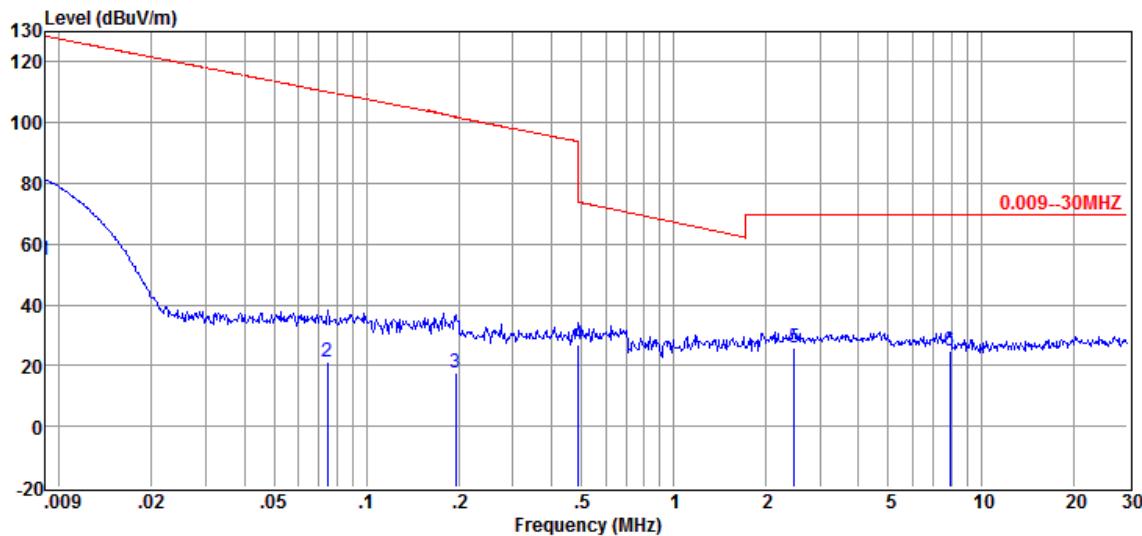


| Item | Freq. | Read Level | Antenna Factor | Cable Loss | Result Level | Limit Line | Over Limit | Detector |
|--------|-------|--------------|----------------|------------|----------------|----------------|------------|----------|
| (Mark) | (MHz) | (dB μ V) | (dB/m) | dB | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 1 | 0.01 | 34.57 | 19.92 | 0.04 | 54.53 | 127.60 | -73.07 | Average |
| 2 | 0.07 | 1.18 | 19.83 | 0.07 | 21.08 | 110.70 | -89.62 | Average |
| 3 | 0.19 | -2.28 | 19.76 | 0.14 | 17.62 | 102.02 | -84.40 | Average |
| 4 | 0.49 | 6.95 | 19.92 | 0.15 | 27.02 | 73.80 | -46.78 | QP |
| 5 | 2.47 | 5.86 | 19.70 | 0.23 | 25.79 | 69.54 | -43.75 | QP |
| 6 | 7.93 | 4.88 | 19.81 | 0.37 | 25.06 | 69.54 | -44.48 | QP |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

| | | | |
|------------|--------------------------|----------------|----------|
| EUT: | Bluetooth Module | Polarization : | Vertical |
| Test Mode: | GFSK Mode Middle Channel | | |

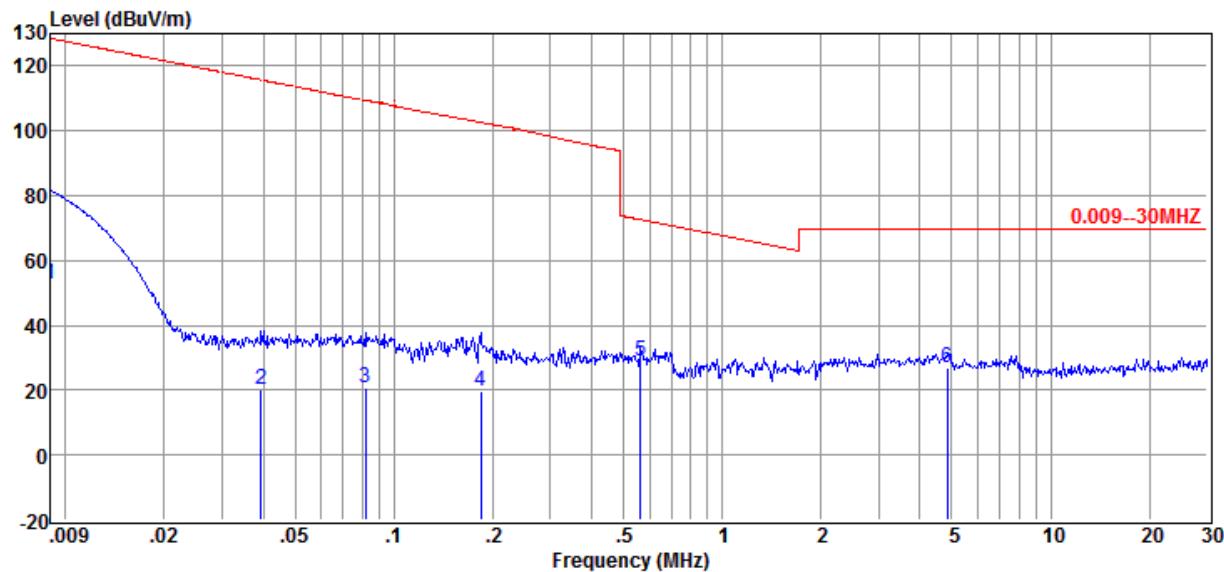

| Item | Freq. | Read Level | Antenna Factor | Cable Loss | Result Level | Limit Line | Over Limit | Detector |
|--------|-------|--------------|----------------|------------|----------------|----------------|------------|----------|
| (Mark) | (MHz) | (dB μ V) | (dB/m) | dB | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 1 | 0.01 | 32.80 | 19.92 | 0.04 | 52.76 | 127.60 | -74.84 | Average |
| 2 | 0.04 | 0.11 | 19.83 | 0.05 | 19.99 | 115.56 | -95.57 | Average |
| 3 | 0.08 | 0.97 | 19.83 | 0.07 | 20.87 | 109.54 | -88.67 | Average |
| 4 | 0.18 | -0.01 | 19.76 | 0.13 | 19.88 | 102.49 | -82.61 | Average |
| 5 | 0.56 | 8.82 | 19.96 | 0.07 | 28.85 | 72.64 | -43.79 | QP |
| 6 | 4.84 | 6.59 | 19.85 | 0.30 | 26.74 | 69.54 | -42.80 | QP |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note 1: All the channels had been tested, but only the worst data recorded in the report.

Note 2: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a) and RSS-Gen Clause 8.8

| FREQUENCY (MHz) | Class A (dBuV) | | Class B (dBuV) | |
|-----------------|----------------|---------|----------------|-----------|
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 |

TEST SETUP AND PROCEDURE

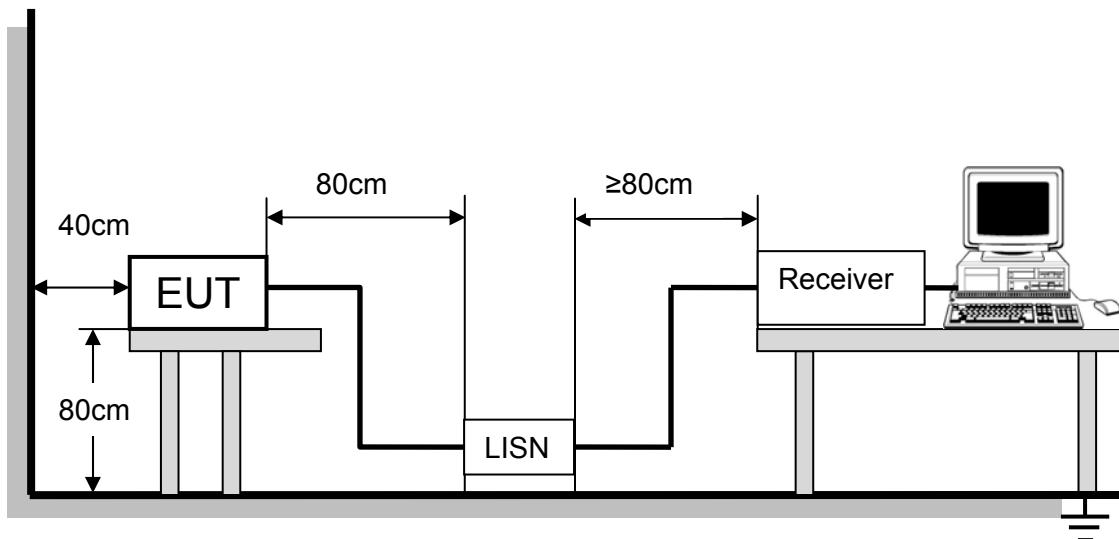


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2014. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST RESULTS (WORST-CASE CONFIGURATION)


| | | | |
|------------|--------------------------|---------|---|
| EUT: | Bluetooth Module | Phase : | L |
| Test Mode: | GFSK Mode Middle Channel | | |

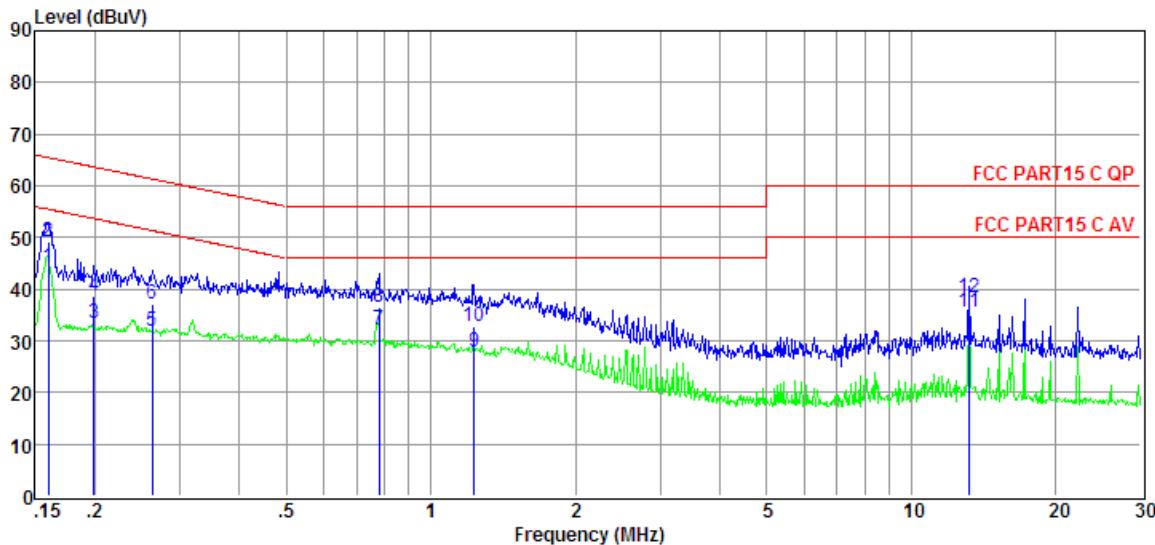

| Item | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector |
|--------|-------|--------------|-------------|------------|----------------------|--------------|--------------|------------|----------|
| (Mark) | (MHz) | (dB μ V) | (dB) | (dB) | (dB) | (dB μ V) | (dB μ V) | (dB) | |
| 1 | 0.16 | 24.65 | 9.61 | 0.02 | 9.86 | 44.14 | 55.47 | -11.33 | Average |
| 2 | 0.16 | 29.53 | 9.61 | 0.02 | 9.86 | 49.02 | 65.47 | -16.45 | QP |
| 3 | 0.20 | 13.86 | 9.61 | 0.02 | 9.86 | 33.35 | 53.67 | -20.32 | Average |
| 4 | 0.20 | 19.30 | 9.61 | 0.02 | 9.86 | 38.79 | 63.67 | -24.88 | QP |
| 5 | 0.26 | 12.39 | 9.61 | 0.02 | 9.86 | 31.88 | 51.34 | -19.46 | Average |
| 6 | 0.26 | 17.48 | 9.61 | 0.02 | 9.86 | 36.97 | 61.34 | -24.37 | QP |
| 7 | 0.78 | 12.66 | 9.61 | 0.03 | 9.86 | 32.16 | 46.00 | -13.84 | Average |
| 8 | 0.78 | 17.09 | 9.61 | 0.03 | 9.86 | 36.59 | 56.00 | -19.41 | QP |
| 9 | 1.23 | 8.40 | 9.62 | 0.03 | 9.86 | 27.91 | 46.00 | -18.09 | Average |
| 10 | 1.23 | 13.24 | 9.62 | 0.03 | 9.86 | 32.75 | 56.00 | -23.25 | QP |
| 11 | 13.20 | 15.68 | 9.79 | 0.12 | 9.91 | 35.50 | 50.00 | -14.50 | Average |
| 12 | 13.20 | 18.47 | 9.79 | 0.12 | 9.91 | 38.29 | 60.00 | -21.71 | QP |

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

| | | | |
|------------|--------------------------|---------|---|
| EUT: | Bluetooth Module | Phase : | N |
| Test Mode: | GFSK Mode Middle Channel | | |

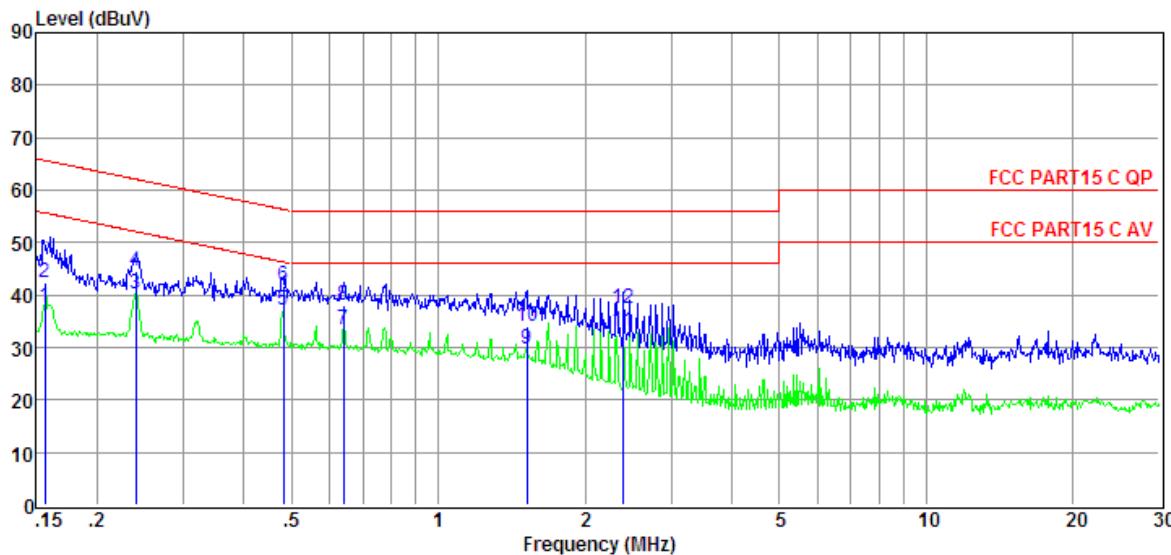

| Item | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector |
|--------|-------|--------------|-------------|------------|----------------------|--------------|--------------|------------|----------|
| (Mark) | (MHz) | (dB μ V) | (dB) | (dB) | (dB) | (dB μ V) | (dB μ V) | (dB) | |
| 1 | 0.16 | 18.34 | 9.61 | 0.02 | 9.86 | 37.83 | 55.65 | -17.82 | Average |
| 2 | 0.16 | 22.96 | 9.61 | 0.02 | 9.86 | 42.45 | 65.65 | -23.20 | QP |
| 3 | 0.24 | 20.87 | 9.61 | 0.02 | 9.86 | 40.36 | 52.08 | -11.72 | Average |
| 4 | 0.24 | 24.92 | 9.61 | 0.02 | 9.86 | 44.41 | 62.08 | -17.67 | QP |
| 5 | 0.48 | 17.61 | 9.61 | 0.02 | 9.86 | 37.10 | 46.32 | -9.22 | Average |
| 6 | 0.48 | 22.23 | 9.61 | 0.02 | 9.86 | 41.72 | 56.32 | -14.60 | QP |
| 7 | 0.64 | 13.98 | 9.61 | 0.03 | 9.86 | 33.48 | 46.00 | -12.52 | Average |
| 8 | 0.64 | 18.64 | 9.61 | 0.03 | 9.86 | 38.14 | 56.00 | -17.86 | QP |
| 9 | 1.52 | 10.23 | 9.62 | 0.04 | 9.86 | 29.75 | 46.00 | -16.25 | Average |
| 10 | 1.52 | 14.41 | 9.62 | 0.04 | 9.86 | 33.93 | 56.00 | -22.07 | QP |
| 11 | 2.40 | 13.51 | 9.63 | 0.04 | 9.87 | 33.05 | 46.00 | -12.95 | Average |
| 12 | 2.40 | 17.89 | 9.63 | 0.04 | 9.87 | 37.43 | 56.00 | -18.57 | QP |

Note: 1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note : All the modulation and channels had been tested, but only the worst data recorded in the report.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

ANTENNA CONNECTOR

EUT has a PCB antenna without antenna connector.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.

END OF REPORT