

Date: 2001-09-10  
No.: HM105742

## **TEST REPORT**

Page 1 of 26

### **FCC PART 15 SUBPART C CERTIFICATION REPORT FOR LOW POWER TRANSMITTER**

**TEST REPORT No.: HM105742**

Equipment Under Test [EUT]: SOUND AND LIGHTS MONITOR  
Model Number: 71638 / 71624  
Applicant: FISHER-PRICE  
FCC ID : CCT71638

**CONTENT:**

Cover	Page 1 of 26
Content	Page 2-3 of 26
Conclusion	Page 4 of 26

**1.0 General Details**

1.1	Test Laboratory	Page 5 of 26
1.2	Applicant Details	Page 5 of 26
	Applicant	
	HKSTC Code Number for Applicant	
	Manufacturer	
1.3	Equipment Under Test [EUT]	Page 6 of 26
	Description of EUT operation	
1.4	Date of Order	Page 6 of 26
1.5	Submitted Sample	Page 6 of 26
1.6	Test Duration	Page 6 of 26
1.7	Country of Origin	Page 6 of 26
1.8	Additional Information of EUT	Page 7 of 26

**2.0 Technical Details**

2.1	Investigations Requested	Page 8 of 26
2.2	Test Standards and Results Summary	Page 8 of 26

**3.0 Test Results**

3.1	Emission	Page 9-22 of 26
3.2	Bandwidth Measurement	Page 21-23 of 26

Date: 2001-09-10  
No.: HM105742

## **TEST REPORT**

Page 3 of 26

### **Appendix A**

List of Measurement Equipment

Page 24 of 26

### **Appendix B**

Photographs

Page 25-26 of 26

Date: 2001-09-10  
No.: HM105742

## **TEST REPORT**

Page 4 of 26

### **CONCLUSION**

The submitted product was deemed to have COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

---

Law Man Kit

Verify by

---

Patrick Wong

Patrick Wong  
for Managing Director

Date: 2001-09-10

No.: HM105742

# **TEST REPORT**

Page 5 of 26

## **1.0 General Details**

### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

### **1.2 Applicant Details**

#### **Applicant**

FISHER-PRICE  
636 Girard Avenue, East Aurora, NY, USA

Telephone: 3185 6612  
Fax: 2317 0618

**HKSTC Code Number for Applicant**

**FIP002**

#### **Manufacturer**

DYNAMIC INDUSTRIES CO., LTD.  
Units 2204 & 2205, 22/F., Nanyang Plaza,  
57 Hung To Road, Kwun Tong, Kowloon, Hong Kong.

Telephone: 852 2389 8230  
Fax: 852 2790 5521

**1.3 Equipment Under Test [EUT]**

**Description of Sample**

Product: Sound and Lights Monitor  
Manufacturer: Dynamic Industries Co., Ltd.  
Brand Name: FISHER-PRICE  
Model Number: 71638 / 71624  
Input Voltage: 9Vd.c ("6F22" size battery x 1) with jack  
The AC/DC Adapter used for the tests was provided by the applicant with the following details: Model Number: LG090010, Input: 120Va.c. 60Hz 3W, Output: 9Vd.c. 100mA

**1.3.1 Description of EUT Operation**

The Equipment Under Test (EUT) is an Dynamic Industries Co., Ltd., 49.8MHz two channel Sound and Lights Monitor. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by Mic. and tape is frequency modulation.

**1.4 Date of Order**

2001-08-28

**1.5 Submitted Sample(s):**

2 Samples per model

**1.6 Test Duration**

2001-08-28 to 2001-08-29

**1.7 Country of Origin**

China

Date: 2001-09-10  
No.: HM105742

## **TEST REPORT**

Page 7 of 26

### **1.8 Additional Information of EUT**

	Submitted	Not Available
User Manual	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part List	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Circuit Diagram	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Printed Circuit Board [PCB] Layout	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Rating Label	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Block diagram	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC ID Label	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**TEST REPORT****2.0 Technical Details****2.1 Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:1992 for FCC Certification.

**2.2 Test Standards and Results Summary Tables**

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:1992	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:1992	Class B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions on AC, 0.45MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:1992	Class B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable


**3.0 Test Results****3.1 Emission****3.1.1 Radiated Emissions**

Test Requirement:	FCC 47CFR 15.235
Test Method:	ANSI C63.4:1992
Test Date:	2001-08-28
Mode of Operation:	On mode

**Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigate all operating modes, rotated about all 3 axis (X, Y & Z) to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane on filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

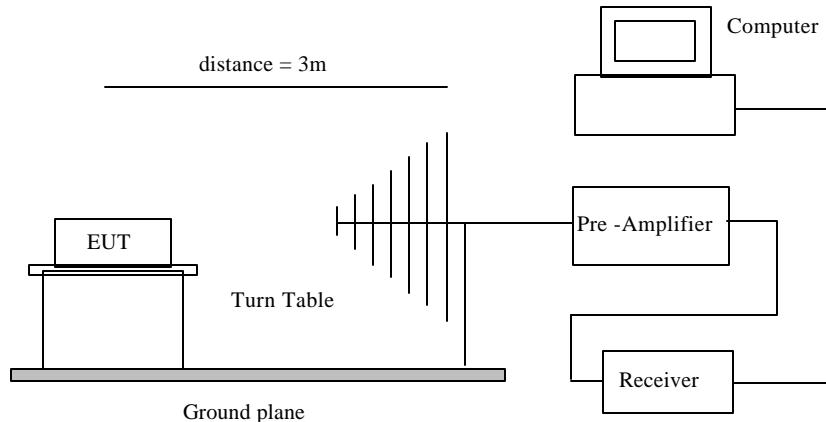**Test Setup:**

Date: 2001-09-10

No.: HM105742

## TEST REPORT

Page 10 of 26

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [ $\mu$ V/m]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]
49.82-49.90	100,000	10,000

#### Results:

#### Channel A

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
49.84	60.4	15.0	75.4	5,888.4	100,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

#### Remarks:

\*: Linear interpolations

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty = 30MHz to 300MHz  $\pm 3.7$ dB  
300MHz to 1GHz  $+3.0$ dB /  $-2.7$ dB

Date: 2001-09-10

No.: HM105742

## TEST REPORT

Page 11 of 26

**Results:**

**Channel A**

Field Strength of Fundamental Emissions						
Average Value *						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
49.84	60.2	15.0	75.2	5,754.4	100,00	Vertical

**Remarks:**

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. .Below setting for HP8572A EMI Receiver.

Resolution Bandwidth =3MHz  
Video Bandwidth =1Hz

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty	=	30MHz to 300MHz	$\pm$ 3.7dB
		300MHz to 1GHz	+3.0dB / -2.7dB

Date: 2001-09-10

No.: HM105742

## TEST REPORT

Page 12 of 26

Limited for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

**Results:**

**Channel A**

Radiated Emissions Quasi-Peak						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	Antenna Polarity
99.8	<1.0	12.2	<13.2	<4.6	150	Vertical
149.7	<1.0	9.8	<10.8	<3.5	150	Vertical
199.6	<1.0	11.5	<12.5	<4.2	150	Vertical
249.5	<1.0	15.9	<16.9	<7.0	200	Vertical
299.4	<1.0	17.0	<18.0	<7.9	200	Vertical
349.3	<1.0	17.2	<18.2	<8.1	200	Vertical
399.2	<1.0	18.8	<19.8	<9.8	200	Vertical
449.1	<1.0	19.7	<20.7	<10.8	200	Vertical
499.0	<1.0	20.6	<21.6	<12.0	200	Vertical

Date: 2001-09-10

No.: HM105742

## TEST REPORT

Page 13 of 26

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [ $\mu$ V/m]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]
49.82-49.90	100,000	10,000

#### Results:

#### Channel B

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
49.87	59.3	15.0	74.3	5,188.0	100,000	Vertical

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

#### Remarks:

\*: Linear interpolations

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty = 30MHz to 300MHz  $\pm 3.7$ dB  
300MHz to 1GHz  $+3.0$ dB /  $-2.7$ dB

Date: 2001-09-10

No.: HM105742

## TEST REPORT

Page 14 of 26

**Results:**

**Channel B**

Field Strength of Fundamental Emissions						
Average Value *						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit ** @3m $\mu$ V/m	Antenna Polarity
49.87	59.1	15.0	74.1	5,069.9	100,00	Vertical

**Remarks:**

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. .Below setting for HP8572A EMI Receiver.

Resolution Bandwidth =3MHz  
Video Bandwidth =1Hz

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty	=	30MHz to 300MHz	$\pm$ 3.7dB
		300MHz to 1GHz	+3.0dB / -2.7dB

Date: 2001-09-10

No.: HM105742

## TEST REPORT

Page 15 of 26

Limited for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

**Results:**

**Channel B**

Radiated Emissions Quasi-Peak						
Frequency MHz	Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	Antenna Polarity
99.7	<1.0	12.2	<13.2	<4.6	150	Vertical
149.5	<1.0	9.8	<10.8	<3.5	150	Vertical
199.3	<1.0	11.5	<12.5	<4.2	150	Vertical
249.2	<1.0	15.9	<16.9	<7.0	200	Vertical
299.0	<1.0	17.0	<18.0	<7.9	200	Vertical
348.8	<1.0	17.2	<18.2	<8.1	200	Vertical
398.7	<1.0	18.8	<19.8	<9.8	200	Vertical
448.5	<1.0	19.7	<20.7	<10.8	200	Vertical
498.3	<1.0	20.6	<21.6	<12.0	200	Vertical


**3.1.1 Conducted Emissions (0.45MHz to 30MHz)**

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4:1992
Test Date:	2001-08-29
Mode of Operation:	On mode

**Test Method:**

The test was performed in accordance with ANSI C63.4: 1992, with the following: an initial measurement was performed in peak and average detection mode on the live line. Any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

**Test Setup:**

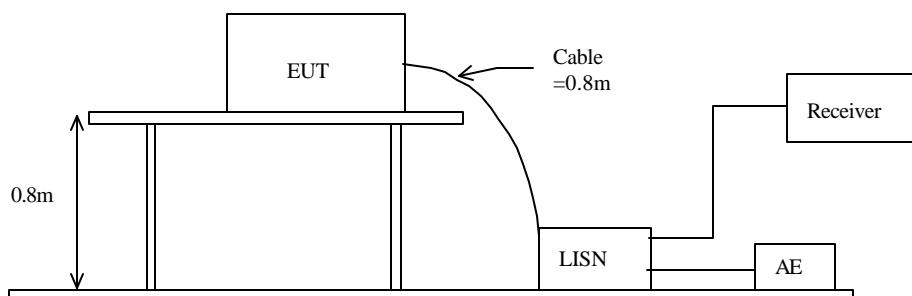

Date: 2001-09-10

No.: HM105742

# TEST REPORT

Page 17 of 26

## Limit for Conducted Emissions (FCC 47 CFR 15.207):

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
0.45-30	250

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram labelled as (QP and AV).

### Results:

#### Channel A

##### (1) Between "Live" and "Ground"

Frequency Range of Emission		Maximum Measured Radio Noise		FCC Limit (Class B)	
MHz		dB(mV)	mV	mV	
0.45	-	0.80	0.00	1.00	250.00
0.80	-	1.60	0.00	1.00	250.00
1.60	-	3.00	0.00	1.00	250.00
3.00	-	5.00	0.00	1.00	250.00
5.00	-	7.00	0.00	1.00	250.00
7.00	-	9.00	0.00	1.00	250.00
9.00	-	11.00	0.00	1.00	250.00
11.00	-	13.00	0.00	1.00	250.00
13.00	-	15.00	0.00	1.00	250.00
15.00	-	17.00	22.90	13.96	250.00
17.00	-	19.00	0.00	1.00	250.00
19.00	-	21.00	0.00	1.00	250.00
21.00	-	23.00	9.30	2.92	250.00
23.00	-	25.00	0.00	1.00	250.00
25.00	-	27.00	0.00	1.00	250.00
27.00	-	30.00	0.00	1.00	250.00

### Remarks:

Calculated measurement uncertainty =  $\pm 2.3$ dB

**Results:****Channel A**

(1) Between "Neutral" and "Ground"

Frequency Range of Emission		Maximum Measured Radio Noise		FCC Limit (Class B)
MHz	MHz	dB(mV)	mV	mV
0.45	-	0.80	0.00	1.00
0.80	-	1.60	0.00	1.00
1.60	-	3.00	0.00	1.00
3.00	-	5.00	0.00	1.00
5.00	-	7.00	0.00	1.00
7.00	-	9.00	0.00	1.00
9.00	-	11.00	0.00	1.00
11.00	-	13.00	0.00	1.00
13.00	-	15.00	0.00	1.00
15.00	-	17.00	< 22.90	13.96
17.00	-	19.00	0.00	1.00
19.00	-	21.00	0.00	1.00
21.00	-	23.00	< 9.30	2.92
23.00	-	25.00	0.00	1.00
25.00	-	27.00	0.00	1.00
27.00	-	30.00	0.00	1.00

## Remarks:

Calculated measurement uncertainty =  $\pm 2.3\text{dB}$

Date: 2001-09-10

No.: HM105742

# TEST REPORT

Page 19 of 26

## Limit for Conducted Emissions (FCC 47 CFR 15.207):

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
0.45-30	250

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram labelled as (QP and AV).

### Results:

#### Channel B

(1) Between "Live" and "Ground"

Frequency Range of Emission		Maximum Measured Radio Noise		FCC Limit (Class B)
MHz		dB(mV)	mV	mV
0.45	-	0.80	0.00	1.00
0.80	-	1.60	0.00	1.00
1.60	-	3.00	0.00	1.00
3.00	-	5.00	0.00	1.00
5.00	-	7.00	0.00	1.00
7.00	-	9.00	0.00	1.00
9.00	-	11.00	0.00	1.00
11.00	-	13.00	0.00	1.00
13.00	-	15.00	0.00	1.00
15.00	-	17.00	26.73	21.70
17.00	-	19.00	0.00	1.00
19.00	-	21.00	< 9.13	2.86
21.00	-	23.00	0.00	1.00
23.00	-	25.00	0.00	1.00
25.00	-	27.00	0.00	1.00
27.00	-	30.00	< 9.40	2.95

### Remarks:

Calculated measurement uncertainty =  $\pm 2.3$ dB

**TEST REPORT****Results:****Channel B**

(1) Between "Neutral" and "Ground"

Frequency Range of Emission		Maximum Measured Radio Noise		FCC Limit (Class B)	
MHz		dB(mV)	mV		mV
0.45	-	0.80	0.00	1.00	250.00
0.80	-	1.60	0.00	1.00	250.00
1.60	-	3.00	0.00	1.00	250.00
3.00	-	5.00	0.00	1.00	250.00
5.00	-	7.00	0.00	1.00	250.00
7.00	-	9.00	0.00	1.00	250.00
9.00	-	11.00	0.00	1.00	250.00
11.00	-	13.00	0.00	1.00	250.00
13.00	-	15.00	0.00	1.00	250.00
15.00	-	17.00	< 26.73	21.70	250.00
17.00	-	19.00	0.00	1.00	250.00
19.00	-	21.00	9.13	2.86	250.00
21.00	-	23.00	0.00	1.00	250.00
23.00	-	25.00	0.00	1.00	250.00
25.00	-	27.00	0.00	1.00	250.00
27.00	-	30.00	9.40	2.95	250.00

## Remarks:

Calculated measurement uncertainty =  $\pm 2.3\text{dB}$

Date: 2001-09-10  
No.: HM105742

## **TEST REPORT**

Page 21 of 26

### **3.2 26dB Bandwidth of Fundamental Emission**

Test Requirement:	FCC 47 CFR 15.235
Test Method:	ANSI C63.4:1992 (Section 13.1.7)
Test Date:	2001-08-29
Mode of Operation:	On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

Date: 2001-09-10

No.: HM105742

## **TEST REPORT**


Page 22 of 26

### **Limits for 26 dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	26dB Bandwidth [KHz]	FCC Limits * [KHz]
49.83	7.8	within 49.82-49.90

Channel A

### **26dB Bandwidth of Fundamental Emission**

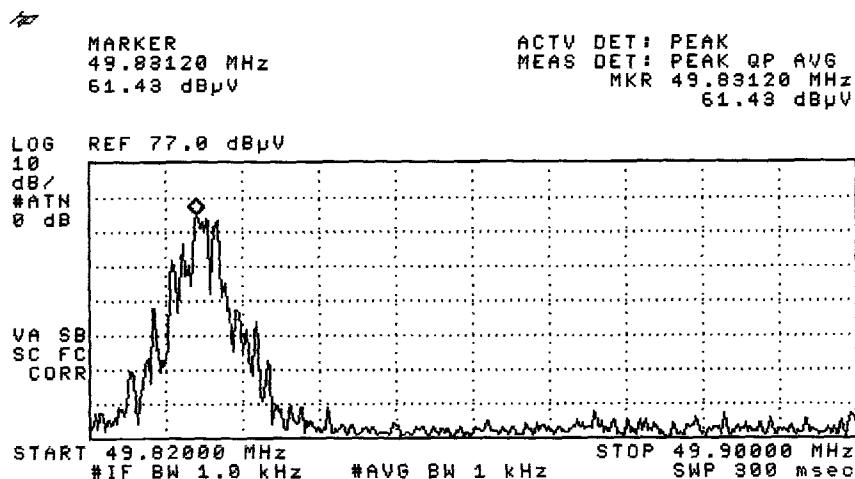

Date: 2001-09-10

No.: HM105742

## **TEST REPORT**


Page 23 of 26

### **Limits for 26 dB Bandwidth of Fundamental Emission:**

Frequency Range [MHz]	26dB Bandwidth [KHz]	FCC Limits * [KHz]
49.876	9.2	within 49.82-49.90

Channel B

### **26dB Bandwidth of Fundamental Emission**

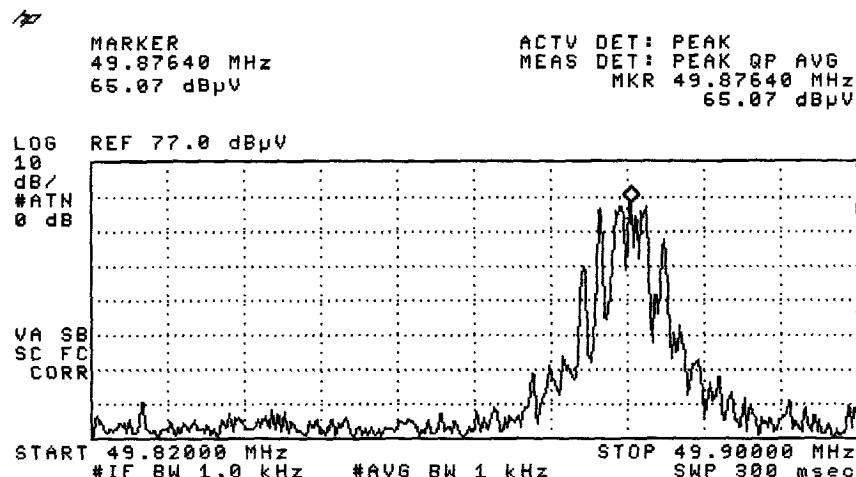

Date: 2001-09-10  
No.: HM105742

# TEST REPORT

Page 24 of 26

## Appendix A

### Test Equipment Audit

#### Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL.
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	18/07/00
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	18/07/00
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	18/07/00
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	18/07/00
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	18/07/00
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	18/07/00
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	CM
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	10/07/00
EM017	ANTENNA	ARA INC.	LPB-2513/A	1069	17/02/00
EM020	HORN ANTENNA	EMCO	3115	4032	09/08/00
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	30/03/98
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	15/02/01
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	31/05/00

#### Conducted Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL.
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	10/09/00
EM002	LISN	EMCO	3825-2	9005-1657	27/07/99
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	31/08/00
EM145	EMI TEST RECEIVER	R & S	ESCS 30	830245/021	31/05/00
EM120	EMI TEST RECEIVER	R&S	ESHS10	1004.0401.10	04/09/00
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	N/A
EM142	PLUSE LIMITER	R & S	ESH3Z2	357.8810.52	29/01/00

Remarks:

CM      Corrective Maintenance  
N/A     Not Applicable or Not Available  
TBD    To Be Determined

Date: 2001-09-10  
No.: HM105742

## TEST REPORT

Page 25 of 26

### Appendix B

#### Photographs of EUT


Front View of the product




Rear View of the product



Inner Circuit Top View

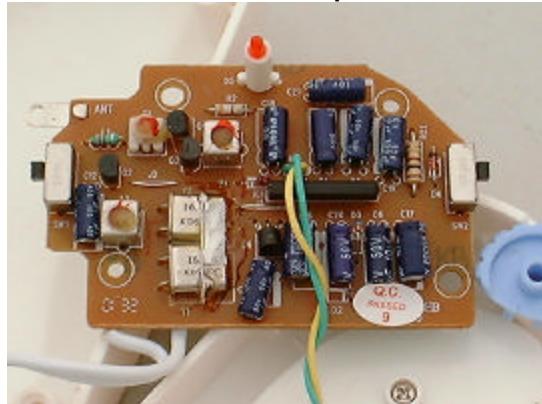

Inner Circuit Bottom View

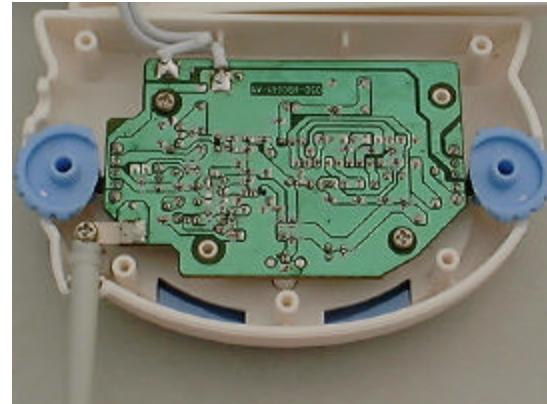

Date: 2001-09-10  
No.: HM105742

## **TEST REPORT**

Page 26 of 26

### **Photographs of EUT**

**Measurement of Radiated Emission Test Set Up**



End of Document