



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Fisher-Price, Inc.
Applicant Address	636 Girard Ave., East Aurora, New York, 14052
FCC ID	CCTT4256R-10
Manufacturer's company	Wynnewood Toys Industrial (Shenzhen) Co., Ltd.
Manufacturer Address	Guan Guang Road, Fuanlan Baoan District, Shenzhen, China

Product Name	Digital Video monitor (Parent unit)
Brand Name	Fisher-Price, Inc.
Model Name	T4256 (receiver)
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247 (2007/10/08)
Test Freq. Range	2409 ~ 2473MHz
Received Date	Mar. 23, 2010
Final Test Date	Jul. 05, 2010
Submission Type	Original Equipment



Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003**,

47 CFR FCC Part 15 Subpart C (2007/10/08) and FCC Public Notice DA00-705.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

ILAC MRA

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies	3
3.5. Table for Test Modes.....	4
3.6. Table for Testing Locations.....	4
3.7. Table for Supporting Units	4
3.8. Table for Parameters of Test Software Setting	4
3.9. Test Configurations	5
4. TEST RESULT	7
4.1. AC Power Line Conducted Emissions Measurement.....	7
4.2. Maximum Peak Output Power Measurement	13
4.3. Hopping Channel Separation Measurement	15
4.4. Number of Hopping Frequency Measurement.....	20
4.5. Dwell Time Measurement.....	22
4.6. Radiated Emissions Measurement	27
4.7. Band Edge Emissions Measurement	36
4.8. Antenna Requirements	40
5. LIST OF MEASURING EQUIPMENTS	41
6. TEST LOCATION.....	43
7. TAF CERTIFICATE OF ACCREDITATION	44
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A9
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~ C2
APPENDIX D. LABEL OF EUT.....	D1 ~D2



History of This Test Report

Original Issue Date: Jun. 12, 2010

Report No.: FR032316-01

- No additional attachment.
- Additional attachment were issued as following record:



1. CERTIFICATE OF COMPLIANCE

Product Name : Digital Video monitor (Parent unit)
Brand Name : Fisher-Price, Inc.
Model Name : T4256 (receiver)
Applicant : Fisher-Price, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247 (2007/10/08)

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 23, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao
Jordan Hsiao
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C (2007/10/08)				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.92 dB
4.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	8.03 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	1.15 dB
4.7	15.247(d)	Band Edge Emissions	Complies	0.48 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	Power Adapter and Battery
Modulation	FHSS
Frequency Range	2409 ~ 2473MHz
Channel Number	17
Channel Band Width (99%)	6720 kHz
Conducted Output Power	12.97 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	PROTRONICS INDUSTRIAL CO., LTD.	PS06B-0600850U	Input: 100-240VAC, 50/60Hz, 9W Output: 6VDC, 850mA
Battery	-	-	3.6VDC, 1500mAh

3.3. Table for Filed Antenna

Ant.	Brand	Part ID	Antenna Type	Connector	Gain (dBi)
1	Super Wealth (Hong Kong) Limited.	P1827-2-01-RH	PIFA Antenna	NA	3.5

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2409~2473 MHz	1	2409 MHz	10	2445 MHz
	2	2413 MHz	11	2449 MHz
	3	2417 MHz	12	2453 MHz
	4	2421 MHz	13	2457 MHz
	5	2425 MHz	14	2461 MHz
	6	2429 MHz	15	2465 MHz
	7	2433 MHz	16	2469 MHz
	8	2437 MHz	17	2473 MHz
	9	2441 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Conducted Emissions	Hopping Mode	-	1
Max. Conducted Output Power	Hopping Mode	1/9/17	NA
Hopping Channel Separation	Hopping Mode	1/9/17	NA
Number of Hopping Frequency	Hopping Mode	1~2/9~10/16~17	NA
Dwell Time	Hopping Mode	Hopping 1~17	NA
Radiated Emissions Below 1GHz	Hopping Mode	-	1
Radiated Emissions Above 1GHz	Hopping Mode	1/9/17	1
Band Edge Emissions	Hopping Mode	1/9/17	1

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	879474	IC 4086	-
CO04-HY	Conduction	Hwa Ya	879474	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Digital video monitor	Mattel Asia Pacific Sourcing Limited	T4256 (transmitter)	CCTT4256T-10

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters



Test Software Version	NA		
Frequency	1	9	17
Power Parameters	DEFAULT	DEFAULT	DEFAULT

No test software was used during testing.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration



Test Configuration: 30MHz~1GHz

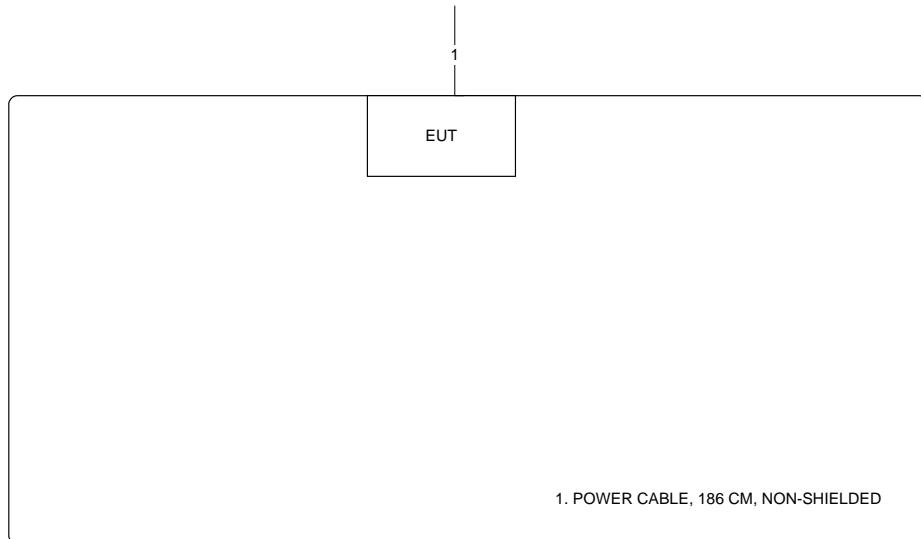

Test Configuration: Above 1GHz

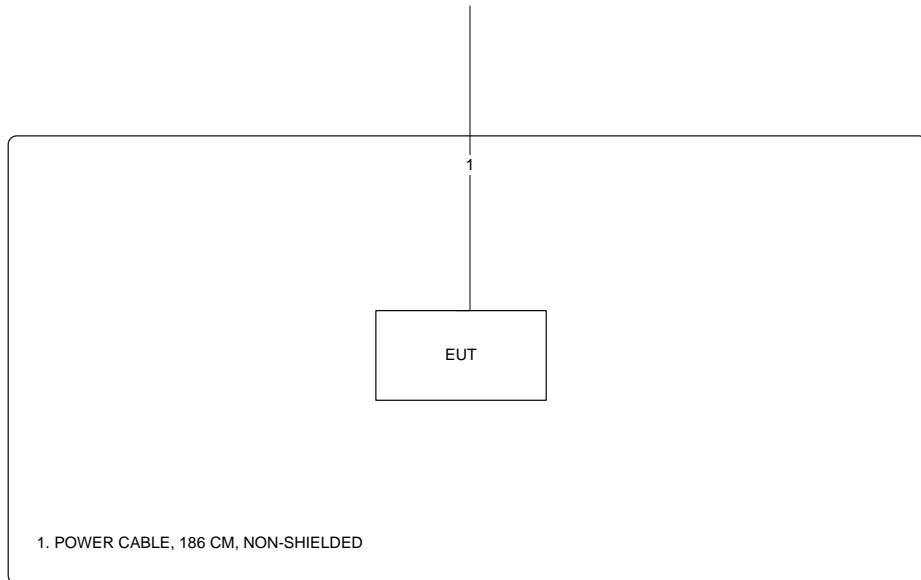

3.9.2. AC Power Line Conduction Emissions Test Configuration

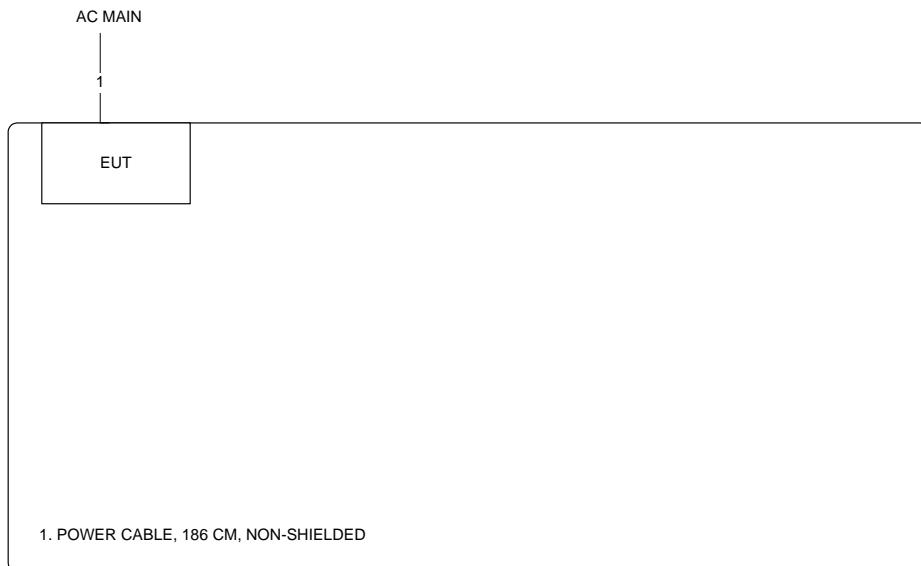

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Quasi-Peak and Average Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

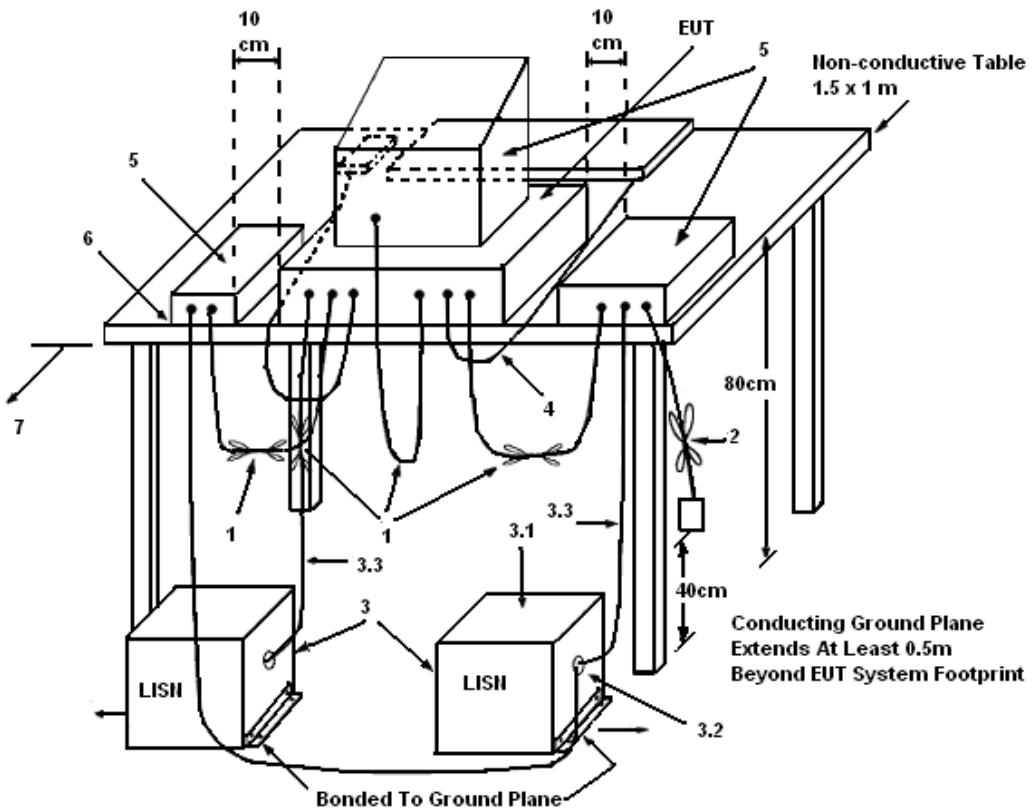

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	24°C	Humidity	54%
Test Engineer	Aric Li	Phase	Line
Configuration	Hopping Mode		

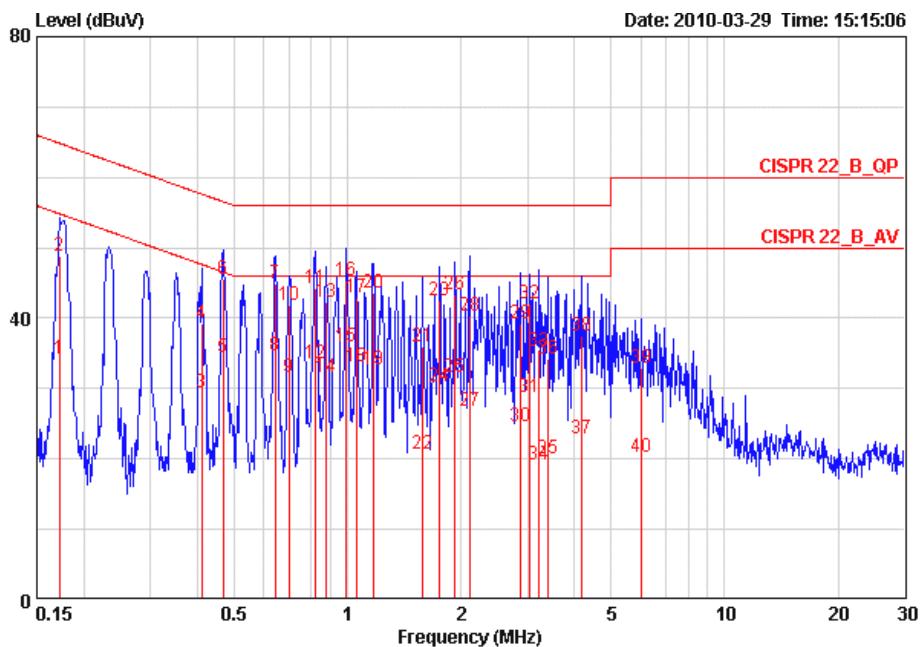

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dBuV	Level	Factor	dB	
1	0.17215	34.22	-20.63	54.86	33.96	0.06	0.20 AVERAGE
2	0.17215	48.88	-15.97	64.86	48.62	0.06	0.20 QP
3	0.41048	29.35	-18.29	47.64	29.12	0.03	0.20 AVERAGE
4	0.41048	39.13	-18.51	57.64	38.90	0.03	0.20 QP
5	0.46861	34.50	-12.04	46.54	34.27	0.03	0.20 AVERAGE
6	0.46861	45.53	-11.01	56.54	45.30	0.03	0.20 QP
7	0.64398	44.91	-11.09	56.00	44.68	0.03	0.20 QP
8	0.64398	34.68	-11.32	46.00	34.45	0.03	0.20 AVERAGE
9	0.70096	31.50	-14.50	46.00	31.27	0.03	0.20 AVERAGE
10	0.70096	41.95	-14.05	56.00	41.72	0.03	0.20 QP
11	0.82172	44.25	-11.75	56.00	44.02	0.03	0.20 QP
12	0.82172	33.53	-12.47	46.00	33.30	0.03	0.20 AVERAGE
13	0.88031	42.38	-13.62	56.00	42.15	0.03	0.20 QP
14	0.88031	31.68	-14.32	46.00	31.45	0.03	0.20 AVERAGE
15	0.99440	35.91	-10.09	46.00	35.68	0.03	0.20 AVERAGE
16	0.99440	45.43	-10.57	56.00	45.20	0.03	0.20 QP
17	1.054	43.03	-12.97	56.00	42.81	0.03	0.19 QP
18	1.054	33.03	-12.97	46.00	32.81	0.03	0.19 AVERAGE
19	1.172	32.74	-13.26	46.00	32.54	0.03	0.16 AVERAGE
20	1.172	43.51	-12.49	56.00	43.31	0.03	0.16 QP
21	1.585	36.03	-19.97	56.00	35.87	0.04	0.12 QP
22	1.585	20.81	-25.19	46.00	20.65	0.04	0.12 AVERAGE
23	1.753	42.53	-13.47	56.00	42.33	0.05	0.15 QP

Freq	MHz	Over Limit		Read		LISN	Cable	Loss	Remark
		Level	Limit	Line	Level				
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
24	1.753	30.34	-15.66	46.00	30.14	0.05	0.15	AVERAGE	
25	1.928	31.59	-14.41	46.00	31.35	0.05	0.19	AVERAGE	
26	1.928	43.29	-12.71	56.00	43.05	0.05	0.19	QP	
27	2.110	26.88	-19.12	46.00	26.63	0.05	0.20	AVERAGE	
28	2.110	40.42	-15.58	56.00	40.17	0.05	0.20	QP	
29	2.869	39.29	-16.71	56.00	39.01	0.08	0.20	QP	
30	2.869	24.72	-21.28	46.00	24.44	0.08	0.20	AVERAGE	
31	3.041	28.71	-17.29	46.00	28.42	0.08	0.21	AVERAGE	
32	3.041	42.15	-13.85	56.00	41.86	0.08	0.21	QP	
33	3.224	35.28	-20.72	56.00	34.95	0.08	0.25	QP	
34	3.224	19.10	-26.90	46.00	18.77	0.08	0.25	AVERAGE	
35	3.399	20.07	-25.93	46.00	19.70	0.09	0.28	AVERAGE	
36	3.399	34.31	-21.69	56.00	33.94	0.09	0.28	QP	
37	4.158	22.78	-23.22	46.00	22.37	0.11	0.30	AVERAGE	
38	4.158	37.55	-18.45	56.00	37.14	0.11	0.30	QP	
39	6.024	32.98	-27.02	60.00	32.46	0.21	0.31	QP	
40	6.024	20.23	-29.77	50.00	19.71	0.21	0.31	AVERAGE	

Temperature	24°C	Humidity	54%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Hopping Mode		

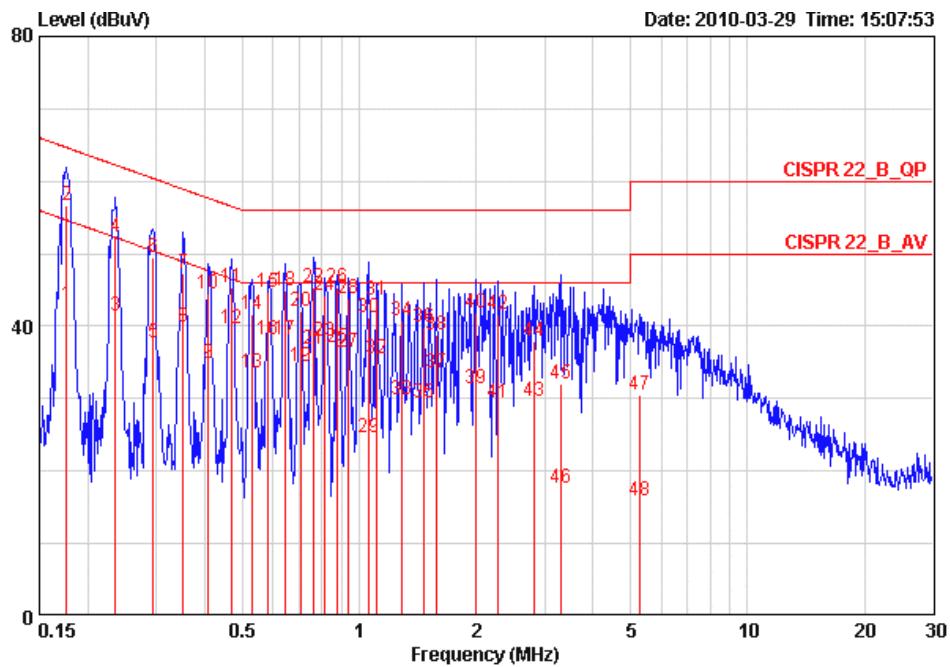

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	Limit	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17584	42.92	-11.76	54.68	42.63	0.09	0.20 AVERAGE
2 @	0.17584	56.67	-8.01	64.68	56.38	0.09	0.20 QP
3	0.23533	41.47	-10.79	52.26	41.19	0.08	0.20 AVERAGE
4 @	0.23533	52.38	-9.88	62.26	52.10	0.08	0.20 QP
5	0.29398	37.66	-12.75	50.41	37.39	0.07	0.20 AVERAGE
6	0.29398	49.44	-10.97	60.41	49.17	0.07	0.20 QP
7	0.35201	47.27	-11.64	58.91	47.00	0.07	0.20 QP
8 @	0.35201	39.92	-8.99	48.91	39.65	0.07	0.20 AVERAGE
9	0.40831	34.94	-12.74	47.68	34.67	0.07	0.20 AVERAGE
10	0.40831	44.40	-13.28	57.68	44.13	0.07	0.20 QP
11	0.46861	45.41	-11.13	56.54	45.14	0.07	0.20 QP
12 @	0.46861	39.62	-6.92	46.54	39.35	0.07	0.20 AVERAGE
13	0.52934	33.49	-12.51	46.00	33.22	0.07	0.20 AVERAGE
14	0.52934	41.73	-14.27	56.00	41.46	0.07	0.20 QP
15	0.58231	44.67	-11.33	56.00	44.40	0.07	0.20 QP
16 @	0.58231	38.24	-7.76	46.00	37.97	0.07	0.20 AVERAGE
17 @	0.64398	38.11	-7.89	46.00	37.84	0.07	0.20 AVERAGE
18	0.64398	44.97	-11.03	56.00	44.70	0.07	0.20 QP
19	0.70468	34.39	-11.61	46.00	34.12	0.07	0.20 AVERAGE
20	0.70468	42.05	-13.95	56.00	41.78	0.07	0.20 QP
21 @	0.76297	36.76	-9.24	46.00	36.49	0.07	0.20 AVERAGE
22	0.76297	45.41	-10.59	56.00	45.14	0.07	0.20 QP
23 @	0.81737	37.91	-8.09	46.00	37.64	0.07	0.20 AVERAGE

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
24	0.81737	44.15	-11.85	56.00	43.88	0.07	0.20 QP
25 @	0.87566	37.16	-8.84	46.00	36.89	0.07	0.20 AVERAGE
26	0.87566	45.30	-10.70	56.00	45.03	0.07	0.20 QP
27 @	0.93810	36.47	-9.53	46.00	36.20	0.07	0.20 AVERAGE
28	0.93810	43.90	-12.10	56.00	43.63	0.07	0.20 QP
29	1.060	24.72	-21.28	46.00	24.46	0.07	0.19 AVERAGE
30	1.060	41.30	-14.70	56.00	41.04	0.07	0.19 QP
31	1.111	43.51	-12.49	56.00	43.26	0.07	0.17 QP
32	1.111	35.55	-10.45	46.00	35.30	0.07	0.17 AVERAGE
33	1.289	29.76	-16.24	46.00	29.54	0.08	0.14 AVERAGE
34	1.289	40.66	-15.34	56.00	40.44	0.08	0.14 QP
35	1.464	29.46	-16.54	46.00	29.27	0.08	0.11 AVERAGE
36	1.464	39.81	-16.19	56.00	39.62	0.08	0.11 QP
37	1.585	33.55	-12.45	46.00	33.35	0.08	0.12 AVERAGE
38	1.585	38.84	-17.16	56.00	38.64	0.08	0.12 QP
39	1.991	31.43	-14.57	46.00	31.14	0.09	0.20 AVERAGE
40	1.991	41.95	-14.05	56.00	41.66	0.09	0.20 QP
41	2.285	29.35	-16.65	46.00	29.05	0.10	0.20 AVERAGE
42	2.285	41.62	-14.38	56.00	41.32	0.10	0.20 QP
43	2.809	29.60	-16.40	46.00	29.29	0.11	0.20 AVERAGE
44	2.809	38.01	-17.99	56.00	37.70	0.11	0.20 QP
45	3.293	31.99	-24.01	56.00	31.60	0.13	0.26 QP
46	3.293	17.70	-28.30	46.00	17.31	0.13	0.26 AVERAGE
47	5.277	30.50	-29.50	60.00	29.98	0.22	0.30 QP
48	5.277	15.93	-34.07	50.00	15.41	0.22	0.30 AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400~2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400~2483.5 MHz band: 0.125 watts (21dBm). The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z51

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

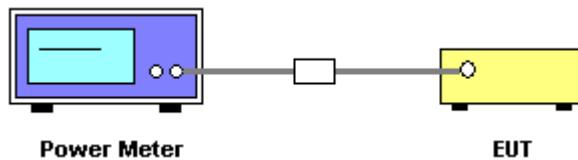

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in hopping mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	18°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	Hopping
Test Date	Mar. 26, 2010		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2409 MHz	11.86	21.00	Complies
9	2441 MHz	11.65	21.00	Complies
17	2473 MHz	12.97	21.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400~2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100 kHz (20dB Bandwidth) / 1 MHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 1 MHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
3. The resolution bandwidth of 1 MHz and the video bandwidth of 1 MHz were utilised for channel separation measurement.
4. Test was performed in accordance with Measurement under FCC Public Notice DA00-705.

4.3.4. Test Setup Layout

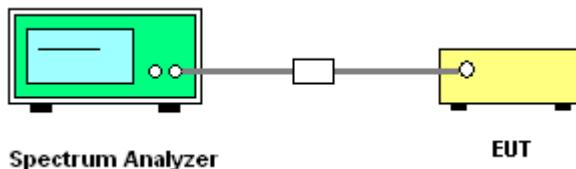

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in hopping mode.


4.3.7. Test Result of Hopping Channel Separation

Temperature	18°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	Hopping

Frequency	20dB Bandwidth (kHz)	99% Occupied BW (kHz)	Channel Spacing (kHz)	Channel Specing Min. Limits (kHz)	Result
2409 MHz	5040.00	4680.00	4000.00	3360.00	Complies
2441 MHz	4800.00	6720.00	4000.00	3200.00	Complies
2473 MHz	4920.00	4560.00	4000.00	3280.00	Complies


Note: The limit should be the greater of 25 kHz or 2/3 of 20 dB bandwidth for device operates with an output power not greater than 125 mW.

20 dB Bandwidth Plot on Channel 1 / 2409 MHz

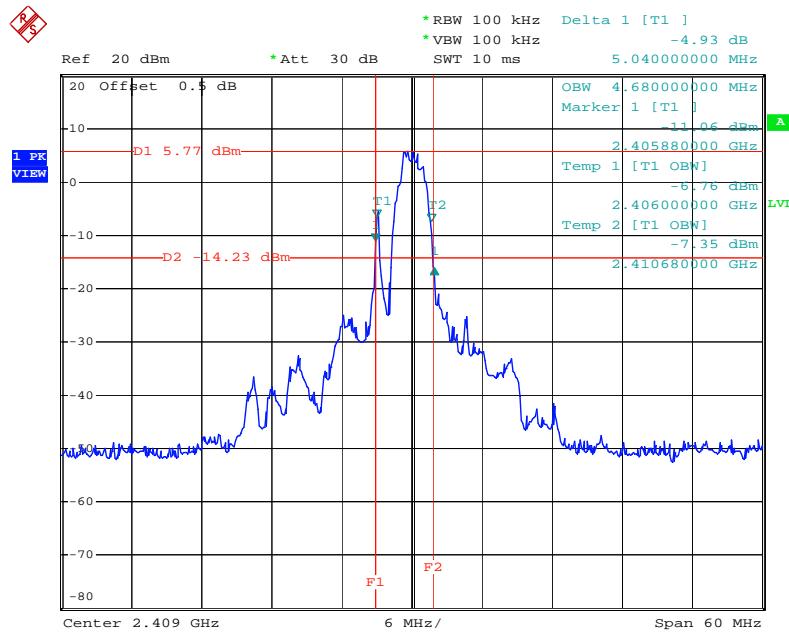


Date: 12.MAY.2010 16:34:34

20 dB Bandwidth Plot on Channel 9 / 2441 MHz

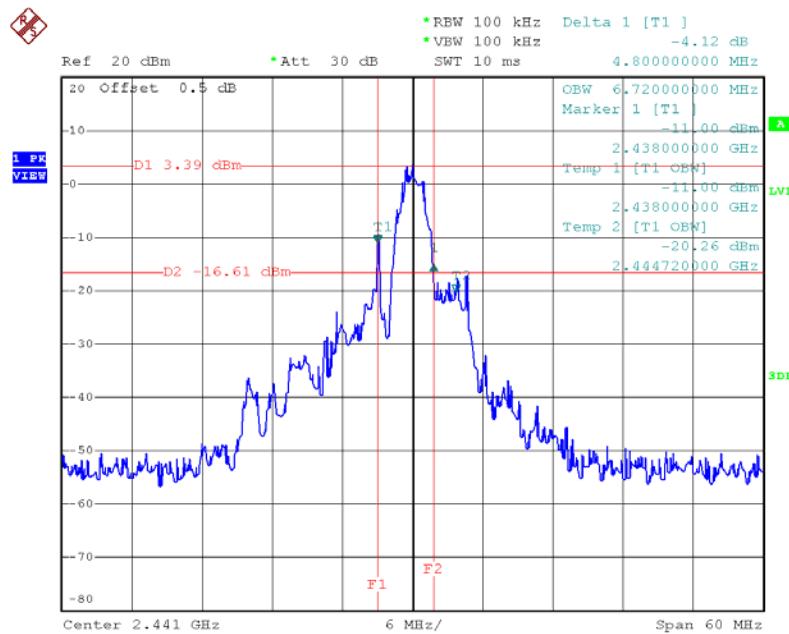


Date: 29.JUN.2010 16:43:41

20 dB Bandwidth Plot on Channel 17 / 2473 MHz

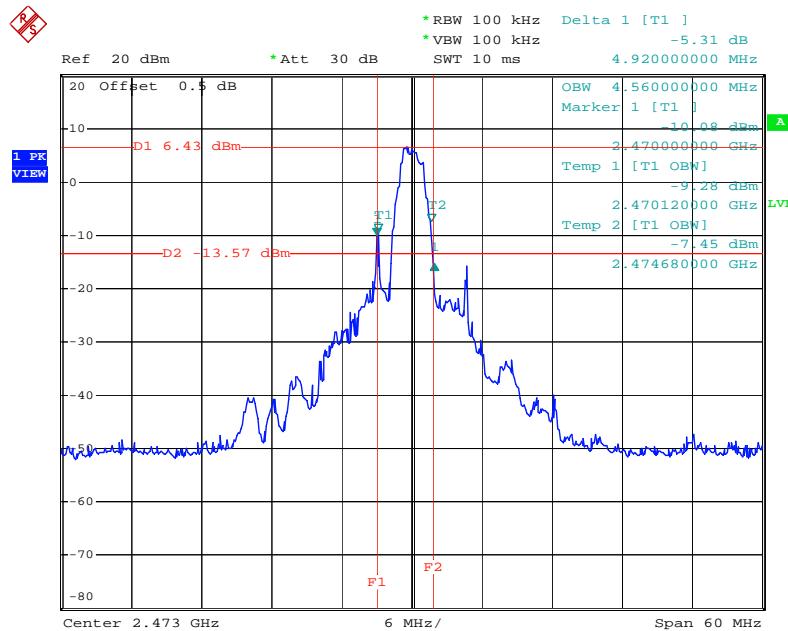


Date: 12.MAY.2010 16:36:37

Channel Separation Plot on Channel 1~2 / 2409 MHz ~ 2413 MHz

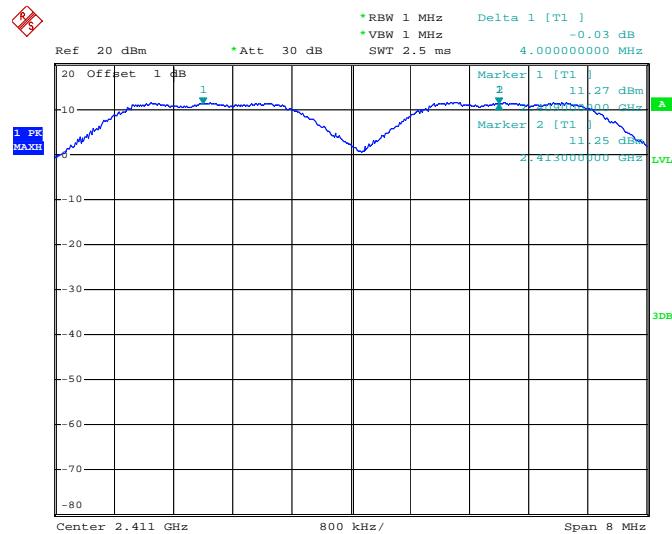


Date: 25.MAR.2010 15:18:00

Channel Separation Plot on Channel 9~10 / 2441 MHz ~ 2445 MHz

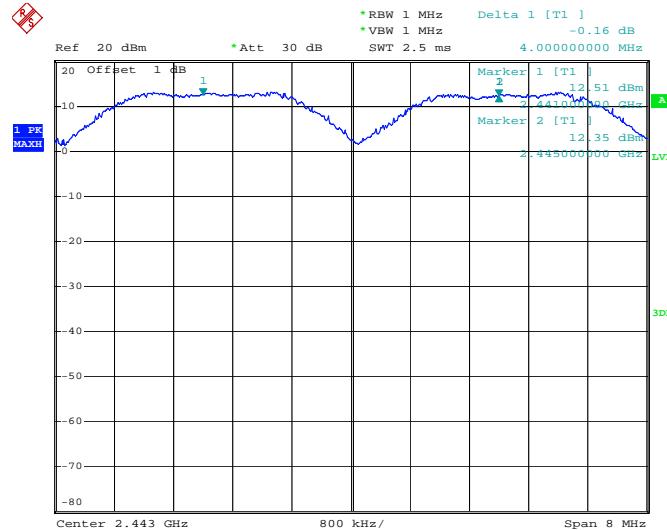

Date: 25.MAR.2010 15:21:03

Channel Separation Plot on Channel 16~17 / 2469MHz ~ 2473 MHz

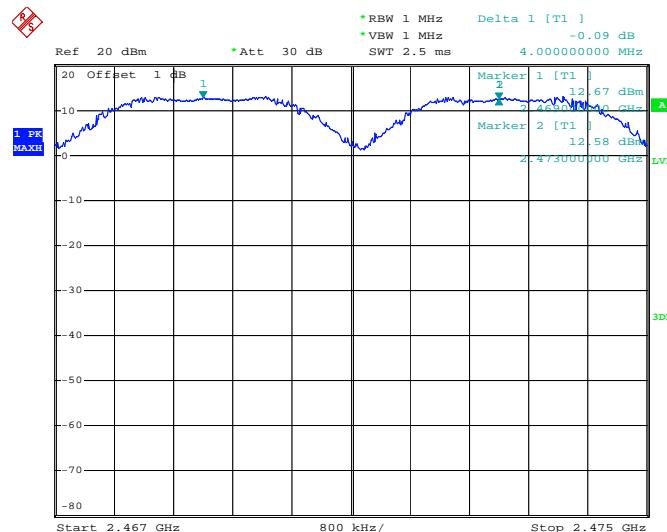

Date: 25.MAR.2010 15:23:10

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

For frequency hopping systems operating in the 2400~2483.5 MHz band employing at least 15 non-overlapping hopping channels.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	1 MHz
VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 1 MHz and the video bandwidth of 1 MHz were utilised.
3. Observe frequency hopping in 2400~2483.5 MHz, there are at least 15 non-overlapping channels.

4.4.4. Test Setup Layout

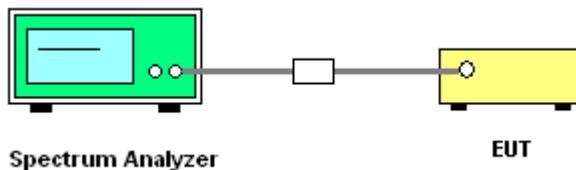

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test


The EUT was programmed to be in hopping mode.

4.4.7. Test Result of Number of Hopping Frequency

Temperature	18°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	HOPPING

Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
1~17	2409~2473	17	15	Complies

Number of Hopping Channel Plot on Channel 1~17 / 2409 MHz ~ 2473 MHz

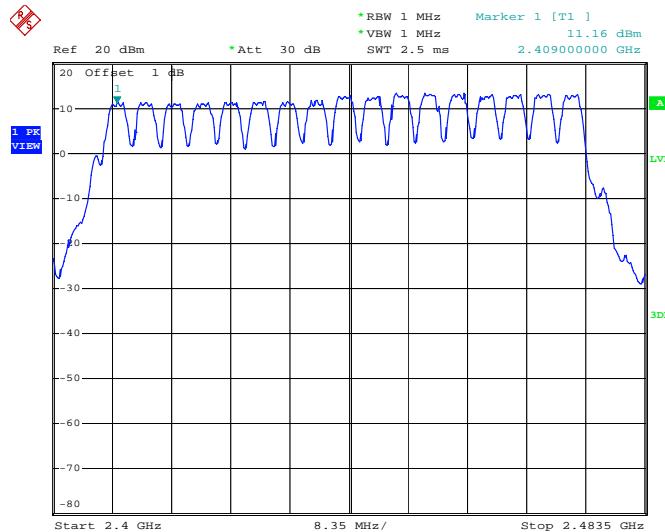

Date: 25.MAR.2010 15:12:35

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400~2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1 MHz
VB	1 MHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Count the number of pulses in the dwell time duration (0.4 seconds multiplied by the number of hopping channels).
8. Dwell time=pulse duration x number of pulses / measure time x dwell time duration.

4.5.4. Test Setup Layout

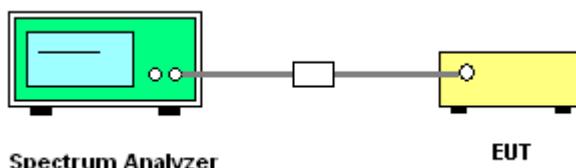

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in hopping mode.


4.5.7. Test Result of Dwell Time

Temperature	18°C	Humidity	60%
Test Engineer	Sam Chen	Configurations	HOPPING

Frequency	Pulse Duration (ms)	Number of Pulses	Measure Time (s)	Dwell time duration (s)	Dwell Time (s)	Limits (s)	Test\Result
2409 MHz	0.00026	112	6.80	6.8	0.0291	0.4000	Complies
2441 MHz	0.00026	114	6.80	6.8	0.0296	0.4000	Complies
2473 MHz	0.00025	112	6.80	6.8	0.0280	0.4000	Complies


Note: Dwell time=pulse duration x number of pulses / measure time x dwell time duration

Pulse Duration Plot on Channel 1 / 2409 MHz

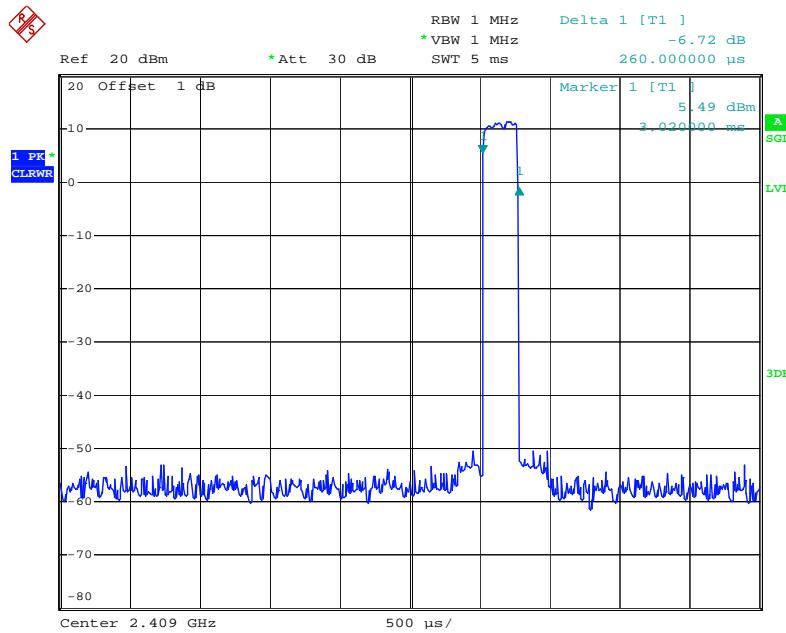


Date: 25.MAR.2010 15:24:53

Number of Pulses Plot on Channel 1 / 2409 MHz

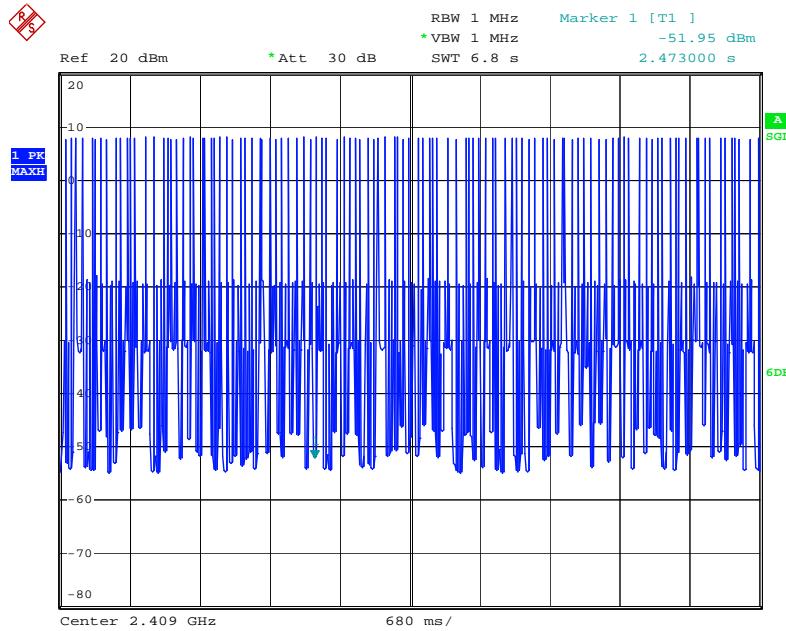


Date: 5.JUL.2010 13:34:03

Pulse Duration Plot on Channel 9 / 2441 MHz

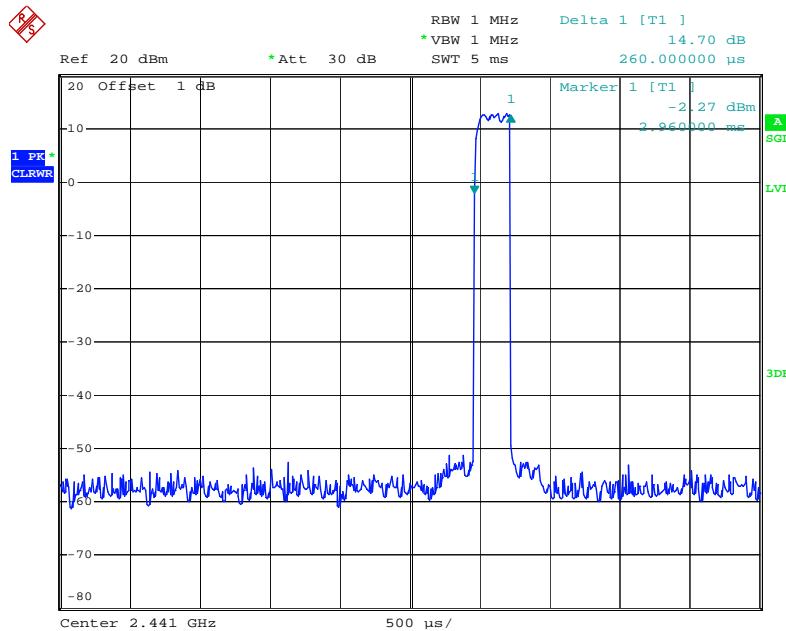


Date: 25.MAR.2010 15:25:20

Number of Pulses Plot on Channel 9 / 2441 MHz

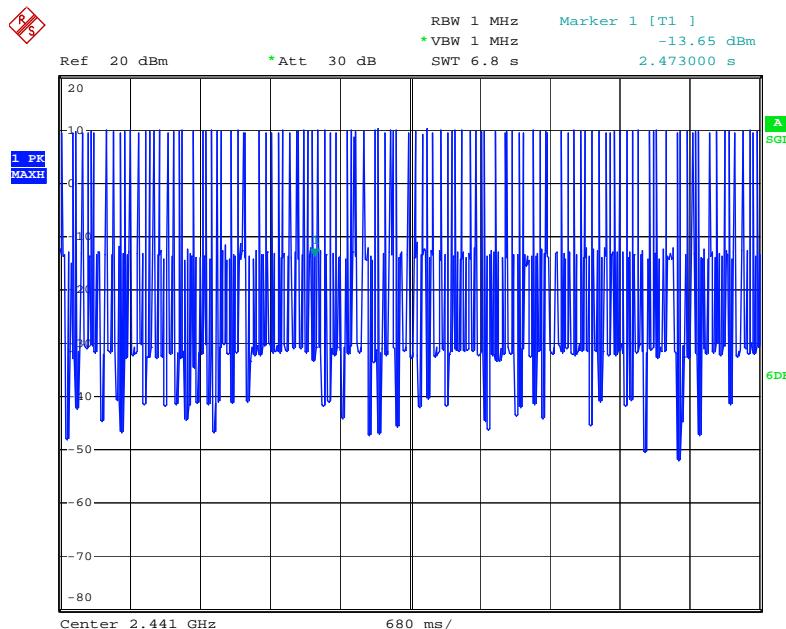


Date: 5.JUL.2010 13:33:27

Pulse Duration Plot on Channel 17 / 2473 MHz

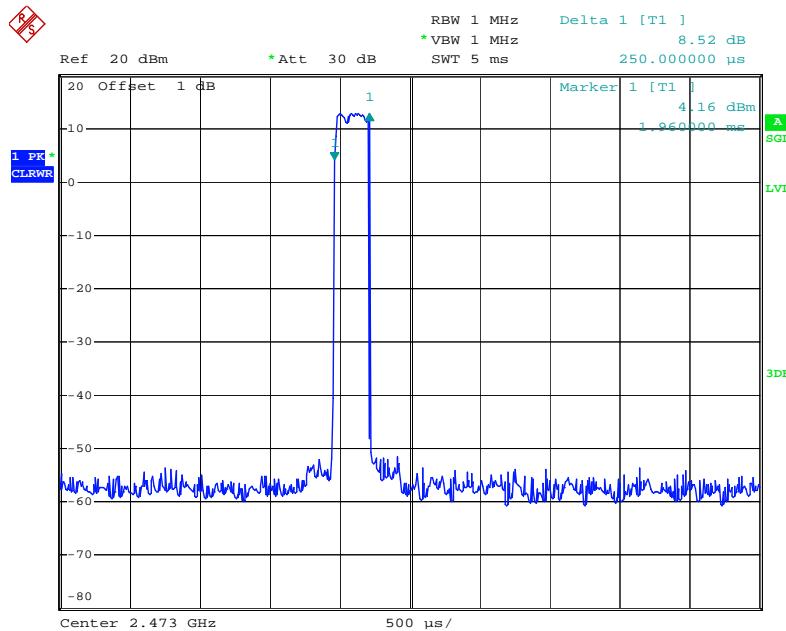

Date: 25.MAR.2010 15:26:00

Number of Pulses Plot on Channel 17 / 2473 MHz

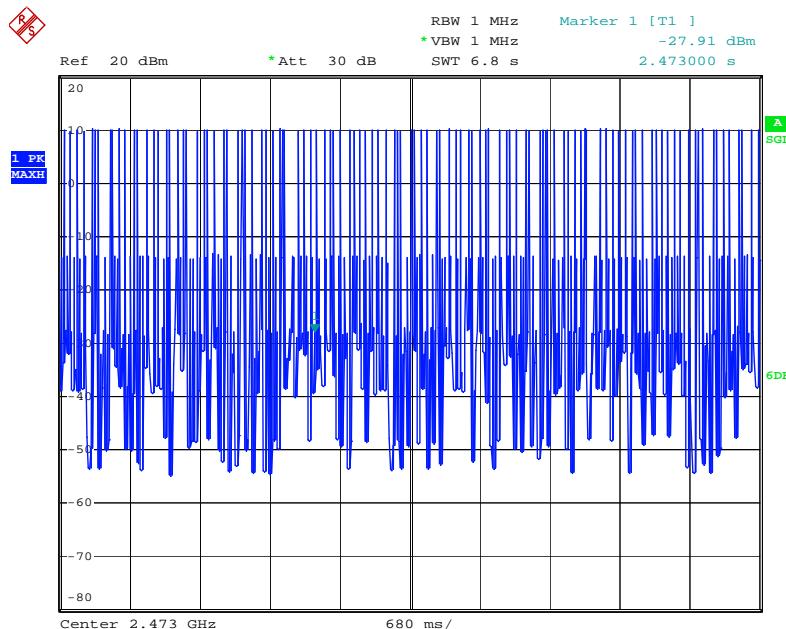

Date: 5.JUL.2010 13:32:33

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

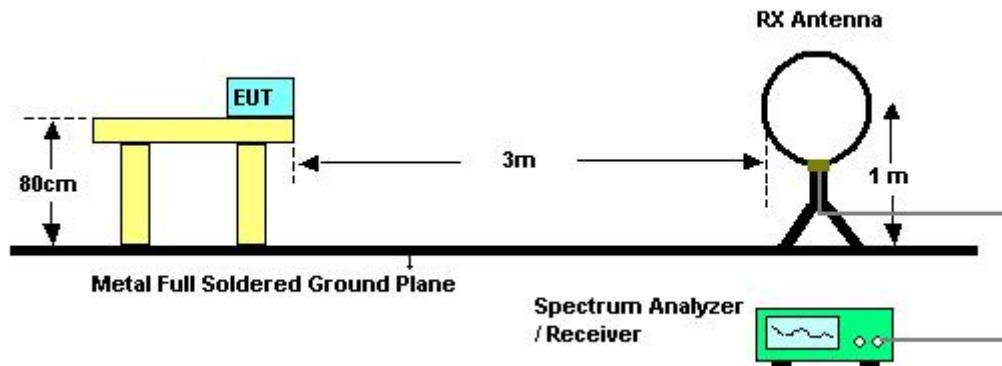

For radiated emissions above 30MHz

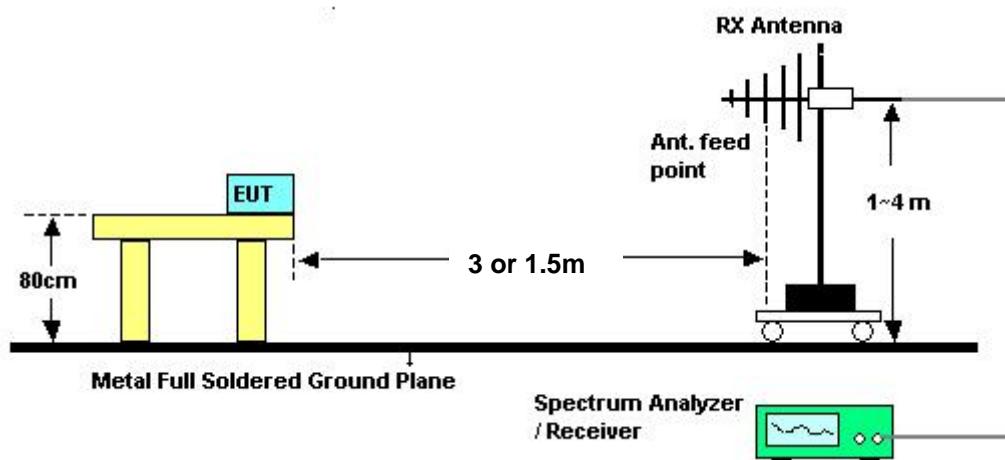

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in hopping mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	54%
Test Engineer	Allen Liu	Test Date	Mar. 23, 2010

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24°C	Humidity	54%
Test Engineer	Allen Liu	Configurations	Hopping Mode

Horizontal

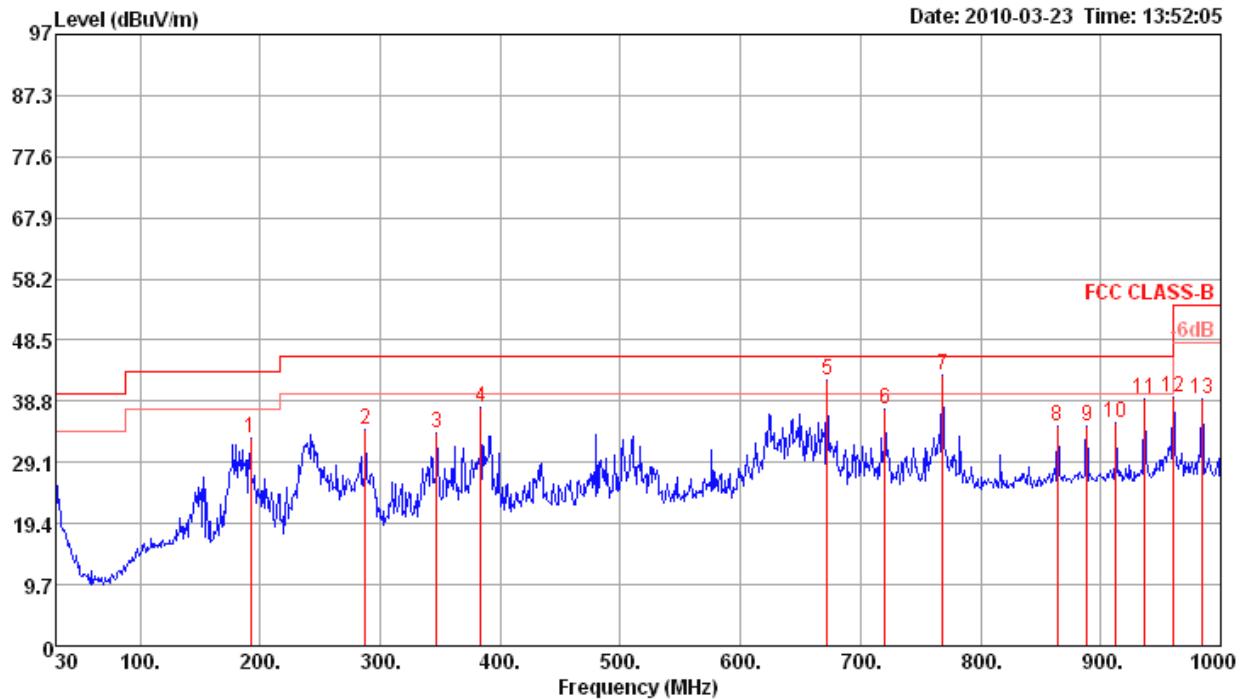

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	191.99	33.06	43.50	-10.44	47.85	1.66	27.14	10.69	0	100 Peak	HORIZONTAL
2	288.02	34.27	46.00	-11.73	45.93	2.05	26.93	13.22	0	100 Peak	HORIZONTAL
3	347.19	33.78	46.00	-12.22	44.18	2.19	27.23	14.64	0	100 Peak	HORIZONTAL
4	384.05	37.91	46.00	-8.09	47.49	2.27	27.49	15.64	0	100 Peak	HORIZONTAL
5	672.14	42.27	46.00	-3.73	47.89	3.41	28.03	19.00	0	100 Peak	HORIZONTAL
6	720.64	37.55	46.00	-8.45	42.85	3.38	27.91	19.23	0	100 Peak	HORIZONTAL
7	768.17	42.92	46.00	-3.08	47.67	3.43	27.73	19.55	0	100 Peak	HORIZONTAL
8	864.20	34.75	46.00	-11.25	38.50	3.46	27.47	20.26	0	100 Peak	HORIZONTAL
9	888.45	34.88	46.00	-11.12	38.31	3.55	27.42	20.44	0	100 Peak	HORIZONTAL
10	912.70	35.40	46.00	-10.60	38.52	3.60	27.35	20.63	0	100 Peak	HORIZONTAL
11	936.95	39.22	46.00	-6.78	42.06	3.60	27.25	20.81	0	100 Peak	HORIZONTAL
12	960.23	39.46	54.00	-14.54	42.01	3.62	27.16	20.99	0	100 Peak	HORIZONTAL
13	984.48	39.13	54.00	-14.87	41.35	3.67	27.06	21.17	0	100 Peak	HORIZONTAL

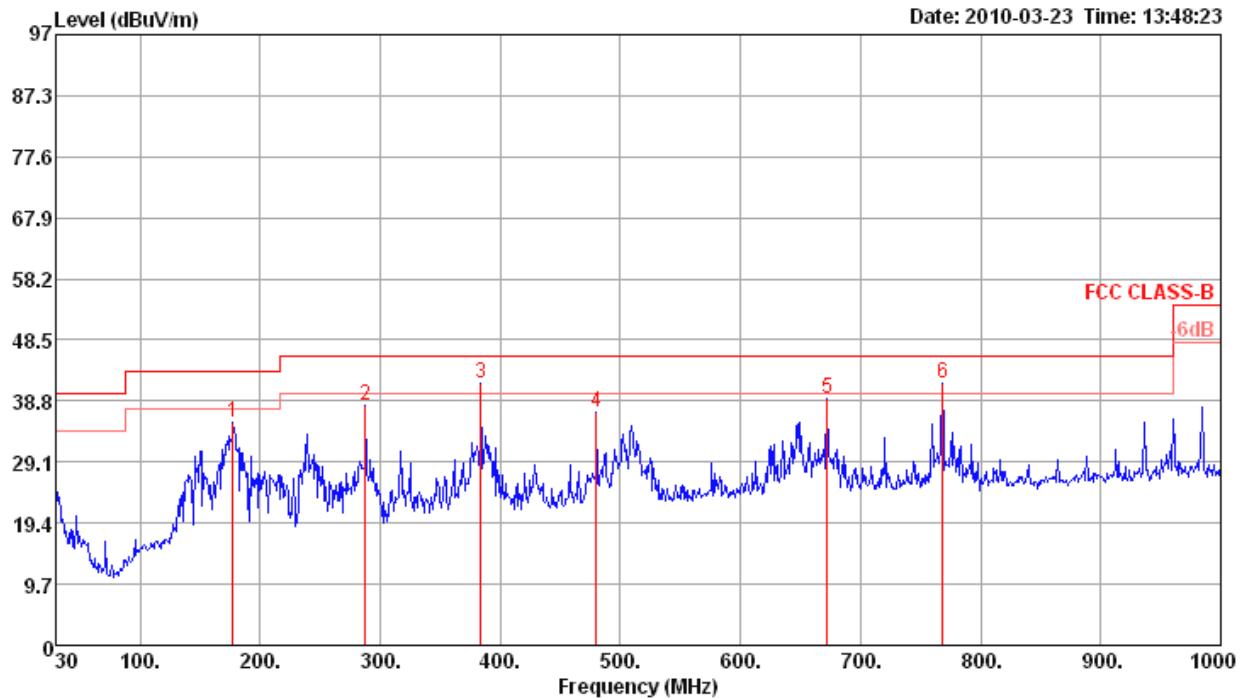Vertical


Freq	Level	Limit		Over Limit	Read Level	Cable Preamp			Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m		deg	cm		
1	177.44	35.53	43.50	-7.97	48.02	1.59	27.21	13.13	0	200	Peak	VERTICAL	
2	288.02	38.17	46.00	-7.83	49.83	2.05	26.93	13.22	0	200	Peak	VERTICAL	
3 p	384.05	41.55	46.00	-4.45	51.13	2.27	27.49	15.64	0	200	Peak	VERTICAL	
4	480.08	36.92	46.00	-9.08	44.95	2.66	28.00	17.31	0	200	Peak	VERTICAL	
5	672.14	39.05	46.00	-6.95	44.67	3.41	28.03	19.00	0	200	Peak	VERTICAL	
6	768.17	41.49	46.00	-4.51	46.24	3.43	27.73	19.55	0	200	Peak	VERTICAL	

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	24°C	Humidity	54%
Test Engineer	Allen Liu	Configurations	Channel 1
Test Date	Mar. 25, 2010		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Preamp			Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m					
1 p	4816.44	61.36	74.00	-12.64	61.20	3.00	35.26	32.42	104	151	Peak	HORIZONTAL	
2 a	4818.76	43.03	54.00	-10.97	42.83	3.00	35.26	32.46	104	151	Average	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Preamp			Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m					
1 p	4816.70	64.63	74.00	-9.37	64.43	3.00	35.26	32.46	222	139	Peak	VERTICAL	
2 a	4818.90	39.29	54.00	-14.71	39.09	3.00	35.26	32.46	222	139	Average	VERTICAL	

Temperature	24°C	Humidity	54%
Test Engineer	Allen Liu	Configurations	Channel 9
Test Date	Mar. 25, 2010		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	4881.68	36.78	54.00	-17.22	36.36	3.01	35.15	32.56	159	146	Average		HORIZONTAL	
2	4882.24	51.85	74.00	-22.15	51.43	3.01	35.15	32.56	159	146	Peak		HORIZONTAL	
3 p	7321.26	67.96	74.00	-6.04	62.45	3.75	34.93	36.69	143	147	Peak		HORIZONTAL	
4 a	7321.68	50.64	54.00	-3.36	45.13	3.75	34.93	36.69	143	147	Average		HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m						
1	4882.40	65.05	74.00	-8.95	64.63	3.01	35.15	32.56	323	100	Peak		VERTICAL	
2	4882.70	39.18	54.00	-14.82	38.76	3.01	35.15	32.56	323	100	Average		VERTICAL	
3 p	7320.94	68.54	74.00	-5.46	63.03	3.75	34.93	36.69	225	100	Peak		VERTICAL	
4 a	7321.60	52.17	54.00	-1.83	46.66	3.75	34.93	36.69	225	100	Average		VERTICAL	

Temperature	24°C	Humidity	54%
Test Engineer	Allen Liu	Configurations	Channel 17
Test Date	Mar. 25, 2010		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	4944.68	43.30	54.00	-10.70	42.54	3.03	34.97	32.70	107	158	Average	HORIZONTAL	
2	4944.74	59.58	74.00	-14.42	58.82	3.03	34.97	32.70	107	158	Peak	HORIZONTAL	
3 p	7416.68	68.01	74.00	-5.99	62.32	3.77	34.88	36.80	145	152	Peak	HORIZONTAL	
4 a	7420.98	52.45	54.00	-1.55	46.74	3.77	34.88	36.82	145	152	Average	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	4944.72	45.59	54.00	-8.41	44.83	3.03	34.97	32.70	324	110	Average	VERTICAL	
2	4945.26	66.99	74.00	-7.01	66.23	3.03	34.97	32.70	324	110	Peak	VERTICAL	
3 p	7416.76	69.84	74.00	-4.16	64.15	3.77	34.88	36.80	7	167	Peak	VERTICAL	
4 a	7417.46	52.85	54.00	-1.15	47.16	3.77	34.88	36.80	7	167	Average	VERTICAL	

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in hopping mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	54%
Test Engineer	Allen Liu	Configurations	Channel 1, 9, 17
Test Date	Mar. 25, 2010		

Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB											
1	2385.00	45.91	54.00	-8.09	15.98	2.04	0.00	27.89	100	100	Average		VERTICAL	
2	2390.00	56.63	74.00	-17.37	26.71	2.05	0.00	27.87	100	100	Peak		VERTICAL	
3 p	2408.40	113.01	74.00			2.05	0.00	27.84	100	100	Peak		VERTICAL	
4 a	2408.60	90.51	54.00			2.05	0.00	27.84	100	100	Average		VERTICAL	

Item 3, 4 are the fundamental frequency at 2409 MHz.

Channel 9

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB											
1 p	2440.40	111.63	74.00			2.07	0.00	27.78	151	100	Peak		VERTICAL	
2 a	2441.20	93.28	54.00			2.08	0.00	27.78	151	100	Average		VERTICAL	

Item 1, 2 are the fundamental frequency at 2441 MHz.

Channel 17

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			dB	dB	dB/m						
MHz	dBuV/m	dBuV/m	dB											
1 p	2472.20	115.23	74.00			2.10	0.00	27.73	148	100	Peak		VERTICAL	
2 a	2473.00	93.22	54.00			2.10	0.00	27.73	148	100	Average		VERTICAL	
3	2483.50	53.52	54.00	-0.48	23.69	2.10	0.00	27.73	148	100	Average		VERTICAL	
4	2483.50	68.98	74.00	-5.02	39.15	2.10	0.00	27.73	148	100	Peak		VERTICAL	

Item 1, 2 are the fundamental frequency at 2473 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Channel 1 / 2409 MHz

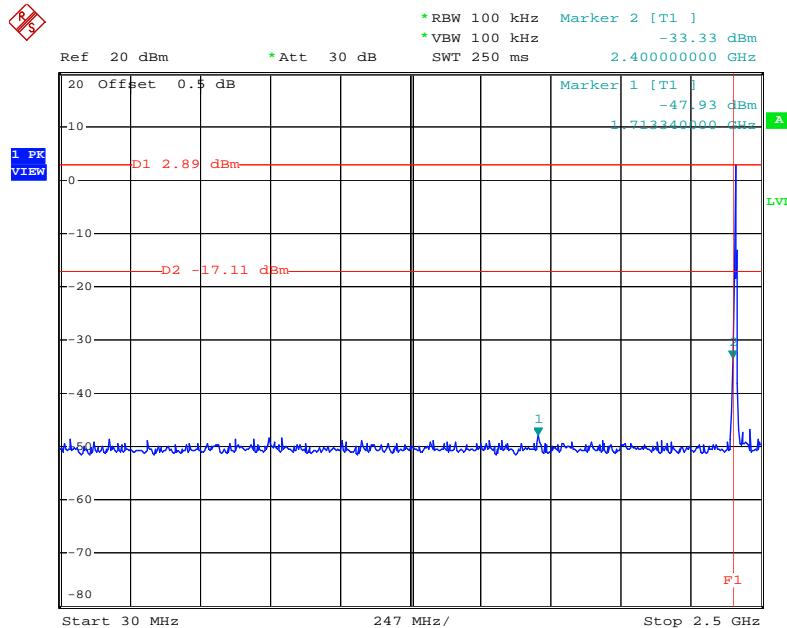


Date: 12.MAY.2010 16:49:20

High Band Edge Plot on Channel 1 / 2409 MHz

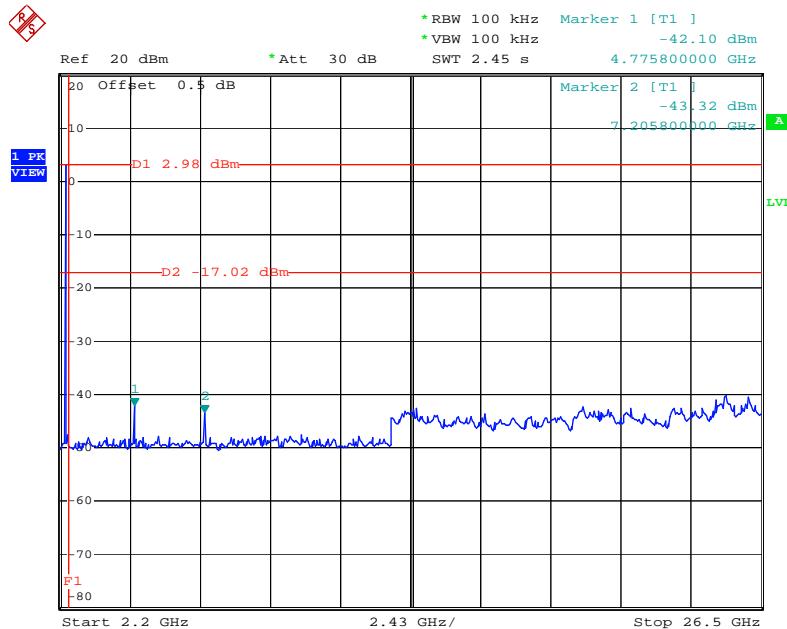


Date: 12.MAY.2010 16:51:25

Low Band Edge Plot on Channel 17 / 2473 MHz

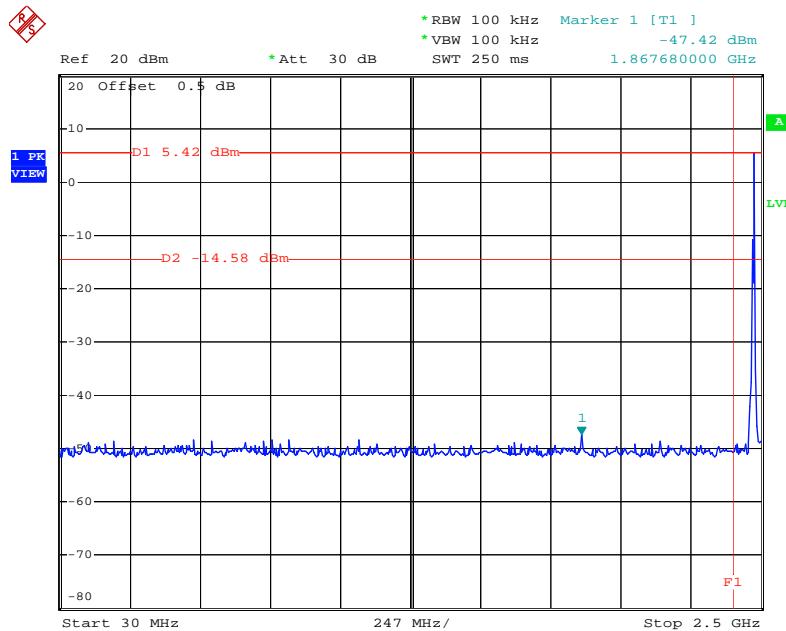

Date: 12.MAY.2010 16:46:37

High Band Edge Plot on Channel 17 / 2473 MHz

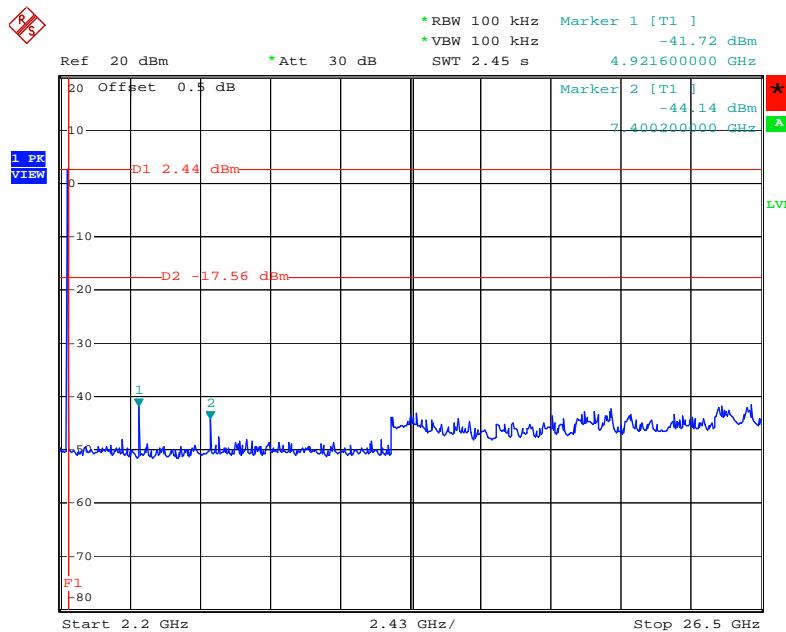

Date: 12.MAY.2010 16:45:50

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2010	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Apr. 29, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 24, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2010	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2010	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2010	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: For "*" Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No.: L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sportun International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix