



LABEL INFORMATION

EXACT LOCATION OF THE LABEL:

LABEL WITH FCC / IC INFORMATION WILL BE EMBOSSED IN THE PLASTIC CASE BACK:



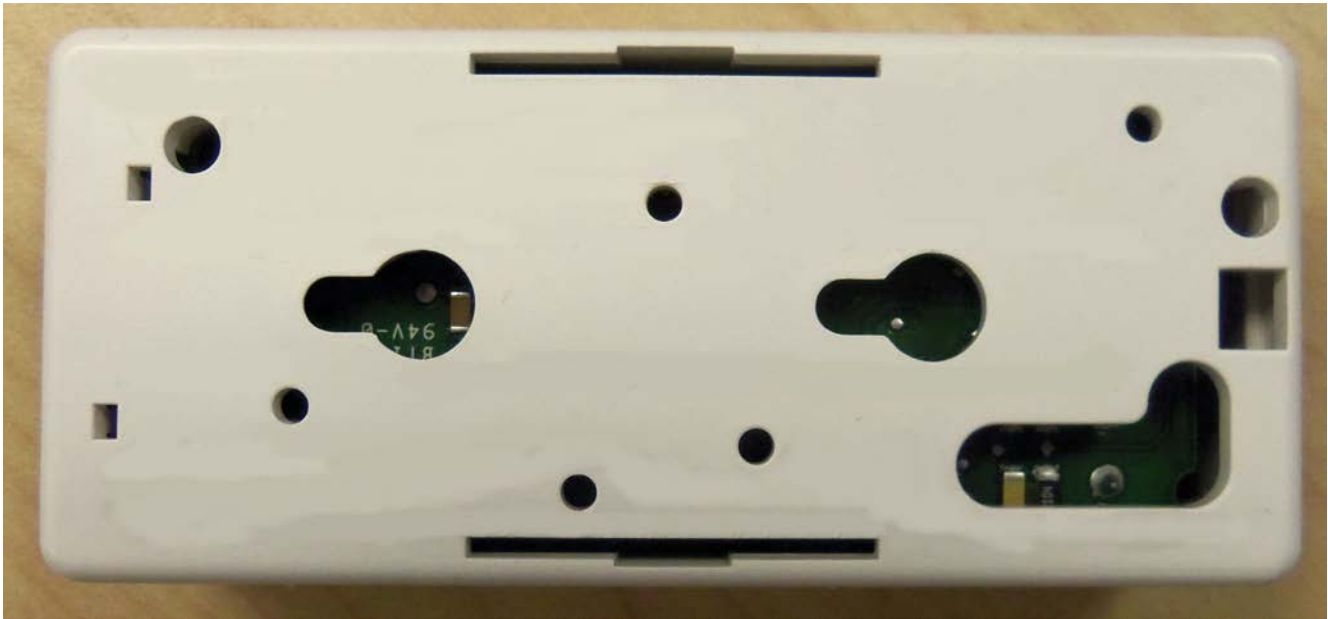


TEXT LOCATIONS FOR LABEL WILL BE LOCATED ACCORDING TO THIS PLASTIC MODEL DRAWING:

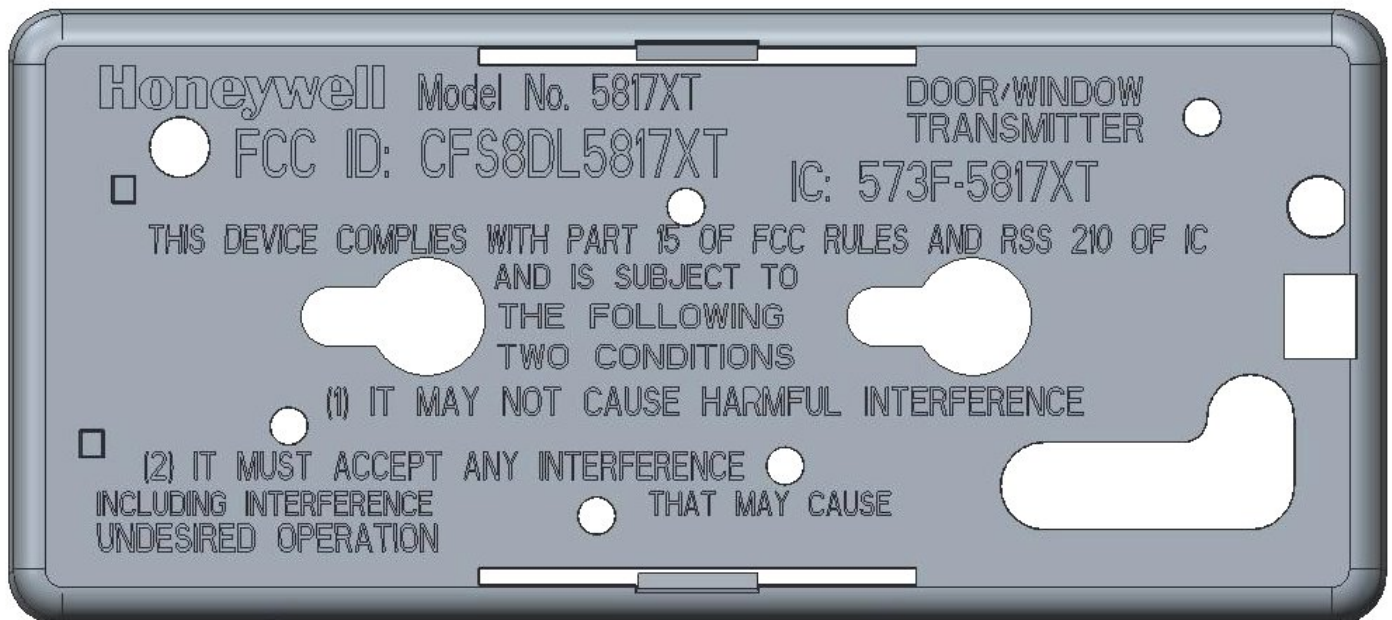



AN ENGINEER'S DRAWING OF THE CASE BACK WITH THE TEXT LOCATIONS AND DIMENSIONS IS ON THE NEXT PAGE:

CFS8DL5817XT / 573F-5817XT

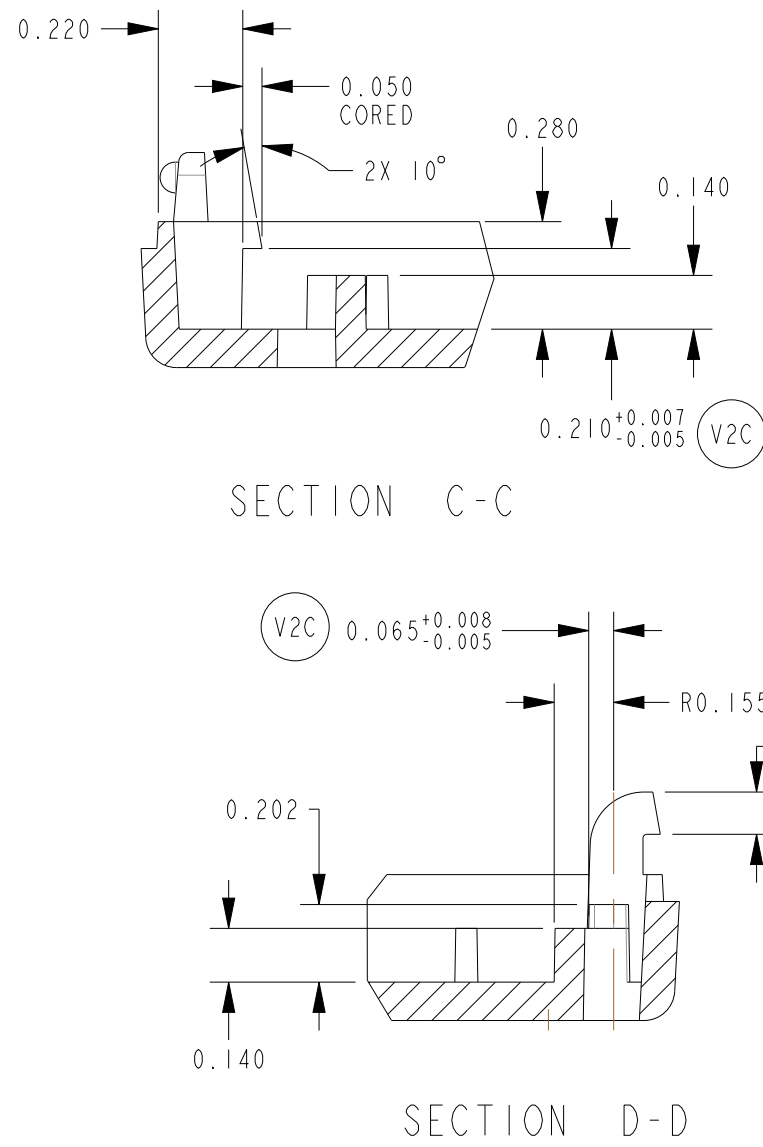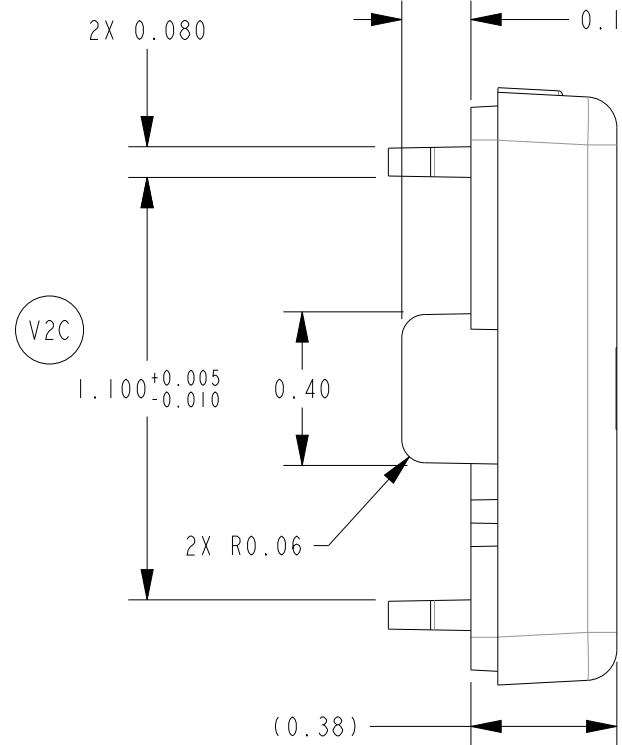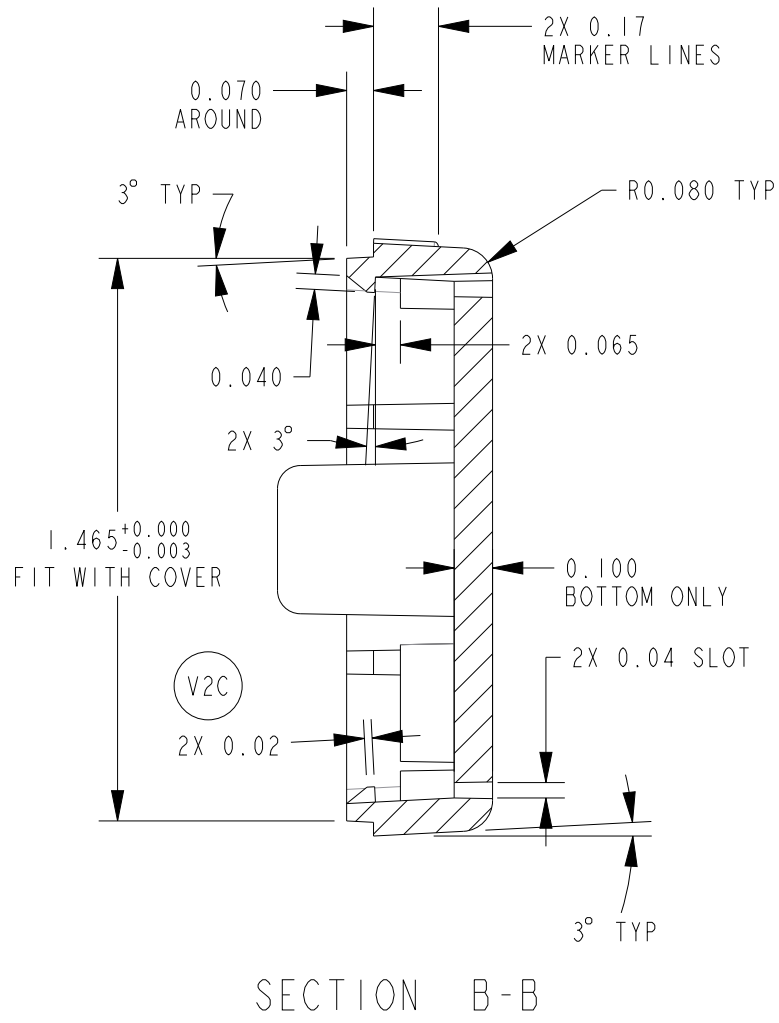1

NOTES: UNLESS OTHERWISE STATED

1. MATERIAL: HSPRO00000131 PER 000-00296 LATEST REV. MATERIAL MAY CONSIST OF 10% BY VOLUME MAXIMUM REGRIND OF THE SPECIFIED RESIN ONLY.
2. COLOR: HSPRO00000666 PER 000-00000 COLOR CLASSIFICATION 2 PER 000-00297 LATEST REV. PRE-COLORED PLASTIC RESIN FROM THE PLASTIC MANUFACTURER IS REQUIRED.
3. TEXTURE ALL EXTERNAL SURFACES PER MOLD TECH 1055-2, REF (KOREAN STANDARD SAI11), (CHINESE STANDARD YS1284)
4. .63 MICRO INCH OR BETTER FINISH ON ALL INTERNAL SURFACES MAXIMUM.
5. MOLD NUMBER 3 OR BETTER PER 000-00292 LATEST REV. FOR MOLD CONSTRUCTION REQUIREMENTS
6. WHERE PART SIZE ALLOWS, GENERIC PART NUMBER, MOLD NUMBER "MXXXX", CAVITY NUMBER (FOR MULTICAVITY TOOLS ONLY), RECYCLE LOGO, INTERCHANGEABLE MONTHLY/YEAR INDICATOR LOCATED AS SHOWN ON AN ADJUSTABLE REVISION WHEEL WHERE POSSIBLE, IN THE REVISION LETTER IS ALREADY IN THE TOOL REMOVE IT FROM THE INDICATOR OF THE TEXT INDICATOR ABOVE IS NOT PERMITTED.
7. ALL OTHER MOLDED IN TEXT AND LOGOS NOT PREVIOUSLY MENTIONED TO BE RECESSED "0.005".
8. PART WARGAGE SHALL NOT EXCEED "0.003" PER INCH.
9. DRAWING SHALL BE IN CONJUNCTION WITH THE PRO/ENGINEER 3-D MODEL OF THE APPROPRIATE REVISION. DIMENSIONS SHOWN ARE TO AID OF INSPECTION. GEOMETRY SHALL BE VERIFIED FROM THE PRO/ENGINEER FILE UNMENTIONED FEATURES SHALL NOT DEVIATE FROM THE PRO/ENGINEER FILE MORE THAN ± 0.005 UNLESS OTHERWISE STATED ON THE DRAWING. ALL DRAWING DIMENSIONS TO BE CHECKED BY THE APPROPRIATE HONEYWELL INSPECTION GROUP INDICATED ON THE PO FOR TOOL APPROVAL. FIRST SHOT SAMPLES MUST BE APPROVED IN BOTH PRIMARY AND SECONDARY RESINS. AN BALLOONED INSPECTION DIMENSIONS TO BE CHECKED BY THE HONEYWELL COMING INSPECTION GROUP. DIMENSIONS TO BE CHECKED TO BE INSPECTED TO COSMETIC INSPECTION CLASSIFICATION 1 PER 000-00293 LATEST REV.
10. SEE 000-00295 LATEST REV. FOR ADDITIONAL STANDARD PART AND SHIPPING REQUIREMENTS
11. GRASSER SHALL BE RESISTANT TO WEAR SUCH THAT RUBBING WITH A PLASTIC ERASER UNDER A 500g LOAD FOR 1500 CYCLES WILL NOT RENDER THE GRAPHICS ILLEGIBLE.
12. PART VOLUME 0.69 CU IN, PART WIEGHT 0.72 OZ.

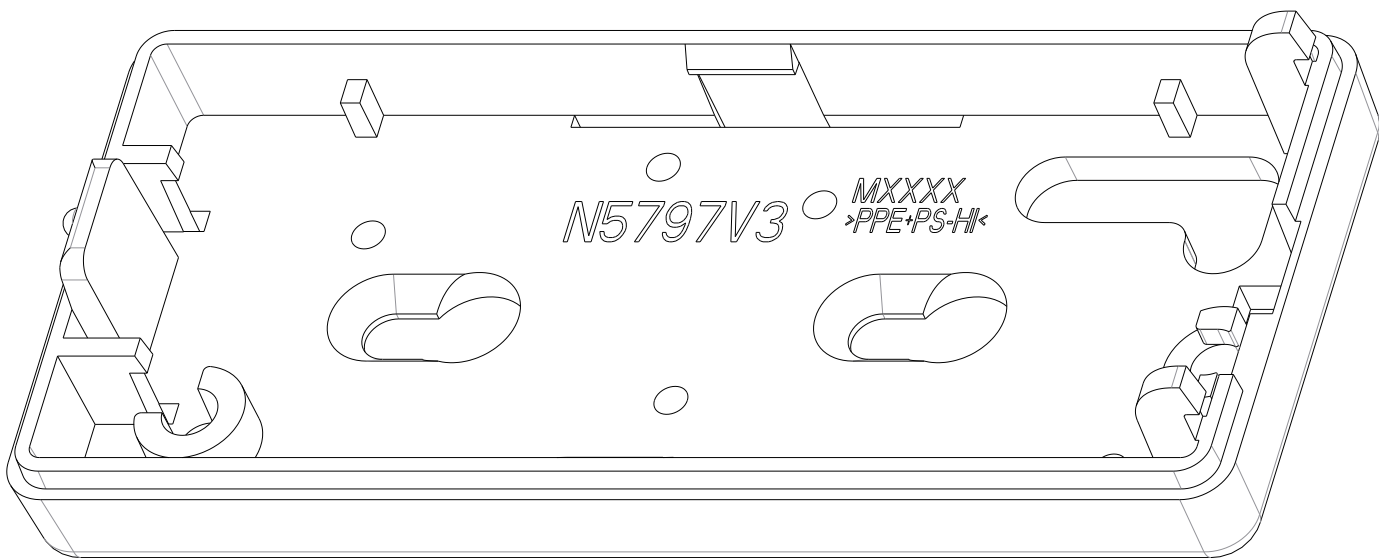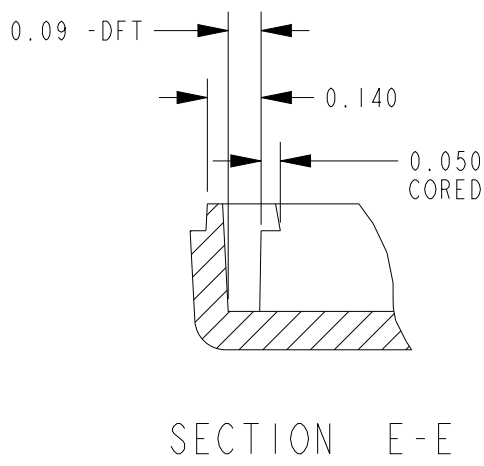

Honeywell		2 CORPORATE CENTER DR MELVILLE, NY 11747		SHEET 1 OF 1	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN BY GGG		DIMENSIONS ARE IN INCHES	
.5 - .999 IN. $\pm .010$		CHECKED BY M.D.		TITLE <i>CASE BACK, 5817</i>	
1.0 - 4.999 IN. $\pm .015$		APPROVED BY		COMPUTER FILE NAME <i>N579TV3</i>	
ANGULAR XX±.X XXX±.X		EPL		DRAWING NUMBER	
SCALE 2:1		MFG DATE 3-20-91		<i>N579TV3-XX</i>	