

Title: Power Spectrum Density Measurement

Date: 4/17/2014

Device: VAM

Criteria: Readings must not exceed 8 dBm. Rules followed as per ANSI C63.10-2009, section 6.11.2.3

	Readings Table					
	11 Mbit			54 Mbit		
	Chan 1 @	Chan 6 @	Chan 11 @	Chan 1 @	Chan 6 @	Chan 11 @
	2.412 GHz	2.437 GHz	2.462 GHz	2.412 GHz	2.437 GHz	2.462 GHz
S/A Reading	-22.60	-21.15	-22.04	-29.73	-21.47	-29.47
Cable Loss	11.5	11.5	11.7	11.5	11.5	11.7
Final Amplitude	-11.1	-9.65	-10.34	-18.23	-9.97	-17.77
Figure	1	2	3	4	5	6

Figure 1

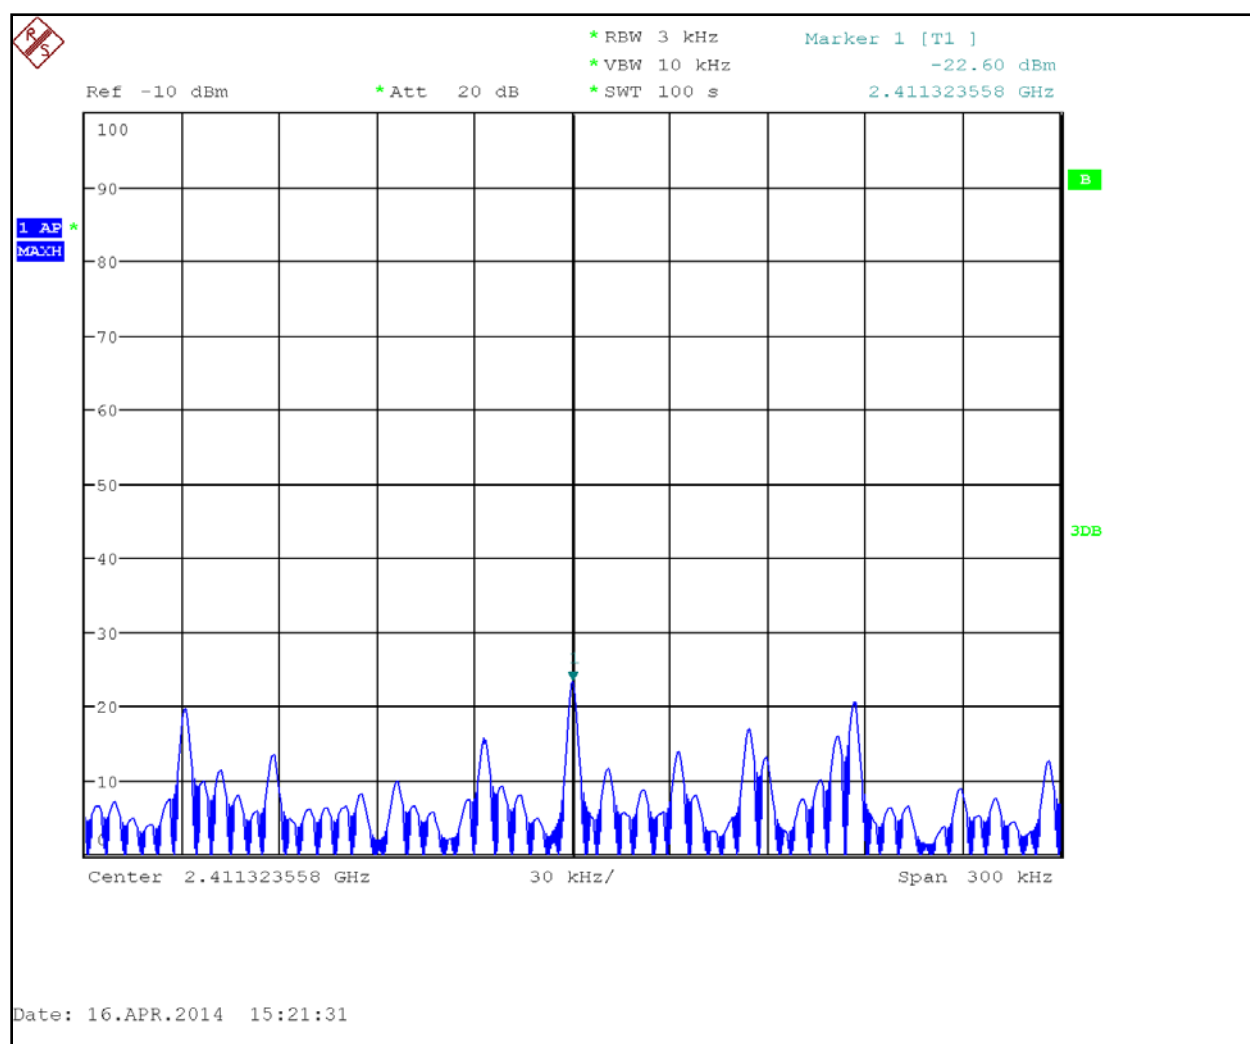


Figure 2

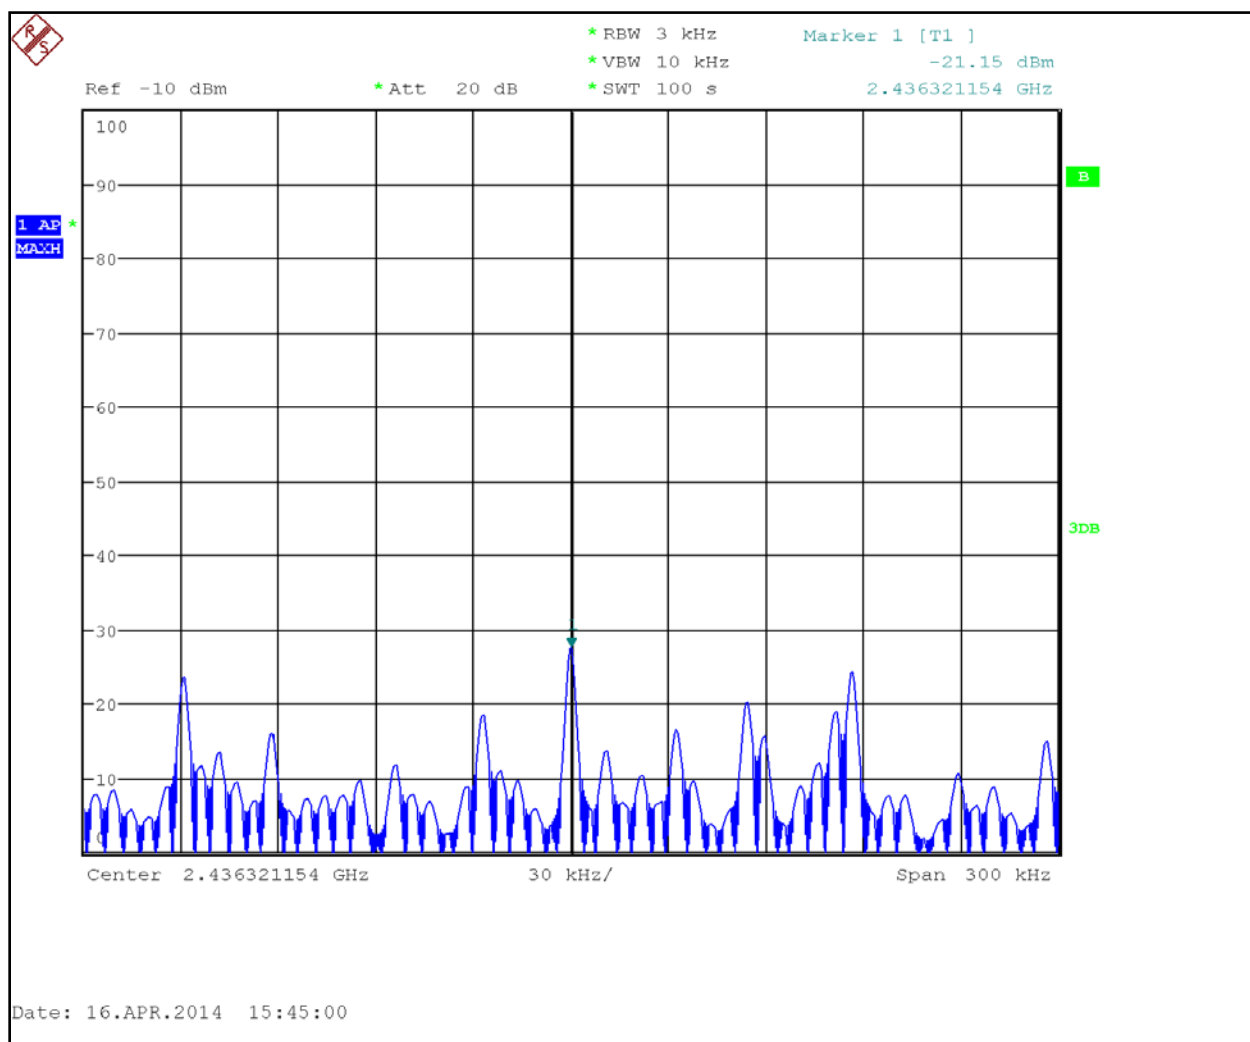


Figure 3

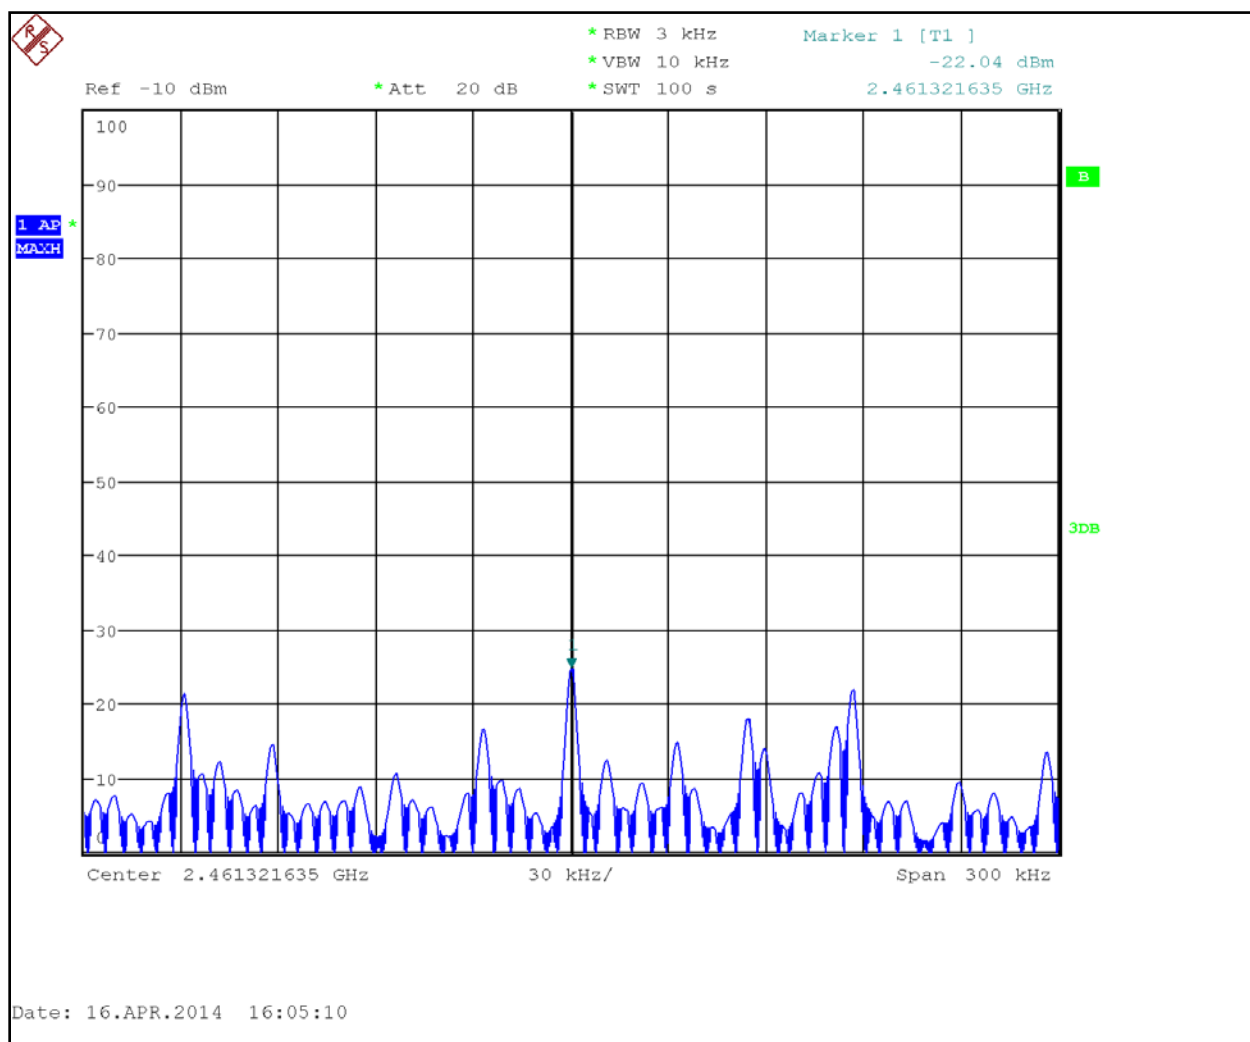


Figure 4

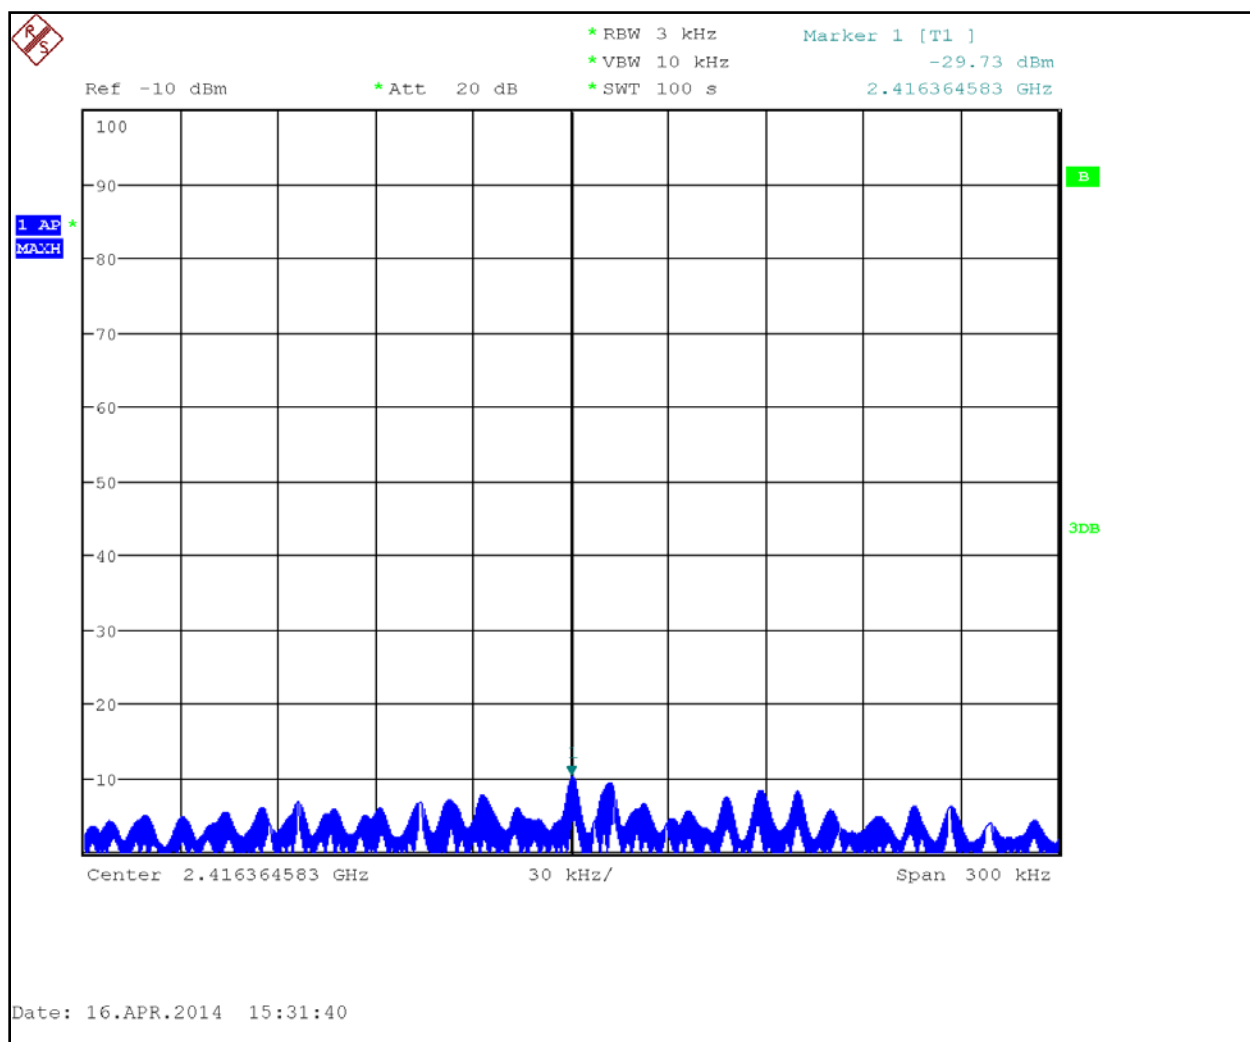


Figure 5

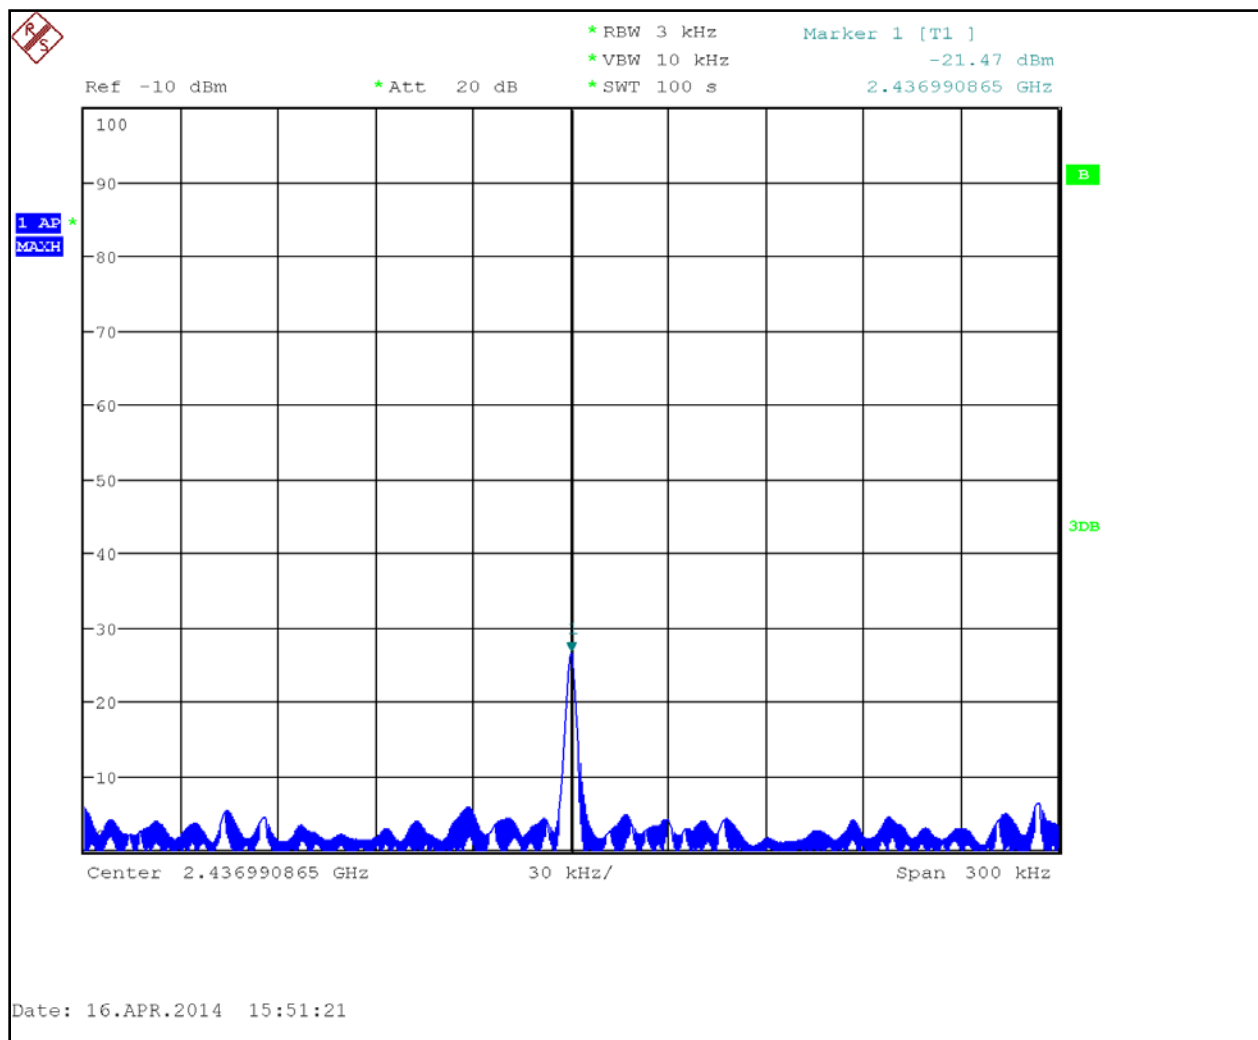


Figure 6

