


Prüfbericht-Nr.: <i>Test Report No.:</i>	10048927 001	Auftrags-Nr.: <i>Order No.:</i>	114039877	Seite 1 von 17 <i>Page 1 of 17</i>			
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	17-Aug-2015				
Auftraggeber: <i>Client:</i>	N.V. Nederlandsche Apparatenfabriek "Nedap", Parallelweg 2, NL-7141 DC, Groenlo, The Netherlands						
Prüfgegenstand: <i>Test item:</i>	Article Surveillance System(EAS)						
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	ASSY FLR RF						
Auftrags-Inhalt: <i>Order content:</i>	IC/FCC Part 15C Test report for 8.2 MHz, covering the design changes of the PCB						
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.223 RSS-210 (12-2010) A2.4 Class II Permissive Change						
Wareneingangsdatum: <i>Date of receipt:</i>	18-Aug-2015						
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000168995-004						
Prüfzeitraum: <i>Testing period:</i>	18-Aug-2015 - 18-Aug-2015						
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei						
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.						
Prüfergebnis*: <i>Test result*:</i>	Pass						
geprüft von / tested by: 	kontrolliert von / reviewed by: 						
28-Aug-2015 Ryan W. T. Chen / Project Engineer	Datum Date	Name / Stellung Name / Position	Unterschrift Signature	28-Aug-2015 Rene Charton/Senior Project Manager	Datum Date	Name / Stellung Name / Position	Unterschrift Signature
Sonstiges / Other:							
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>				Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(fail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(fail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested							
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>							
v04							

Prüfbericht - Nr.: 10048927 001
Test Report No.

Seite 2 von 17
Page 2 of 17

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 FIELD STRENGTH OF FUNDAMENTAL

RESULT: Passed

5.1.3 DUTY CYCLE CORRECTION FACTOR

RESULT: Not tested

5.1.4 6dB BANDWIDTH

RESULT: Not tested

5.1.5 SPURIOUS EMISSION

RESULT: Passed

Contents

1. GENERAL REMARKS	4
1.1 COMPLEMENTARY MATERIALS.....	4
2. TEST SITES	5
2.1 TEST LABORATORY	5
2.2 TEST FACILITY.....	5
2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.4 TRACEABILITY	7
2.5 CALIBRATION	7
2.6 MEASUREMENT UNCERTAINTY	7
3. GENERAL PRODUCT INFORMATION.....	8
3.1 PRODUCT FUNCTION AND INTENDED USE	8
3.2 RATINGS AND SYSTEM DETAILS.....	9
3.3 INDEPENDENT OPERATION MODES.....	11
3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.5 SUBMITTED DOCUMENTS.....	11
4. TEST SET-UP AND OPERATION MODES.....	12
4.1 PRINCIPLE OF CONFIGURATION SELECTION	12
4.2 TEST OPERATION AND TEST SOFTWARE.....	12
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
5. TEST RESULTS	13
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1 <i>Antenna Requirement</i>	13
5.1.2 <i>Field strength of fundamental.....</i>	14
5.1.3 <i>Duty Cycle Correction Factor.....</i>	15
5.1.4 <i>6dB Bandwidth</i>	16
5.1.5 <i>Spurious Emission</i>	17

Prüfbericht - Nr.: 10048927 001
Test Report No.

Seite 4 von 17
Page 4 of 17

1. General Remarks

1.1 Complementary Materials

These attachments are integral parts of this test report.:

Appendix S: Setup Photo Documentation
(File Name: 10048927APPENDIX S)

Appendix D: Test Result of Radiated Emissions
(File Name: 10048927APPENDIX D)

Test Specifications

The following standards were applied.

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.223 ANSI C63.4:2014, ANSI C63.10:2013

2. Test Sites

2.1 Test Laboratory

TUV Rheinland Taiwan Ltd.
Taichung Branch Office

No.9, Lane 36, Minsheng Rd., Sec. 3, Daya District,
Taichung City 428
Taiwan (R.O.C.)

2.2 Test Facility

TUV Rheinland Taiwan Ltd.
Taipei Office

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC RegistrationNo.: 365730
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2013-Jul-1st to 2016-Jun-30th



Testing Laboratory
0759

2.3 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Last Calibration	Next Calibration
EMI Test Receiver	R&S	ESR7	101062	31-Aug-14	30-Aug-15
Bilog Antenna	TESEQ	CBL6111D	29802	4-Jul-14	3-Jul-16
Spectrum Analyzer	R&S	FSV 40	100921	17-Dec-14	16-Dec-15
Spectrum Analyzer	Agilent	N9010A	MY53470241	1-Apr-15	30-Mar-16
Horn Antenna	ETS-Lindgren	3117	138160	12-Jan-15	11-Jan-17
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	30-Oct-13	29-Oct-15
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	23-Aug-14	22-Aug-15

2.4 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.5 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.6 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1.5 \text{ dB}$
Adjacent channel power	$\pm 3 \text{ dB}$
Radiated emission of transmitter, valid up to 26 GHz	$\pm 6 \text{ dB}$
Radiated emission of receiver, valid up to 26 GHz	$\pm 6 \text{ dB}$
Temperature	$\pm 2 \text{ }^{\circ}\text{C}$
Humidity	$\pm 10 \text{ \%}$

3. General Product Information

3.1 Product Function and Intended Use

The EUT is an Electronic Article Surveillance System working in the 8 MHz Band.

The purpose of this report is to cover possible emission characteristics changes caused by the design changes of the PCB in the 8.2 MHz portion.

3.2 Ratings and System Details

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	Article Surveillance System(EAS)
Type Designation	ASSY FLR RF
FCC ID	CGDFLRRF
Canada ID	1444A-FLRRF

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequency	7565 kHz to 8571.25 kHz
Channel number	24
Operation Voltage	N/A
Modulation	FHSS

Produkte

Products

Prüfbericht - Nr.: 10048927 001
Test Report No.Seite 10 von 17
Page 10 of 17

No operation in restricted bands:

Nr.	Frequency (kHz)	Nr.	Frequency (kHz)	Nr.	Frequency (kHz)
1	7565.00	9	7915.00	17	8265.00
2	7608.75	10	7958.75	18	8308.75
3	7652.50	11	8002.50	19	8352.50
4	7696.25	12	8046.25	20	8396.25
5	7740.00	13	8090.00	21	8440.00
6	7783.75	14	8133.75	22	8483.75
7	7827.50	15	8177.50	23	8527.50
8	7871.25	16	8221.25	24	8571.25

So the fundamental emission are outside of the bands listed in Section 15.205 (a).

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a Data interface which makes it possible to control them through a test software installed on a notebook computer.

Both alarming and non-alarming have been evaluated, only the worst case situation is shown.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Kind of Equipment	Manufacturer	Model Name	S/N
--	--	--	--

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: Passed

Standard	:	Part 15.203 and RSS-Gen 7.1.4
Requirement	:	use of approved antennas only

The antenna and the transmitter are one assembly with no possibility of replacement with a non-approved antenna by a normal end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

Prüfbericht - Nr.: 10048927 001
Test Report No.
Seite 14 von 17
Page 14 of 17

5.1.2 Field strength of fundamental

RESULT:
Passed

Test standard : FCC Part 15.223
 RSS-210 A2.3
 Basic standard : ANSI C63.10:2013

Test setup

Test Frequency : Low. High
 Operation Mode : A
 Atmospheric pressure : 100-103 kPa

Applicable Limit:

Frequency (MHz)	Field strength AV (μV/m)	Field strength AV (dBμV/m)	Field strength Pk (dBμV/m)	Measurement Distance (m)
1.705 - 10	100	40	60	30
1.705 - 10	10000	80	100	3

The center frequency is around 8068 kHz.

The 6 dB BW is more than 810 kHz

Table 6: Field strength of fundamental, maximal level found

Frequency (kHz)	Level(3m) (dBuV/m)	Detector/ Calculation	Limit(3m) (dBuV/m)	Level(30m) (dBuV/m)	Limit(30m) (dBuV/m)	Remark	Result
7565.00	74.28	PK	100	34.28	60	--	Pass
7565.00	71.3	AV	80	31.3	40	--	Pass
8177.5	77.51	PK	100	37.51	60	--	Pass
8177.5	74.53	AV	80	34.53	40	--	Pass
8571.25	78.58	PK	100	38.58	60	--	Pass
8571.25	75.6	AV	80	35.6	40	--	Pass

Duty Cycle Correction Factor: **-2.98 dB**

Remark: For details refer to Appendix D

Prüfbericht - Nr.: 10048927 001
Test Report No.

Seite 15 von 17
Page 15 of 17

5.1.3 Duty Cycle Correction Factor

RESULT:


Not tested

For test records, please refer to
test report No. 14060504 prepared by TÜV Rheinland Nederland B.V.

These are the results found in that test report:

64 peaks were observed in a 100 ms interval. Each peak was measured to have a duration of 1.094 ms. This yields a total on-time of 70.02 ms in a 100 ms interval. Using the formula Average factor (dB) = $20 \cdot \log(70.02\text{ms} / 100\text{ms})$, the duty cycle average factor is therefore **-3.10 dB**.

Plot 3a and 3b below show the RF On/Off characteristics of the EUT's emissions. From these characteristics a correction factor is calculated that is required to derive Average values from the measured peak values of the emissions.

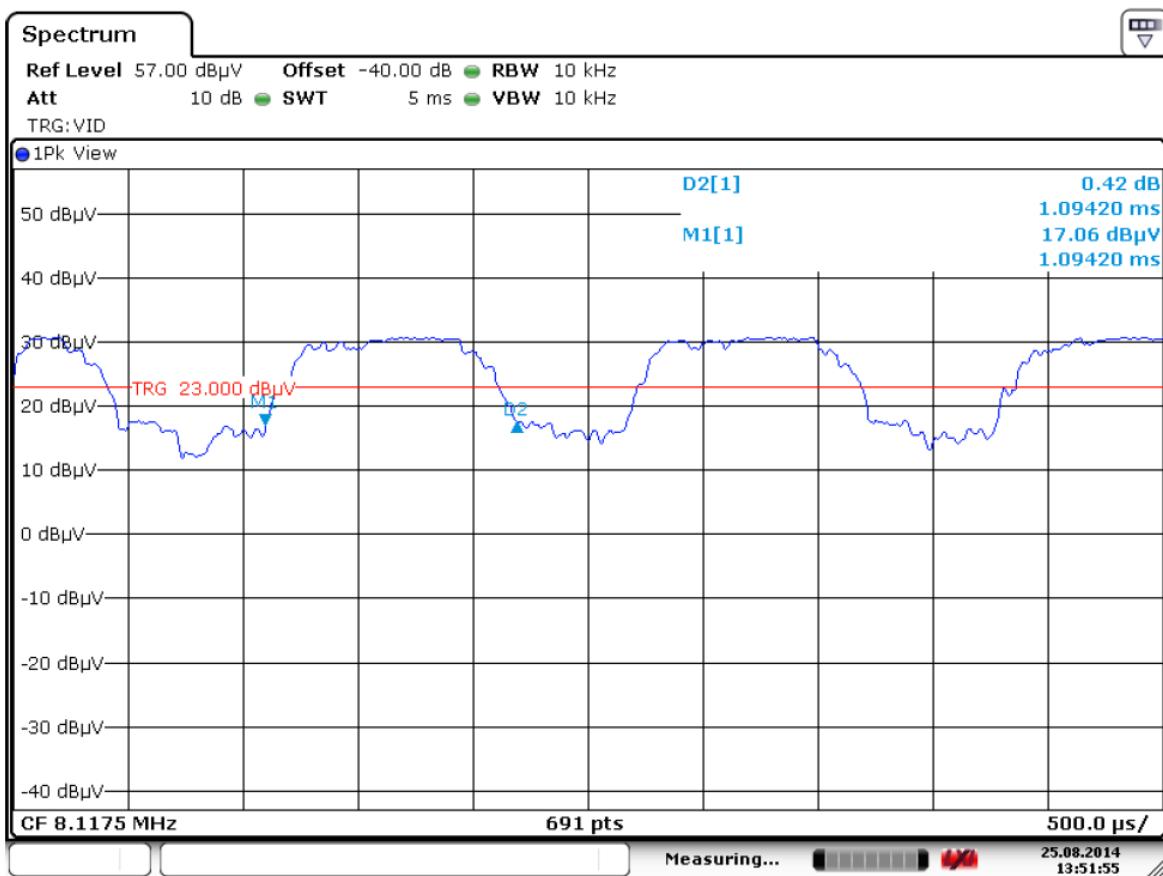

Prüfbericht - Nr.: 10048927 001
Test Report No.

Seite 16 von 17
Page 16 of 17

5.1.4 6dB Bandwidth

RESULT:

Not tested

For results, please refer to
test report No. 14060504 prepared by TÜV Rheinland Nederland B.V.

5.1.5 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC Part 15.223 RSS-210 A2.4 RSS-Gen
Basic standard Limits	:	ANSI C63.10: 2013 The field strength of emissions outside of the band 1.705–10.0 MHz shall not exceed the general radiated emission limits in § 15.209 Outside of the swept frequency band, the out-of-band emission limits in sections A2.5 and A2.6, or the general field strength limits listed in RSS-Gen apply, whichever are less stringent. This test is to be carried out with the frequency sweep in operation
Kind of test site	:	3m Semi-Anechoic Chamber
Test setup		
Test Channel	:	Sweep on
Operation mode	:	A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.