

Prüfbericht-Nr.: <i>Test Report No.:</i>	50081217 002	Auftrags-Nr.: <i>Order No.:</i>	114061471	Seite 1 von 27 <i>Page 1 of 27</i>	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	20-Feb-2017		
Auftraggeber: <i>Client:</i>	N.V. Nederlandsche Apparatenfabriek "Nedap", Parallelweg 2, 7141 DC Groenlo, The Netherlands				
Prüfgegenstand: <i>Test item:</i>	Neck Tag Rumination Act FDX 434 MHz				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	NECK TAG RUMINATION ACT				
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report RSS-210 Test report				
Prüfgrundlage: <i>Test specification:</i>	FCC CFR47 Part 15: Subpart C Section 15. 231 (e) RSS-210 Issue 9, August 2016				
Wareneingangsdatum: <i>Date of receipt:</i>	10-Mar-2017				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000508345-001				
Prüfzeitraum: <i>Testing period:</i>	17-Mar-2017 – 20-Mar-2017				
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei				
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:		kontrolliert von / reviewed by:			
23-June-2017 Sam C.J. Kuo/Engineer		23-June-2017 Amy Hsu/Project Engineer			
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	
				Unterschrift <i>Signature</i>	
Sonstiges / Other:	This report is reissued for the purpose of showing the new standard version RSS-210 Issue 9, August 2016, to meet the requirements of the ISED public notice regarding the transition period.				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet	5 = mangelhaft
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested	5 = poor
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

5.1.2 FIELD STRENGTH OF FUNDAMENTAL

RESULT: *Passed*

5.1.3 FIELD STRENGTH OF HARMONICS

RESULT: *Passed*

5.1.4 20dB BANDWIDTH AND 99% BANDWIDTH

RESULT: *Passed*

5.1.5 PULSE WIDTH/TX GAP

RESULT: *Passed*

5.1.6 SPURIOUS EMISSION

RESULT: *Passed*

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: *Passed*

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.3	TRACEABILITY	8
2.4	CALIBRATION	8
2.5	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	SYSTEM DETAILS AND RATINGS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Field strength of fundamental.....</i>	<i>15</i>
5.1.3	<i>Field strength of harmonics.....</i>	<i>17</i>
5.1.4	<i>20dB Bandwidth</i>	<i>18</i>
5.1.5	<i>Pulse Width/TX gap</i>	<i>20</i>
5.1.6	<i>Spurious Emission</i>	<i>23</i>
6.	SAFETY HUMAN EXPOSURE	24
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	24
6.1.1	<i>Electromagnetic Fields.....</i>	<i>24</i>
7.	PHOTOGRAPHS OF THE TEST SET-UP.....	25
8.	LIST OF TABLES	27

9. LIST OF PHOTOGRAPHS..... 27

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix P: Photo Documentation

(File Name: 50081217 001APPENDIX P)

Appendix D: Test Result of Radiated Emissions

(File Name: 50081217 001APPENDIX D)

Test Specifications

The following standards were applied (in bold: product standards, otherwise: basic standards).

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15. 231(e) RSS-210 Issue 9, August 2010 RSS-Gen, Issue 4, November 2014 ANSI C63.10:2013

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC RegistrationNo.: 365730
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manu-facturer	Type	S/N	Last Calibration	Next Calibration
Test Software	Farad	EZ_EMG	Ver. TUV3A1	N/A	N/A
EMI Test Receiver	R&S	ESR7	101062	2016/09/12	2017/09/12
Spectrum Analyzer	R&S	FSV 40	100921	2016/04/21	2017/04/21
Spectrum Analyzer	Agilent	N9010A	MY53470241	2016/04/25	2017/04/24
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2016/07/29	2017/07/29
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2016/12/01	2017/12/01
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	060558	2016/11/17	2017/11/17
Bilog Antenna	TESEQ	CBL6111D	29804	2016/06/23	2017/06/23
Horn Antenna	ETS-Lindgren	3117	138160	2016/05/03	2017/05/03
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101029	2016/10/11	2017/10/11
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2016/05/11	2017/05/11
EMI Test Receiver	R&S	ESC17	100797	2016/12/30	2017/12/30
Spectrum Analyzer	R&S	FSL3	101943	2015/09/07	2017/09/07
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	2015/07/13	2017/07/12

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are ± 3 dB.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Radiated emission of transmitter, valid up to 26 GHz	± 6 dB
Radiated emission of receiver, valid up to 26 GHz	± 6 dB
Temperature	± 2 °C
Humidity	± 10 %

3. General Product Information

3.1 Product Function and Intended Use

The device is an active RFID (=Radio Frequency Identification) tag for individual cow activity monitoring and it is also used for detecting heat, health and rumination indications. The activity is monitored using an acceleration sensor. This sensor is read out two times per second. It has two types of communication devices on board. One 134.2kHz inductive RFID tag (passive) and the other one is an active 433.6-434.2MHz RFID Tag. The device is attached to the animal's neck.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	Neck Tag Rumination Act FDX 434 MHz
Type Designation	NECK TAG RUMINATION ACT
FCC ID	CGDIFER
Canada ID	1444A-IFER
Canada HVIN	NECK TAG RUMINATION ACT

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequency	433.6MHz, 433.8MHz, 434.0MHz and 434.2MHz
Channel Spacing	0.2MHz
Channel number	4
Operation Voltage	3.60V
Modulation	FSK

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing:

The EUT was supplied with modifications which enabled a constant transmit mode for testing purposes.

The EUT has been tested in modulated transmit mode, i.e. the EUT is transmitting data.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

N/A

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test


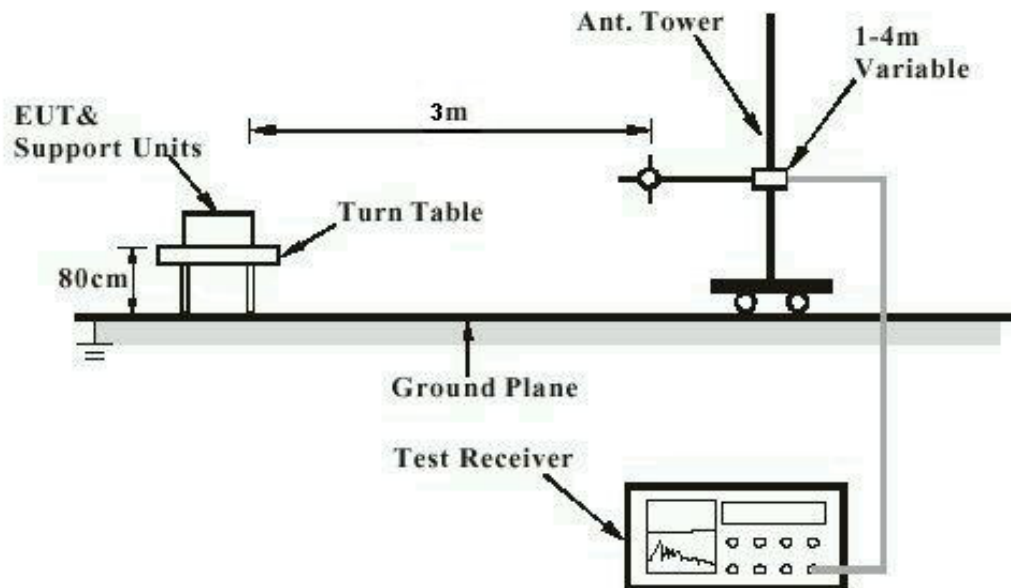


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

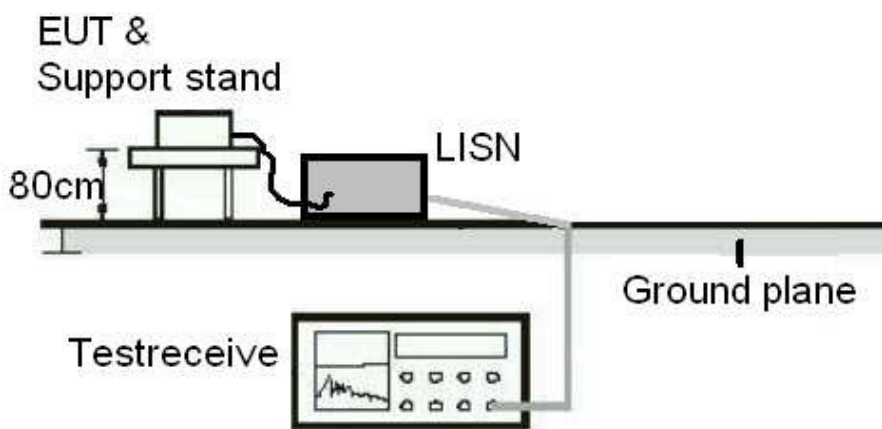

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: **Passed**

Standard : Part 15.203 and RSS-Gen 8.3
Requirement : Manufacturer must ensure approved antenna is used

The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Field strength of fundamental

RESULT:**Passed**

Test standard : FCC Part 15. 231(e)
RSS-210 A1.4, Table A2
LP0003 3.4.2 (5.2)

Basic standard : ANSI C63.10:2013

Test setup

Test Channel : 433.8 MHz
Operation Mode : Pulse Transmission

Atmospheric pressure : 100-103 kPa

The EUT employs pulsed operation.
The pulse width is: 12 msec.

The Tables below show calculated average values from the pulsed emissions measurement data, corrected with the worst case duty cycle factor over 100 msec.

The average values noted are calculated through the application of a duty cycle correction, according to part 15.35c

Duty cycle calculation:

Duty cycle correction (dB) = $20 \log (10 \text{ msec} / 100 \text{ msec}) = -20 \text{ dB}$.

Table 6: Test result of Field strength of fundamental

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Antenna orientation	Detector or calculated value
433.8	92.23	92.56	Horizontal	Peak
433.8	72.23	72.56		Average
433.8	82.32	92.56	Vertical	Peak
433.8	62.32	72.56		Average

5.1.3 Field strength of harmonics

RESULT: **Passed**

Test standard : FCC Part 15. 231(e)
 RSS-210 A1.4, Table A2
 LP0003 3.4.2 (5.2)
 Basic standard : ANSI C63.10:2013

Test setup

Test Channel : 433.8MHz
 Operation Mode : Pulse Transmission
 Atmospheric pressure : 100-103 kPa

Table 7: Test result of Field strength of harmonics, maximum

Frequency (MHz)	Test result			
	Level (dBuV/m)	Limit (dBuV/m)	Antenna orientation	Detector
1735	41.2	74	Horizontal	Peak
1735	<41.2	54		Average
2885	43.84	74	Horizontal	Peak
2885	<43.84	54		Average
4355	45.39	74	Horizontal	Peak
4355	<45.39	54		Average
1735	42.84	74	Vertical	Peak
1735	<42.84	54		Average
4330	45.33	74	Vertical	Peak
4330	<45.33	54		Average
5210	47.15	74	Vertical	Peak
5210	<47.15	54		Average

Remark: The maximum results found are reported. For detailed results of all frequencies tested, please refer to Appendix D.

5.1.4 20dB Bandwidth

RESULT:
Passed

Test standard : FCC Part 15.231(c), A1.3, RSS Gen
 Basic standard : ANSI C63.10:2013,
 Kind of test site : Shielded room

Test setup

Test Channel : 433.8MHz (20dB BW)
 Operation Mode : A

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Ambient temperature : 22-26 °C
 Relative humidity : 50-65 %
 Atmospheric pressure : 100-103 kPa

Table 8: Test result of 20 dB Bandwidth,

Channel Frequency (MHz)	-20 dB BW (kHz)	Limit (kHz)	Result
433.8	252.7	1084.5	Pass

5.1.5 Pulse Width/TX gap

RESULT:
Passed

Test standard : FCC Part 15.231(e), RSS-210 (Annex A1.4(b))

Kind of test site : Anechoic Chamber

Test setup

Test Channel : 433.8 MHz

Operation Mode : A

The device has automatic control mechanism such that each transmission time(Pulse width) is shorter than 1 second, and stop duration of a transmission period(TX gap) is longer than 10 seconds and is not shorter than transmission time multiplied by 30.

Atmospheric pressure : 100-103 kPa


Table 9: Test result of Pulse Width

Channel Frequency (MHz)	Pulse Width (ms)	Limit (ms)	Result
433.8	10	<1000	Pass

Table 10: Test result of TX gap

Channel Frequency (MHz)	TX gap (s)	Limit (s)	Result
433.8	299.6	>10	Pass

Test Plot of Pulse Width

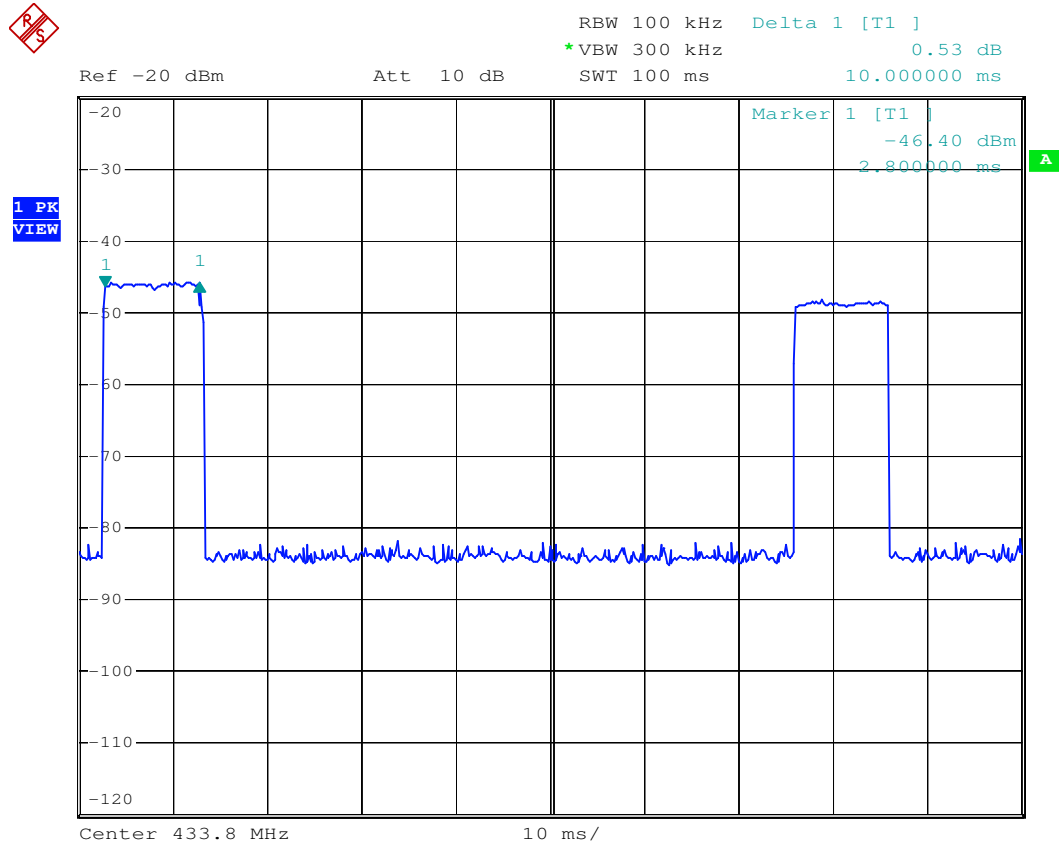

Date: 9.MAY.2017 11:28:42

Test Plot of TX gap




RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -47.93 dB
SWT 700 s 299.600000 s

Ref -20 dBm

Att 10 dB

1 PK
MAXH

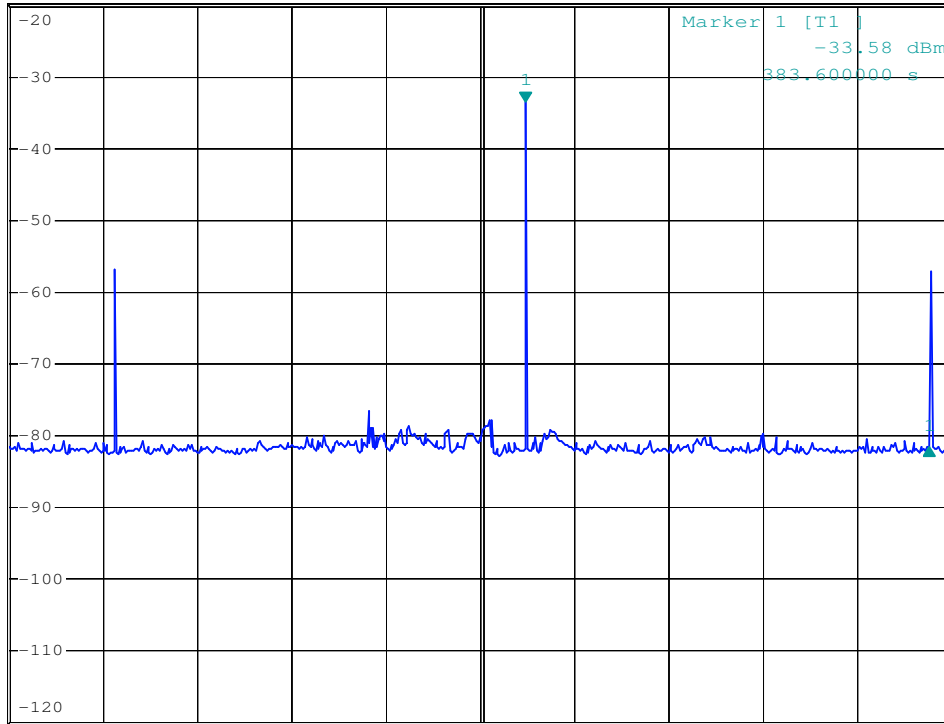

Center 433.8 MHz

70 s/

Date: 9.MAY.2017 11:20:38

5.1.6 Spurious Emission

RESULT:**Passed**

Test standard : FCC part 15. 231(b) AND FCC 15.205, FCC 15.209, RSS-210 A1.4(d) AND RSS-Gen

Basic standard : ANSI C63.10: 2013

Limits : Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) or FCC 15. 231(b).

Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/ Middle/ High

Operation mode : A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Passed**

Test standard : FCC KDB Publication 447498 D01 v06
RSS-102 issue 5, Table 1

FCC:

Since maximum peak output power of the transmitter is $0.03\text{mW} < 22\text{mW}$, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498: Mobile Portable RF Exposure


Canada:

Maximum Power available: 0.48mW


Since maximum output power, either EIRP or conducted, of the transmitter $< 52\text{mW}$, hence the EUT is excluded from SAR evaluation according to Table 1 in RSS-102

7. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)

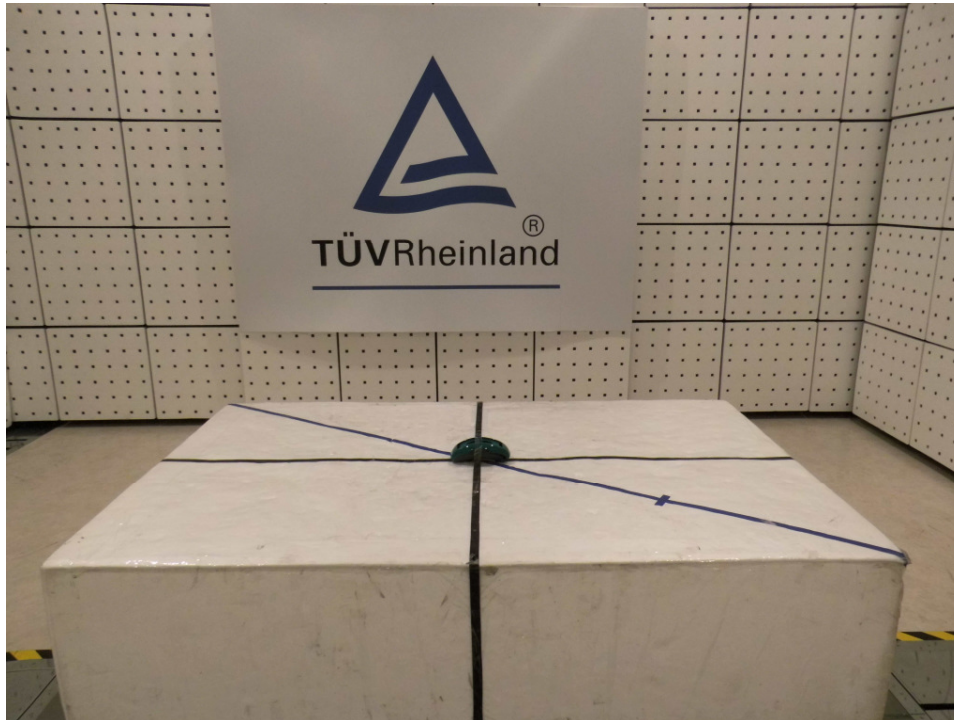

Photograph 2: Set-up for Spurious Emissions (Back View 1 TX)

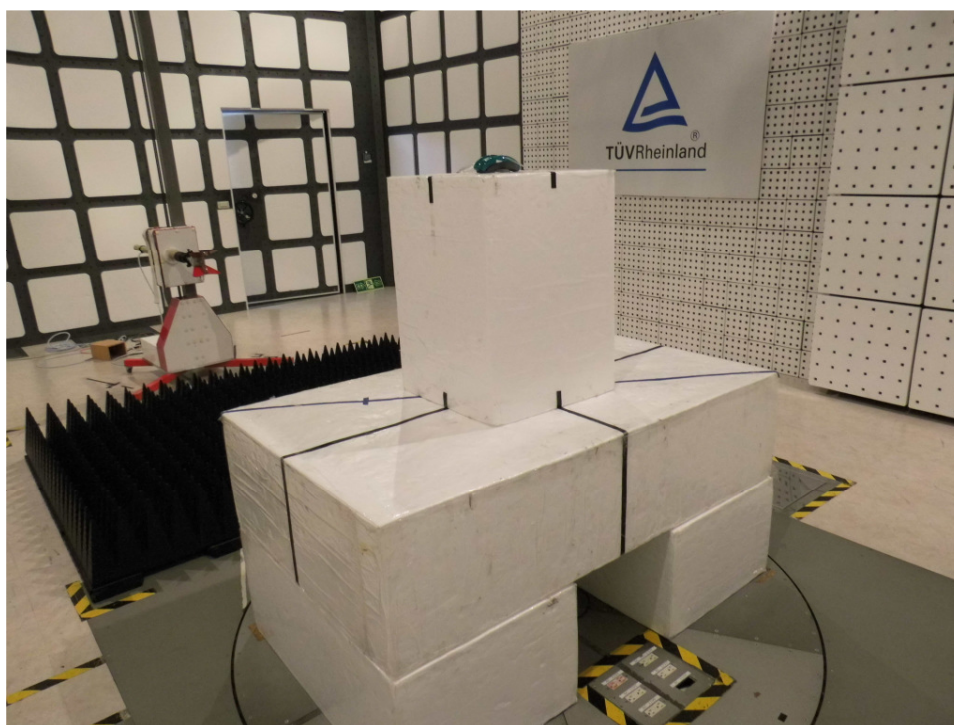

Photograph 3: Set-up for Spurious Emissions (Back View 2 TX)

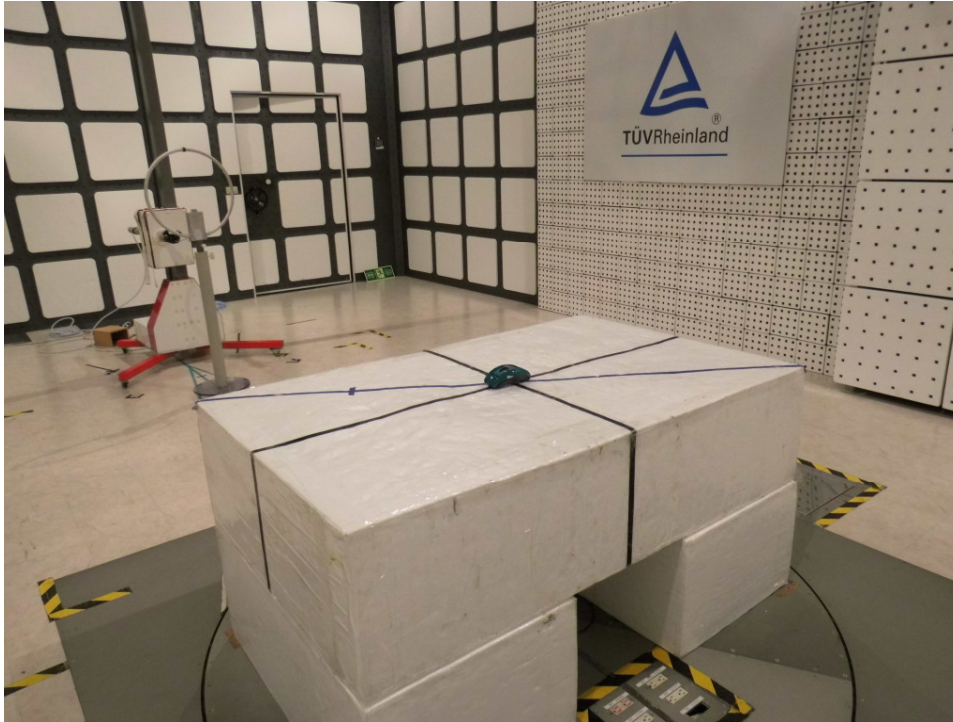

8. List of Tables

Table 1: Applied Standard and Test Levels	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Test result of Field strength of fundamental.....	16
Table 7: Test result of Field strength of harmonics, maximum	17
Table 8: Test result of 20 dB Bandwidth,	18
Table 9: Test result of Pulse Width	20
Table 10: Test result of TX gap	20

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	25
Photograph 2: Set-up for Spurious Emissions (Back View 1 TX)	25
Photograph 3: Set-up for Spurious Emissions (Back View 2 TX)	26