

Prüfbericht-Nr.: <i>Test Report No.:</i>	10047509 001	Auftrags-Nr.: <i>Order No.:</i>	114024737	Seite 1 von 41 <i>Page 1 of 41</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	July 17, 2014	
Auftraggeber: <i>Client:</i>	N.V. Nederlandsche Apparatenfabriek "Nedap" , Parallelweg 2, NL-7141 DC, Groenlo, The Netherlands			
Prüfgegenstand: <i>Test item:</i>	IDTop UHF RFID system			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	ASSY OVR RFID			
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Test report			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247 RSS-210 (12-2010) A8			
Wareneingangsdatum: <i>Date of receipt:</i>	07/24/2014			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000104320-003			
Prüfzeitraum: <i>Testing period:</i>	25-Jul-2014 - 3-Sep-2014			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
2014-09-05 Ryan W. T. Chen / Project Engineer		2014-09-05 Rene Charton / Senior Project Manager		
Datum	Name / Stellung	Unterschrift	Datum	Name / Stellung
Date	Name / Position	Signature	Date	Name / Position
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

v04

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

5.1.2 PEAK OUTPUT POWER

RESULT: *Passed*

5.1.3 20dB BANDWIDTH

RESULT: *Passed*

5.1.4 99% BANDWIDTH

RESULT: *Passed*

5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100KHZ BANDWIDTH

RESULT: *Passed*

5.1.6 SPURIOUS EMISSION

RESULT: *Passed*

5.1.7 FREQUENCY SEPARATION

RESULT: *Passed*

5.1.8 NUMBER OF HOPPING FREQUENCY

RESULT: *Passed*

5.1.9 TIME OF OCCUPANCY

RESULT: *Passed*

5.2.1 MAINS CONDUCTED EMISSIONS

RESULT: *Passed*

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: *Passed*

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.3	TRACEABILITY	8
2.4	CALIBRATION	8
2.5	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	SYSTEM DETAILS AND RATINGS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.5	SUBMITTED DOCUMENTS.....	11
4.	TEST SET-UP AND OPERATION MODES.....	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE.....	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	13
4.5	TEST SETUP DIAGRAM	13
5.	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1	<i>Antenna Requirement</i>	<i>15</i>
5.1.2	<i>Peak Output Power</i>	<i>16</i>
5.1.3	<i>20dB Bandwidth</i>	<i>19</i>
5.1.4	<i>99% Bandwidth</i>	<i>22</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>25</i>
5.1.6	<i>Spurious Emission</i>	<i>29</i>
5.1.7	<i>Frequency Separation.....</i>	<i>30</i>
5.1.8	<i>Number of hopping frequency.....</i>	<i>32</i>
5.1.9	<i>Time of Occupancy</i>	<i>34</i>
5.2	MAINS EMISSIONS.....	36
5.2.1	<i>Mains Conducted Emissions.....</i>	<i>36</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP.....	37

7.	LIST OF TABLES	41
8.	LIST OF PHOTOGRAPHS.....	41

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix D: Test Result of Radiated Emissions
(File Name: 10047509APPENDIX D)**

Test Specifications

The following standards were applied

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247 ANSI C63.4:2009, Public Notice DA 00-705

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 365730
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759

TAF Accreditation effective period: 2013-Jul-1st to 2016-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until	Used for test items
EMI Test Receiver	R&S	ESCI 7	101062	1-Sep-14	Spurious Emission and Frequency Band Edge
Bilog Antenna	TESEQ	CBL6111D	29802	4-Jul-15	Spurious Emission and Frequency Band Edge
Spectrum Analyzer	R&S	FSV 40	100921	10-Dec-14	6dB Bandwidth, Output Power, Power Density, Cond. Spurious Emissions, Rad. Spurious Emission
Spectrum Analyzer	Agilent	N9010A	MY53470241	19-Jan-15	6dB Bandwidth, Output Power, Power Density, Cond. Spurious Emissions, Rad. Spurious Emission
Horn Antenna	ETS-Lindgren	3117	138160	10-Jan-15	Spurious Emission and Frequency Band Edge
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	29-Oct-15	Spurious Emission and Frequency Band Edge
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2-Sep-14	Spurious Emission and Frequency Band Edge
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2-Sep-14	Spurious Emission and Frequency Band Edge
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM30180	60558	23-Oct-14	Spurious Emission and Frequency Band Edge
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	28-Sep-14	Spurious Emission and Frequency Band Edge
EMI Test Receiver	R&S	ESCI	101094	29-Aug-14	Mains Spurious Emission
LISN (1 phase)	R&S	ENV216	101243	30-May-15	Mains Spurious Emission
LISN	Rolf Heine	NNB-2/16Z	99080	30-Aug-14	Mains Spurious Emission

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basics using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements:.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
RF power density, conducted	± 3 dB
spurious emissions, conducted	± 3 dB
all emissions, radiated	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %
DC and low frequency voltages	± 3 %

3. General Product Information

3.1 Product Function and Intended Use

UHF RFID Reader mounted to the shop ceiling or wall operating in the 902-928 MHz Band
 For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	!DTop UHF RFID system
Type Designation	ASSY OVR RFID
FCC ID:	FCC ID: CGDOVRRFID IC: 1444A-CGDOVRRFID

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequency	902.75MHz ~ 927.25MHz
Channel Spacing	500 kHz
Channel number	50
Operation Voltage	115 V (from controller)
Modulation	Pulse Modulation
Antenna gain	4.9 dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 4. All testing were performed according to the procedures in ANSI C63.10: 2009 and DA 00-705 of March 30, 2000.

The samples were used as follows:

Conducted: A000104320-003

Radiation: A000104320-003

Full test was applied on all test modes, but only worst case was shown.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Kind of Equipment	Manufacturer	Model Name	S/N
Laptop	HP	Compaq nc4400	CND7030X3F

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested containing the noise suppression parts as in the Photo Appendix and the Test Setup Photos. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

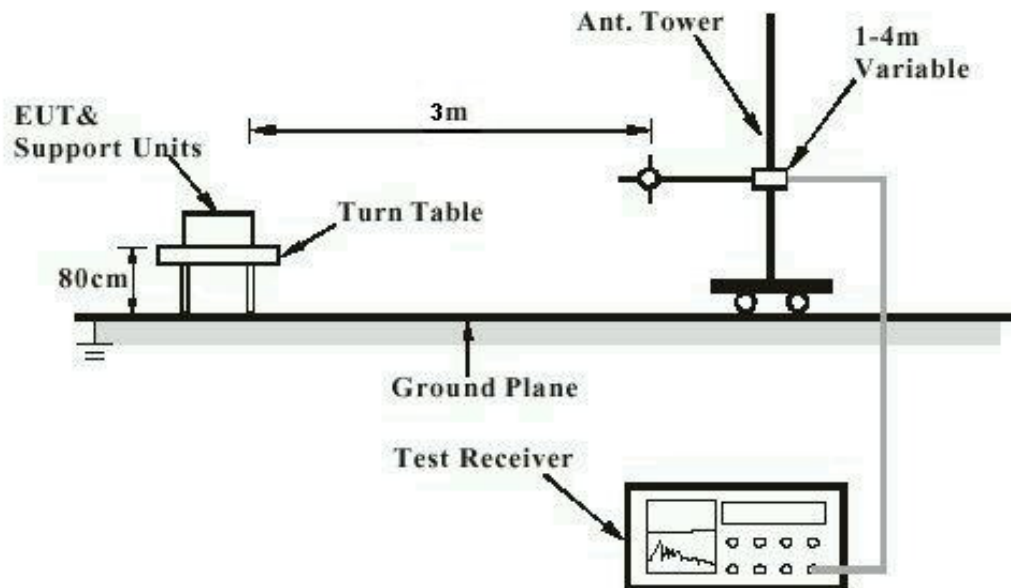


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement


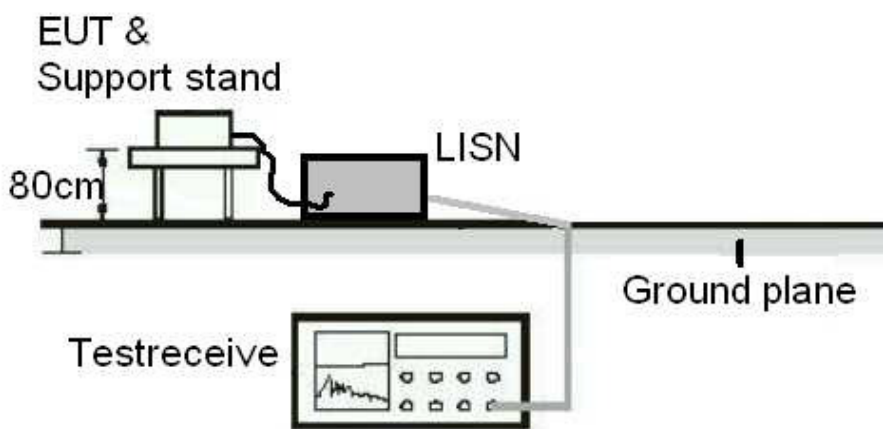


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

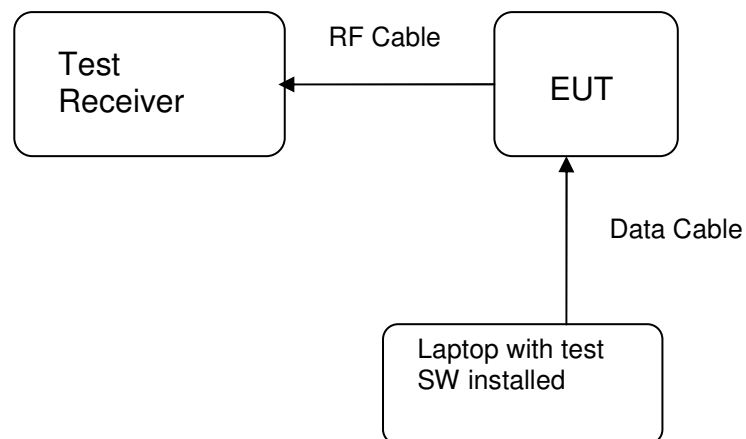

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: **Passed**

Test standard	:	LP0002(2011): 2.2, 3.10.1, (3) FCC Part 15.247(b)(4), Part 15.203 and RSS- Gen 7.1.4
Requirement	:	use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of max. 4.9 dBi.

The antenna is within the enclosure with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:
Passed

Test standard : FCC Part 15.247(b)(1),
 RSS-210 A8.4(2)
 LP0002(2011): 3.10.1, (2)
 Basic standard : DA 00-705 of March 30, 2000
 Kind of test site : Shielded room


Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 22-26 °C
 Relative humidity : 50-65 %
 Atmospheric pressure : 100-103 kPa


Table 6: Test result of Peak Output


Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(W)	(W)
Low Channel	902.75 MHz	28.92	0.7798	1
Middle Channel	914.75 MHz	28.90	0.7762	1
High Channel	927.25 MHz	28.74	0.7482	1

Test Plot of Peak Output Power, Low Channel

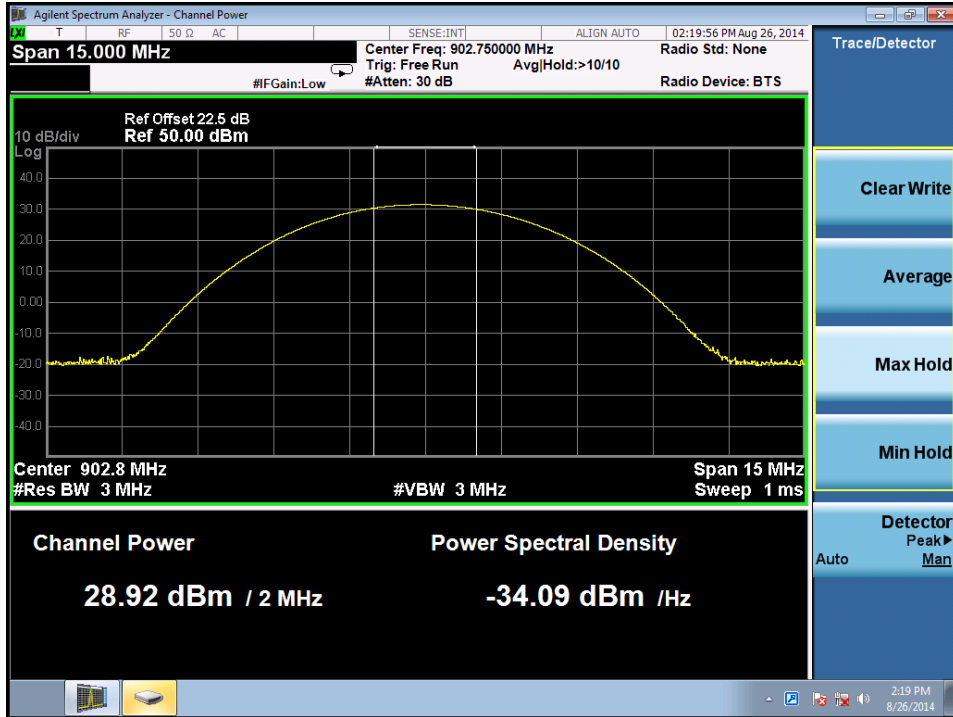

Middle Channel

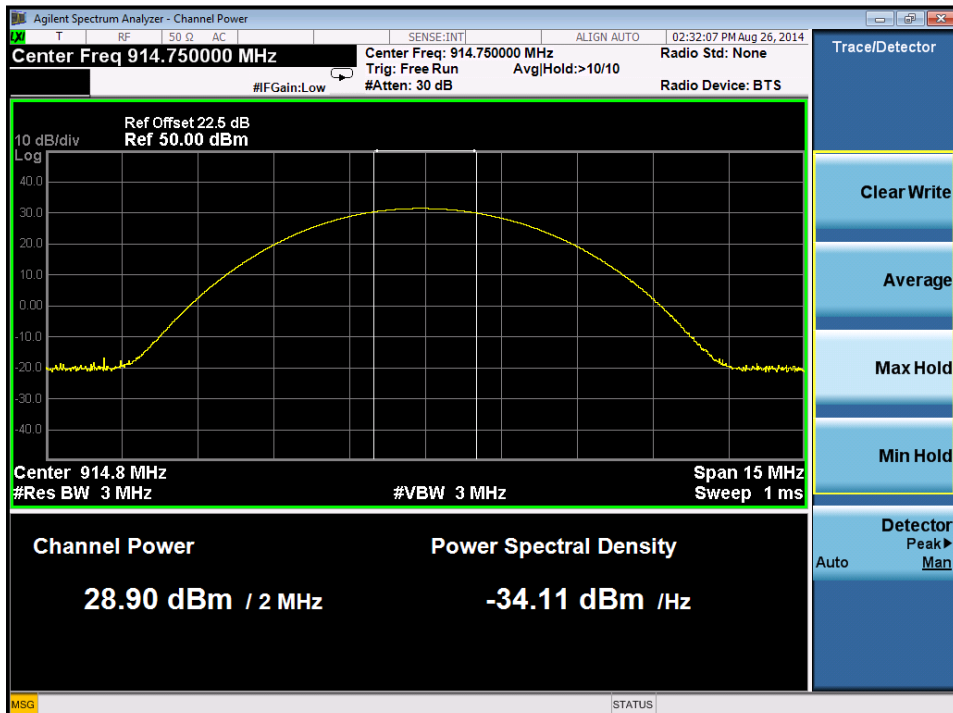

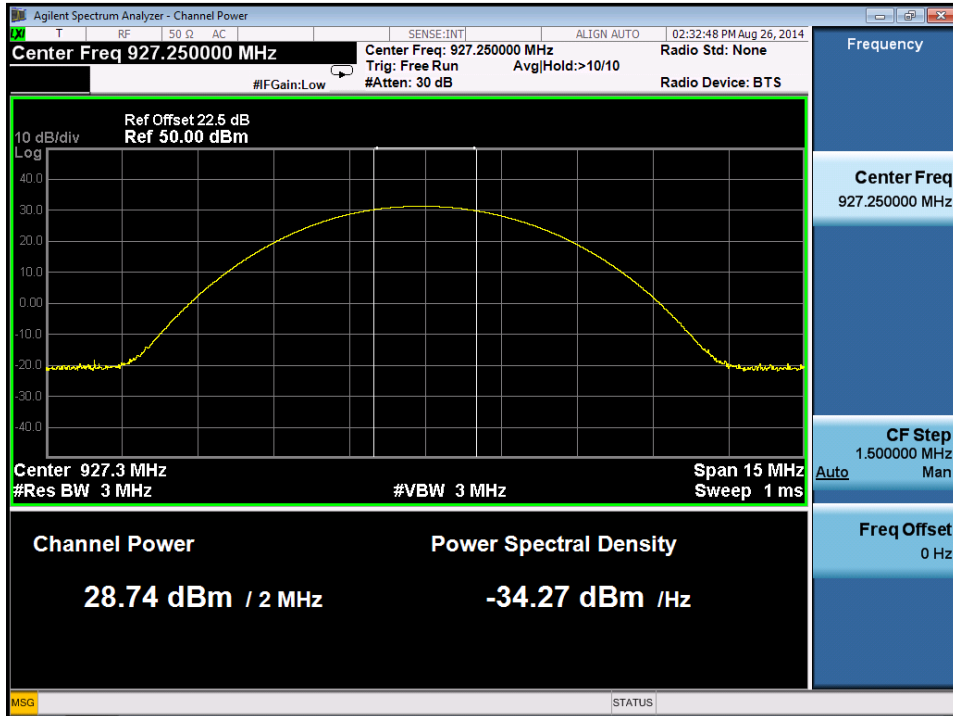High Channel


5.1.3 20dB Bandwidth

RESULT:
Passed

Test standard : FCC Part 15.247(a)(1),
 RSS-210 A8.1(a)
 LP0002(2011): 3.10.1, (6.1.1)
 Basic standard : DA 00-705 of March 30, 2000
 LP0002(2011) Appendix II
 Kind of test site : Shielded room

Test setup


Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 22-26°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103kPa

Table 7: Test result of 20dB Bandwidth,


Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	902.75 MHz	112.5	500	Pass
Mid Channel	914.75 MHz	114.0	500	Pass
High Channel	927.25 MHz	113.5	500	Pass

Test Plot of 20dB Bandwidth

Low Channel

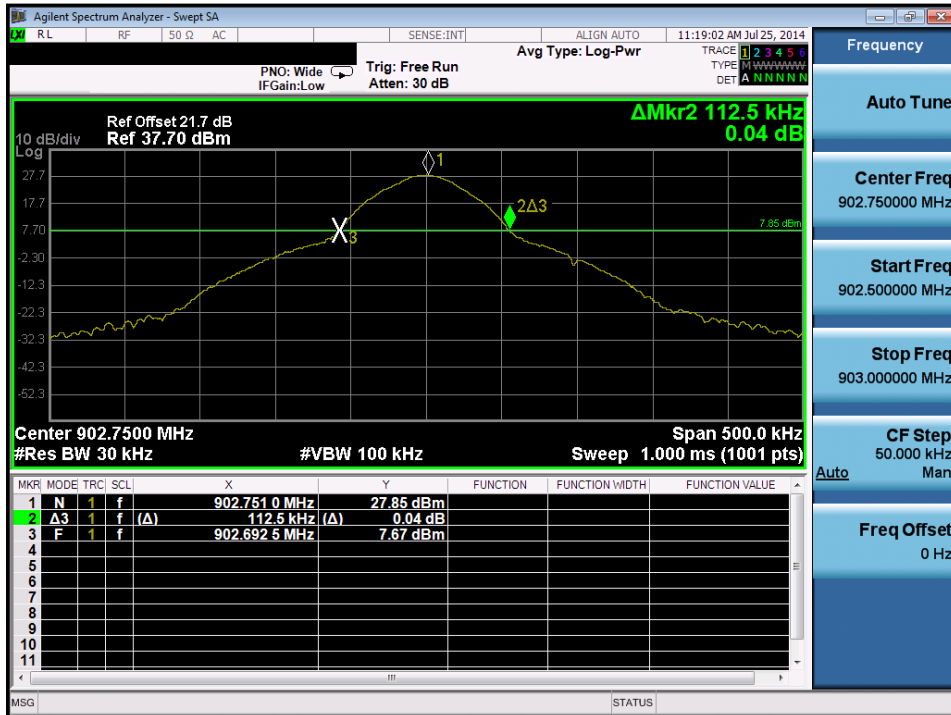

Middle Channel

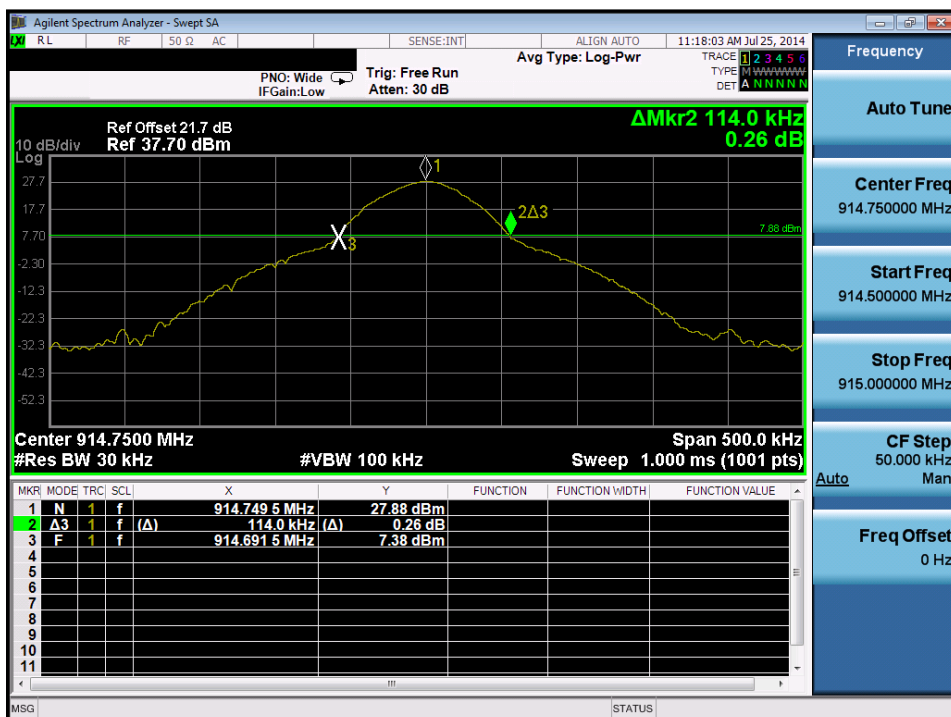

5.1.4 99% Bandwidth

RESULT:
Passed

Test standard : LP0002(2011): 3.10.1, (5)
 FCC Part 15.247(a)(2), RSS-210 A8.2(1)
 Basic standard : ANSI C63.10:2009, KDB558074
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A


 Ambient temperature : 22-26°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 8: Test result of 99% Bandwidth, GFSK modulation


Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	
Low Channel	2402	103	
Mid Channel	2442	104	
High Channel	2480	104	


Test Plot of 99% Bandwidth

Low Channel

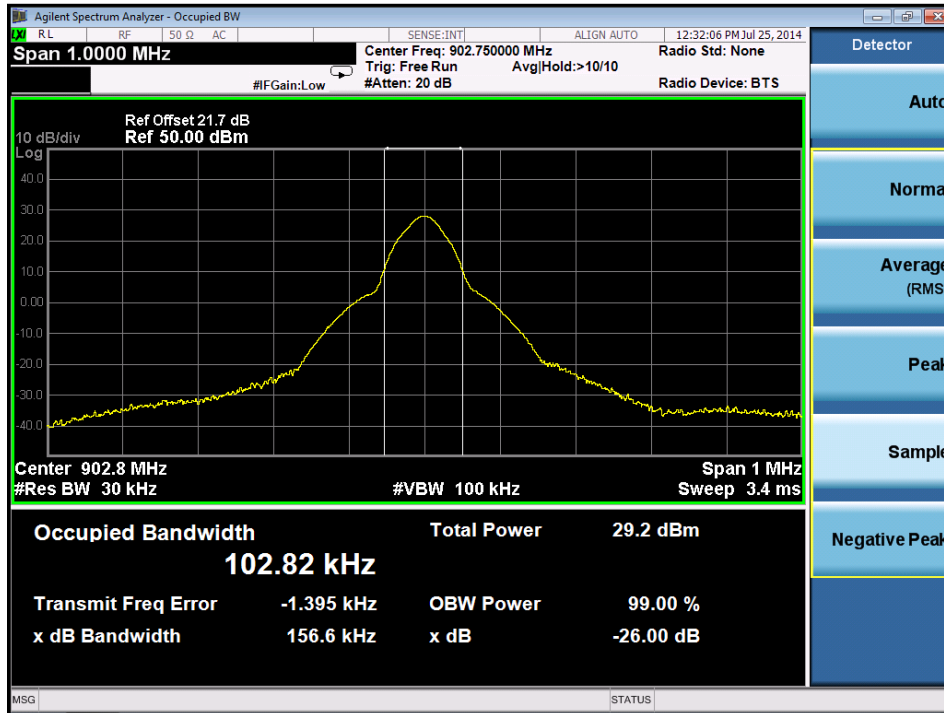

Middle Channel

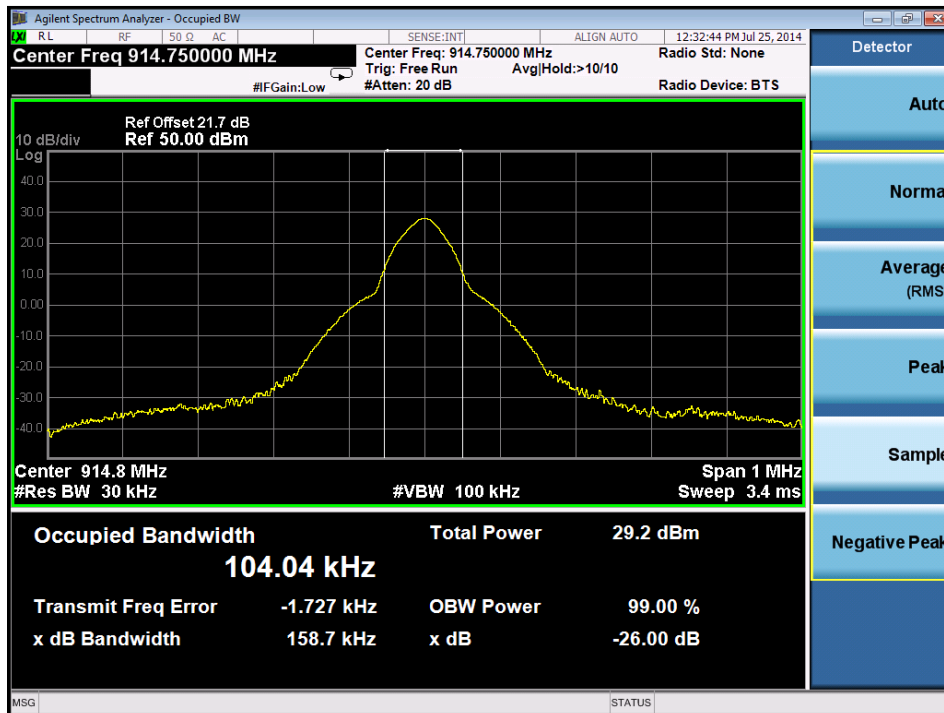

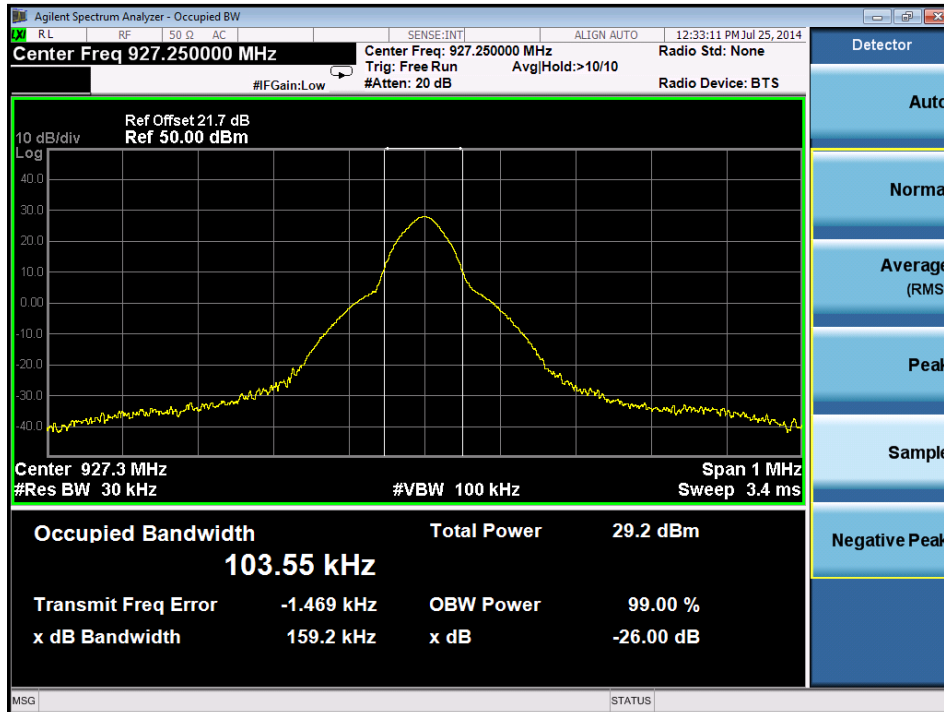High Channel


5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), RSS-210 A8.5 LP0002(2011): 3.10.1, (5)
Basic standard	:	DA 00-705 of March 30, 2000 LP0002(2011) Appendix II
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A
Ambient temperature	:	22-26°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa


All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

Test Plot of 100kHz Conducted Emissions, Low Channel



Middle Channel

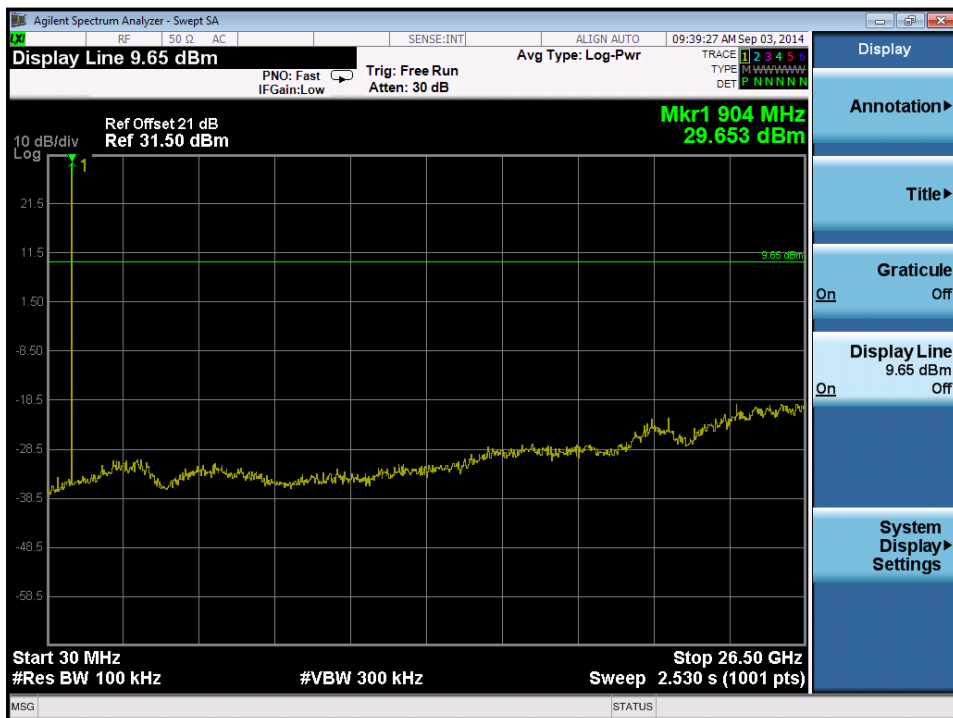

High Channel


5.1.6 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 A8.5 and RSS-Gen 7.2.1 LP0002(2011): 3.10.1, (5)
Basic standard	:	ANSI C63.10: 2009
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-210 2.7 (Table 1), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-210 2.7 (Table 2 and 3). Emission radiated outside the specified frequency bands must comply with the -20dBc emission limits specified in FCC 15.247 and RSS-210 A8.5
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic. For details refer to Appendix D. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

5.1.7 Frequency Separation

RESULT:
Passed

Test standard : FCC part 15.247(a)(1)
 RSS-210 A8.1(b)
 LP0002(2011): 3.10.1, (6.1.1)
 Basic standard : DA 00-705 of March 30, 2000
 LP0002(2011) Appendix II
 Limit : $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater


Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 24°C
 Relative humidity : 53%

Table 9: Test result of Frequency Separation

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Record Channel	914.25	0.5	$\geq 115\text{ kHz}$	Pass
Record Channel adj 1	914.75			
Record Channel adj 2	915.25			

Test Plot of Frequency Separation

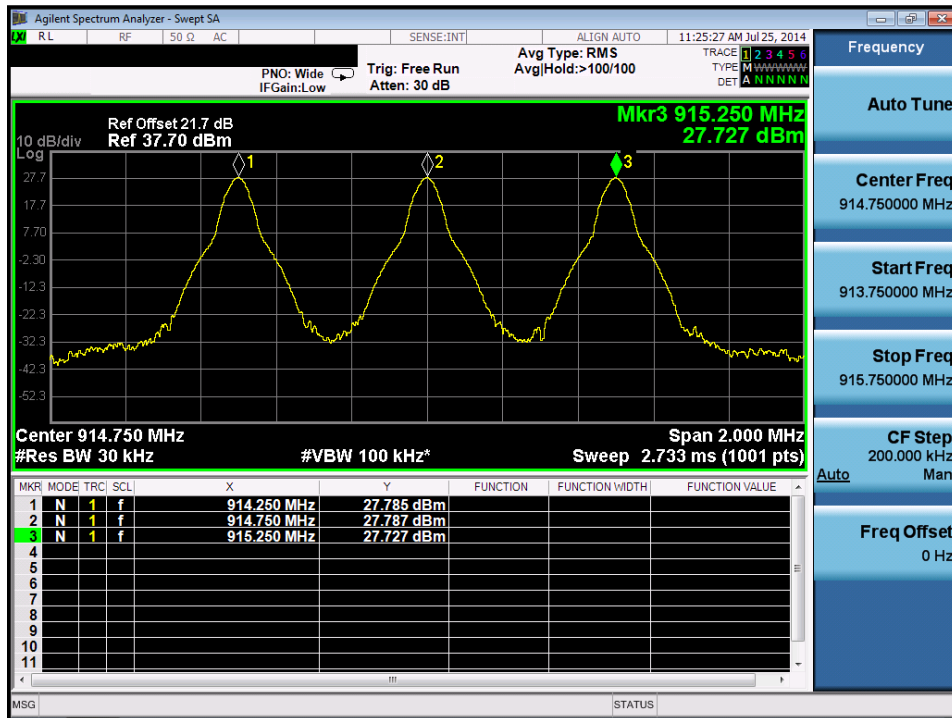

5.1.8 Number of hopping frequency

RESULT:
Passed

Test standard : FCC part 15.247(a)(1)(iii)
 RSS-210 A8.1(d)
 LP0002(2011): 3.10.1, (6.1.2)
 Basic standard : DA 00-705 of March 30, 2000
 LP0002(2011) Appendix II
 Limits : ≥ 15 non-overlapping channels
 Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 22-26°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 10: Test result of Number of hopping frequency

Frequency Range	Measured Number of Hopping Channel	Limit	Result
902 to 928 MHz	50	≥ 50	Pass

5.1.9 Time of Occupancy

RESULT:
Passed

Test standard : FCC part 15.247(a)(1)(iii)
 RSS-210 A8.1(d)
 LP0002(2011): 3.10.1, (6.1.2)
 Basic standard : DA 00-705 of March 30, 2000
 LP0002(2011) Appendix II
 Limits : 0.4s
 Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 22-26°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 11: Test result of Time of Occupancy

Data Mode	Captured Burst (s)	Dwell time (s)	On+Off time (s)	Limit (s)	Result
--	0.01836	0.354	0.02073	0.4	Pass


Note:

$$\text{Dwell time} = \text{Pulse width} \times (\text{Hopping rate} / \text{Number of channels}) \times \text{Period}$$

$$\text{Period} = 0.4 \text{ (seconds/ channel)} \times 50 \text{ (channel)} = 20 \text{ seconds.}$$

$$\text{Hopping rate} = 1 / (\text{On+Off time}) = 48.2 \text{ Hz}$$

Test Plot of Time of Occupancy

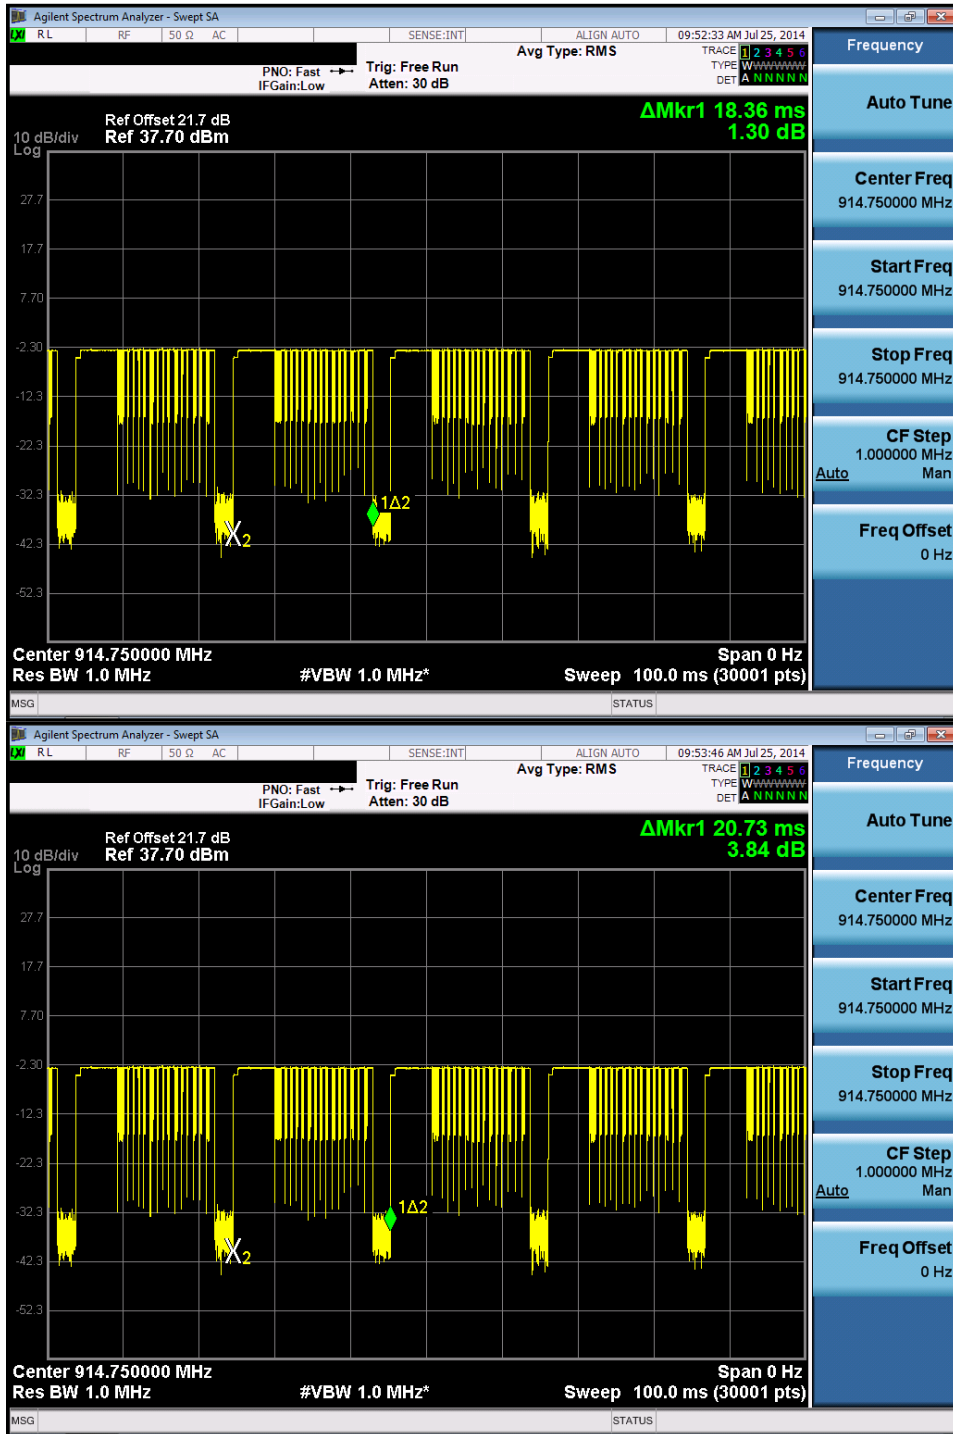

5.2 Mains Emissions

5.2.1 Mains Conducted Emissions

RESULT:**Passed**

Test standard : FCC Part 15.207
FCC Part 15.107
RSS-Gen 7.2.4
LP0002: 2.3

Limits : Mains Conducted emissions as defined in
above test standards must comply with the
mains conducted emission limits specified

Kind of test site : Shielded Room


Test setup

Test Channel : Middle
Operation mode : A



Remark: For details refer to Appendix D.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)

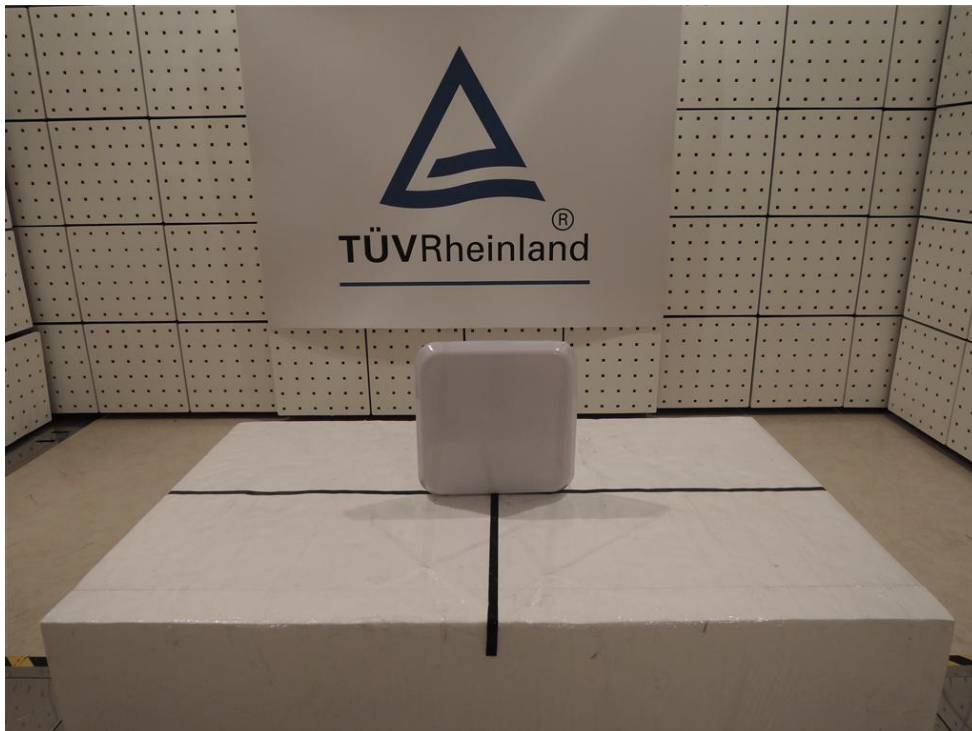

Photograph 2: Set-up for Spurious Emissions (Back View 1)

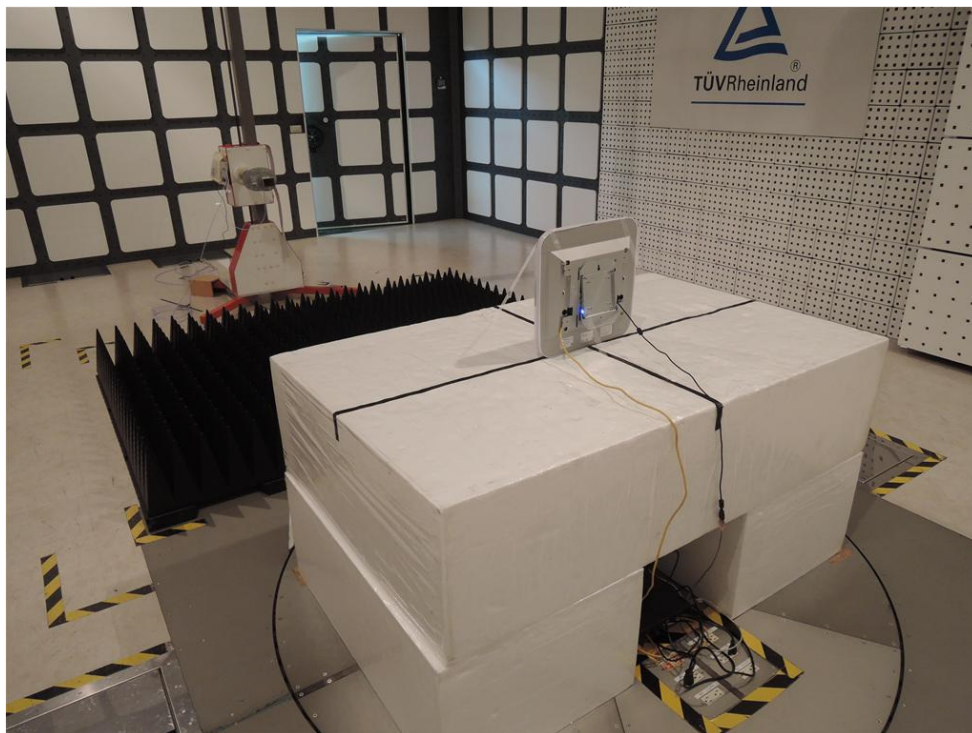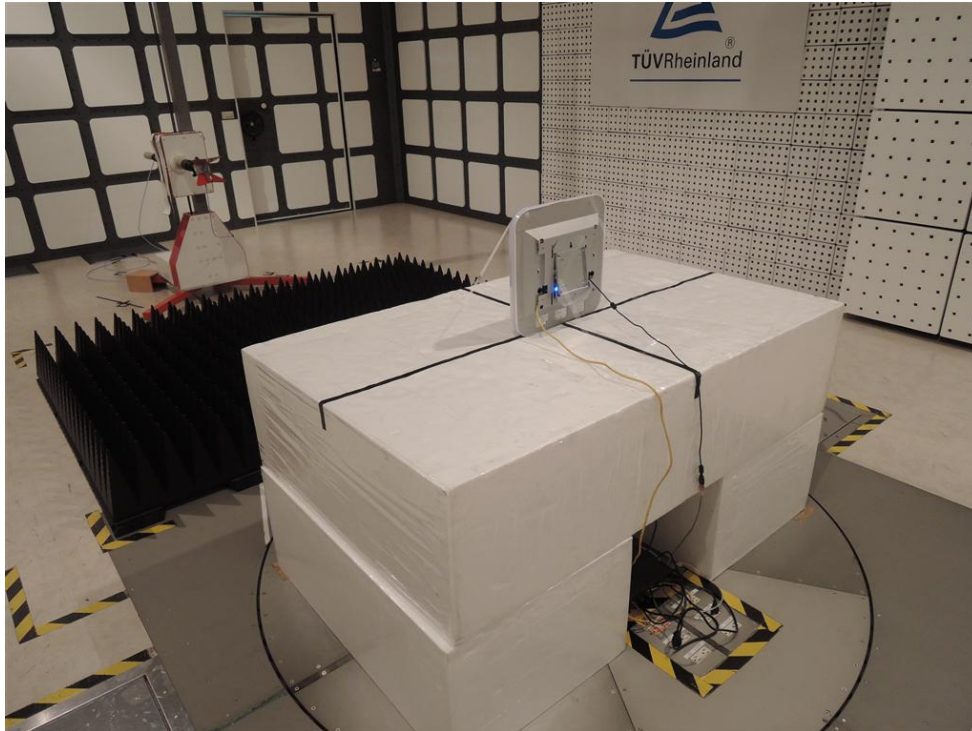

Photograph 3: Set-up for Spurious Emissions (Back View 2)

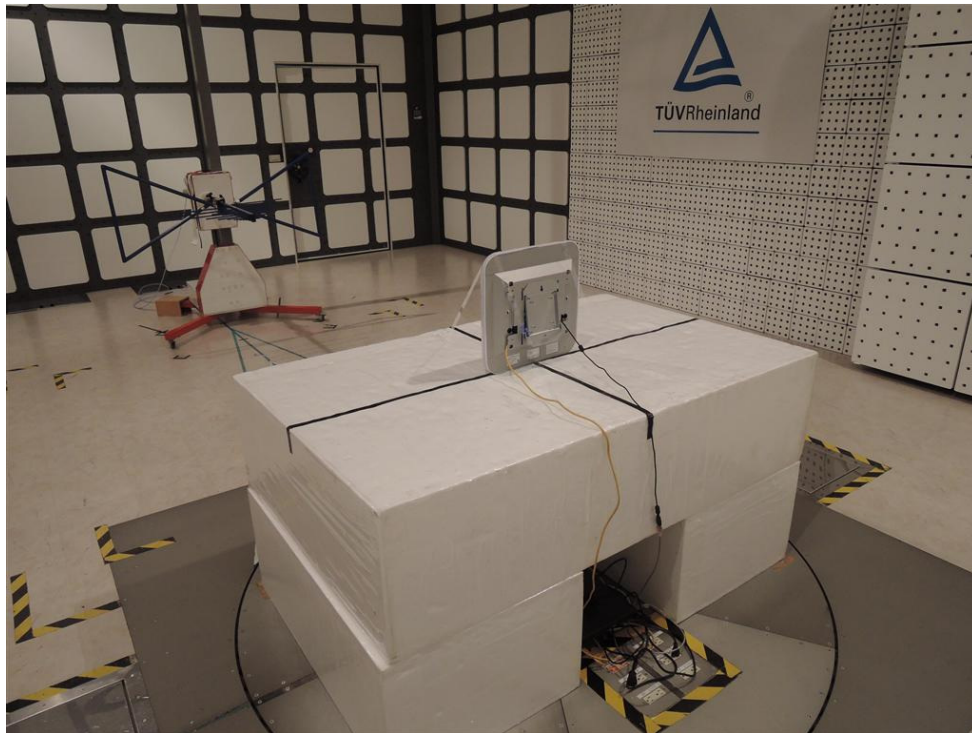

Photograph 4: Set-up for for Mains Conducted testing Back



Photograph 5: Set-up for for Mains Conducted testing Front



7. List of Tables

Table 1: Applied Standard and Test Levels	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Test result of Peak Output.....	16
Table 7: Test result of 20dB Bandwidth,	19
Table 8: Test result of 99% Bandwidth, GFSK modulation	22
Table 8: Test result of Frequency Separation	30
Table 9: Test result of Number of hopping frequency	32
Table 10: Test result of Time of Occupancy.....	34

8. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	37
Photograph 2: Set-up for Spurious Emissions (Back View 1)	38
Photograph 3: Set-up for Spurious Emissions (Back View 2)	39
Photograph 4: Set-up for for Mains Conducted testing Back	40
Photograph 5: Set-up for for Mains Conducted testing Front.....	40