

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>10050448 001</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	114032973	Seite 1 von 32 <i>Page 1 of 32</i>
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	25-Feb-2015	
<b>Auftraggeber:</b> <i>Client:</i>	N.V. Nederlandsche Apparatenfabriek Nedap, Parallelweg 2, NL-7141 DC, Groenlo, The Netherlands			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Electronic Parking License			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	SENSIT EPL US			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC/IC Test report			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247 RSS-247 (05-2015)			
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	2-Mar-2015			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A000178390-001			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2-Mar-2015 - 25-Jun-2015			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMC Laboratory Taipei			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>		
07-Jul-2015	Ryan W. T. Chen / Project Engineer	07-Jul-2015	Rene Charton/Senior Project Manager	
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>
				<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				



## TEST SUMMARY

### 5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

### 5.1.2 PEAK OUTPUT POWER

RESULT: *Passed*

### 5.1.3 20dB BANDWIDTH

RESULT: *Passed*

### 5.1.4 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100KHZ BANDWIDTH

RESULT: *Passed*

### 5.1.5 SPURIOUS EMISSION

RESULT: *Passed*

### 5.1.6 FREQUENCY SEPARATION

RESULT: *Passed*

### 5.1.7 NUMBER OF HOPPING FREQUENCY

RESULT: *Passed*

### 5.1.8 TIME OF OCCUPANCY

RESULT: *Passed*

## Contents

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS.....</b>	<b>4</b>
<b>2.</b>	<b>TEST SITES .....</b>	<b>5</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>5</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>6</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>7</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>7</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>8</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>8</b>
<b>3.2</b>	<b>SYSTEM DETAILS AND RATINGS.....</b>	<b>8</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES.....</b>	<b>9</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>10</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4.</b>	<b>TEST SET-UP AND OPERATION MODES.....</b>	<b>11</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>11</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>11</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>11</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>12</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>12</b>
<b>5.</b>	<b>TEST RESULTS .....</b>	<b>13</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>	<b>13</b>
5.1.1	<i>Antenna Requirement .....</i>	<i>13</i>
5.1.2	<i>Peak Output Power .....</i>	<i>14</i>
5.1.3	<i>20dB Bandwidth .....</i>	<i>16</i>
5.1.4	<i>99% Bandwidth .....</i>	<i>19</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>22</i>
5.1.6	<i>Spurious Emission .....</i>	<i>25</i>
5.1.7	<i>Frequency Separation.....</i>	<i>26</i>
5.1.8	<i>Number of hopping frequency.....</i>	<i>28</i>
5.1.9	<i>Time of Occupancy .....</i>	<i>30</i>
<b>6.</b>	<b>LIST OF TABLES .....</b>	<b>32</b>

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix P: Photo Documentation**

(File Name: 10050448APPENDIX P)

**Appendix D: Test Result of Radiated Emissions**

(File Name: 10050448APPENDIX D)

Test Specifications

The following standards were applied

**Table 1: Applied Standard and Test Levels**

<b>Radio</b>
FCC CFR47 Part 15: Subpart C Section 15.247 RSS-247 Issue 1 May 2015 RSS-Gen, Issue 4, November 2014 ANSI C63.4:2014, ANSI C63.10:2013 Public Notice DA 00-705

## 2. Test Sites

### 2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

FCC Registration No.: 365730  
IC Canada Registration No.: 9465A-1  
TAF Accredited NCC Test Lab. No.:0759

**TAF Accreditation effective period: 2013-Jul-1<sup>st</sup> to 2016-Jun-30<sup>th</sup>**



**Testing Laboratory**  
**0759**

## 2.2 List of Test and Measurement Instruments

**Table 2: List of Test and Measurement Equipment**

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	R&S	ESR7	101062	30-Aug-15
Bilog Antenna	TESEQ	CBL6111D	29802	4-Jul-15
Spectrum Analyzer	R&S	FSV 40	100921	16-Dec-15
Horn Antenna	ETS-Lindgren	3117	138160	11-Jan-16
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	29-Oct-15
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	22-Aug-15
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	25-Aug-15
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM30180	60558	3-Nov-15
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	21-Oct-15
EMI Test Receiver	R&S	ESCI7	100797	27-Dec-15

## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements:.

**Table 3: Emission Measurement Uncertainty**

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1.5$ dB
RF power density, conducted	$\pm 3$ dB
spurious emissions, conducted	$\pm 3$ dB
all emissions, radiated	$\pm 6$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
DC and low frequency voltages	$\pm 3$ %

## 3. General Product Information

### 3.1 Product Function and Intended Use

The EUT is a device for parking occupancy detection of individual spaces through identification of the car. It can communicate with a Datacollector through a wireless interface. For details refer to the User Guide, Data Sheet and Circuit Diagram.

### 3.2 System Details and Ratings

**Table 4: Basic Information of EUT**

Item	EUT information
Kind of Equipment	Electronic Parking License
Type Designation	SENSIT EPL US
FCC ID	CGDSENSITEPL
Canada ID	1444A-SENSITEPL

**Table 5: Technical Specification of EUT**

Technical Specification	Value
Operating Frequency	902.4MHz - 927.6MHz
Channel Spacing	400 kHz
Channel number	63 (hopping)
Operation Voltage	3 V
Modulation	GFSK
Antenna gain	-2 dBi



### **3.3 Independent Operation Modes**

The basic operation modes are:

- A. Transmitting
  - 1. Low channel
  - 2. Middle channel
  - 3. High channel
- B. Receiving
- C. Standby
- D. Off

### **3.4 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.5 Submitted Documents**

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## **4. Test Set-up and Operation Modes**

### **4.1 Principle of Configuration Selection**

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

### **4.2 Test Operation and Test Software**

Test operation refers to test setup in chapter 4. All testing were performed according to the procedures in ANSI C63.10 and DA 00-705 of March 30, 2000.

The samples were used as follows:

Conducted: None

Radiation: A000178390-001

Full test was applied on all test modes, but only worst case was shown.

### **4.3 Special Accessories and Auxiliary Equipment**

The product has been tested together with the following additional accessories:


None

## 4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested containing the noise suppression parts as in the Photo Appendix and the Test Setup Photos. No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

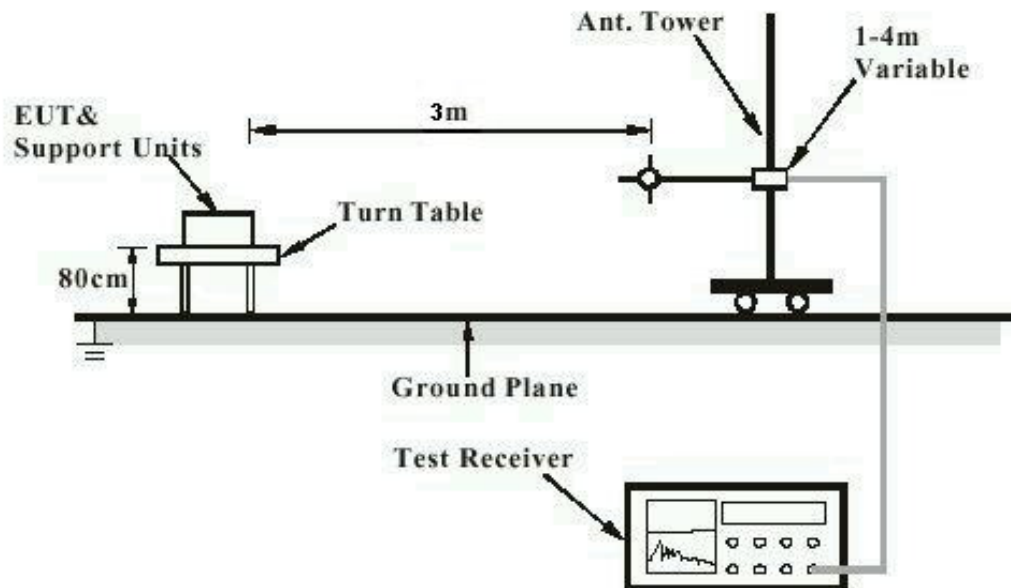

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Passed**

Test standard	:	FCC Part 15.247(b)(4), Part 15.203 and RSS-Gen 8.3
Requirement	:	use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of -2 dBi. The antenna is a Chip Antenna soldered to the PCB with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

**Prüfbericht - Nr.: 10050448 001**

Test Report No.

Seite 14 von 32

Page 14 of 32

## 5.1.2 Peak Output Power

**RESULT:****Passed**

Test standard : FCC Part 15.247(b)(1),  
RSS-247 5.4(2)

Basic standard : DA 00-705 of March 30, 2000  
LP0002(2011) Appendix II

Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High

Operation Mode : A

Ambient temperature : 20-24 °C

Relative humidity : 50-65 %

Atmospheric pressure : 100-103 kPa

**Table 6: Test result of Peak Output**

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(W)	(W)
Low Channel	902.4 MHz	2.76	0.00189	1
Middle Channel	915 MHz	5.32	0.00340	1
High Channel	927.6 MHz	3.54	0.00226	1

Test procedure:  
 Public notice DA 00-705 March 30, 2000 Alternative Test Procedure.

Since the EUT has no connector port available for conducted measurements the test results are obtained by radiated measurement using the setup for radiated emissions. From the measured radiated field strength at a distance of 3m and the antenna gain **G** (as provided by the applicant, see attachment for datasheet) the peak conducted output power value is calculated. This value is calculated using the formula:

E is the measured maximum fundamental field strength in V/m

- > -24 dBV/m = 0.063 V/m @ 902.4 MHz
- > -21.4 dBV/m = 0.085 V/m @ 915 MHz
- > -23.2 dBV/m = 0.069 V/m @ 927.6 MHz

G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.

- > -2 dBi => 0.631

d is the distance in meters from which the field strength was measured.

- > 3m

P is the power in watts:

$$P = \frac{(E*d)^2}{30G}$$

- @ 902.4 MHz      SQ( 0.063 \*3) / 18.93 = 0.00189 W      = 2.76 dBm
- @ 915 MHz      SQ( 0.085 \*3) / 18.93 = 0.0034 W      = 5.32 dBm
- @ 927.6 MHz      SQ( 0.069 \*3) / 18.93 = 0.00226 W      = 3.54 dBm

For details refer to Appendix D.

### 5.1.3 20dB Bandwidth

**RESULT:****Passed**

Test standard : FCC Part 15.247(a)(1),  
RSS-247 5.1(1)  
Basic standard : DA 00-705 of March 30, 2000  
Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A  
Ambient temperature : 20-24°C  
Relative humidity : 50-65%  
Atmospheric pressure : 100-103kPa


**Table 7: Test result of 20dB Bandwidth,**

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	902.4 MHz	239.8	< 500	Pass
Mid Channel	915.12MHz	235.8	< 500	Pass
High Channel	927.6 MHz	237.8	< 500	Pass




## Test Plot of 20dB Bandwidth

### Low Channel

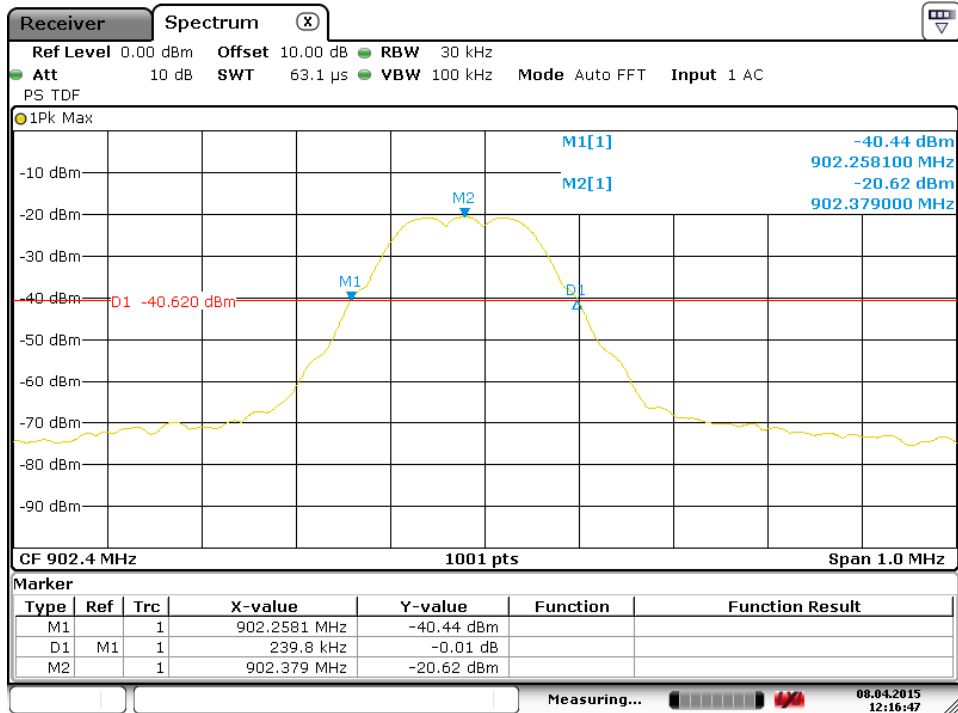


Date: 8.APR.2015 12:16:47

### Middle Channel

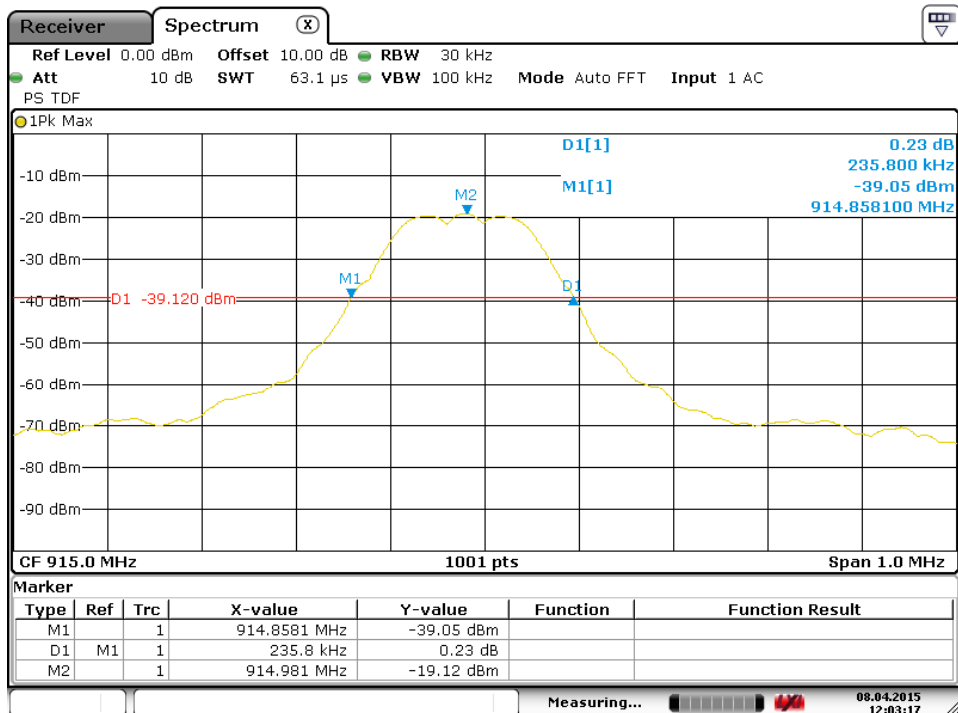

Date: 8.APR.2015 12:03:17

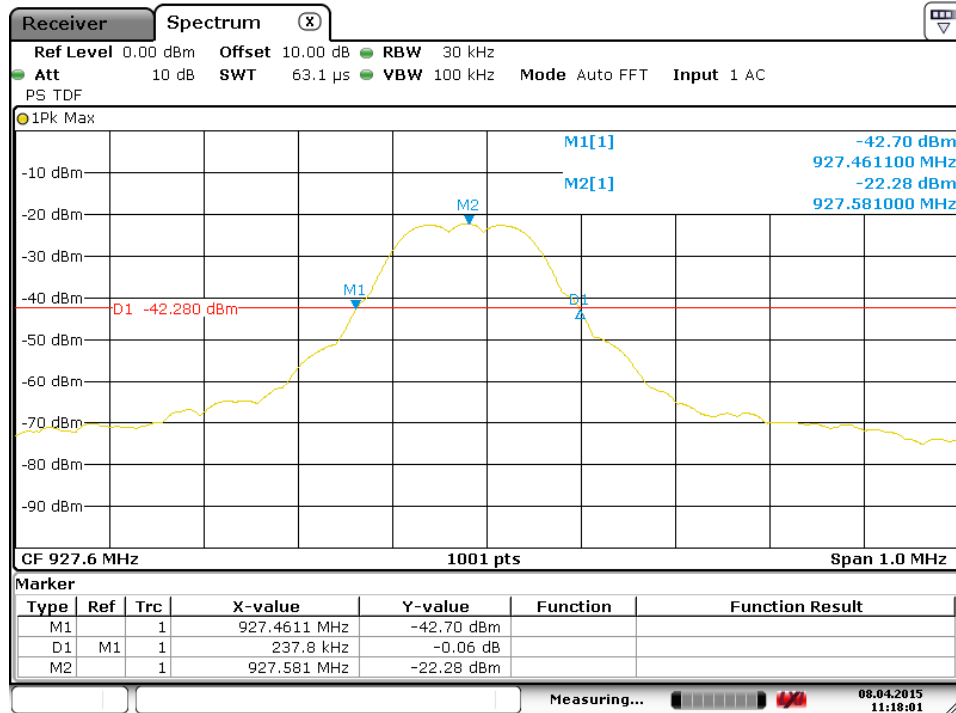**High Channel**


Date: 8.APR.2015 11:18:01

### 5.1.4 99% Bandwidth

**RESULT:****Passed**

Test standard : RSS-Gen, Issue 4, November 2014  
Basic standard : ANSI C63.10:2013  
Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A


Ambient temperature : 20-24°C  
Relative humidity : 50-65%  
Atmospheric pressure : 100-103 kPa

**Table 8: Test result of 99% Bandwidth, GFSK modulation**

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	902.4 MHz	193
Mid Channel	915.14 MHz	194
High Channel	927.6 MHz	192


## Test Plot of 99% Bandwidth

### Low Channel

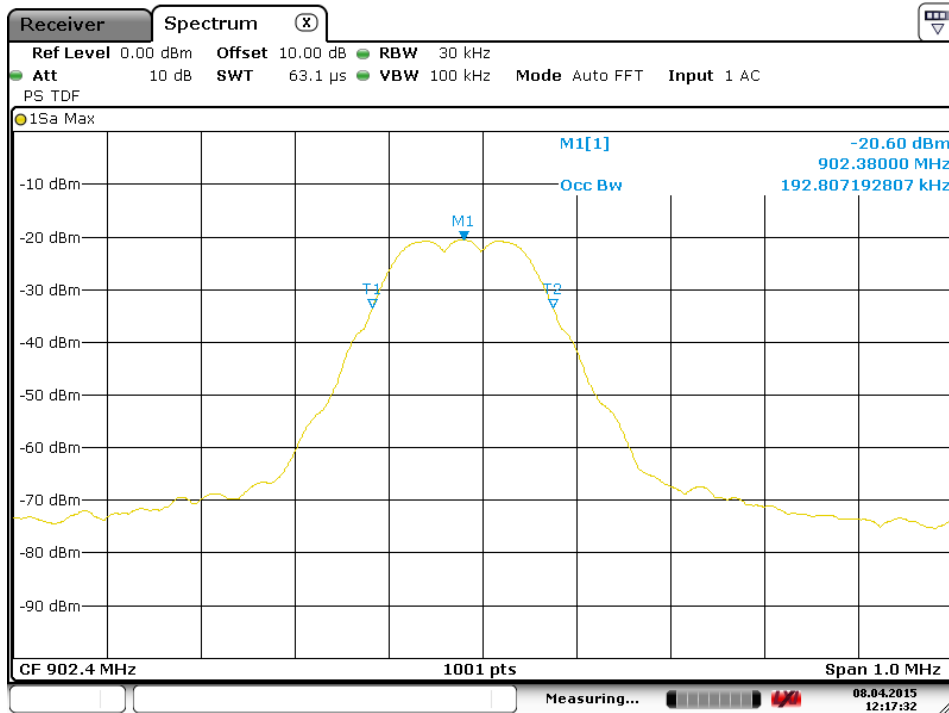


Date: 8.APR.2015 12:17:31

### Middle Channel

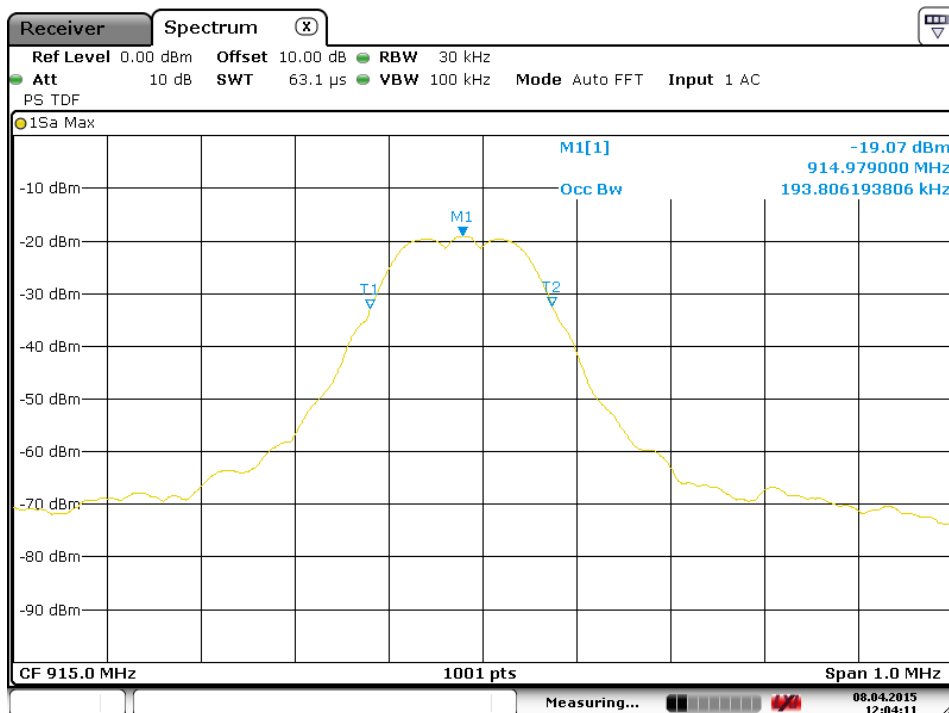

Date: 8.APR.2015 12:04:11

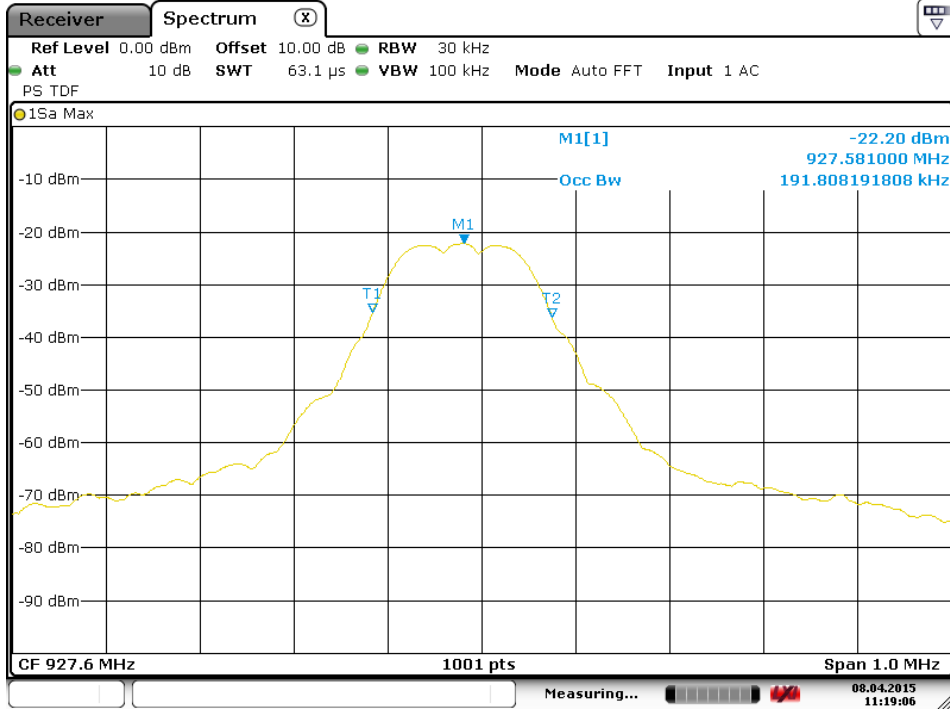**High Channel**


Date: 8.APR.2015 11:19:06

### 5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

**RESULT:****Passed**

Test standard	:	FCC part 15.247(d), RSS-247 5.5
Basic standard	:	DA 00-705 of March 30, 2000
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

**Test setup**


Test Channel	:	Low/High/Hopping
Operation Mode	:	A
Ambient temperature	:	20-24°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.


## Test Plot of 100kHz Bandwidth of Frequency Band Edge

### Low Channel

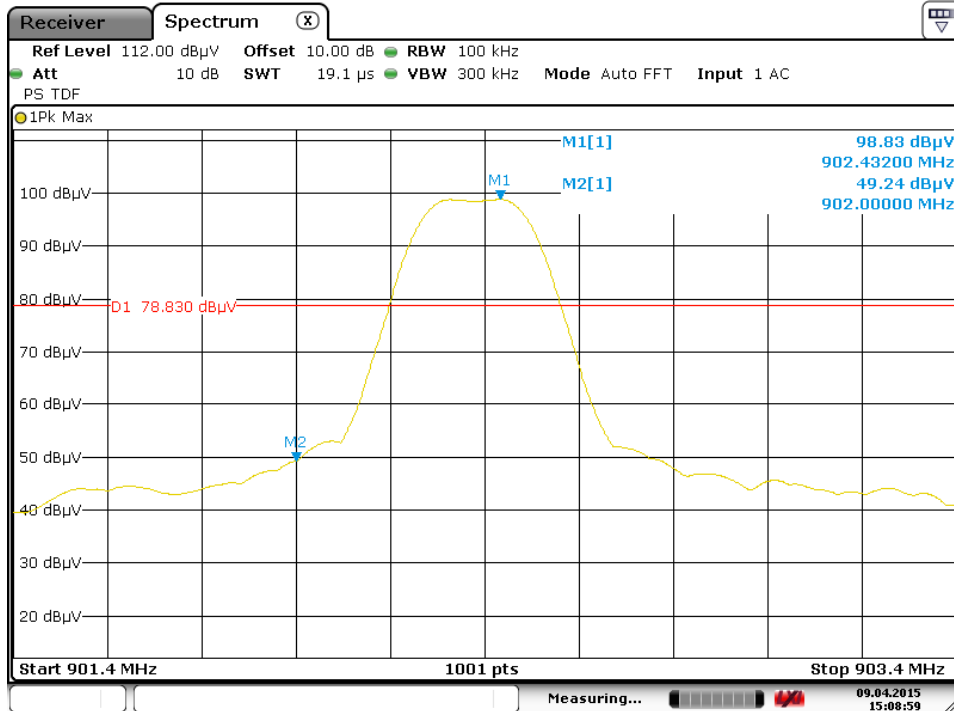

Date: 9.APR.2015 15:08:59

### High Channel

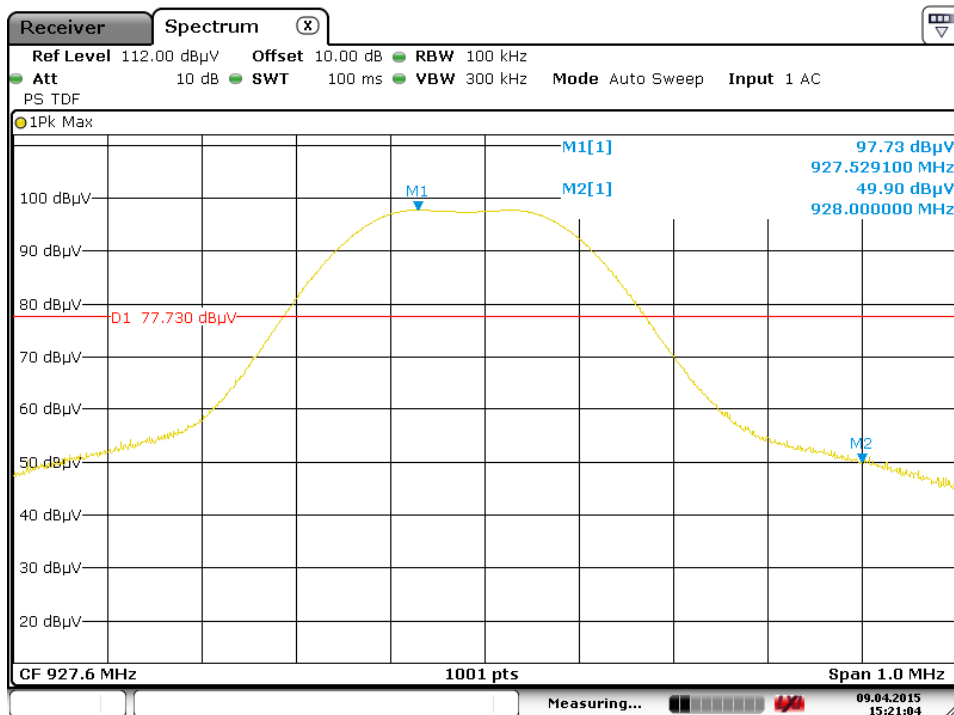

Date: 9.APR.2015 15:21:04





## 5.1.6 Spurious Emission

**RESULT:****Passed**

Test standard : FCC part 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-247 5.5 and RSS-Gen 8.9

Basic standard : ANSI C63.10: 2013  
Limits : Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-210 2.7 (Table 1), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-210 2.7 (Table 2 and 3).  
Emission radiated outside the specified frequency bands must comply with the -20dBc emission limits specified in FCC 15.247 and RSS-210 A8.5

Kind of test site : 3m Semi-Anechoic Chamber

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic. For details refer to Appendix D. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

### 5.1.7 Frequency Separation

**RESULT:** **Passed**

Test standard : FCC part 15.247(a)(1)  
 RSS-247 5.1

Basic standard : DA 00-705 of March 30, 2000

Limit :  $\geq 25\text{kHz}$  or  $2/3$  of 20dB bandwidth, whichever is greater


**Test setup**

Test Channel : Low/ Middle/ High  
 Operation Mode : A  
 Ambient temperature : 24°C  
 Relative humidity : 53%

**Table 9: Test result of Frequency Separation**

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Record Channel	915.2	0.4	$\geq 115\text{ kHz}$	Pass
Record Channel adj 1	914.77			
Record Channel adj 2	915.55			

## Test Plot of Frequency Separation

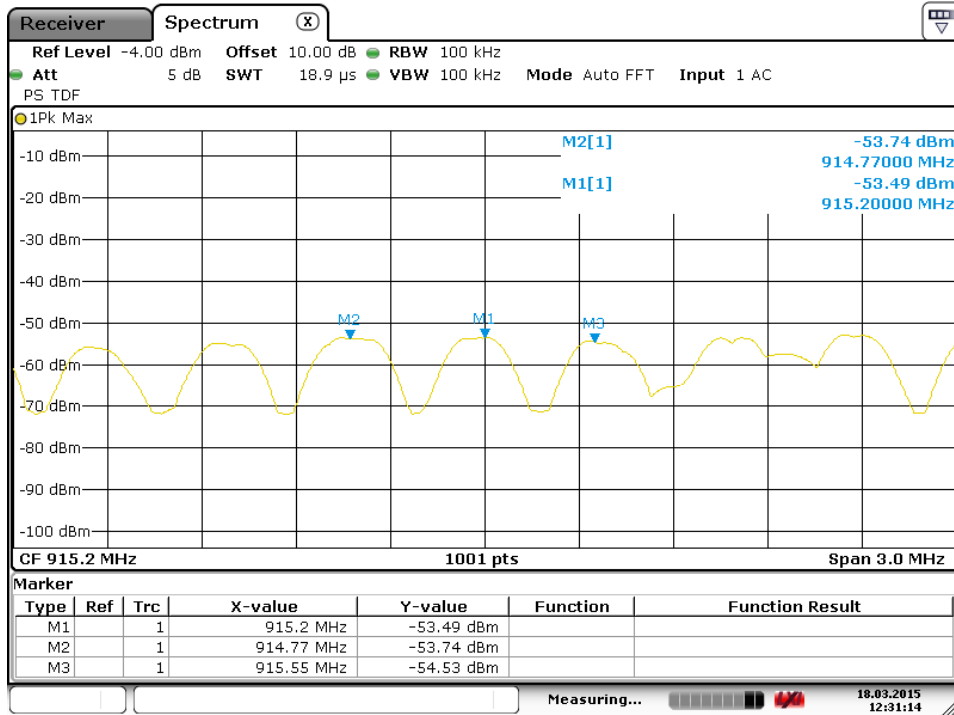

Date: 18.MAR.2015 12:31:14

### 5.1.8 Number of hopping frequency

**RESULT:**
**Passed**

Test standard : FCC part 15.247(a)(1)(iii)  
 RSS-247 5.1(5)  
 Basic standard : DA 00-705 of March 30, 2000  
 Limits :  $\geq 15$  non-overlapping channels  
 Kind of test site : Shield room


**Test setup**

Test Channel : Low/ Middle/ High  
 Operation Mode : A  
 Ambient temperature : 20-24°C  
 Relative humidity : 50-65%  
 Atmospheric pressure : 100-103 kPa

**Table 10: Test result of Number of hopping frequency**

Frequency Range	Measured Number of Hopping Channel	Limit	Result
902 to 928 MHz	63	$\geq 50$	Pass

### Test Plot of Number of hopping frequencies

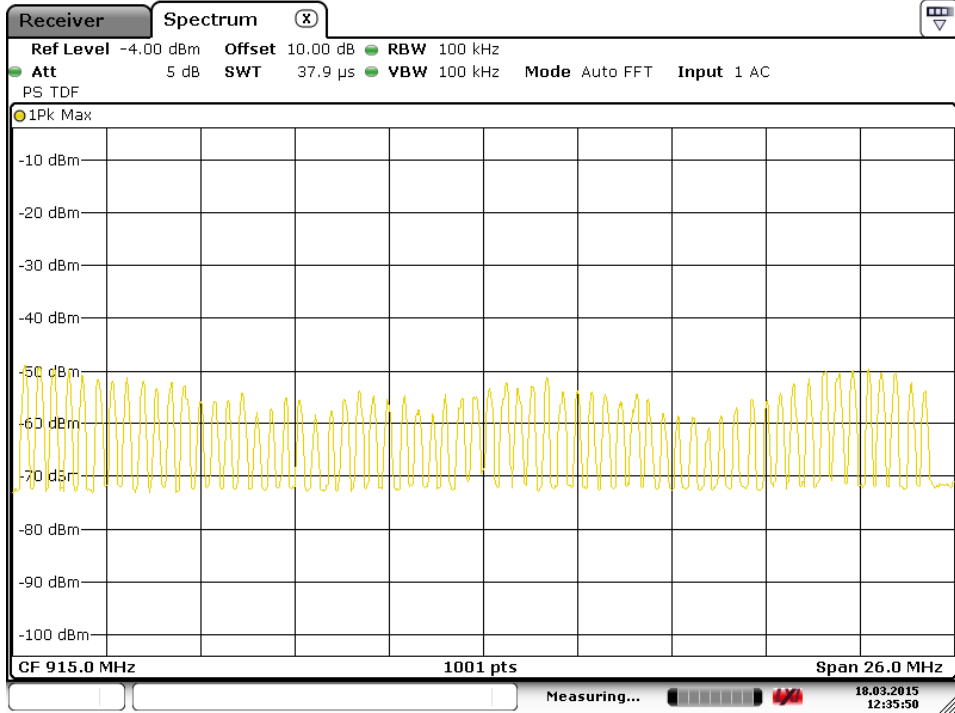

Date: 18.MAR.2015 12:35:51

### 5.1.9 Time of Occupancy

**RESULT:**
**Passed**

Test standard : FCC part 15.247(a)(1)(iii)  
 RSS-247 5.1(5)  
 LP0002(2011): 3.10.1, (6.1.2)  
 Basic standard : DA 00-705 of March 30, 2000  
 LP0002(2011) Appendix II  
 Limits : 0.4s  
 Kind of test site : Shield room

**Test setup**

Test Channel : Low/ Middle/ High  
 Operation Mode : A  
 Ambient temperature : 20-24°C  
 Relative humidity : 50-65%  
 Atmospheric pressure : 100-103 kPa

**Table 11: Test result of Time of Occupancy**

Data Mode	Captured Burst (s)	Dwell time (s)	On+Off time (s)	Limit (s)	Result
--	0.25850	0.0309	3.34800	0.4	Pass


Note:

$$\text{Dwell time} = \text{Pulse width} \times (\text{Hopping rate} / \text{Number of channels}) \times \text{Period}$$


$$\text{Period} = 0.4 \text{ (seconds/ channel)} \times 63 \text{ (channel)} = 25.2 \text{ seconds.}$$

$$\text{Hopping rate} = 1 / (\text{On+Off time}) = 0.298 \text{ Hz}$$

### Test Plot of Time of Occupancy

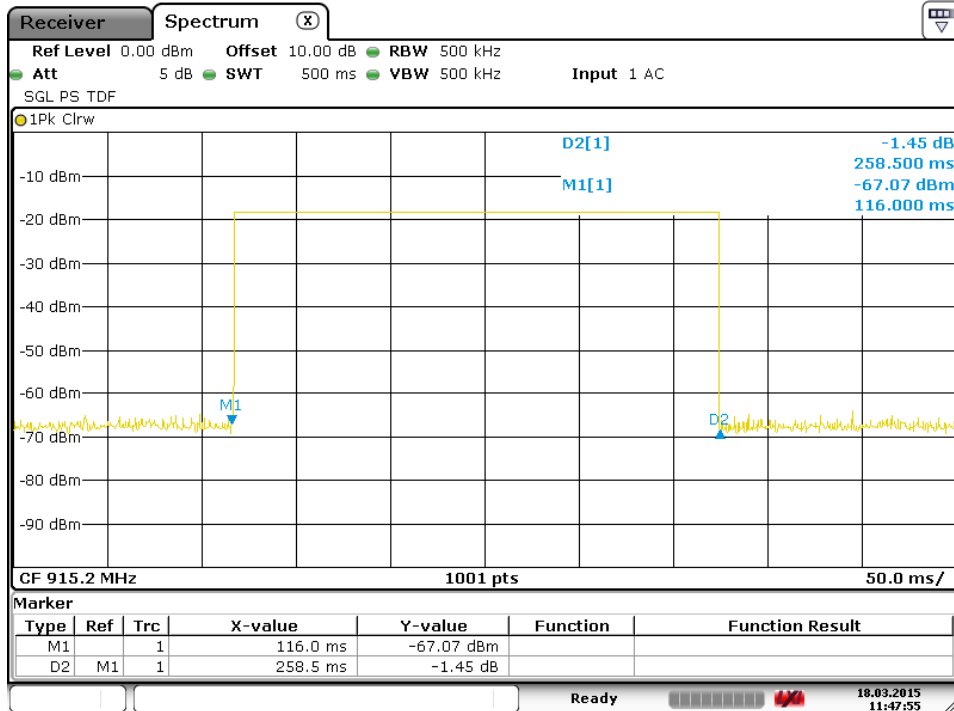

Date: 18.MAR.2015 11:47:55

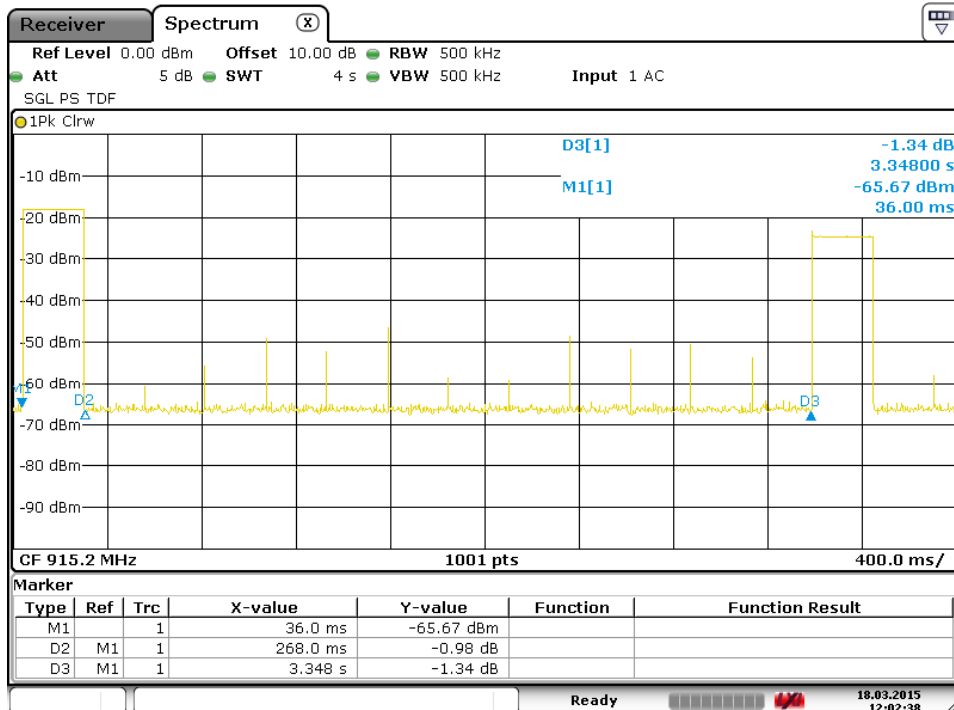

Date: 18.MAR.2015 12:02:38

## 6. List of Tables

Table 1: Applied Standard and Test Levels .....	4
Table 2: List of Test and Measurement Equipment .....	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Basic Information of EUT .....	8
Table 5: Technical Specification of EUT .....	8
Table 6: Test result of Peak Output.....	15
Table 7: Test result of 20dB Bandwidth, .....	16
Table 8: Test result of 99% Bandwidth, GFSK modulation .....	19
Table 8: Test result of Frequency Separation .....	26
Table 9: Test result of Number of hopping frequency .....	28
Table 10: Test result of Time of Occupancy.....	30