

Test Report No.10050448 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 10050448AppendixD)

Contents

| | |
|--|----|
| Fundamental Power | 2 |
| Spurious Emissions, TX Mode, 30M-1G | 5 |
| Spurious Emissions, TX Mode, 1-18G..... | 11 |
| Spurious Emissions, TX Mode, For IC, 1-18G | 17 |


Fundamental Power



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

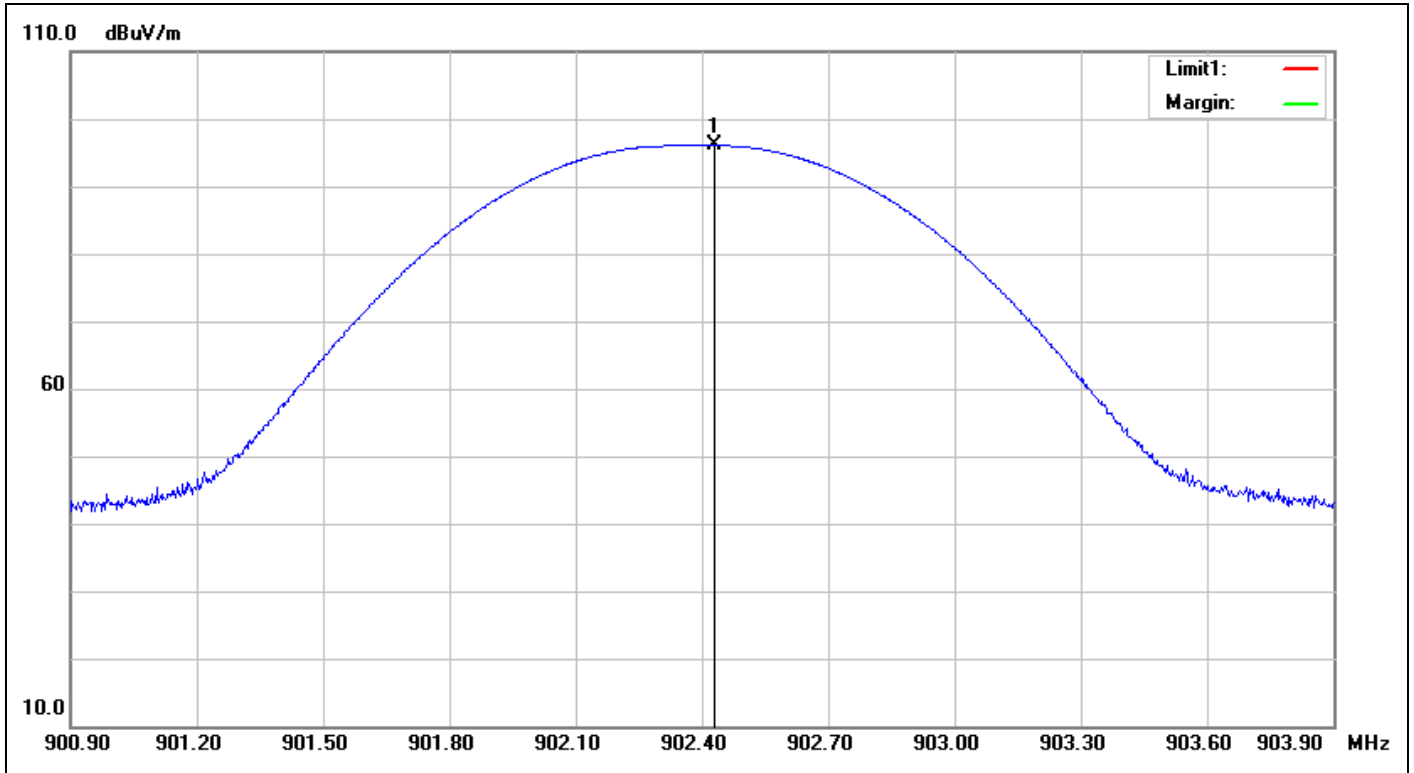

| | | | |
|-----------------------|----------------------------|---------------------------|--------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 16:43:44 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 902.4MHz | | |
| Remark: | X | | |
| | H:1.5m | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 902.4300 | -2.02 | 98.08 | 96.06 | | | peak | | | |


- 24 dBV/m

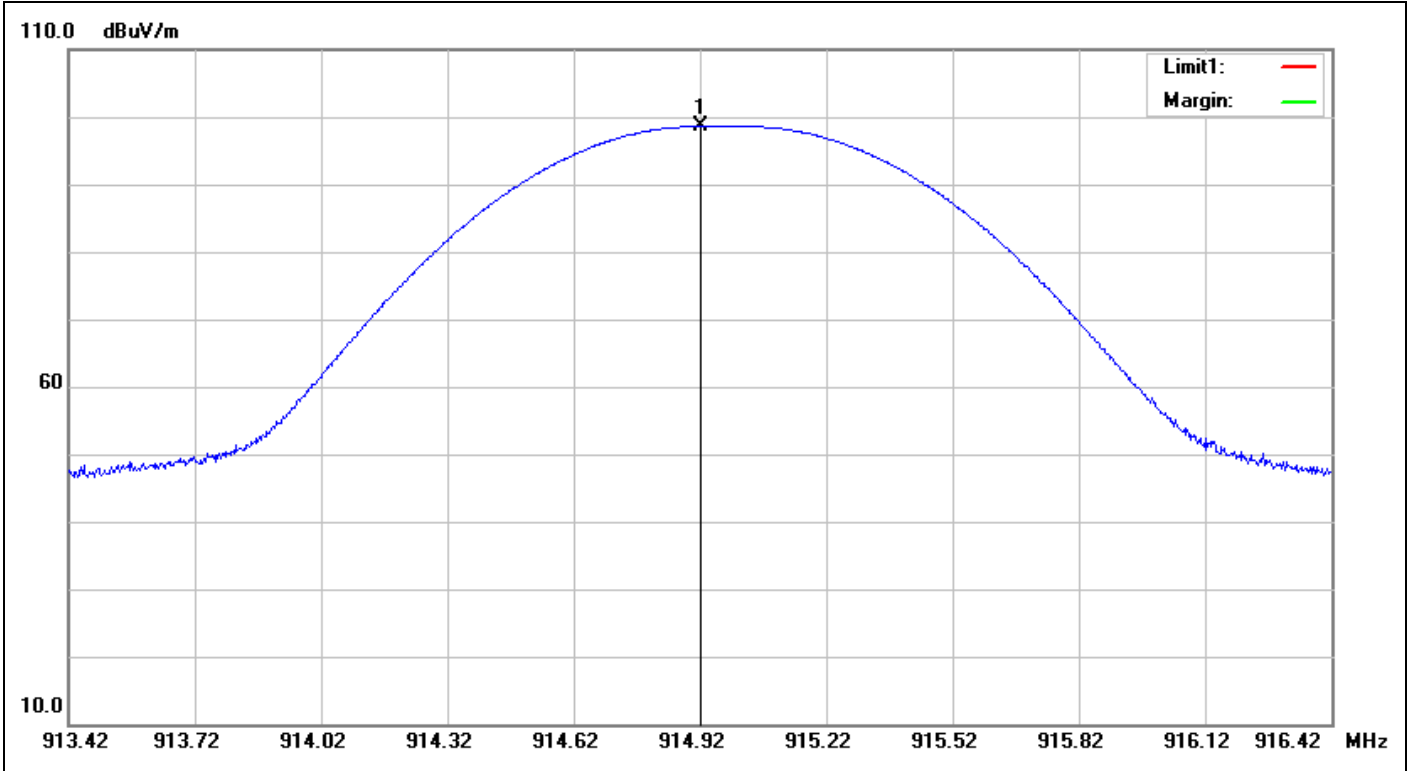

| | | | |
|-----------------------|----------------------------|---------------------------|--------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 16:51:58 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 915.2MHz | | |
| Remark: | X | | |
| | H:1.5m | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 914.9270 | -1.62 | 100.24 | 98.62 | | | peak | | | |

- 21.4 dBV/m

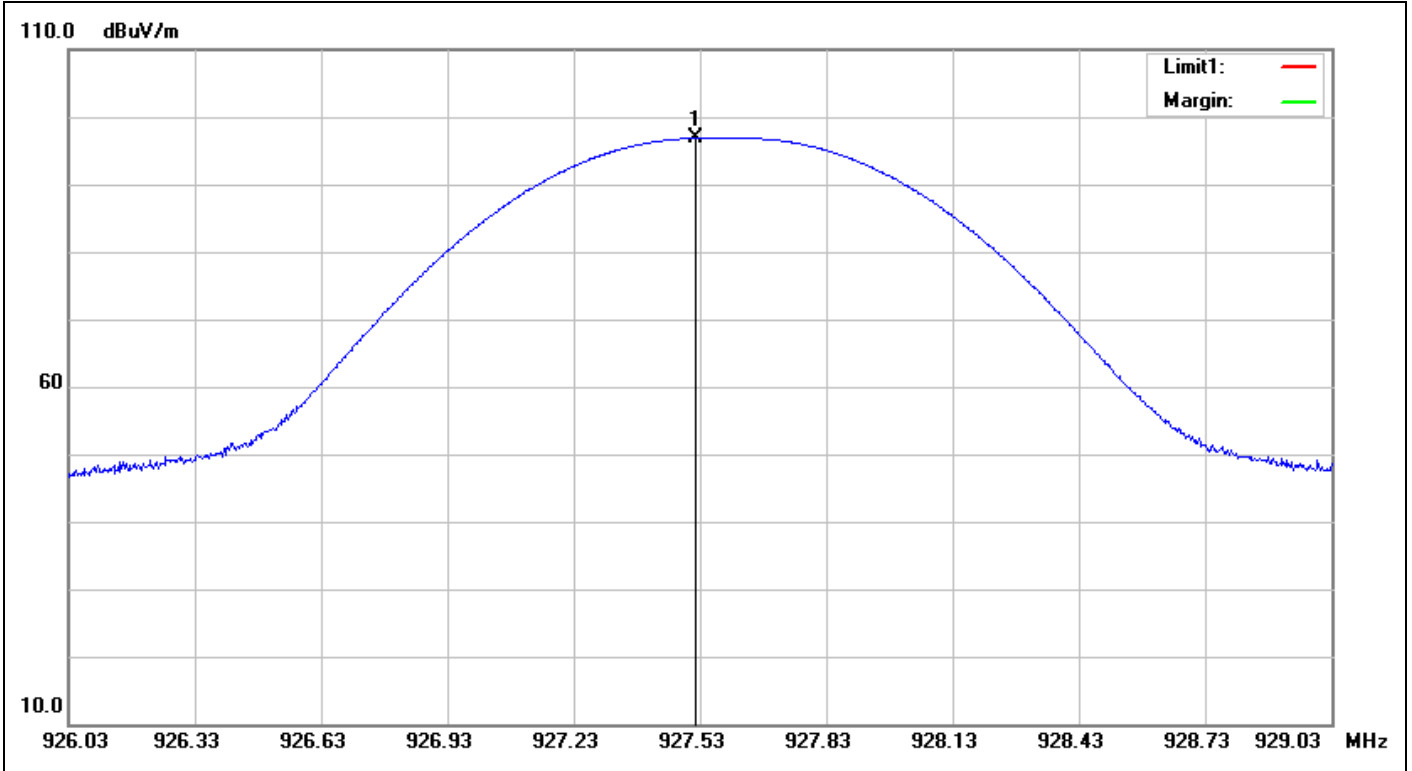

| | | | |
|-----------------------|----------------------------|---------------------------|--------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 17:26:52 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 927.6MHz | | |
| Remark: | X | | |
| | H:1.5m | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 927.5173 | -1.23 | 98.08 | 96.85 | | | peak | | | |

- 23.2 dBV/m


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

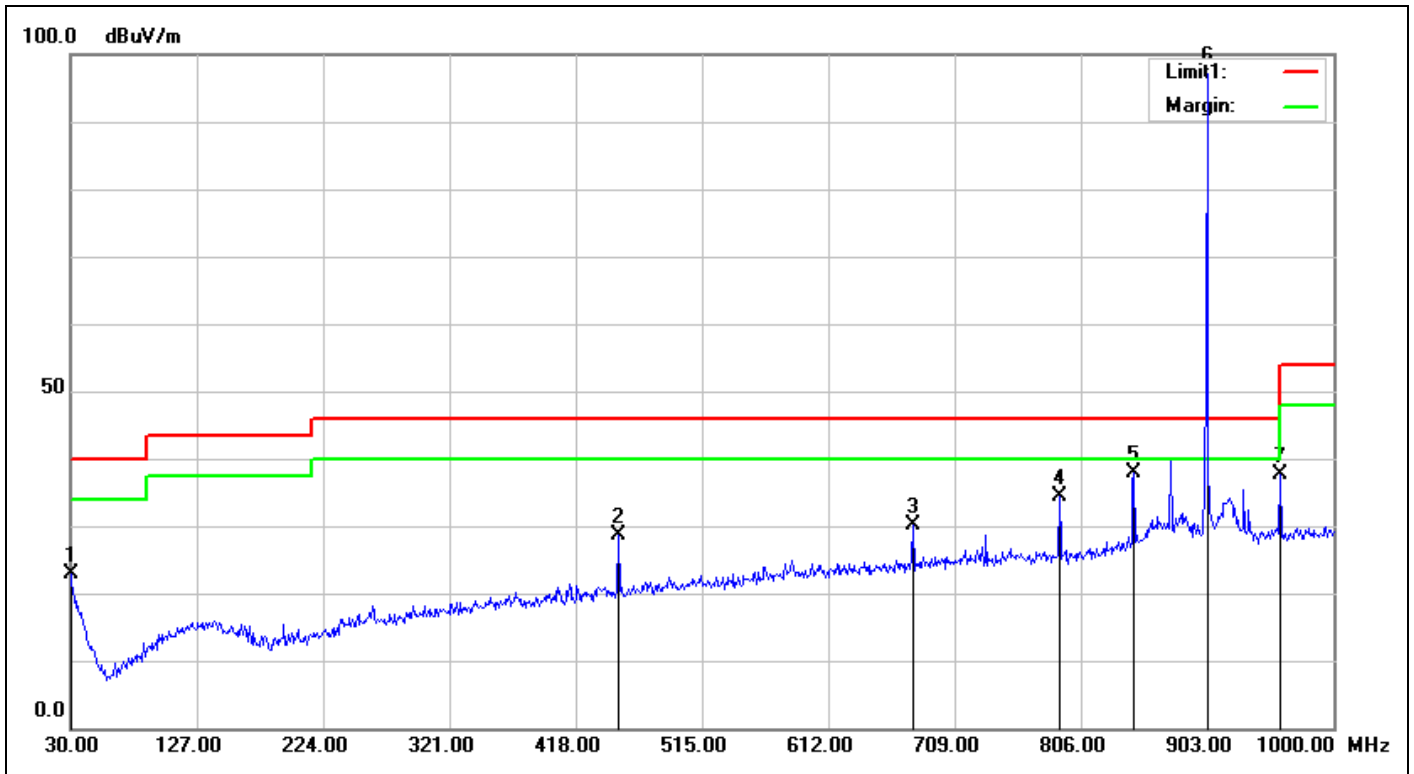


| | | | |
|-----------------------|-----------------------------------|---------------------------|---------------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | FCC Class B 3M Radiation | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 16:35:52 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 902.4MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 30.0000 | -5.83 | 28.69 | 22.86 | 40.00 | -17.14 | peak | 100 | 0 | |
| 2 | 450.9800 | -7.99 | 36.68 | 28.69 | 46.00 | -17.31 | peak | 100 | 357 | |
| 3 | 676.9900 | -5.22 | 35.41 | 30.19 | 46.00 | -15.81 | peak | 100 | 317 | |
| 4 | 789.5099 | -3.79 | 38.15 | 34.36 | 46.00 | -11.64 | peak | 100 | 144 | |
| 5 | 846.7400 | -2.53 | 40.37 | 37.84 | 46.00 | -8.16 | peak | 100 | 186 | |
| 6 | 903.0000 | -1.99 | 99.16 | 97.17 | 46.00 | 51.17 | peak | 100 | 341 | TX |
| 7 | 959.2599 | -0.43 | 38.01 | 37.58 | 46.00 | -8.42 | peak | 100 | 155 | |

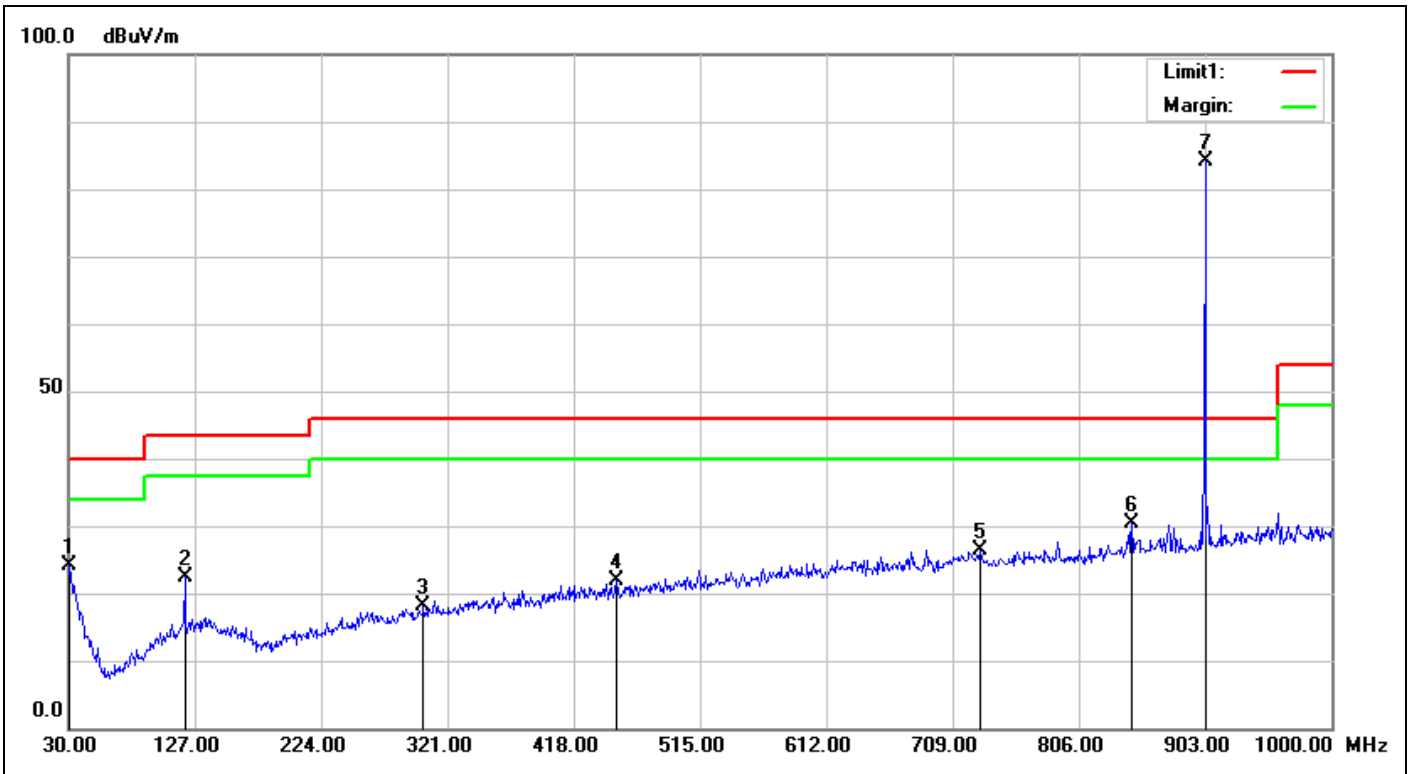


| | | | |
|-----------------------|-----------------------------------|---------------------------|---------------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | FCC Class B 3M Radiation | Ant. Polarization: | Vertical |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 16:36:56 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 902.4MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 30.0000 | -5.83 | 29.97 | 24.14 | 40.00 | -15.86 | peak | 100 | 20 | |
| 2 | 119.2400 | -13.02 | 35.32 | 22.30 | 43.50 | -21.20 | peak | 100 | 171 | |
| 3 | 302.5700 | -10.43 | 28.48 | 18.05 | 46.00 | -27.95 | peak | 100 | 22 | |
| 4 | 450.9800 | -7.99 | 29.99 | 22.00 | 46.00 | -24.00 | peak | 100 | 280 | |
| 5 | 730.3400 | -4.49 | 30.85 | 26.36 | 46.00 | -19.64 | peak | 100 | 352 | |
| 6 | 846.7400 | -2.53 | 32.79 | 30.26 | 46.00 | -15.74 | peak | 100 | 264 | |
| 7 | 903.0000 | -1.99 | 86.01 | 84.02 | 46.00 | 38.02 | peak | 100 | 269 | TX |

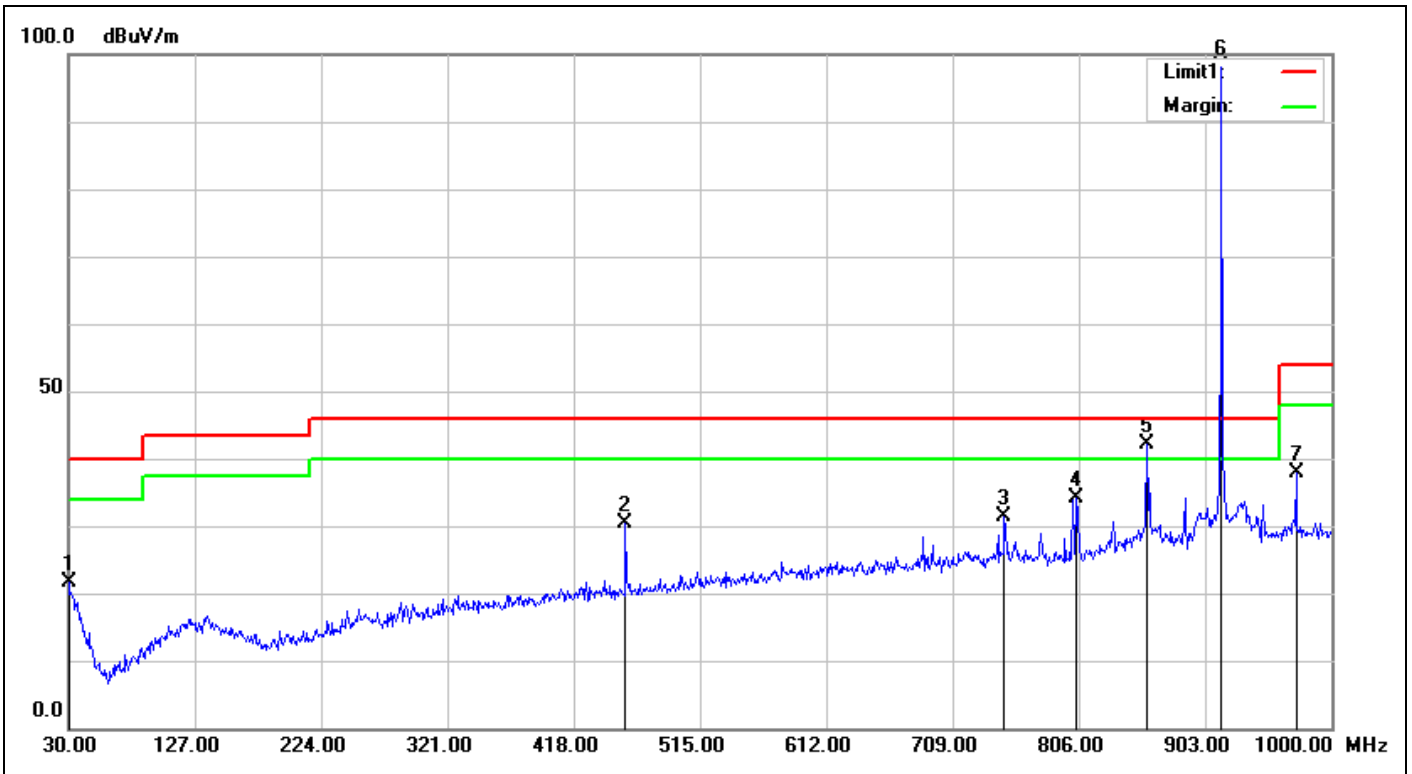


| | | | |
|-----------------------|-----------------------------------|---------------------------|---------------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | FCC Class B 3M Radiation | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 16:54:29 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 915.2MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 30.0000 | -5.83 | 27.53 | 21.70 | 40.00 | -18.30 | peak | 100 | 155 | |
| 2 | 457.7699 | -7.88 | 38.32 | 30.44 | 46.00 | -15.56 | peak | 100 | 344 | |
| 3 | 748.7698 | -4.12 | 35.45 | 31.33 | 46.00 | -14.67 | peak | 100 | 359 | |
| 4 | 804.0599 | -3.61 | 37.73 | 34.12 | 46.00 | -11.88 | peak | 100 | 150 | |
| 5 | 858.3799 | -2.40 | 44.57 | 42.17 | 46.00 | -3.83 | peak | 100 | 176 | |
| 6 | 915.6100 | -1.60 | 99.72 | 98.12 | 46.00 | 52.12 | peak | 100 | 160 | TX |
| 7 | 972.8400 | -0.29 | 38.29 | 38.00 | 54.00 | -16.00 | peak | 100 | 168 | |

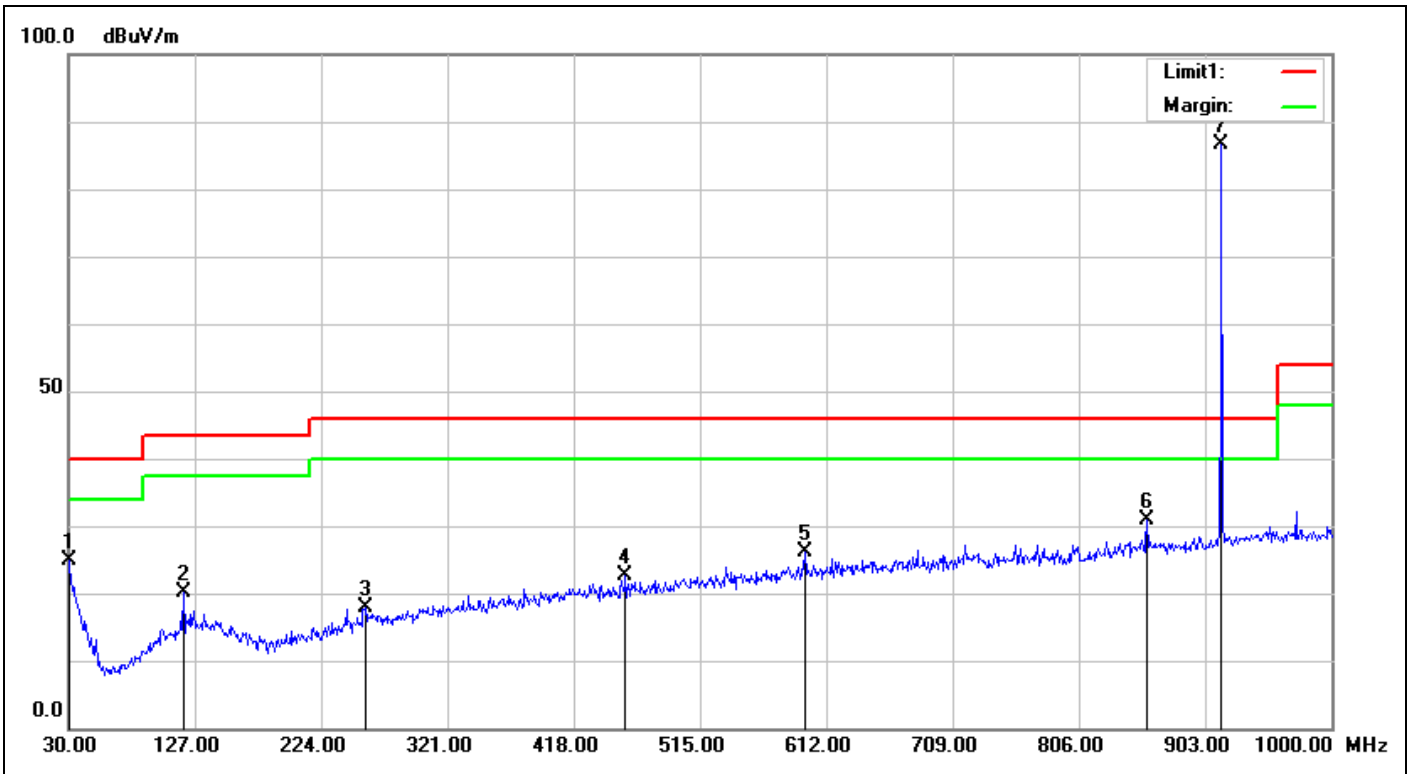


| | | | |
|-----------------------|-----------------------------------|---------------------------|---------------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | FCC Class B 3M Radiation | Ant. Polarization: | Vertical |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 16:55:32 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 915.2MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 30.0000 | -5.83 | 30.73 | 24.90 | 40.00 | -15.10 | peak | 100 | 301 | |
| 2 | 118.2700 | -13.08 | 33.15 | 20.07 | 43.50 | -23.43 | peak | 100 | 11 | |
| 3 | 257.9500 | -10.96 | 28.72 | 17.76 | 46.00 | -28.24 | peak | 100 | 312 | |
| 4 | 457.7700 | -7.88 | 30.50 | 22.62 | 46.00 | -23.38 | peak | 100 | 210 | |
| 5 | 595.5100 | -6.06 | 32.19 | 26.13 | 46.00 | -19.87 | peak | 100 | 357 | |
| 6 | 858.3800 | -2.40 | 33.38 | 30.98 | 46.00 | -15.02 | peak | 100 | 248 | |
| 7 | 915.6100 | -1.60 | 88.20 | 86.60 | 46.00 | 40.60 | peak | 100 | 266 | TX |

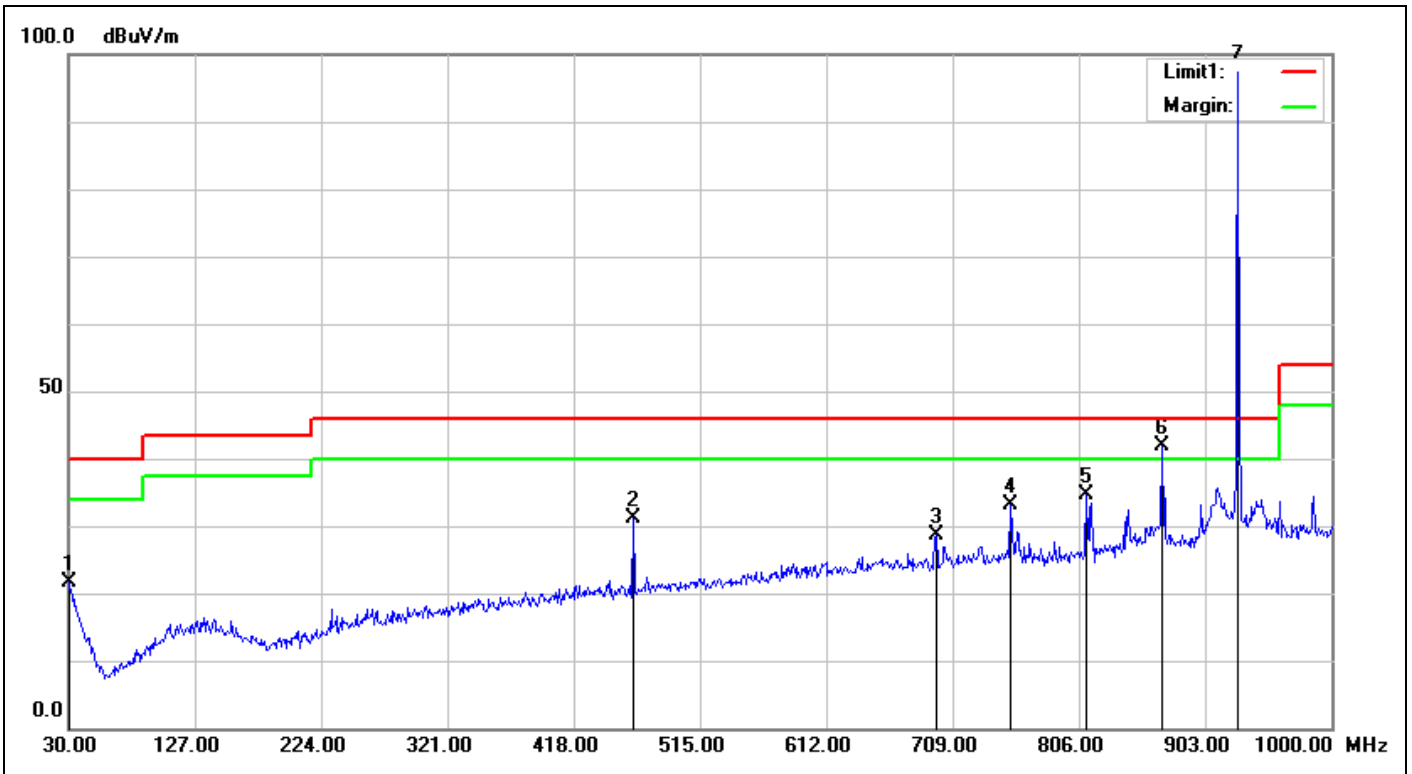

| | | | |
|-----------------------|-----------------------------------|---------------------------|---------------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | FCC Class B 3M Radiation | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 17:20:52 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 927.6MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 30.0000 | -5.83 | 27.53 | 21.70 | 40.00 | -18.30 | peak | 100 | 27 | |
| 2 | 463.5899 | -7.80 | 39.00 | 31.20 | 46.00 | -14.80 | peak | 100 | 158 | |
| 3 | 696.3899 | -5.11 | 33.64 | 28.53 | 46.00 | -17.47 | peak | 100 | 155 | |
| 4 | 753.6200 | -4.08 | 37.32 | 33.24 | 46.00 | -12.76 | peak | 100 | 163 | |
| 5 | 811.8200 | -3.42 | 38.12 | 34.70 | 46.00 | -11.30 | peak | 100 | 360 | |
| 6 | 870.0199 | -2.30 | 44.12 | 41.82 | 46.00 | -4.18 | peak | 100 | 358 | |
| 7 | 928.2200 | -1.22 | 98.48 | 97.26 | 46.00 | 51.26 | peak | 100 | 349 | TX |

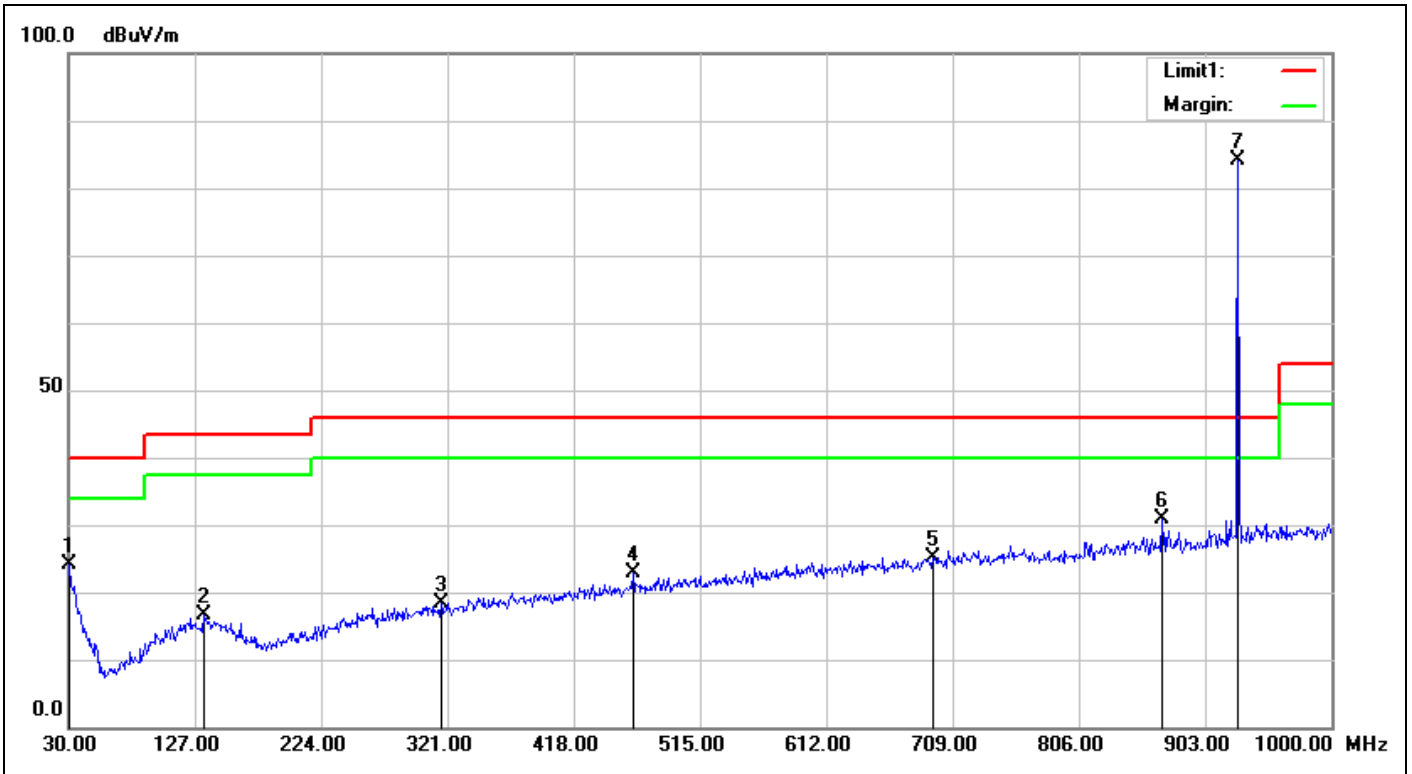

| | | | |
|-----------------------|----------------------------|---------------------------|--------------------|
| Service No.: | 114032973_CE | Test Distance: | 3m |
| Test Standard: | FCC Class B 3M Radiation | Ant. Polarization: | Vertical |
| Test item: | Radiation Emission | Test Time: | 2015/6/25 17:21:56 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.2(°C)/58% |
| Model No.: | SENSIT EPL US | Test Engineer: | Hugo Chang |
| Test Mode: | TX 927.6MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 30.0000 | -5.83 | 30.04 | 24.21 | 40.00 | -15.79 | peak | 100 | 272 | |
| 2 | 133.7899 | -12.63 | 29.17 | 16.54 | 43.50 | -26.96 | peak | 100 | 238 | |
| 3 | 316.1499 | -10.14 | 28.50 | 18.36 | 46.00 | -27.64 | peak | 100 | 174 | |
| 4 | 463.5899 | -7.80 | 30.58 | 22.78 | 46.00 | -23.22 | peak | 100 | 43 | |
| 5 | 693.4800 | -5.13 | 30.36 | 25.23 | 46.00 | -20.77 | peak | 100 | 211 | |
| 6 | 870.0199 | -2.30 | 33.23 | 30.93 | 46.00 | -15.07 | peak | 100 | 277 | |
| 7 | 928.2200 | -1.22 | 85.41 | 84.19 | 46.00 | 38.19 | peak | 100 | 277 | TX |


Spurious Emissions, TX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

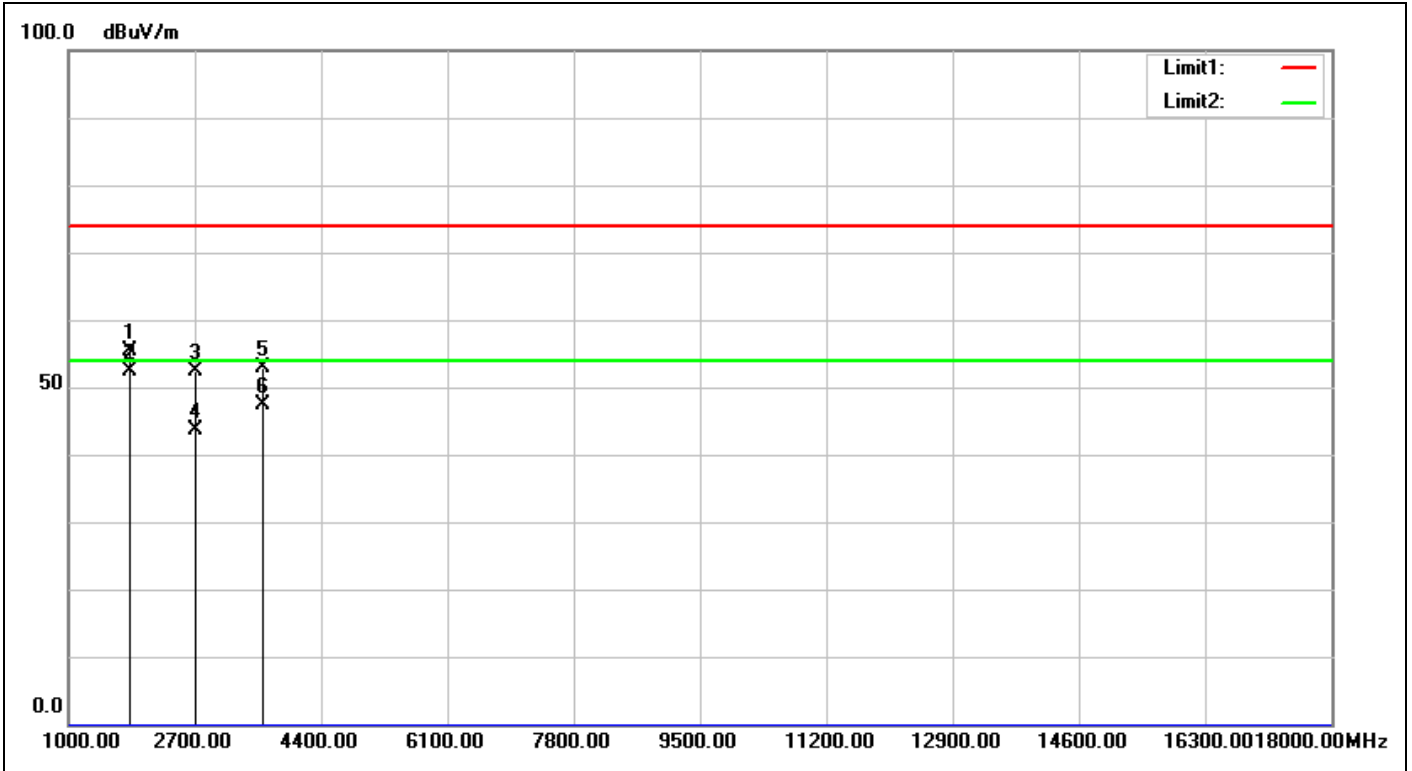


| | | | |
|-----------------------|----------------------------|---------------------------|-------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/4/7 14:40:39 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 20.9(°C)/46% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 902.4MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1804.800 | -9.85 | 65.12 | 55.27 | 74.00 | -18.73 | peak | 100 | 166 | |
| 2 | 1804.800 | -9.85 | 62.19 | 52.34 | 54.00 | -1.66 | AVG | 100 | 166 | |
| 3 | 2707.200 | -7.64 | 60.06 | 52.42 | 74.00 | -21.58 | peak | | 0 | |
| 4 | 2707.200 | -7.64 | 51.19 | 43.55 | 54.00 | -10.45 | AVG | | 0 | |
| 5 | 3609.600 | -6.35 | 59.16 | 52.81 | 74.00 | -21.19 | peak | | 0 | |
| 6 | 3609.600 | -6.35 | 53.61 | 47.26 | 54.00 | -6.74 | AVG | | 0 | |

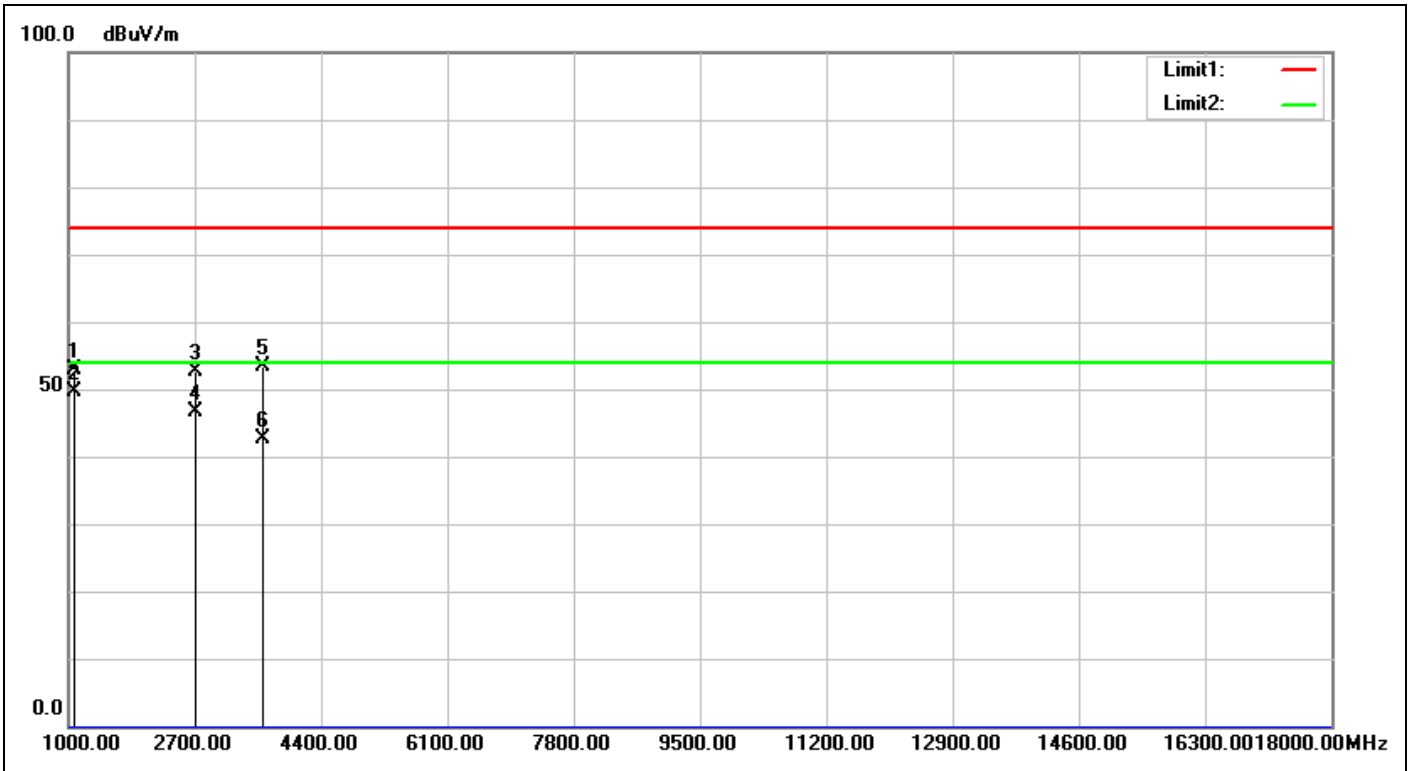

| | | | |
|-----------------------|-----------------------------------|---------------------------|--------------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Vertical |
| Test item: | Radiation Emission | Test Time: | 2015/4/7 14:41:41 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 20.9(°C)/46% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 902.4MHz | | |
| Remark: | X | | |


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1084.800 | -10.55 | 63.31 | 52.76 | 74.00 | -21.24 | peak | 100 | 34 | |
| 2 | 1084.800 | -10.55 | 60.09 | 49.54 | 54.00 | -4.46 | AVG | 100 | 34 | |
| 3 | 2707.200 | -7.64 | 60.15 | 52.51 | 74.00 | -21.49 | peak | | 0 | |
| 4 | 2707.200 | -7.64 | 54.38 | 46.74 | 54.00 | -7.26 | AVG | | 0 | |
| 5 | 3609.600 | -6.35 | 59.73 | 53.38 | 74.00 | -20.62 | peak | | 0 | |
| 6 | 3609.600 | -6.35 | 48.90 | 42.55 | 54.00 | -11.45 | AVG | | 0 | |

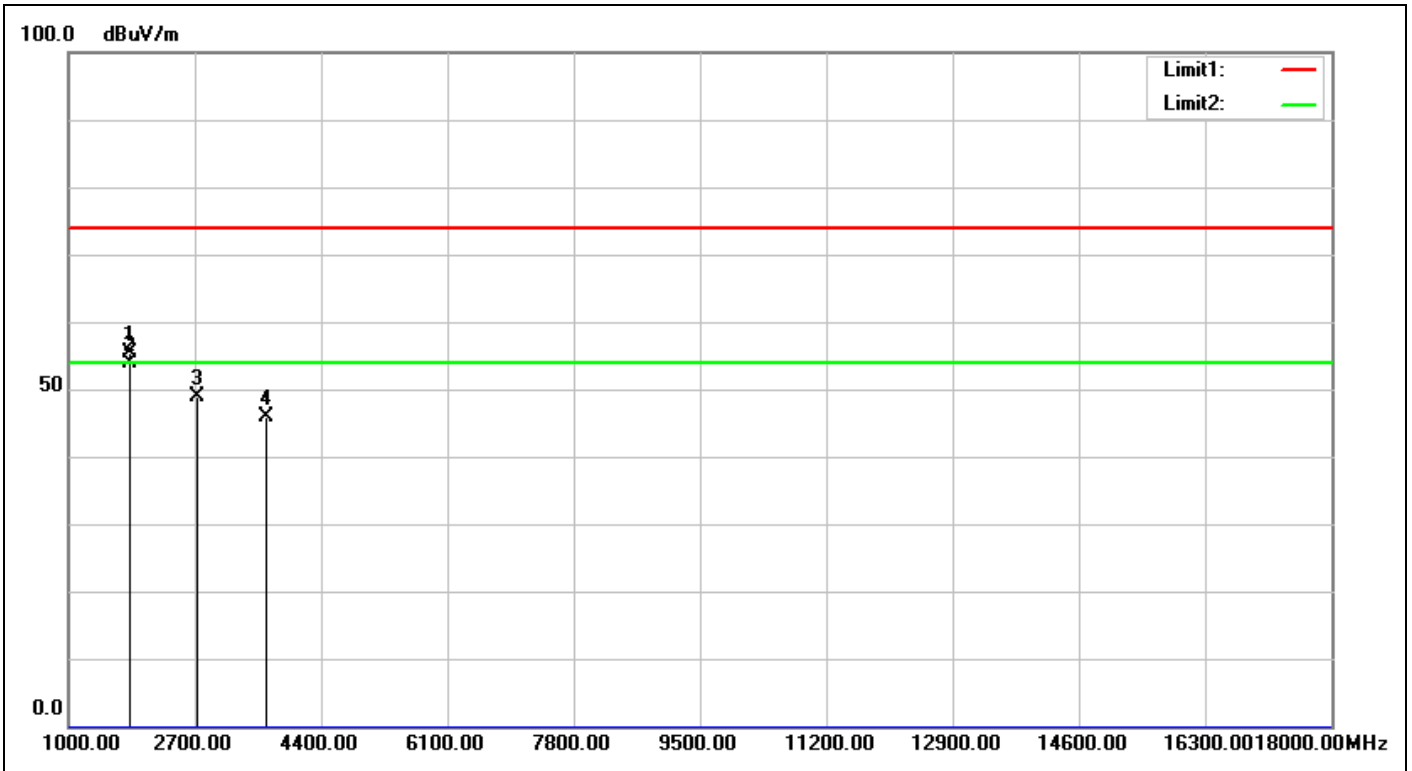

| | | | |
|-----------------------|----------------------------|---------------------------|-------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/4/8 09:27:01 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 20.9(°C)/46% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 915.2MHz | | |
| Remark: | X | | |


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1830.400 | -9.78 | 65.06 | 55.28 | 81.39 | -26.11 | peak | 100 | 341 | * |
| 2 | 1830.400 | -9.78 | 63.66 | 53.88 | 66.6 | -12.72 | AVG | 100 | 341 | * |
| 3 | 2745.600 | -7.59 | 56.51 | 48.92 | 74.00 | -25.08 | peak | 100 | 174 | |
| 4 | 3660.800 | -6.28 | 52.22 | 45.94 | 74.00 | -28.06 | peak | | 0 | |

*limit - 20dB below the peak of fundamental.

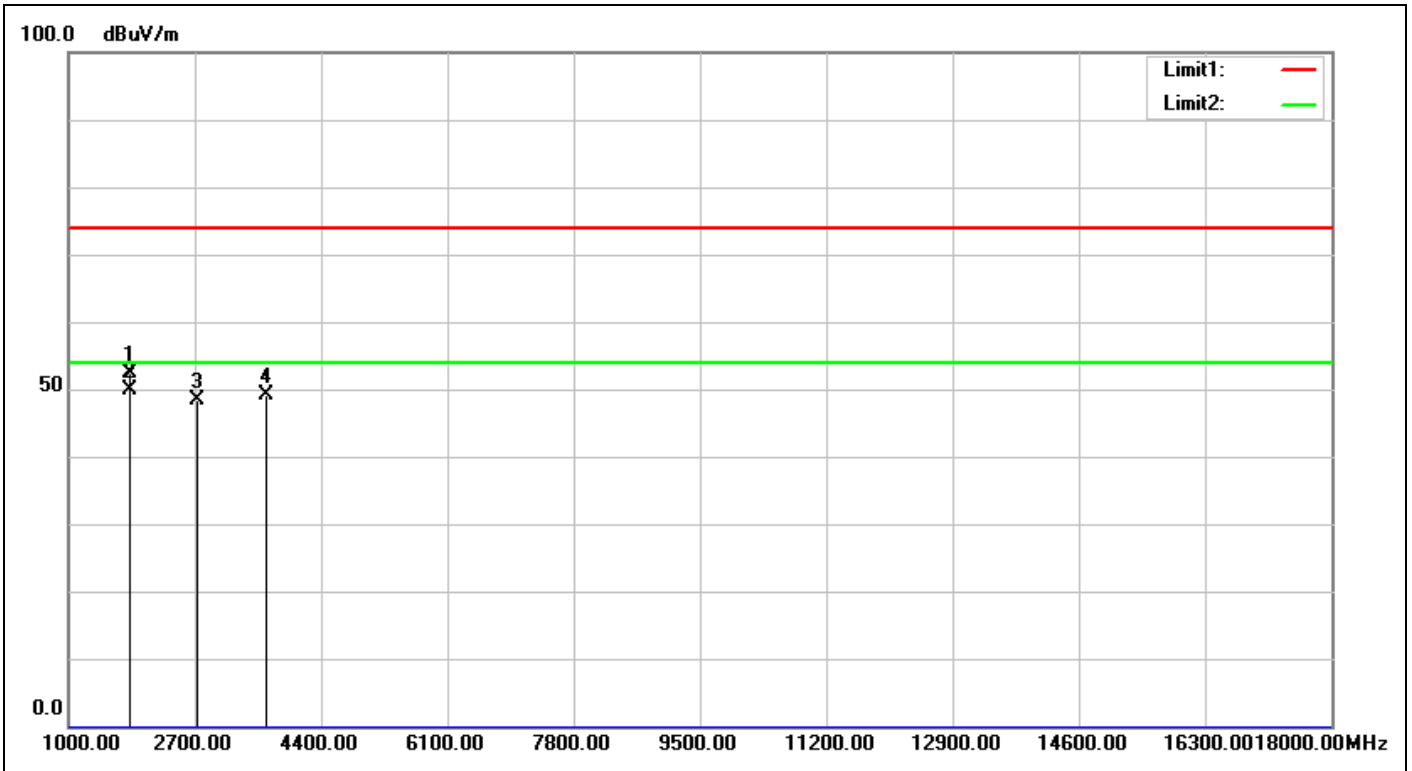

| | | | |
|-----------------------|----------------------------|---------------------------|-------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Vertical |
| Test item: | Radiation Emission | Test Time: | 2015/4/8 09:28:04 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 20.9(°C)/46% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 915.2MHz | | |
| Remark: | X | | |


| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1830.400 | -9.78 | 62.10 | 52.32 | 74.00 | -21.68 | peak | 100 | 184 | |
| 2 | 1830.400 | -9.78 | 59.65 | 49.87 | 54.00 | -4.13 | AVG | 100 | 184 | |
| 3 | 2745.600 | -7.59 | 55.89 | 48.30 | 74.00 | -25.70 | peak | 100 | 112 | |
| 4 | 3660.800 | -6.30 | 55.37 | 49.07 | 74.00 | -24.93 | peak | 100 | 198 | |

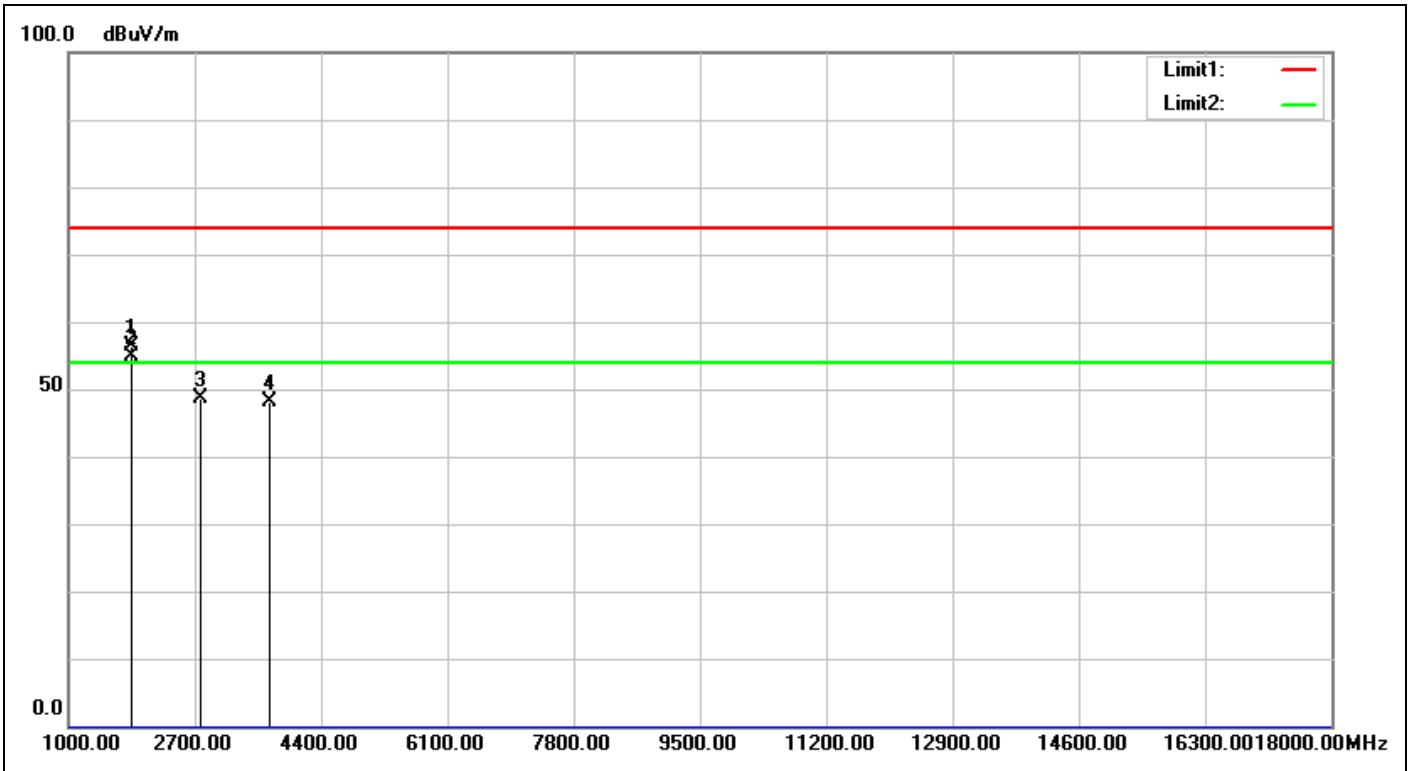

| | | | |
|-----------------------|----------------------------|---------------------------|-------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/4/8 10:51:56 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 20.9(°C)/46% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 927.6MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1855.200 | -9.56 | 65.86 | 56.30 | 79.7 | -23.4 | peak | 100 | 95 | * |
| 2 | 1855.200 | -9.56 | 64.44 | 54.88 | 65 | -10.12 | AVG | 100 | 95 | * |
| 3 | 2782.800 | -7.51 | 56.20 | 48.69 | 74.00 | -25.31 | peak | 100 | 239 | |
| 4 | 3710.400 | -6.21 | 54.41 | 48.20 | 74.00 | -25.80 | peak | 100 | 158 | |

*limit - 20dB below the peak of fundamental.

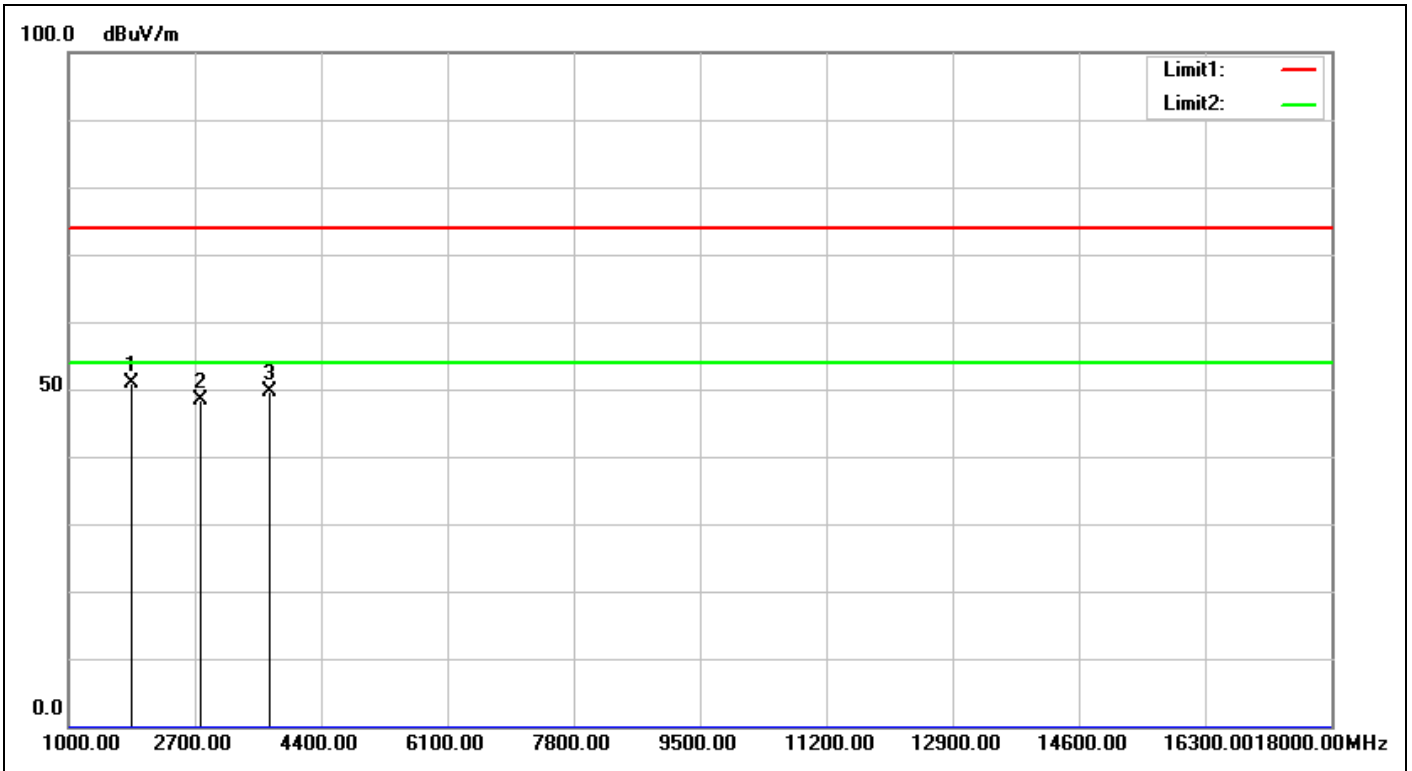

| | | | |
|-----------------------|----------------------------|---------------------------|-------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Vertical |
| Test item: | Radiation Emission | Test Time: | 2015/4/8 10:52:59 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 20.9(°C)/46% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 927.6MHz | | |
| Remark: | X | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1855.200 | -9.56 | 60.35 | 50.79 | 74.00 | -23.21 | peak | 100 | 2 | |
| 2 | 2782.800 | -7.51 | 55.91 | 48.40 | 74.00 | -25.60 | peak | 100 | 304 | |
| 3 | 3710.400 | -6.21 | 55.94 | 49.73 | 74.00 | -24.27 | peak | 100 | 13 | |


Spurious Emissions, TX Mode, For IC, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

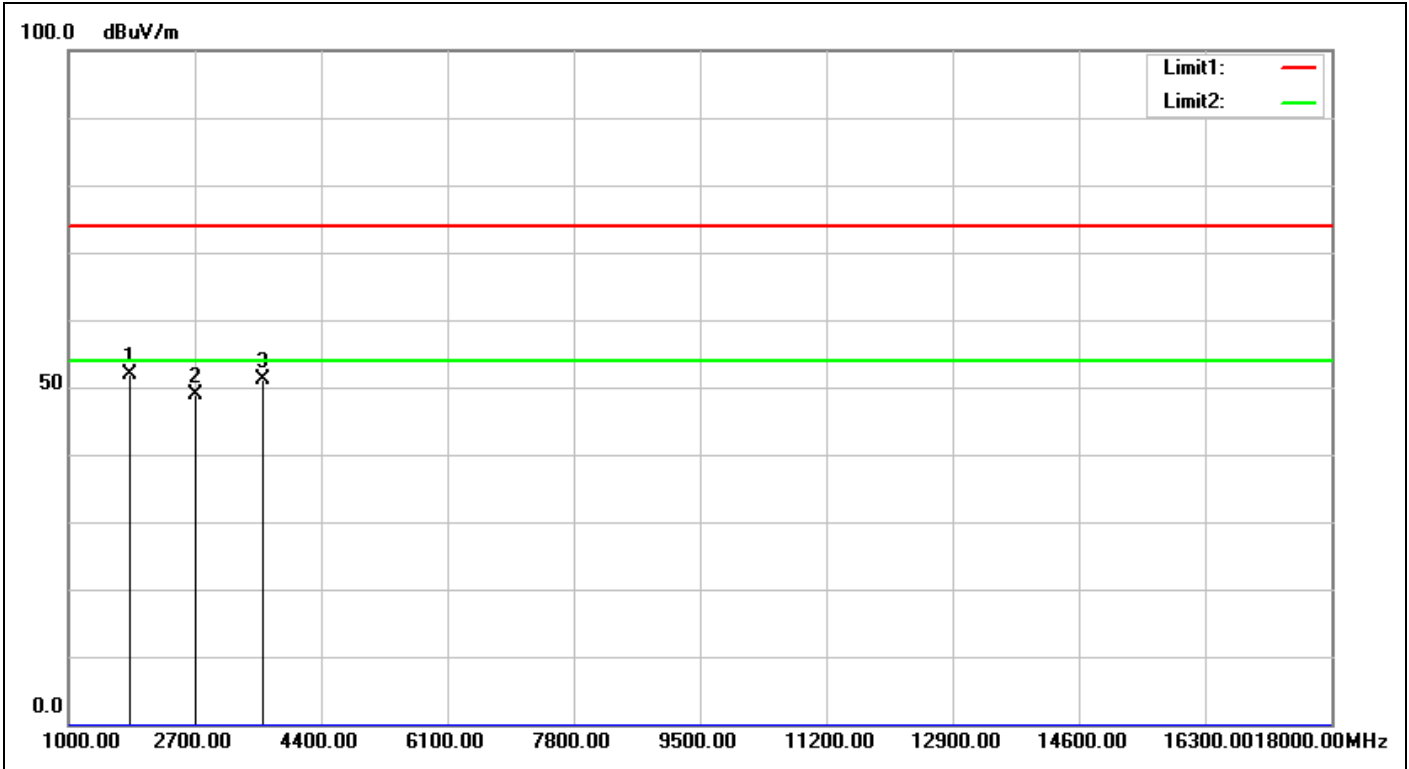

| | | | |
|-----------------------|----------------------------|---------------------------|--------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Horizontal |
| Test item: | Radiation Emission | Test Time: | 2015/4/28 10:08:15 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.3(°C)/55% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 902.4MHz | | |
| Remark: | IC turntable height 1.5m | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1804.800 | -9.31 | 61.17 | 51.86 | 74.00 | -22.14 | peak | 100 | 97 | |
| 2 | 2707.200 | -7.14 | 56.10 | 48.96 | 74.00 | -25.04 | peak | 100 | 194 | |
| 3 | 3609.600 | -6.03 | 57.04 | 51.01 | 74.00 | -22.99 | peak | 100 | 207 | |

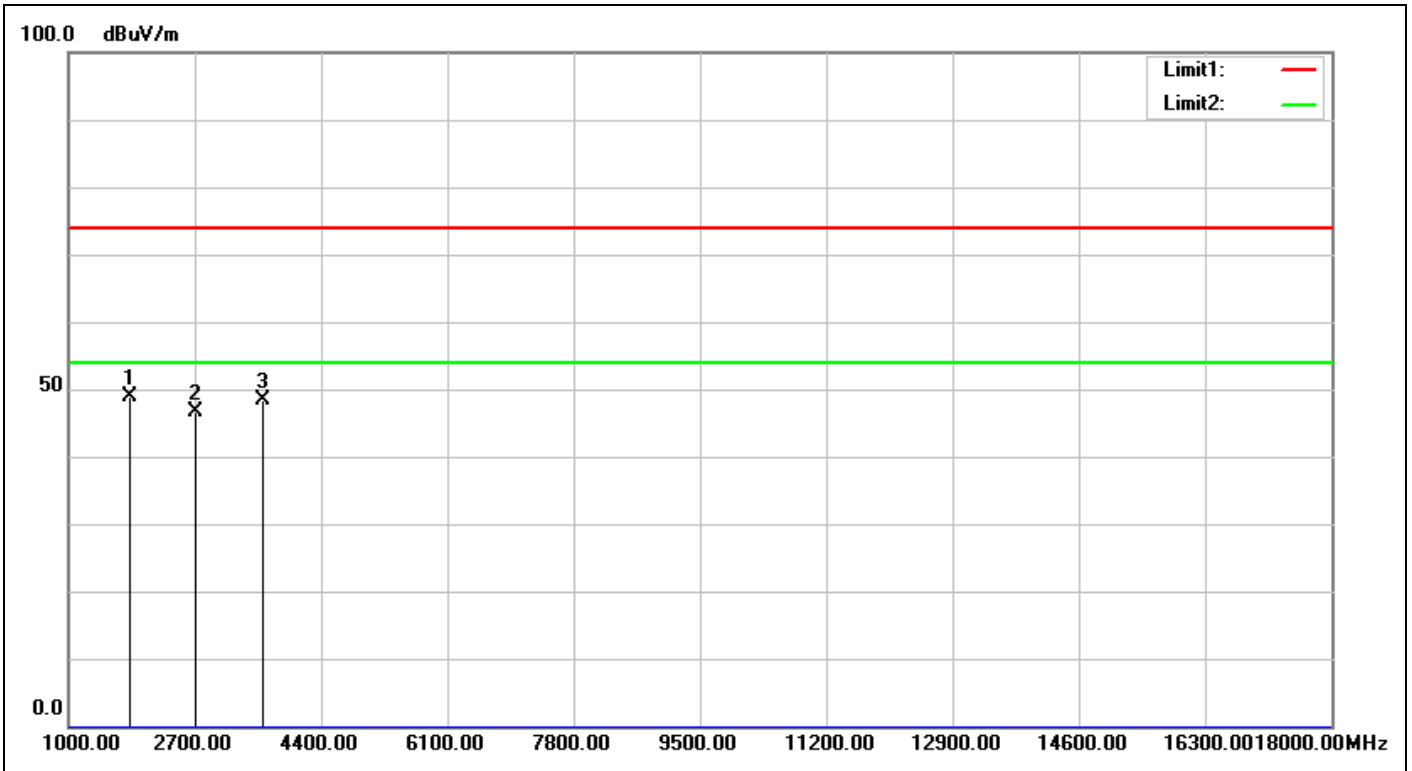

| | | | |
|-----------------------|-----------------------------------|---------------------------|---------------------------|
| Service No.: | 114032973_FCC | Test Distance: | 3m |
| Test Standard: | FCC Above 1G PEAK | Ant. Polarization: | Vertical |
| Test item: | Radiation Emission | Test Time: | 2015/4/28 10:09:17 |
| Applicant: | Nedap | Test Rating: | |
| Product: | Electronic Parking License | Temp.(°C)/Hum.(%): | 22.3(°C)/55% |
| Model No.: | SENSIT EPL US | Test Engineer: | Freeman Wang |
| Test Mode: | TX 902.4MHz | | |
| Remark: | IC turntable height 1.5m | | |

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Det. | Height (cm) | Azimuth (°) | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|------|-------------|-------------|--------|
| 1 | 1804.800 | -9.31 | 58.19 | 48.88 | 74.00 | -25.12 | peak | 100 | 328 | |
| 2 | 2707.200 | -7.14 | 53.82 | 46.68 | 74.00 | -27.32 | peak | 100 | 39 | |
| 3 | 3609.600 | -6.03 | 54.49 | 48.46 | 74.00 | -25.54 | peak | 100 | 355 | |