



Test Report No.:		13031902.fcc01		Page 1 of 42	
<i>Client:</i>	N.V. Nederlandsche Apparatenfabriek "Nedap" Parallelweg 2, 7141 DC Groenlo Netherlands				
<i>Test Item:</i>	Spread Spectrum Transmitter (DSS) UHF RFID Reader				
<i>Identification:</i>	ID Gate Region 2	<i>Serial No.:</i>	D408 010		
<i>Project No.:</i>	13031902	<i>Date of Receipt:</i>	2013-04-25		
<i>Testing Location:</i>	TÜV Rheinland EPS B.V. Eiberkamp 10 9351VT Leek				
<i>Test Specification:</i>	FCC 47 CFR Part 15, Subpart C, Section 15.247 (10-1-12 Edition) RSS-Gen (issue 3, December 2010) an RSS-210 (Issue 8, December 2010) ANSI C63.10: 2009				
<i>Test Result:</i>	The test item passed the test specification(s).				
<i>Testing Laboratory:</i>	TÜV Rheinland EPS B.V. Eiberkamp 10 9351 VT Leek				
<i>Tested by:</i>			<i>Reviewed by:</i>		
2013-06-11	R. van der Meer / Inspector		2013-06-11	O. Hoekstra / Reviewer	
<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>	<i>Date</i>	<i>Name/Position</i>	<i>Signature</i>
<i>Other Aspects:</i> N/A					
<i>Abbreviations:</i> P(ass) = passed F(ail) = failed N/A = not applicable NT = not tested					
<p>This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland EPS B.V. The test results relate only to the item(s) tested.</p>					

Test Report No.:

13031902.fcc01

Page 2 of 42

TEST SUMMARY

5.1.1 CONDUCTED OUTPUT POWER

RESULT: PASS

5.1.2 20dB BANDWIDTH

RESULT: PASS

5.1.3 CONDUCTED SPURIOUS EMISSION

RESULT: PASS

5.1.4 BAND EDGE CONDUCTED EMISSIONS

RESULT: Pass

5.1.5 RADIATED SPURIOUS EMISSIONS OF THE TRANSMITTER IN RESTRICTED BANDS

RESULT: Pass

5.1.6 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER

RESULT: PASS

5.2 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER

RESULT: PASS

6 Number of hopping channels, Carrier frequency separation, Average time of occupancy

RESULT: PASS

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....	5
2.3	MEASUREMENT UNCERTAINTY	6
3.	GENERAL PRODUCT INFORMATION.....	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	SYSTEM DETAILS	7
3.3	CLOCK FREQUENCIES	8
3.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	TEST METHODOLOGY	9
4.2	OPERATION MODES	9
4.3	PHYSICAL CONFIGURATION FOR TESTING	9
4.4	TEST SOFTWARE	10
4.5	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
5.	TEST RESULTS	12
5.1	CONDUCTED AND RADIATED MEASUREMENTS.....	12
5.1.1	<i>Conducted Output Power.....</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth.....</i>	<i>16</i>
5.1.3	<i>Conducted Spurious Emission.....</i>	<i>21</i>
5.1.4	<i>Band Edge Conducted Emissions</i>	<i>25</i>
5.1.5	<i>Radiated Spurious Emissions of Transmitter in the restricted bands</i>	<i>28</i>
5.1.6	<i>Radiated field strength measurements (30 MHz – 1 GHz, E-field),.....</i>	<i>30</i>
5.2	AC POWER LINE CONDUCTED MEASUREMENTS.....	31
5.2.1	<i>AC Power Line Conducted Emission of Transmitter.....</i>	<i>31</i>
6.	NUMBER OF HOPPING CHANNELS, CARRIER FREQUENCY SEPARATION, AVERAGE TIME OF OCCUPANCY	35

Test Report No.:

13031902.fcc01

Page 4 of 42

1. General Remarks

1.1 Complementary Materials

There is no attachment to this test report.

2. Test Sites

2.1 Test Facilities

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland EPS B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

Temperature (*)	: +15°C to +35°C
Relative humidity(*)	: 20 % to 75 %
Supply voltage	: 120VAC/60Hz
Air pressure	: 950 – 1050 hPa

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
For Antenna Port Conducted Emission					
Spectrum Analyzer	Rohde & Schwarz	FSP	99538	12/2012	12/2013
Temperature-Humiditymeter	Extech	SD500	99857	02/2013	02/2014
RF Cable	S+H	Sucotest 18 /Sucoflex 102	99742	04/2013	04/2014
20dB attenuator	S+H	6620	-	04/2013	04/2014
For Radiated Emission					
Measurement Receiver	Rohde & Schwarz	ESCI	99699	03-29/2012	03-29/2013
RF Cable S-AR	Gigalink	APG0500	99858	02/2013	02/2014
Controller	Heinrich Deisel	4630-100	99107	N/A	N/A
Test facility	Comtest	FCC listed: 90828	99580	02/2012	02/2015
Spectrum Analyzer	Rohde & Schwarz	FSP	99538	12/2012	12/2013
Spectrum Analyzer	Rohde & Schwarz	FSV	99733	05-24/2012	05-24/2013
Controller	EMCS	DOC202	99608	N/A	N/A
Antenna mast	EMCS	AP-4702C	99609	N/A	N/A
Temperature-Humiditymeter	Extech	SD500	99855	02/2013	02/2014
Guidehorn 1-18 GHz	EMCO	3115	12484	04/2012	04/2013
Biconilog Testantenna	Chase	CBL 6111B	15633	01/2013	01/2014
Bandpass filter 4-10 GHz	Reactel	7AS-7G-6G-511	99076	N/A	N/A
Preamplifier 0.5 - 18 GHz	Miteq	AMF-5D-005180-28-13p	99596	N/A	N/A
For AC Line Conducted Emission					
Measurement Receiver	Rohde & Schwarz	ESCS30	15667	10-2012	10-2013
LISN	EMCO	3625/2	12512	01/2012	01/2014
Pulse limiter	R&S	ESH3-Z2	13313	01/2013	01/2014
Shielded room for Conducted emissions	Euroshield	RFD-100 359	99848	--	--
Variac 250V 6A	RFT	LTS006	99161	--	--

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

Test Report No.:

13031902.fcc01

Page 6 of 42

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.5dB
	> 1GHz	±0.7dB
AC Line Conducted emissions	150kHz - 30MHz	±3.5dB
Radiated Emission	150kHz - 30MHz	±5.0dB
	30MHz - 1GHz	±5.0dB
	> 1GHz	±5.5dB

3. General Product Information

3.1 Product Function and Intended Use

The brand Nedap model !D Gate Region 2, hereafter referred to as EUT, is a Spread Spectrum Transmitter (DSS) intended to be used in a building access system.
The EUT is a UHF RFID reader and is factory configured for the 902.75 – 927.25 MHz band.

The content of this report and measurement results have not been changed other than the way of presenting the data.

3.2 System Details

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT	:	Spread Spectrum Transmitter (DSS)
Manufacturer	:	N.V. Nederlandsche Apparatenfabriek "Nedap"
Brand	:	Nedap
Model	:	!D Gate Region 2
Serial number	:	D408 010 (unit 1)
Voltage input rating	:	12 Vdc
Voltage output rating	:	--
Current input rating	:	--
Antenna	:	External antenna
Operating frequency	:	902.75 – 927.25 MHz
Modulation	:	GFSK
Spreading technique	:	FHSS
Remarks	:	n.a.

Test Report No.:

13031902.fcc01

Page 8 of 42

Table 3: Interfaces present on the EUT

There is an Ethernet and an USB interface present on the EUT.
The USB interface is for servicing purposes only.

No.	Port	From	To	Remarks
1.	Mains	Mains	Laptop (AUX1)	Through a AC/DC power supply
2.	Mains	Mains	AUX2	--
3.	DC power	AUX2	EUT	--
4.	Data com.	Laptop USB or Ethernet	EUT	--
5.	Communication	!D-GATE (Unit 1)	!D-GATE (Unit 2)	--
6.	Mains	Mains	AUX3	--
7.	Ethernet	Ethernetpoint	AUX3	--
8.	Ethernet	AUX3	AUX2	--

3.3 Clock Frequencies

The highest clock frequency generated by the EUT is 24.000 MHz.

3.4 Countermeasures to achieve EMC Compliance

No additional measures were employed to achieve compliance.

4. Test Set-up and Operation Modes

4.1 Test Methodology

The test methodology used is based on the requirements of 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247 and RSS-Gen and RSS-210.

The test methods, which have been used, are based on ANSI C63.10: 2009.

During pretests no significant differences were observed in testresults while varying supply voltage from 85% to 115%.

For details, see under each test item.

4.2 Operation Modes


Testing was performed at the lowest operating frequency (902.75), at the operating frequency in the middle of the specified frequency band (914.75 MHz) and at the highest operating frequency (927.25 MHz).

4.3 Physical Configuration for Testing

The EUT was tested on a stand-alone basis and the test system was configured in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10:2009.

Figure 1: Test Setup Diagram

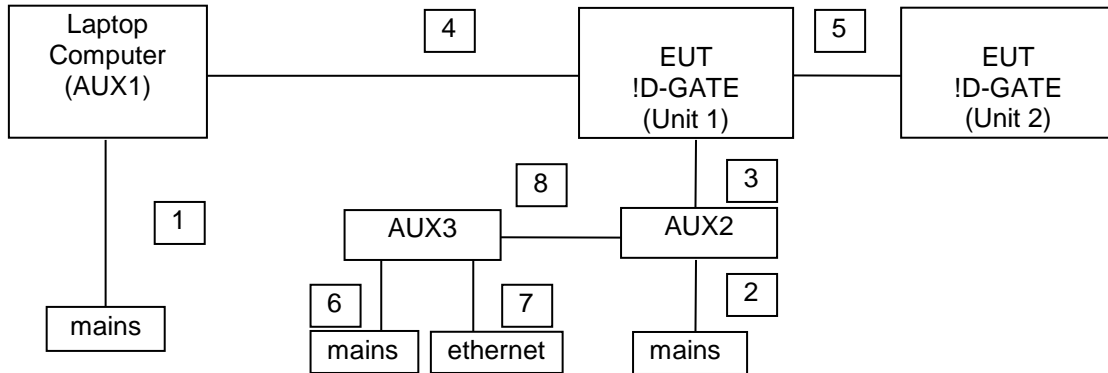

Notes:

For more details, refer to the document: Test Set-Up Photographs document.

4.4 Test Software

The EUT was provided by the manufacturer with suitable software to allow operation in all the required modes.

Software used for testing: !D Reader Test Application.

This software was running on a laptop computer (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate.

Test Report No.:

13031902.fcc01

Page 11 of 42

4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. AUX1
Product: Laptop Computer
Brand: HP
Model: Compaq 610
Serial Number: CNU94710W B
Remark: property TR-EPS, host for testsoftware

2. AUX2
Product: NCC-MK2
Brand: Nedap
Model: NCC-MK2
Output Voltage: 12Vdc
Serial Number: CN16010
Remarks: connects to EUT

3. AUX 3
Product: Power Inserter
Manufacturer: Power-Win Technology Corp.
Brand: Power-Win Technology Corp.
Model: PW-085C-1Y560IPOE
Nedap Art. Nr.: 9651772
Serial number: PW73658385
Voltage input rating: 100-240Vac 50-60 Hz
Voltage output rating: 56Vdc
Remark: --

5. Test Results

5.1 Conducted and Radiated Measurements

5.1.1 Conducted Output Power

RESULT: PASS

Date of testing: 2013-05-14

Requirements:

FCC 15.247(b)(2) and RSS-210 Section A8.4 (1)

For systems using frequency hopping in the 902-928 MHz band, the maximum peak output power is 1W (+30dBm) for systems employing at least 50 hopping channels.

Test procedure:

ANSI C63.10: 2009.

The Peak Conducted Output Power was measured using the method stated in section 6.10.1 in ANSI C63.10: 2009.

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

Table 4: Conducted Output Power

Frequency [MHz]	Configured Average Output Power [dBm]	Output Peak Power [dBm]	Output Peak Power [mW]	Limit [dBm]	Limit [mW]	Result
902.75	28.0	28.50	707.9	+30	1000	Pass
914.75	28.0	28.47	703.1	+30	1000	Pass
927.25	28.0	28.33	680.8	+30	1000	Pass

Notes: $mW = 10^{(dBm/10)}$
 $dBm = 10 \times \log(mW)$

plots : Peak power plots,

See next pages for the plots of the Peak Power outputs, correction factors included in the reading. Offset in the plots shown is 20.5 dB, this is the total loss of attenuators and cable used.




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 28.50 dBm
SWT 2.5 ms 902.752000000 MHz

Ref 40 dBm

*Att 50 dB

1 PK
VIEW

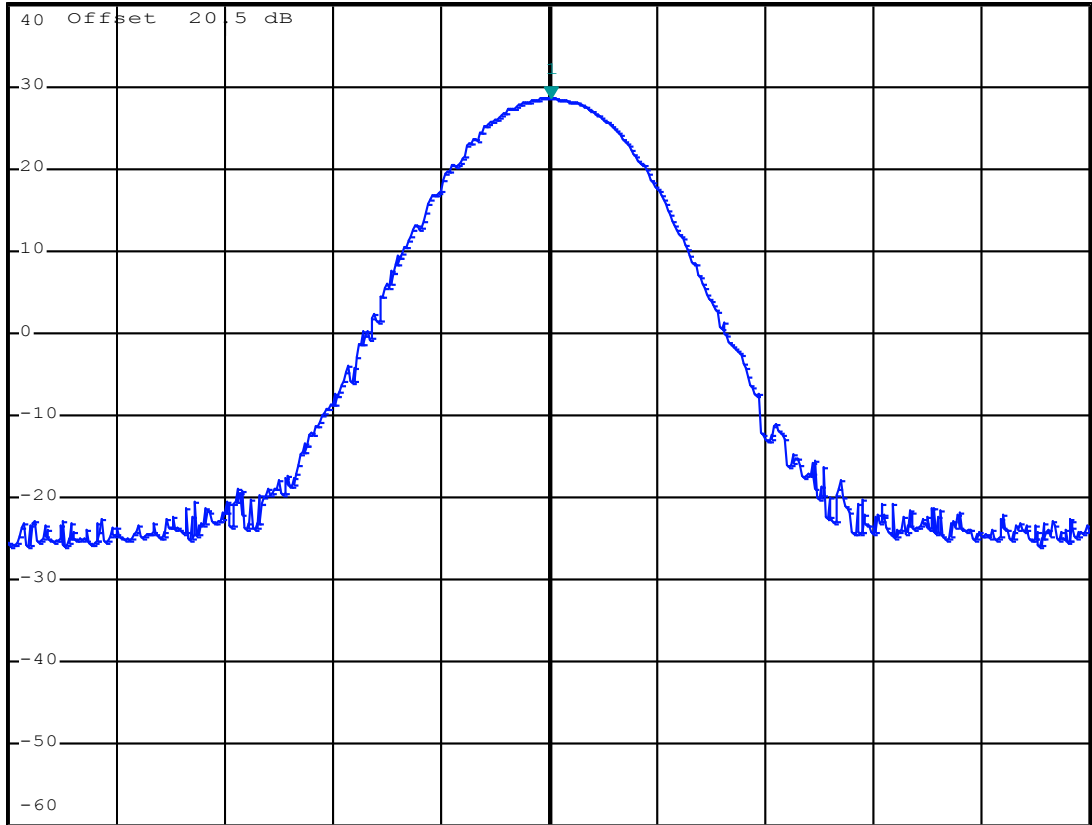

Center 902.75 MHz

100 kHz/

Span 1 MHz

Date: 14.MAY.2013 16:12:28

Figure 2a: Plot: Output Power (902.7 MHz)

Test Report No.:


13031902.fcc01

Page 14 of 42



Ref 40 dBm *Att 50 dB *RBW 100 kHz Marker 1 [T1] *VBW 300 kHz 28.47 dBm
SWT 2.5 ms 914.754000000 MHz

1 PK
VIEW

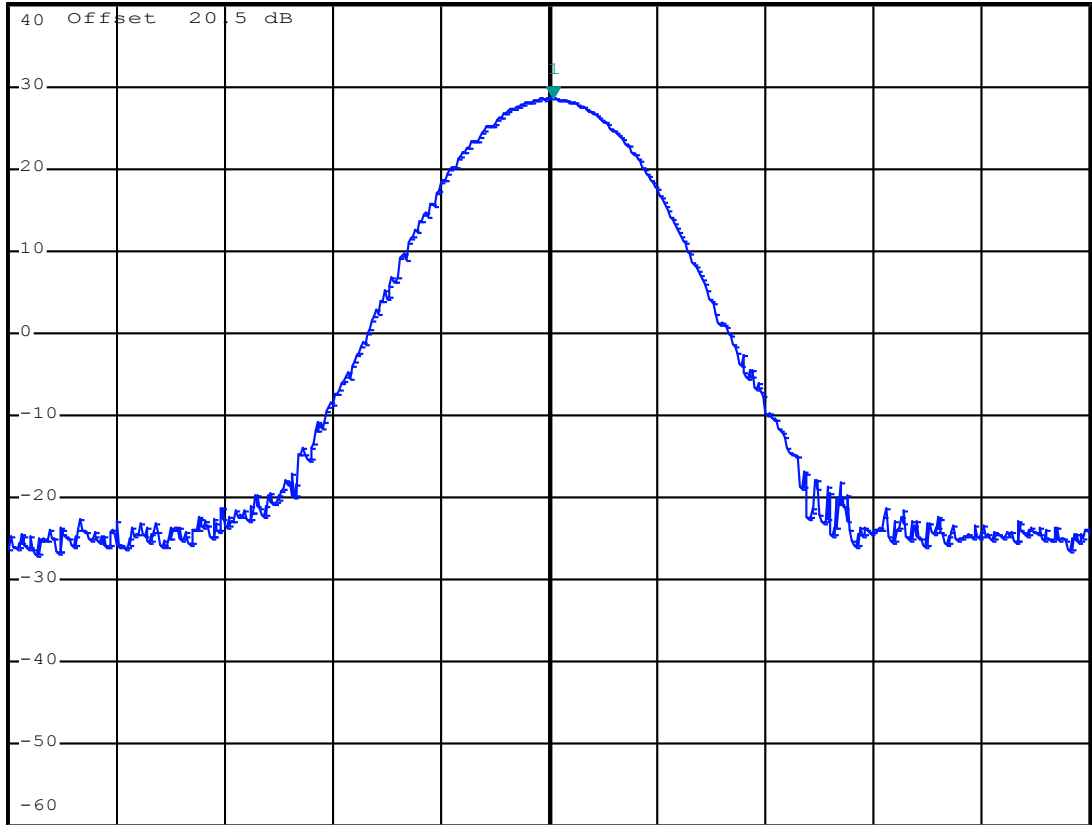

Center 914.75 MHz 100 kHz/ Span 1 MHz

Date: 14.MAY.2013 16:14:10

Figure 2b: Plot: Output Power (914.75 MHz)

Test Report No.:


13031902.fcc01

Page 15 of 42



Ref 40 dBm *Att 50 dB SWT 2.5 ms 927.25000000 MHz
*RBW 100 kHz Marker 1 [T1] 28.33 dBm
*VBW 300 kHz

1 PK
VIEW

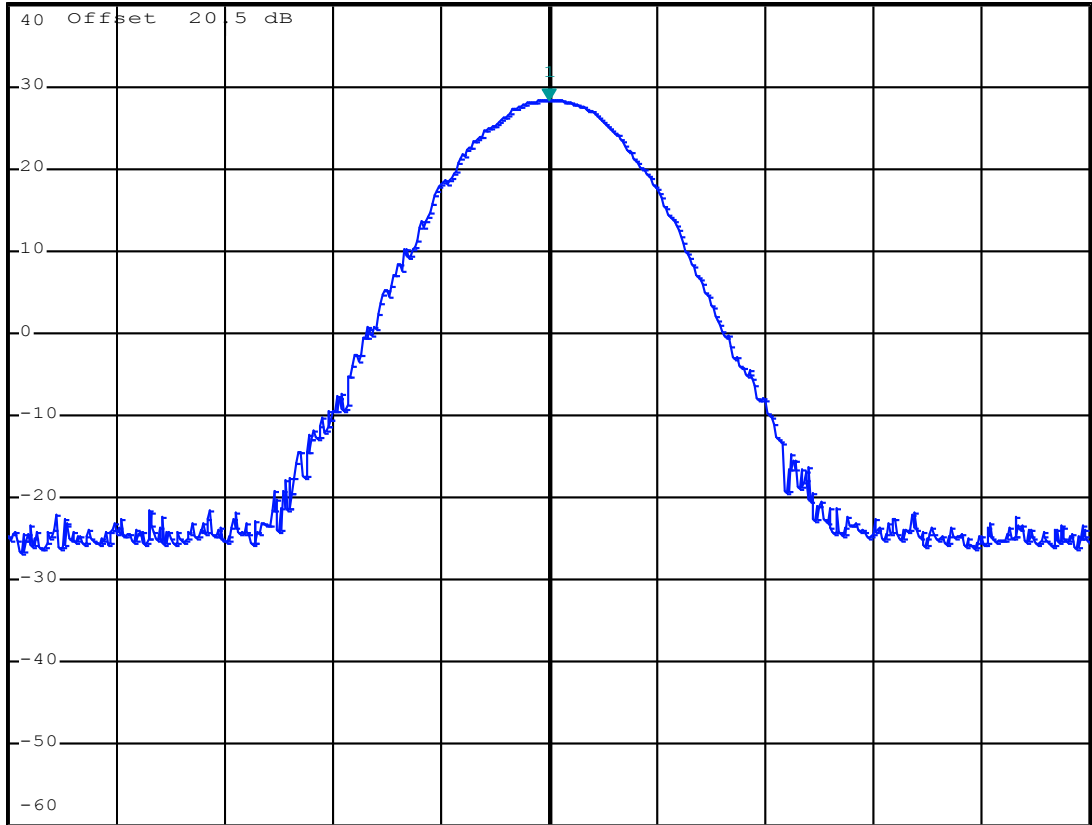

Center 927.25 MHz 100 kHz/ Span 1 MHz

Date: 14.MAY.2013 16:15:21

Figure 2c: Plot: Output Power (927.2 MHz)

Test Report No.:

13031902.fcc01

Page 16 of 42

5.1.2 20dB Bandwidth

RESULT: Pass

Date of testing: 2013-05-14

Requirements:

FCC 15.247(a)(1)(i) and RSS-210 Section A8.1(c).

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall have at least have 50 hopping channels and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test procedure:

ANSI C63.10: 2009.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 10kHz and the span between 2 – 5 times the emission bandwidth.

Offset in the plots shown is 20.5 dB, this is the total loss of attenuators and cable used.

Note: 99% bandwidth is provided for info.

Test Report No.:


13031902.fcc01

Page 17 of 42

Table 5: 20dB Bandwidth

Operating Frequency [MHz]	20dB Bandwidth [kHz]	Limit [kHz]
902.75	76.4	<500
914.75	78.4	<500
927.25	77.6	<500

Figure 3: 20dB Bandwidth, 902.75 MHz

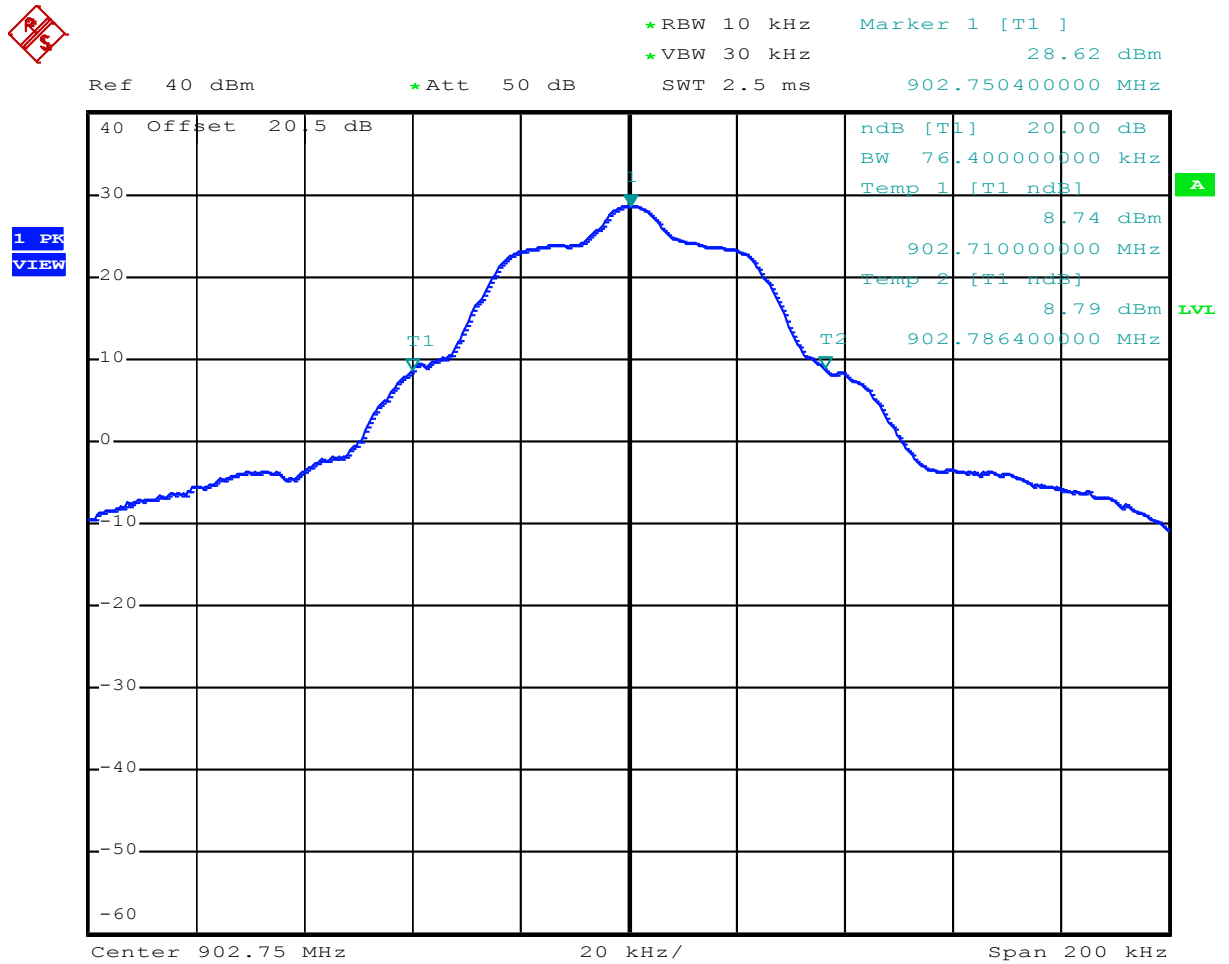

Date: 14.MAY.2013 16:22:47

Test Report No.:


13031902.fcc01

Page 19 of 42

Table 6: 99% Bandwidth

Operating Frequency [MHz]	99% Bandwidth [kHz]	Limit [kHz]
902.75	72.0	<500
914.75	73.2	<500
927.25	72.8	<500

Figure 6: 99% Bandwidth, 902.75 MHz

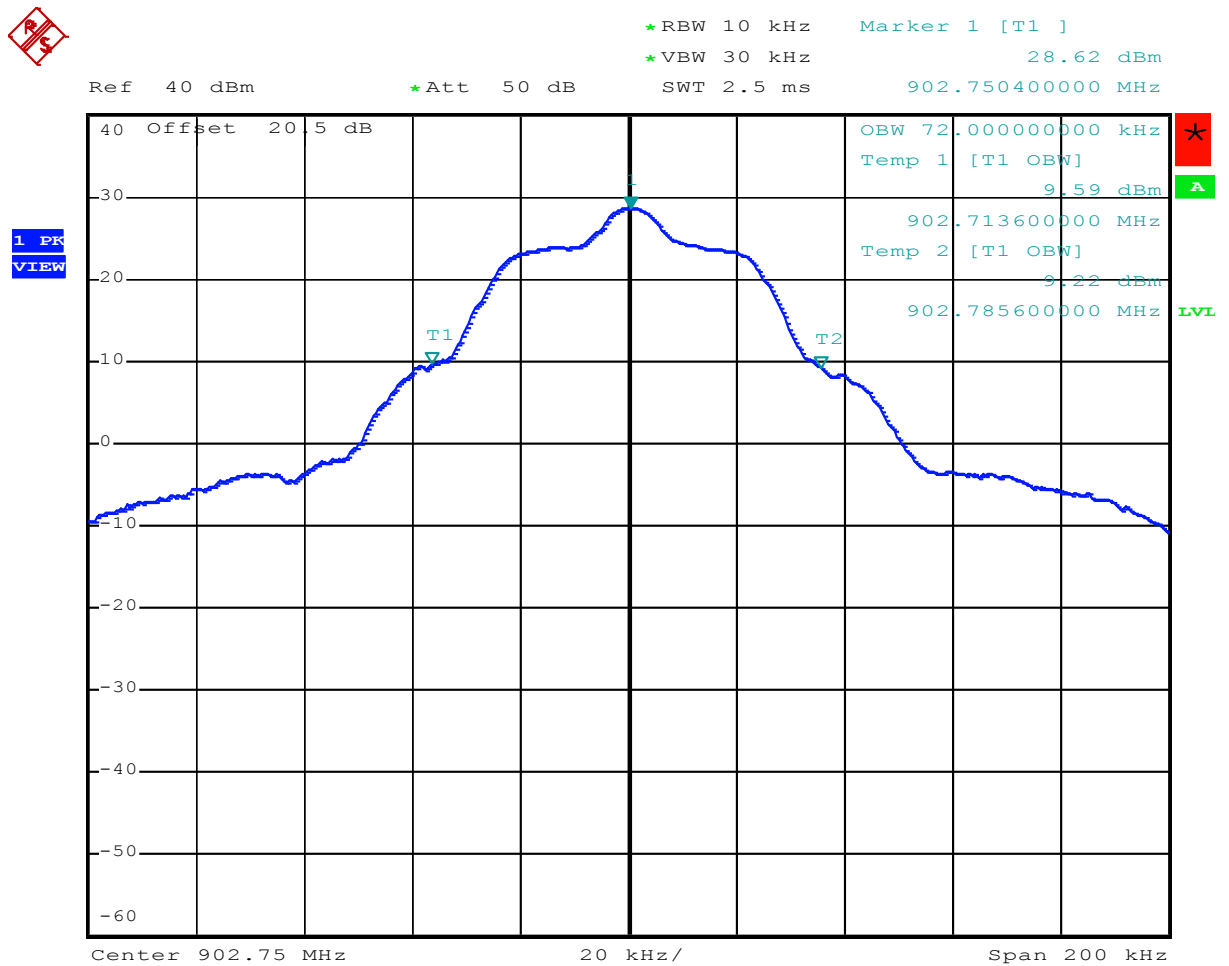

Date: 14.MAY.2013 16:23:10

Figure 7: 99% Bandwidth, 914.75 MHz


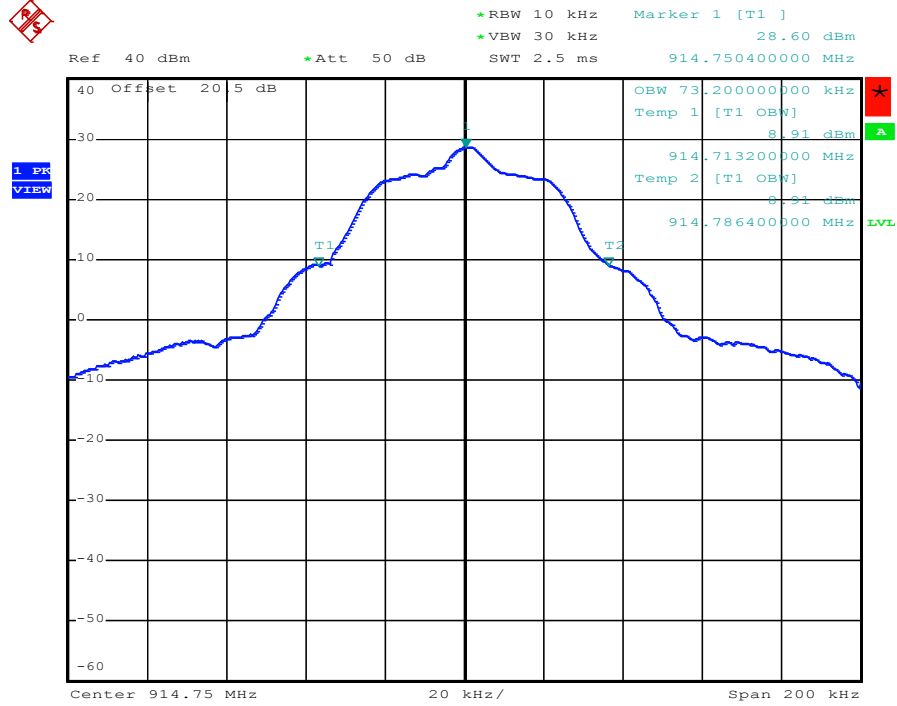


Figure 8: 99% Bandwidth, 927.25 MHz

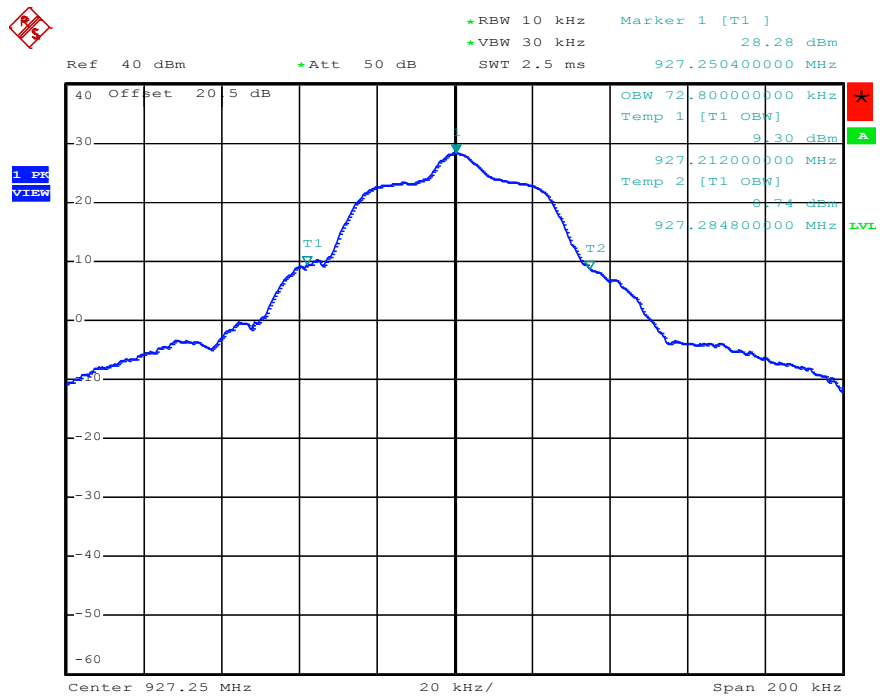

Test Report No.:

13031902.fcc01

Page 21 of 42

5.1.3 Conducted Spurious Emission

RESULT: Pass

Date of testing: 2013-05-14

Requirements:

FCC 15.247(d) and RSS-210 Section A8.5.

In any 100kHz bandwidth outside the frequency band, the RF power shall be at least 20dB below that of the maximum in-band 100kHz emission.


Test procedure:

ANSI C63.10: 2009.

A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 100kHz. For each channel investigated, the in-band and out-of-band emission measurements were performed. The out-of-band emissions were measured from 30MHz to 10GHz (10th harmonics).


The final measurement takes into account the loss generated by all the involved cables. Offset in the plots shown is 20.5 dB, this is the total loss of attenuators and cable used.

Figure 9: Conducted Spurious Emission, 30MHz - 10GHz, 902.75 MHz

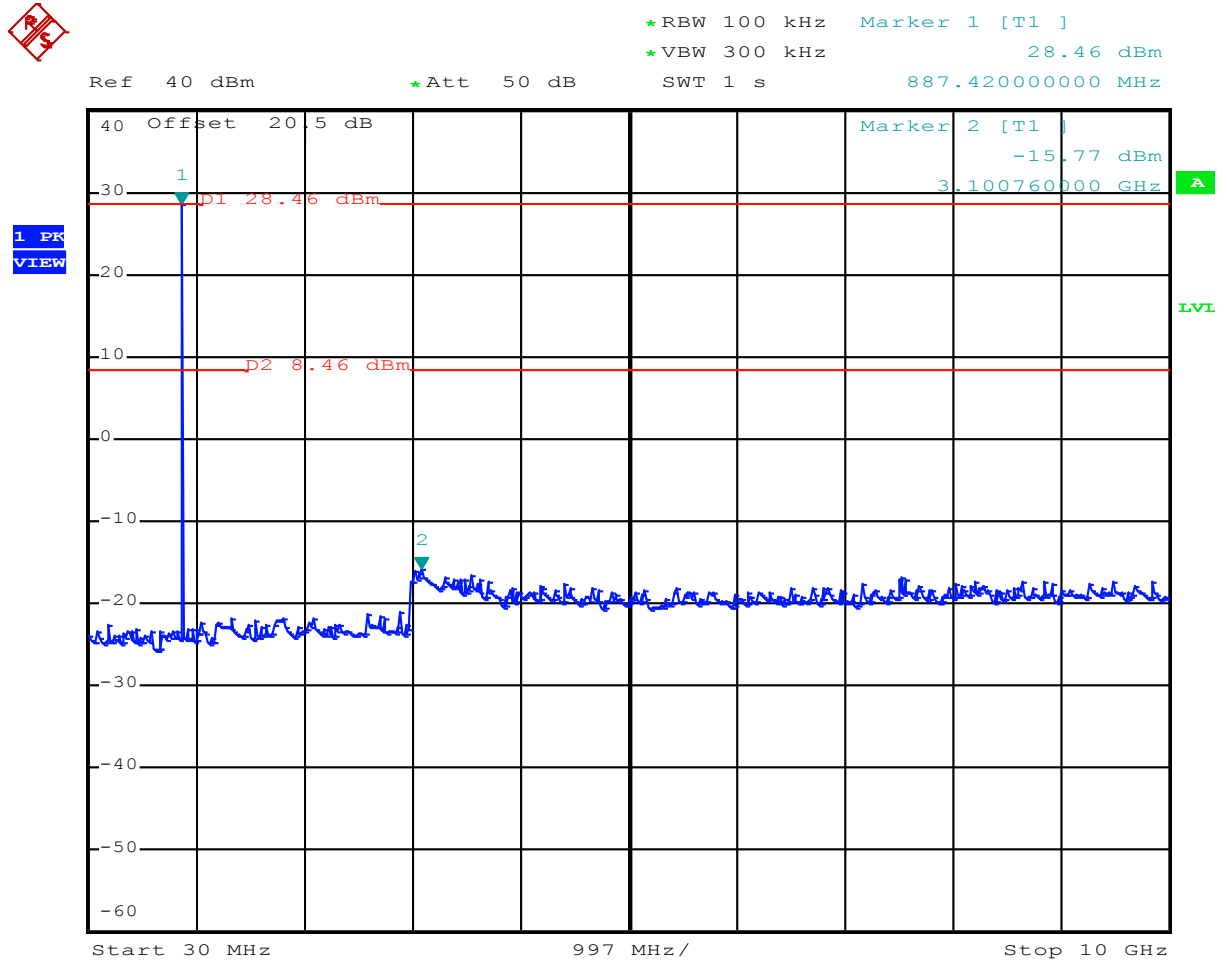

Date: 14.MAY.2013 16:25:13

Figure 11: Conducted Spurious Emission, 30MHz - 10GHz, 927.25 MHz

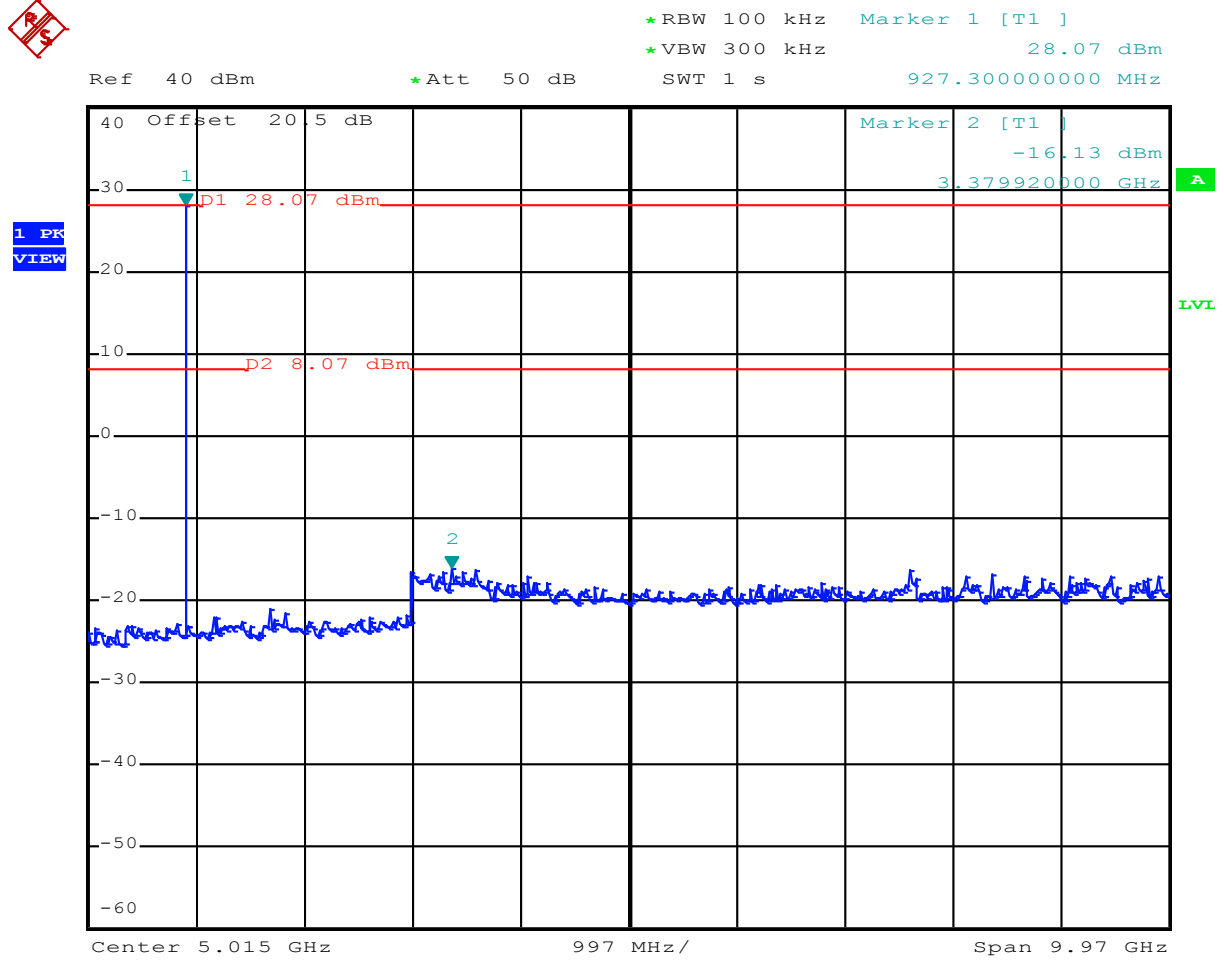

Date: 14.MAY.2013 16:29:54

Test Report No.:

13031902.fcc01

Page 25 of 42

5.1.4 Band Edge Conducted Emissions

RESULT: Pass

Date of testing: 2013-05-14

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-210 section A8.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:


ANSI C63.10: 2009.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:
RBW = 100kHz, VBW = 100kHz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See Figures 12 and 13 on the following pages.
Offset in the plots shown is 20.5 dB, this is the total loss of attenuators and cable used.

Figure 12: Band Edge Conducted Emission, Spectral Diagram, Mode 1 Hopping

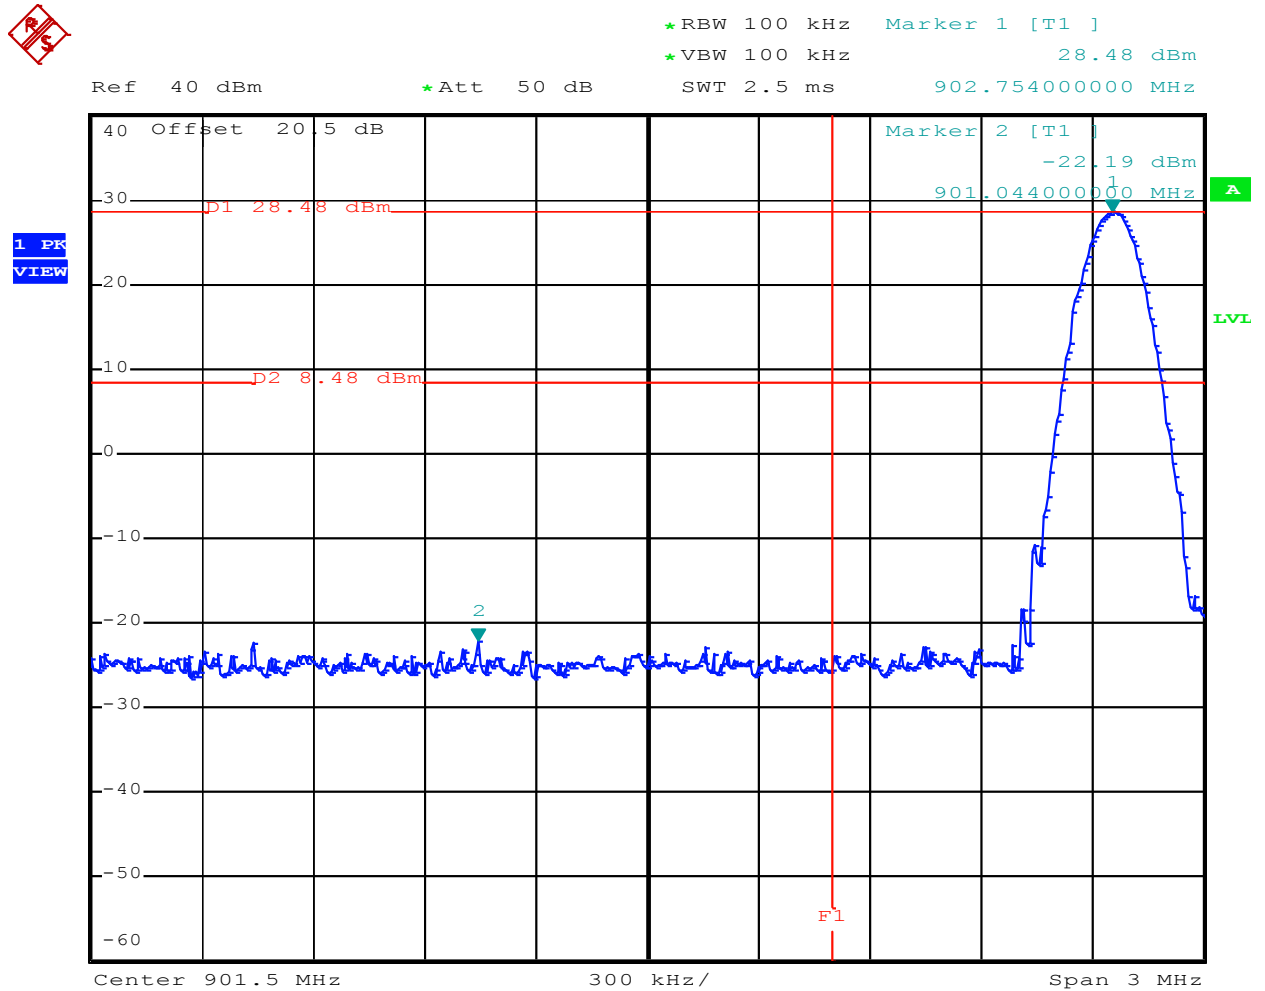


Date: 14.MAY.2013 16:34:37

Plot showing more than 20 dB band edge attenuation.

F1 shows the band edge frequency of 902 MHz.

Note: Only lowest channel captured , since it takes a long time before it has sequenced all channels.

Figure 13: Band Edge Conducted Emission, Spectral Diagram, Mode 1 Hopping

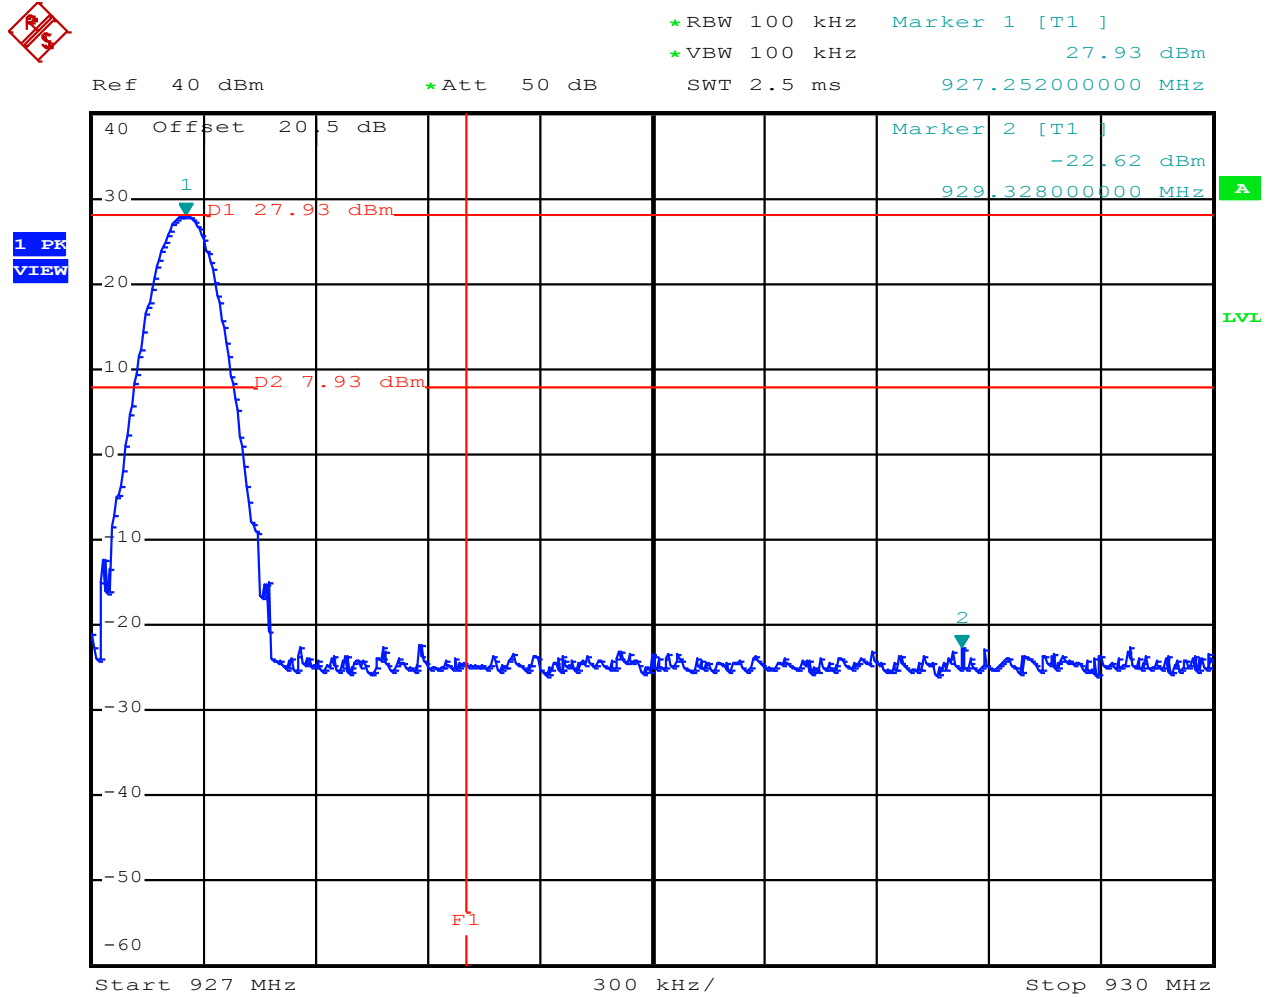

Date: 14.MAY.2013 16:36:38

Plot showing more than 20 dB band edge attenuation.

F1 shows the band edge frequency of 928 MHz.

Note: Only highest channel captured , since it takes a long time before it has sequenced all channels.

Test Report No.:

13031902.fcc01

Page 28 of 42

5.1.5 Radiated Spurious Emissions of Transmitter in the restricted bands

RESULT: Pass

Date of testing: 2013-06-03

Frequency range: 30MHz - 10GHz

Requirements:

FCC 15.205, FCC 15.209 and RSS-Gen Section 7.2.2.

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen Table 3, must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen Table 5.

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a)/ RSS Gen Table 5 or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

Test procedure:

ANSI C63.10: 2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

5.1.6 Radiated field strength measurements (30 MHz – 1 GHz, E-field),

Freq. [MHz]	Antenna Orientation	Level QP [dBµV/m]	Limit [dBµV/m]	Result Pass/Fail
177.90	Vertical	37.4	43.5	Pass
209.22	Vertical	37.9	43.5	Pass
237.06	Vertical	35.0	46.0	Pass
499.80	Vertical	37.4	46.0	Pass
816.48	Vertical	42.9	46.0	Pass
832.14	Vertical	43.3	46.0	Pass

Table 8 Radiated emissions of the EUT, normal mode (sweeping).

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.209 are depicted in Table 8. The system is tested as in whole, being the worst case situation. So with all equipment as shown in Figure1 in place and functioning.

Notes:

1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
2. Measurement uncertainty is ±5.0dB
3. The reported field strength values are the worst case values at the indicated frequency. The receiving antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
4. A Quasi-peak detector was used with a resolution bandwidth of 120 kHz.
5. The EUT was tested in both passive mode (i.e. without a tag in its proximity) and in activated mode (i.e. with a tag in its proximity). Maximum values have been noted.

Used test equipment and ancillaries:

99608	99699	99847	99861	99858	99580			

Test engineer

Signature : 

Name : Richard van der Meer

Date : April 25, 2013

Test Report No.:

13031902.fcc01

Page 31 of 42

5.2 AC Power Line Conducted Measurements

5.2.1 AC Power Line Conducted Emission of Transmitter

RESULT: Pass

Date of testing: 2013-05-16

Requirements: FCC 15.207 and RSS-Gen Section 7.2.4.

Except when the requirements applicable to a given device state otherwise, for any license-exempt radio communication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the following table. The tighter limit applies at the frequency range boundaries.

Frequency of Emission (MHz)	Conducted Limit (dB μ V) Quasi-Peak	Conducted Limit (dB μ V) Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	46	50

*Decreases with the logarithm of the frequency.

Test Report No.:

13031902.fcc01

Page 32 of 42

Frequency (MHz)	Measurement results (dBµV) Neutral/L2		Measurement results (dBµV) Line 1		Limits (dBµV)		Result
	QP	AV ^(note 4)	QP	AV ^(note 4)	QP	AV	
0.15000	30.1	--	20.0	--	66.0	56.0	PASS
0.15240	30.0	--	30.2	--	65.9	55.9	PASS
0.19033	25.4	--	26.0	--	64.0	54.0	PASS
0.31132	27.0	--	27.5	--	60.0	50.0	PASS
14.97154	28.2	--	29.2	--	60.0	50.0	PASS
29.78154	37.5	--	38.1	--	60.0	50.0	PASS

The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.207(a) and RSS-Gen Section 7.2.4, at the 120 Volts/ 60 Hz AC mains connection terminals of the power supply which was connected to the AUX2 which connects to the EUT, are depicted in the table above. The system is tested as in whole, so with all equipment as shown in Figure 1 in place and functioning. Being the worst case situation. See plots on pages 32 – 33.

Notes:

1. Tests were performed with the EUT in Mode1, it's entended use.
2. Measurement uncertainty is ±3.5dB
3. The resolution bandwidth used was 9 kHz.
4. Qp values are already within Av limits, therefor not retested on Av.
5. The antenna was replaced by a 50 Ohm load as per KDB 174176.

Used test equipment and ancillaries:

13313	99161	12512	15667	99852	99855	

Test Report No.:


13031902.fcc01

Page 33 of 42

16. May 13 10:51

```
Scan Settings (1 Range)
|----- Frequencies -----|----- Receiver Settings -----|
  Start      Stop      Step      IF BW  Detector  M-Time  Atten  Preamp
  150k       30M       1.6%     9k     PK        20ms   AUTO  LN   OFF

Final Measurement: x QP
                   Meas Time: 1 s
                   Subranges: 25
                   Acc Margin: 6dB
```

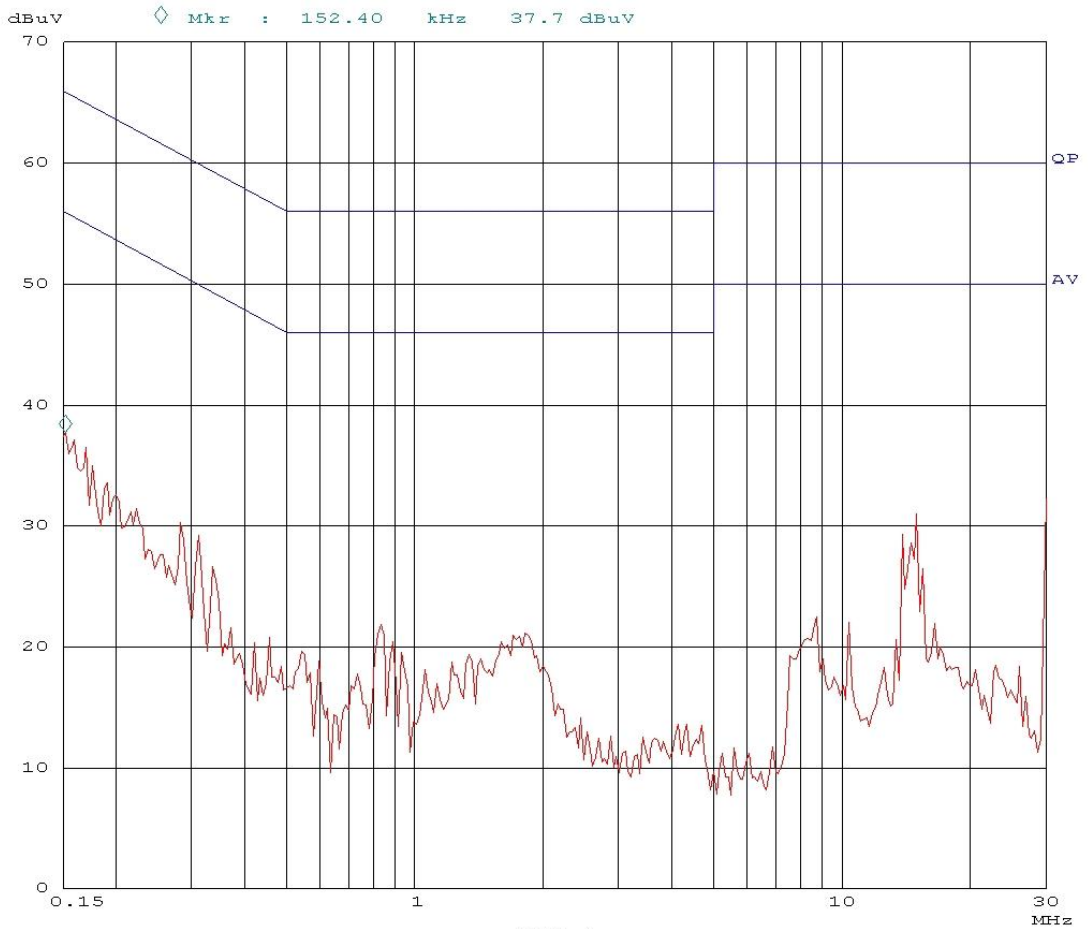

Plot1 Conducted emissions on L1

Test Report No.:


13031902.fcc01

Page 34 of 42

16. May 13 10:59

```
Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
  Start      Stop      Step      IF BW  Detector  M-Time  Atten  Preamp
  150k       30M        1.6k      9k     PK        20ms  AUTO  LN   OFF

Final Measurement: x QP
                   Meas Time:    1 s
                   Subranges:    25
                   Acc Margin:    6dB
```

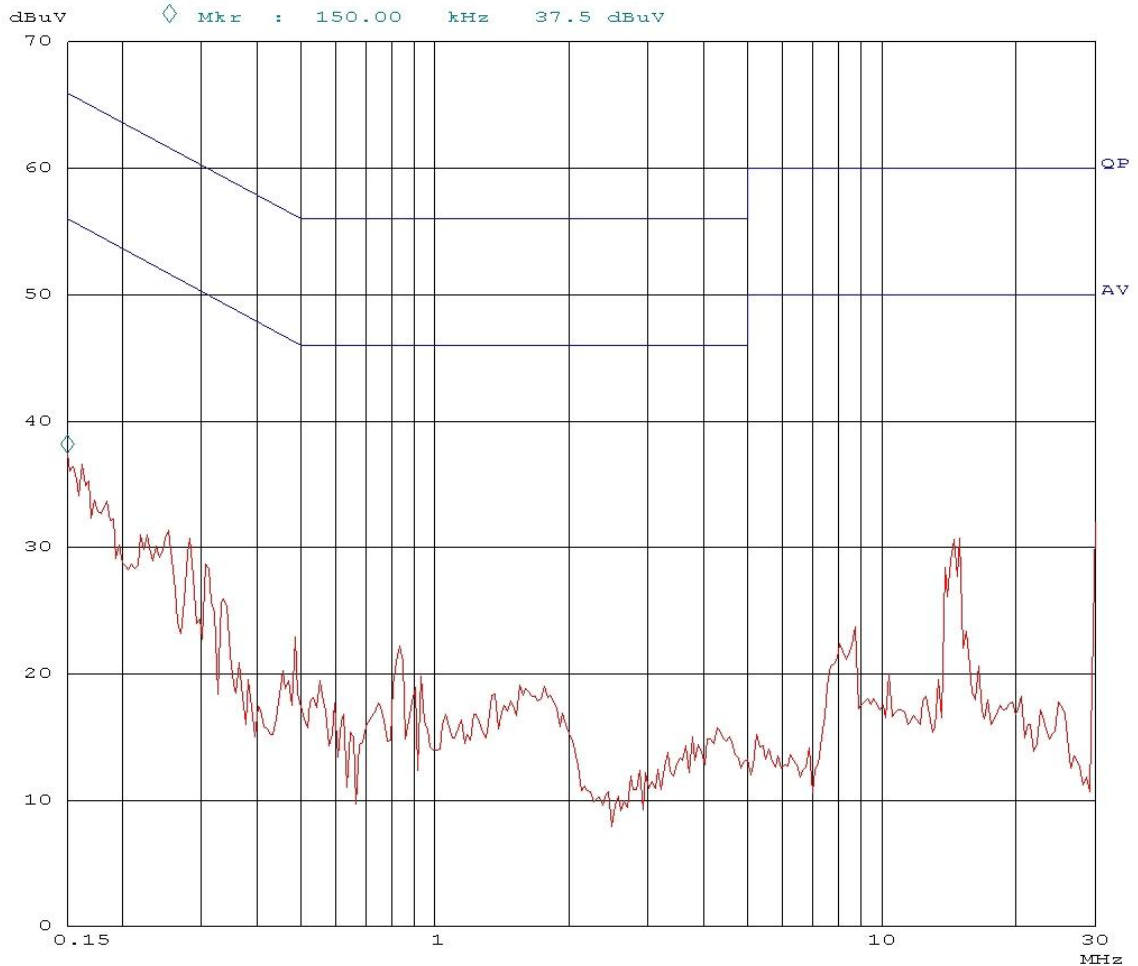

Plot 2 Conducted emissions on L2

Test Report No.:

13031902.fcc01

Page 35 of 42

6. Number of hopping channels, Carrier frequency separation, Average time of occupancy

RESULT: Pass

Date of testing:

2013-05-15

Requirements:

FCC 15.247(a)(1)(i) and RSS-210 A8.1(c).

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test procedure:

ANSI C63.10: 2009.

A spectrum analyzer was connected to the antenna port of the EUT.

Offset in the plots shown is 20.5 dB, this is the total loss of attenuators and cable used.

Test Report No.:


13031902.fcc01

Page 36 of 42



* RBW 100 kHz
* VBW 300 kHz

Ref 40 dBm * Att 50 dB SWT 5 ms

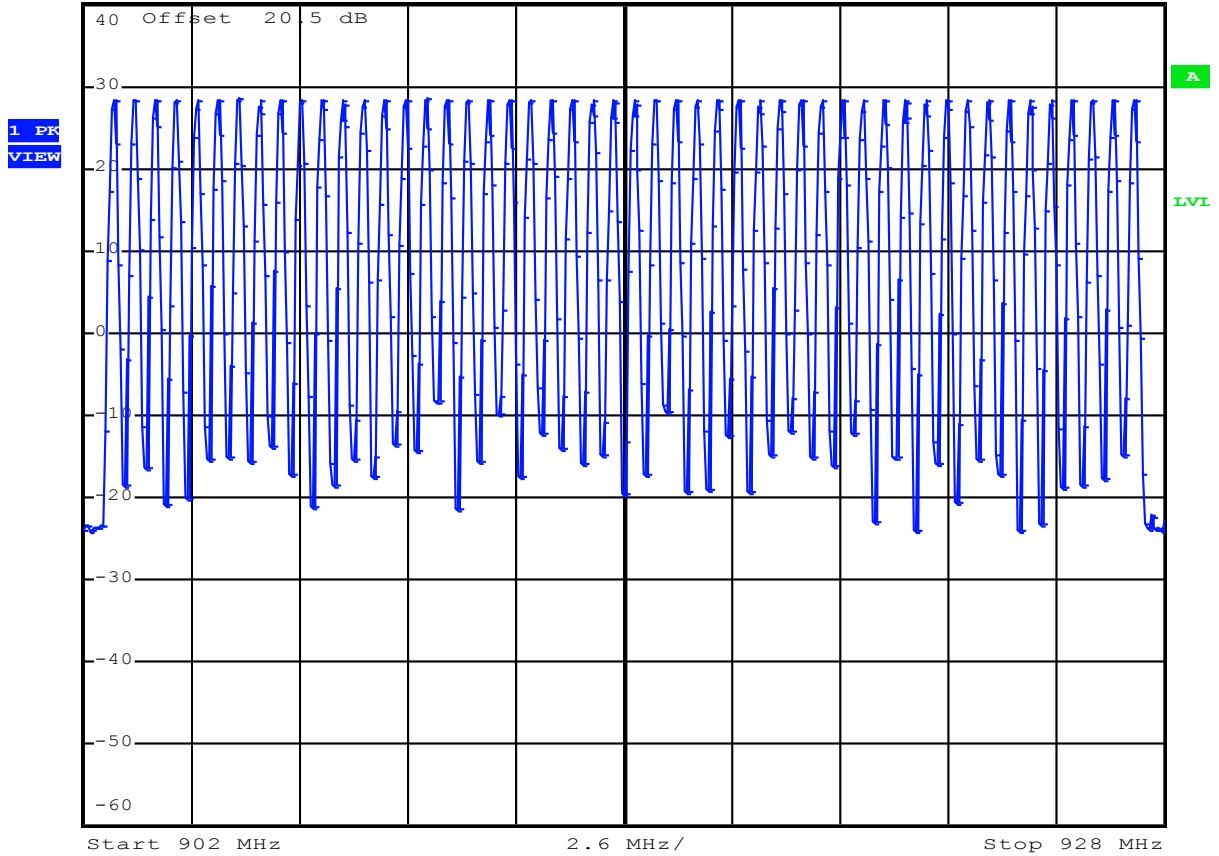

Date: 15.MAY.2013 08:42:31

Plot showing 50 hopping frequencies as required by section FCC 15.247(a)(1)(i) and RSS-210 A8.1(c), as measured on a spectrum analyzer.

Requirement: the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall therefore have at least 50 hopping channels.

Result: **Pass**


Test Report No.:

13031902.fcc01

Page 37 of 42



Ref 40 dBm *Att 50 dB RBW 1 MHz Delta 2 [T1] -0.06 dB
*VBW 1 MHz 391.000000 ms
SWT 500 ms

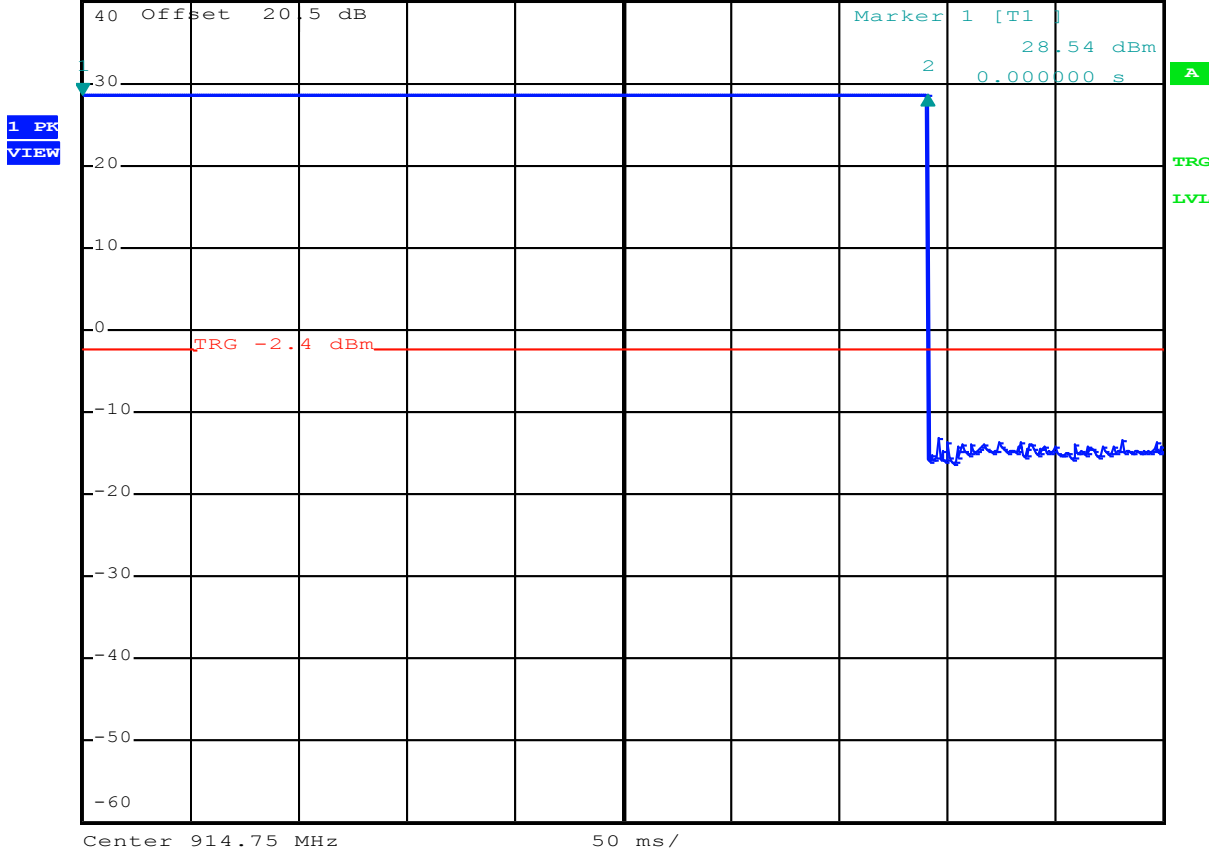

Date: 15.MAY.2013 08:47:52

Plot showing Dwell time of a hop as measured on a spectrum analyzer.


Test Report No.:

13031902.fcc01

Page 38 of 42




RBW 500 kHz Delta 3 [T1]
*VBW 1 MHz -44.64 dB
Ref 40 dBm *Att 50 dB SWT 20 s 20.000000 s

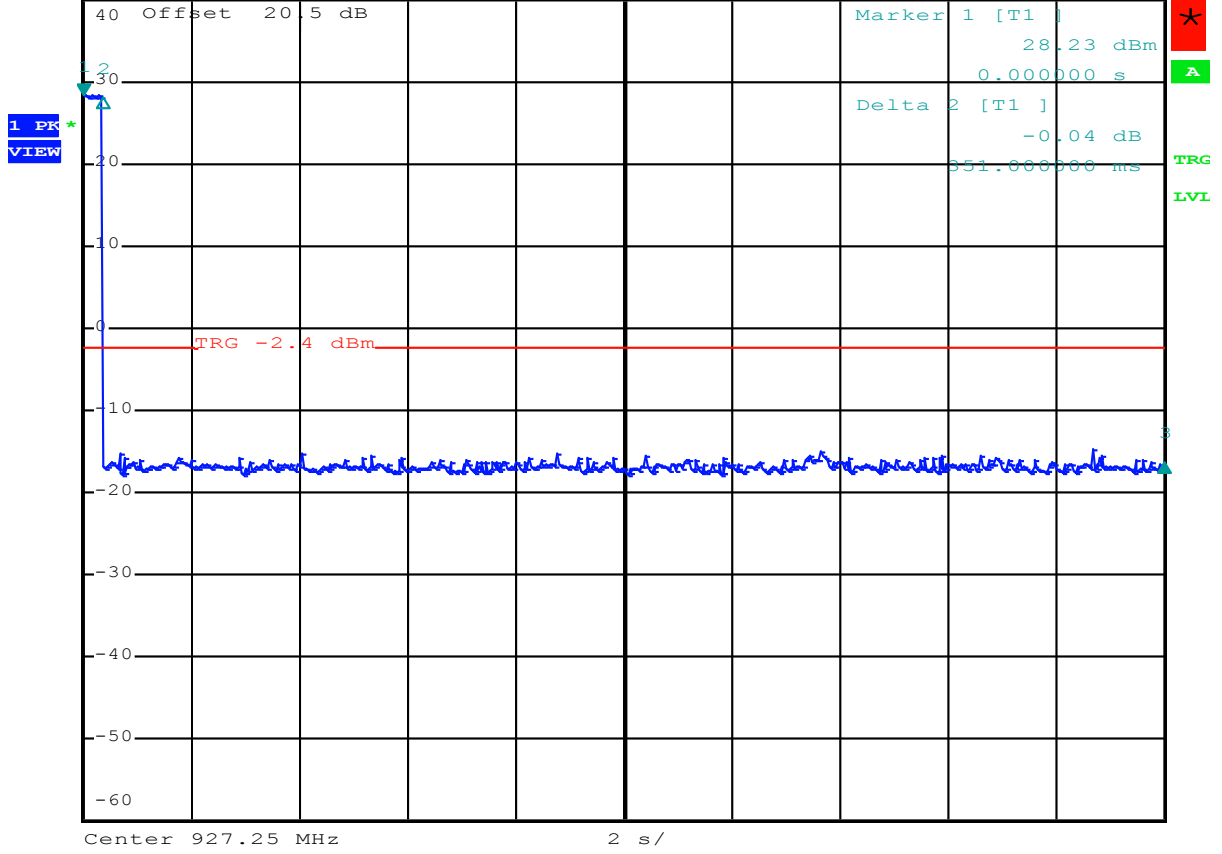

Date: 15.MAY.2013 08:52:15

Plot showing occupancy time in a 20 second period as measured on a spectrum analyzer.

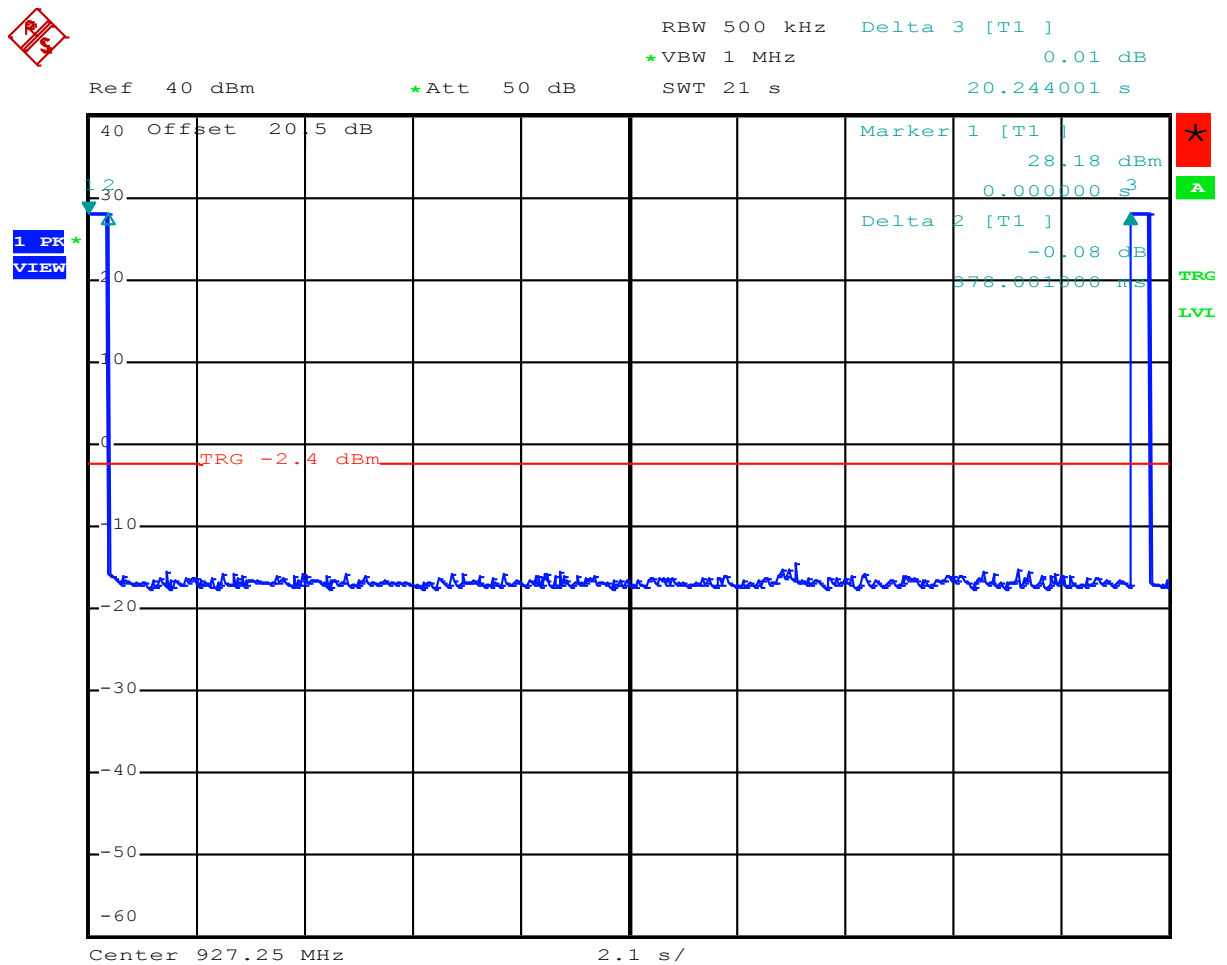

Date: 15.MAY.2013 08:53:56

Plot showing period time of a hop cycle on 1 channel as measured on a spectrum analyzer.

Note: Not measured in 1 MHz resolution bandwidth to avoid hops from next channel being registered. Instead a RBW of 500 kHz is used with a sharp Channel filter. Offset in the plots shown is 20.5 dB, this is the total loss of attenuators and cable used.

The average time of occupancy and equal frequency use is provided in the table on the next page.

Test Report No.:

13031902.fcc01

Page 40 of 42

Channel	Frequency (MHz)	Power	Average occupancy time (ms)	Percentage of Total On Time (%)
1	902.75	Full	391.00	1.9314
2	903.25	Full	391.00	1.9314
3	903.75	Full	391.00	1.9314
4	904.25	Full	391.00	1.9314
5	904.75	Full	391.00	1.9314
6	905.25	Full	391.00	1.9314
7	905.75	Full	391.00	1.9314
8	906.25	Full	391.00	1.9314
9	906.75	Full	391.00	1.9314
10	907.25	Full	391.00	1.9314
11	907.75	Full	391.00	1.9314
12	908.25	Full	391.00	1.9314
13	908.75	Full	391.00	1.9314
14	909.25	Full	391.00	1.9314
15	909.75	Full	391.00	1.9314
16	910.25	Full	391.00	1.9314
17	910.75	Full	391.00	1.9314
18	911.25	Full	391.00	1.9314
19	911.75	Full	391.00	1.9314
20	912.25	Full	391.00	1.9314
21	912.75	Full	391.00	1.9314
22	913.25	Full	391.00	1.9314
23	913.75	Full	391.00	1.9314
24	914.25	Full	391.00	1.9314
25	914.75	Full	391.00	1.9314
26	915.25	Full	391.00	1.9314
27	915.75	Full	391.00	1.9314
28	916.25	Full	391.00	1.9314
29	916.75	Full	391.00	1.9314
30	917.25	Full	391.00	1.9314
31	917.75	Full	391.00	1.9314
32	918.25	Full	391.00	1.9314
33	918.75	Full	391.00	1.9314
34	919.25	Full	391.00	1.9314
35	919.75	Full	391.00	1.9314
36	920.25	Full	391.00	1.9314
37	920.75	Full	391.00	1.9314
38	921.25	Full	391.00	1.9314
39	921.75	Full	391.00	1.9314
40	922.25	Full	391.00	1.9314
41	922.75	Full	391.00	1.9314
42	923.25	Full	391.00	1.9314
43	923.75	Full	391.00	1.9314
44	924.25	Full	391.00	1.9314
45	924.75	Full	391.00	1.9314
46	925.25	Full	391.00	1.9314
47	925.75	Full	391.00	1.9314
48	926.25	Full	391.00	1.9314
49	926.75	Full	391.00	1.9314
50	927.25	Full	391.00	1.9314

Test Report No.:

13031902.fcc01

Page 41 of 42

Table shows average time of occupancy per channel is less than 0.4 seconds and each frequency is used equally.

Note: Percentage of total On Time = (Dwell time(ms) / Period time (ms) of 1 cycle) * 100%

Limit: The 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall therefore have an average time of occupancy not greater than 0.4 seconds within a 20 second period. Each frequency must be used equally on the average by each transmitter.

Result: **Pass**


Test Report No.:

13031902.fcc01

Page 42 of 42



Ref 40 dBm *Att 50 dB *RBW 100 kHz Delta 2 [T1]
*VBW 300 kHz -0.10 dB
SWT 2.5 ms 500.00000000 kHz

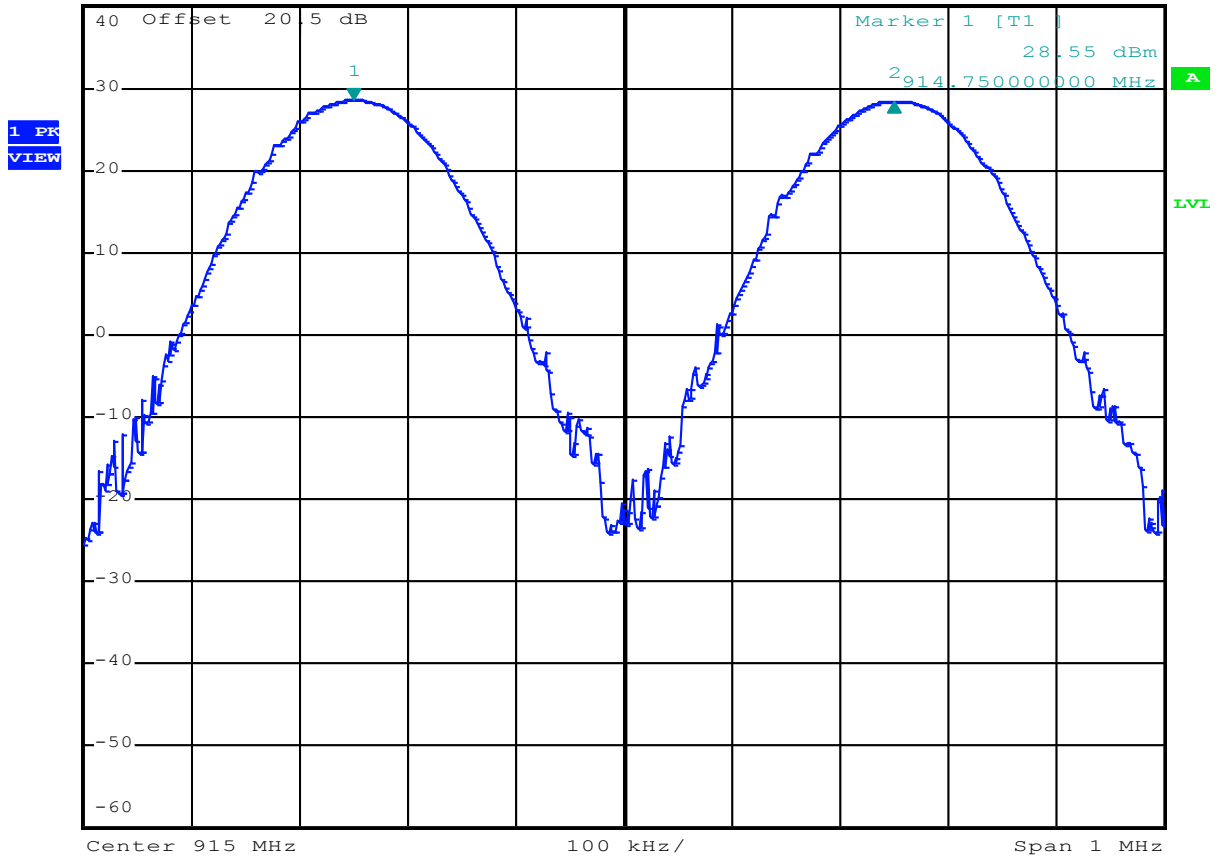

Date: 15.MAY.2013 08:45:05

Plot : showing 500 kHz separation between channels as measured on a spectrum analyzer. Offset in the plots shown is 20.5 dB, this is the total loss of attenuators and cable used.

Limit: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Result: **Pass**