

Prüfbericht-Nr.: <i>Test Report No.:</i>	50157344 001	Auftrags-Nr.: <i>Order No.:</i>	114078743	Seite 1 von 23 Page 1 of 23
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	13-Jun-2018	
Auftraggeber: <i>Client:</i>	N.V. Nederlandsche Apparatenfabriek "Nedap" , Parallelweg 2, 7141 DC Groenlo, The Netherlands			
Prüfgegenstand: <i>Test item:</i>	Lumen iL33			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	ASSY T325R RF+MD+RFID			
Auftrags-Inhalt: <i>Order content:</i>	FCC and ISED Test Report for 125 kHz portion			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.207 and 15.209 RSS-210 (08-2016) 4.4			
Wareneingangsdatum: <i>Date of receipt:</i>	4-Jul-2018			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000769422-005, A000769422-006			
Prüfzeitraum: <i>Testing period:</i>	9-Jul-2018 - 17-Jul-2018			
Ort der Prüfung: <i>Place of testing:</i>	EMC Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
2018-08-17	Ryan W. T. Chen / Project Manager	2018-08-17	Rene Charton/Expert	
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
				Unterschrift <i>Signature</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 FIELD STRENGTH OF FUNDAMENTAL

RESULT: Passed

5.1.3 5.1.3 20dB AND 99% BANDWIDTH

RESULT: Passed

5.1.4 SPURIOUS EMISSION

RESULT: Passed

5.2.1 CONDUCTED EMISSIONS LINE AND NEUTRAL

RESULT: Passed

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	9
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS	10
4.	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM.....	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
	5.1.1 <i>Antenna Requirement.....</i>	<i>14</i>
	5.1.2 <i>Field strength of fundamental.....</i>	<i>15</i>
	5.1.3 <i>20dB and 99% Bandwidth.....</i>	<i>16</i>
	5.1.4 <i>Spurious Emission.....</i>	<i>18</i>
5.2	MAINS CONDUCTED EMISSIONS.....	19
	5.2.1 <i>Conducted Emissions Line and Neutral.....</i>	<i>19</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	20
7.	LIST OF TABLES	23
8.	LIST OF PHOTOGRAPHS	23

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Photo Documentation

(File Name: **50157344APPENDIX P**)

Appendix D: Test Result of Radiated Emissions

(File Name: **50157344APPENDIX D**)

Test Specifications

The following standards were applied (in bold: product standards, otherwise: basic standards).

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.207 and 15.209
RSS-210 Issue 9, August 2016
RSS-Gen, Issue 4, November 2014
ANSI C63.10:2013
LP0002(2016)(105年6月28日)

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 340738
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Last Calibration	Next Calibration
Test Software	Farad	EZ_EMC	Ver. TUV3A1	N/A	N/A
EMI Test Receiver	R&S	ESR 7	101549	2017/11/10	2018/11/10
Spectrum Analyzer	R&S	FSV 40	100921	2018/05/02	2019/05/02
EXA Signal Analyzer	KEYSIGHT	N9010A	MY52221334	2018/02/05	2019/02/04
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2017/08/14	2018/08/14
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2018/01/18	2019/01/18
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	60558	2017/11/21	2018/11/21
Bilog Antenna	TESEQ	CBL6111D	29804	2017/08/18	2018/08/18
Horn Antenna	ETS-Lindgren	3117	201918	2017/08/18	2018/08/18
Horn Antenna (18GHz~40GHz)	COM-POWER	AH-840	101029	2017/11/28	2018/11/28
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2018/06/14	2019/06/14
EMI Test Receiver	R&S	ESR 7	101549	2017/11/10	2018/11/10

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are ± 3 dB.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Radiated emission of transmitter, valid up to 26 GHz	± 6 dB
Radiated emission of receiver, valid up to 26 GHz	± 6 dB
Temperature	± 2 °C
Humidity	± 10 %

3. General Product Information

3.1 Product Function and Intended Use

The model ASSY T325R RF+MD+RFID is an Electronic Article Surveillance System. The device incorporates a Tag detector working in the 7-8 MHz Band and a metal detector that works at a frequency of 125 kHz. This report relates to the 125 kHz portion of the device.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 Ratings and System Details

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	Lumen iL33
Type Designation	ASSY T325R RF+MD+RFID+RFID
FCC ID	CGDT325RRFMDID
Canada ID	1444A-T325RRFMDID
HVIN	ASSY T325R RF+MD+RFID

Table 5: Technical Specification of EUT

Item	Value
Operating Frequencies	125 kHz
Channel number	1
Operation Voltage	120V (PoE adapter)
Modulation	CW

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are modified to continuous transmitter mode which makes it possible to transmit when power on.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Kind of Equipment	Manufacturer	Model Name	S/N
--	--	--	--

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test


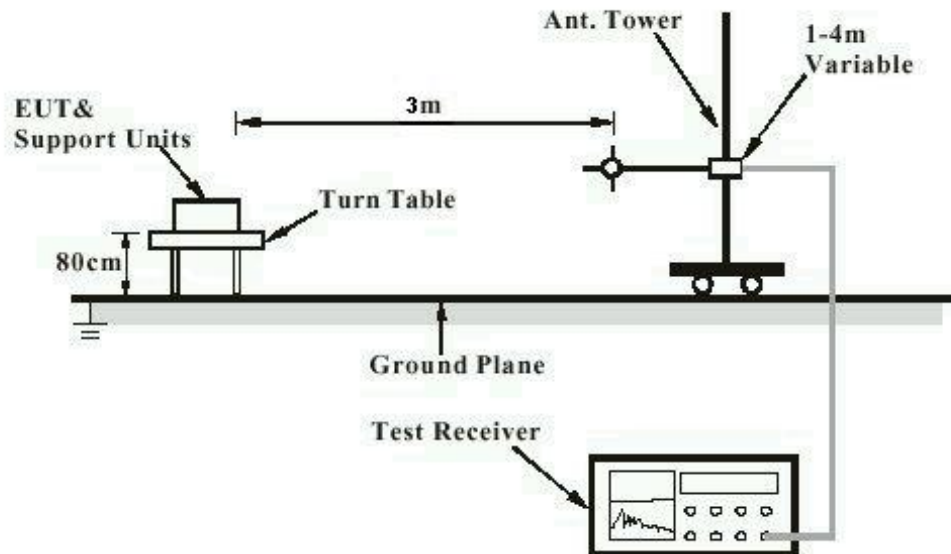


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

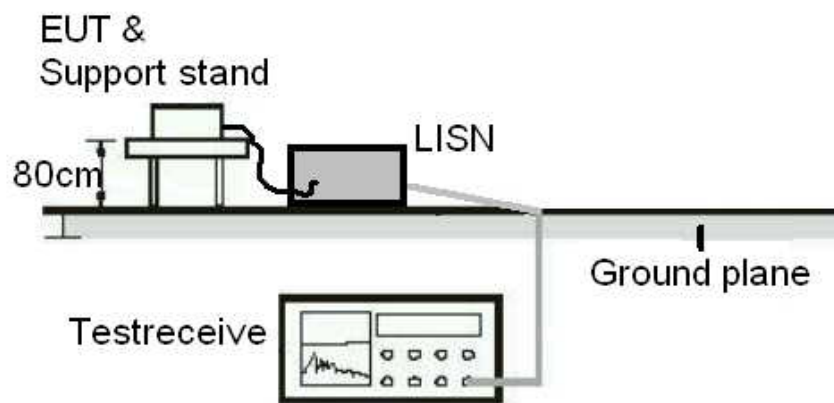

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Standard : LP0002(2011): 2.2
Part 15.203 and RSS-Gen 7.1.4
Requirement : use of approved antennas only

The antenna and the transmitter are one assembly with no possibility of replacement with a non-approved antenna by a normal the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Field strength of fundamental

RESULT:
Passed

Test standard : FCC Part 15.209
 RSS-210 (08-2016) 4.4
 LP0002(2011) 3.3.1
 Basic standard : ANSI C63.10:2013

Test setup

Test Frequency : 125 kHz
 Operation Mode : A
 Atmospheric pressure : 100-103 kPa

Table 6: Field strength of fundamental, maximal level found

Frequency (kHz)	Level(3m) (dBuV/m)	Detector	Limit(3m) (dBuV/m)	Level(300m) (dBuV/m)	Limit(300m) (dBuV/m)	Remark	Result
125	84	peak	125.62	4	45.62	--	Pass
125	83.5	average	105.62	3.5	25.62	--	Pass

Remark: For details refer to Appendix D

Limits:

Frequency	Electric Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
9-490 kHz	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	30
1,705-30 MHz	30	30

9-90 kHz and 110-490 kHz: Average detector.

5.1.3 20dB and 99% Bandwidth**RESULT:****Passed**Test standard : RSS Gen
Basic standard : ANSI C63.10:2013,**Test setup**

Operation Mode : A

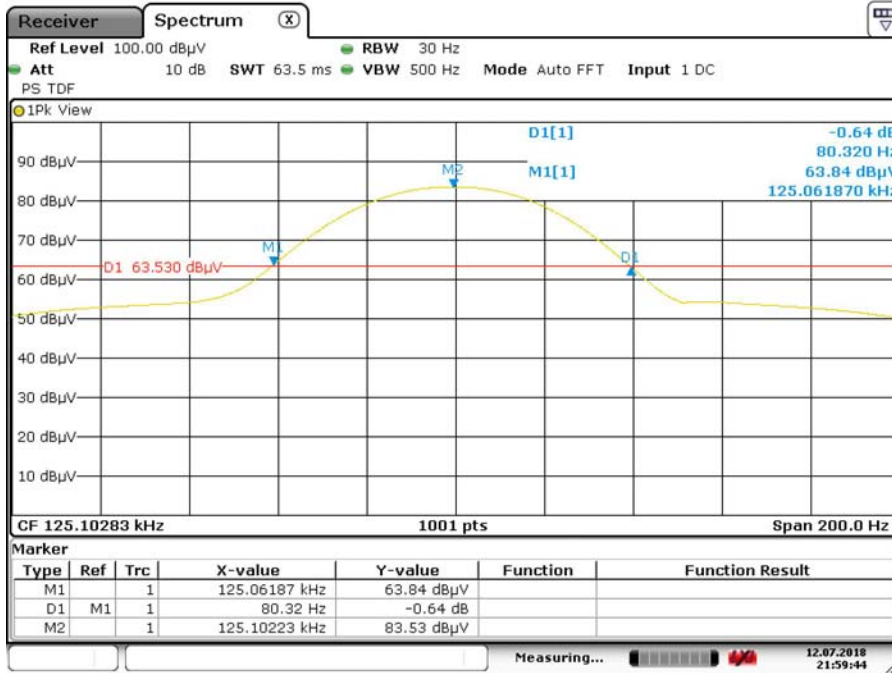
Atmospheric pressure : 100-103 kPa

Table 7: Test result of 20dB Bandwidth

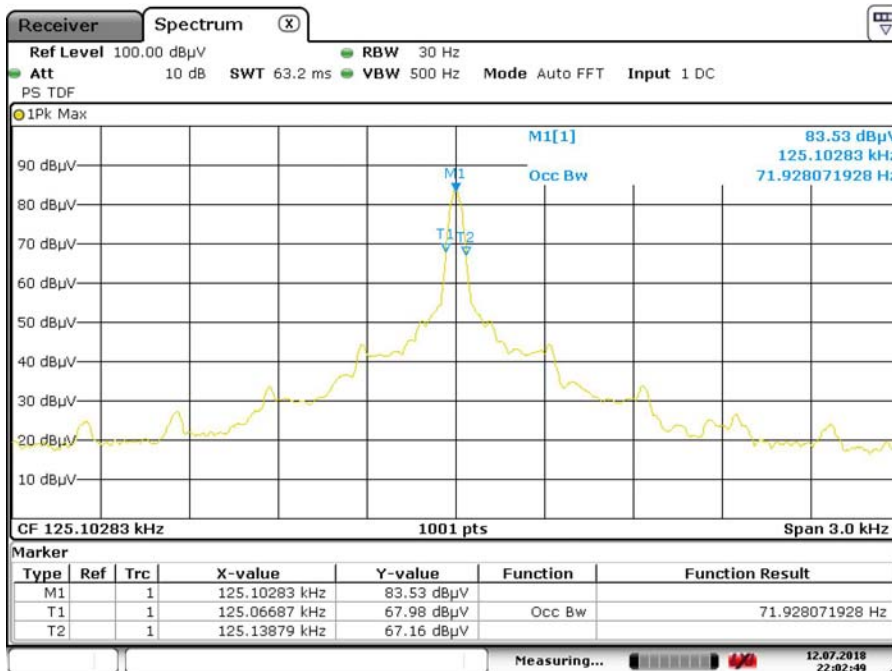
Frequency	20dB Bandwidth	
125 kHz	80.32 Hz	

Table 8: Test result of 99% Bandwidth

Frequency	99% Bandwidth	
125 kHz	72 Hz	

Test Plot of 20dB BW


Date: 12.JUL.2018 21:59:45

Test Plot of 99% BW


Date: 12.JUL.2018 22:02:49

Prüfbericht - Nr.: 50157344 001
Test Report No.**Seite 18 von 23**
Page 18 of 23

5.1.4 Spurious Emission

RESULT:**Passed**

Test standard : FCC part 15. 209
RSS-Gen
LP0002(2011) 2.8

Basic standard : ANSI C63.10: 2013

Limits : Radiated emissions must comply with the
radiated emission limits specified in FCC
15.209(a) AND 2.8

Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : 125 kHz

Operation mode : A

Remark: Testing was carried out within frequency range 9 kHz to more than the tenth harmonic.

For details refer to Appendix D.

5.2 Mains Conducted Emissions

5.2.1 Conducted Emissions Line and Neutral

RESULT: **Passed**

Test standard : FCC Part 15.207
FCC Part 15.107
RSS-Gen
LP0002: 2.3

Limits : Mains Conducted emissions as defined in
LP0002: 2.3 , must comply with the mains
conducted emission limits specified in LP0002:
2.3

Kind of test site : Shielded Room

Test setup

Test Channel : 125 kHz
Operation mode : A


Remark: For details refer to Appendix D.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Radiated Emissions TX (Front View)



Photograph 2: Set-up for Radiated Emissions (Back View 1)

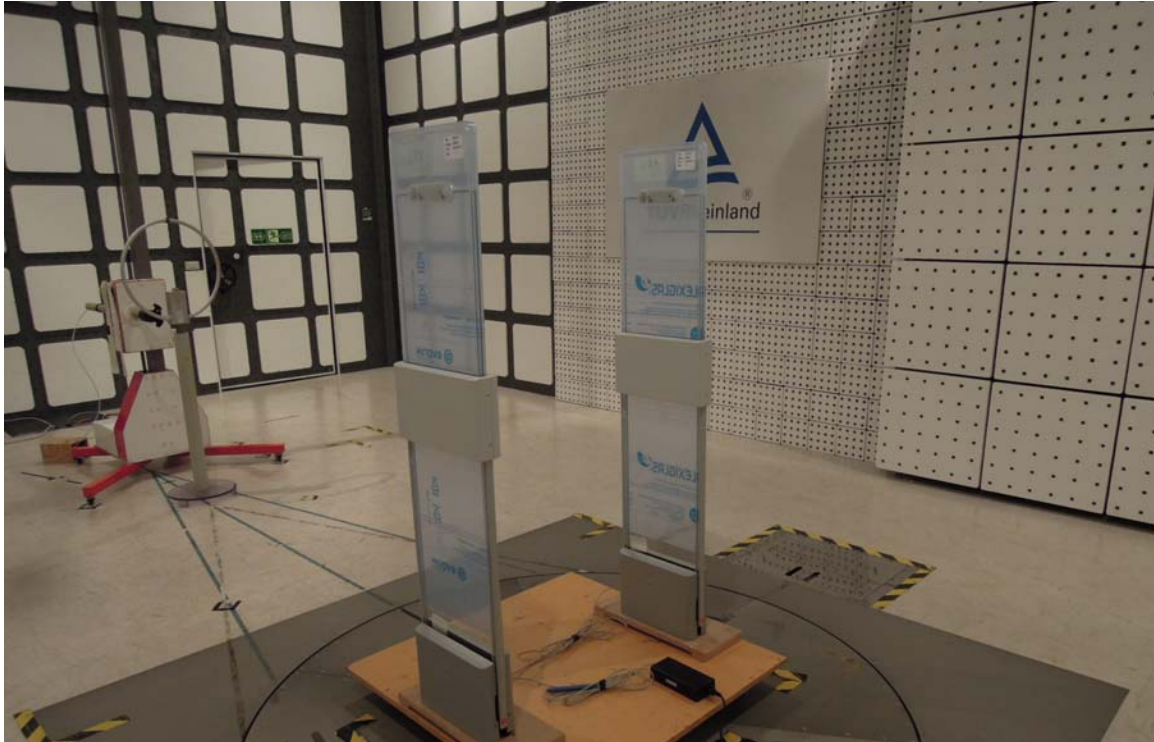

Photograph 3: Set-up for Radiated Emissions (Back View 2)

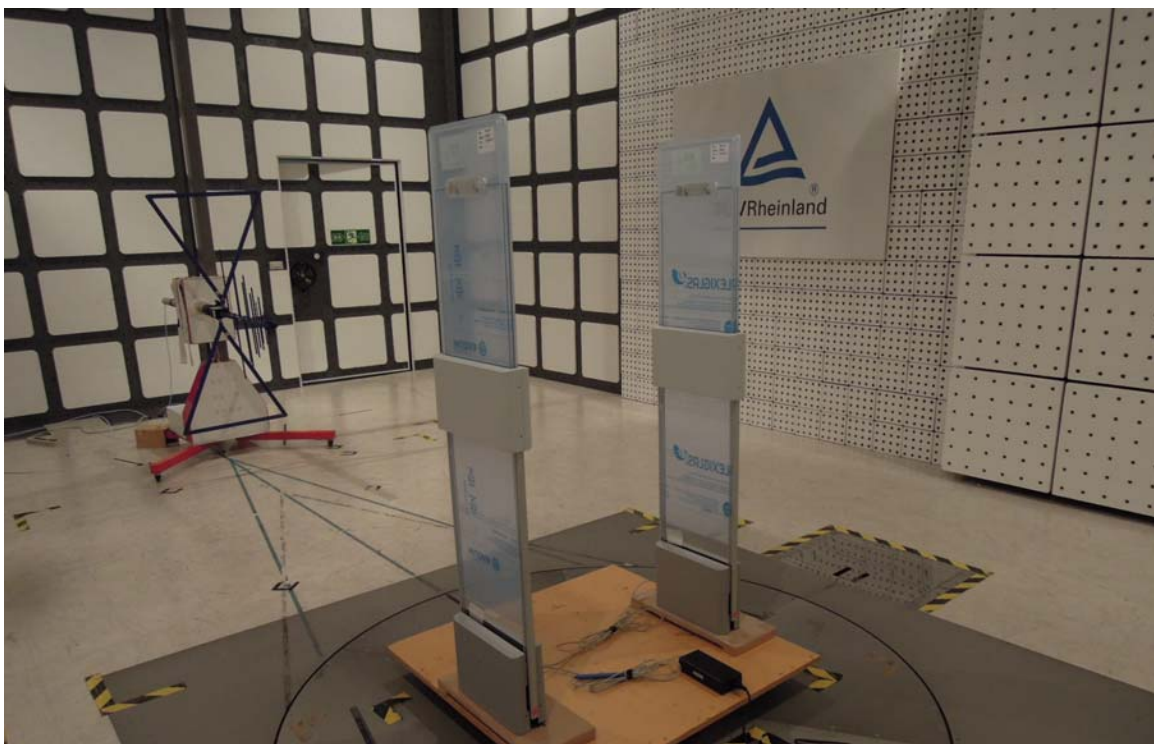

Photograph 4: Set-up for Mains Conducted testing Back



Photograph 5: Set-up for Mains Conducted testing Front



7. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment.....	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Field strength of fundamental, maximal level found	15
Table 7: Test result of 20dB Bandwidth	16
Table 8: Test result of 99% Bandwidth.....	16

8. List of Photographs

Photograph 1: Set-up for Radiated Emissions TX (Front View)	20
Photograph 2: Set-up for Radiated Emissions (Back View 1)	21
Photograph 3: Set-up for Radiated Emissions (Back View 2)	21
Photograph 4: Set-up for Mains Conducted testing Back.....	22
Photograph 5: Set-up for Mains Conducted testing Front	22