



|  |   |   |                             |  |   |
|--|---|---|-----------------------------|--|---|
| <b>Prüfbericht-Nr.:</b><br><i>Test Report No.:</i>   | <b>50081304 001</b>   | <b>Auftrags-Nr.:</b><br><i>Order No.:</i>   | 114061212                   | Seite 1 von 34<br><i>Page 1 of 34</i>            |   |
| <b>Kunden-Referenz-Nr.:</b><br><i>Client Reference No.:</i>  | N/A   | <b>Auftragsdatum:</b><br><i>Order date:</i>   | 16-Feb-2017                 |  |   |
| <b>Auftraggeber:</b><br><i>Client:</i>   | N.V. Nederlandsche Apparatenfabriek "Nedap" , Parallelweg 2, 7141 DC Groenlo, The Netherlands |   |                             |  |   |
| <b>Prüfgegenstand:</b><br><i>Test item:</i>  | 134 kHz Inductive proximity tag reader  |   |                             |  |   |
| <b>Bezeichnung / Typ-Nr.:</b><br><i>Identification / Type No.:</i>   | VP1006  |   |                             |  |   |
| <b>Auftrags-Inhalt:</b><br><i>Order content:</i>   | FCC/ISED Test Report Class II Permissive Change   |   |                             |  |   |
| <b>Prüfgrundlage:</b><br><i>Test specification:</i>  | FCC 47CFR Part 15: Subpart C Section 15.207 and 15.209<br>RSS-210 (08-2016) 4.4               |   |                             |  |   |
| <b>Wareneingangsdatum:</b><br><i>Date of receipt:</i>  | 9-Mar-2017  |   |                             |  |   |
| <b>Prüfmuster-Nr.:</b><br><i>Test sample No.:</i>  | A000509942-001 –<br>A000509942-004  |   |                             |  |   |
| <b>Prüfzeitraum:</b><br><i>Testing period:</i>   | 16-Mar-2017 – 17-Mar-2017   |   |                             |  |   |
| <b>Ort der Prüfung:</b><br><i>Place of testing:</i>  | EMC Laboratory Taipei   |   |                             |  |   |
| <b>Prüflaboratorium:</b><br><i>Testing laboratory:</i>   | TUV Rheinland Taiwan Ltd.   |   |                             |  |   |
| <b>Prüfergebnis*:</b><br><i>Test result*:</i>  | Pass  |   |                             |  |   |
| <b>geprüft von / tested by:</b>  |   | <b>kontrolliert von / reviewed by:</b>  |                             |  |   |
| 5-May-2017   | SamC.J. Kuo / Engineer  |  | 5-May-2017                  | Ryan W.T. Chen / Project Manager                 |  |
| <b>Datum</b><br><i>Date</i>  | <b>Name / Stellung</b><br><i>Name / Position</i>  | <b>Unterschrift</b><br><i>Signature</i>   | <b>Datum</b><br><i>Date</i> | <b>Name / Stellung</b><br><i>Name / Position</i> | <b>Unterschrift</b><br><i>Signature</i>   |
| <b>Sonstiges / Other:</b>  |   |   |                             |  |   |
| <b>Zustand des Prüfgegenstandes bei Anlieferung:</b><br><i>Condition of the test item at delivery:</i>   |   | Prüfmuster vollständig und unbeschädigt<br><i>Test item complete and undamaged</i>  |                             |  |   |
| * Legende: 1 = sehr gut      2 = gut      3 = befriedigend      4 = ausreichend      5 = mangelhaft<br>P(ass) = entspricht o.g. Prüfgrundlage(n)      F(ail) = entspricht nicht o.g. Prüfgrundlage(n)      N/A = nicht anwendbar      N/T = nicht getestet   |   |   |                             |  |   |
| Legend: 1 = very good      2 = good      3 = satisfactory      4 = sufficient      5 = poor<br>P(ass) = passed a.m. test specification(s)      F(ail) = failed a.m. test specification(s)      N/A = not applicable      N/T = not tested  |   |   |                             |  |   |
| <b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b><br><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i> |   |   |                             |  |   |

## TEST SUMMARY

### **5.1.1 ANTENNA REQUIREMENT**

*RESULT: Passed*

### **5.1.2 FIELD STRENGTH OF FUNDAMENTAL**

*RESULT: Passed*

### **5.1.3 20dB AND 99% BANDWIDTH**

*RESULT: Passed*

### **5.1.4 SPURIOUS EMISSION**

*RESULT: Passed*

### **5.2.1 CONDUCTED EMISSIONS LINE AND NEUTRAL**

*RESULT: Passed*

## Contents

|              |   |           |
|--------------|---|-----------|
| <b>1.</b>    | <b>GENERAL REMARKS .....</b>                              | <b>4</b>  |
| <b>1.1</b>   | <b>COMPLEMENTARY MATERIALS.....</b>                       | <b>4</b>  |
| <b>2.</b>    | <b>TEST SITES .....</b>                                   | <b>5</b>  |
| <b>2.1</b>   | <b>TEST FACILITIES .....</b>                              | <b>5</b>  |
| <b>2.2</b>   | <b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>      | <b>6</b>  |
| <b>2.3</b>   | <b>TRACEABILITY .....</b>                                 | <b>7</b>  |
| <b>2.4</b>   | <b>CALIBRATION .....</b>                                  | <b>7</b>  |
| <b>2.5</b>   | <b>MEASUREMENT UNCERTAINTY .....</b>                      | <b>7</b>  |
| <b>3.</b>    | <b>GENERAL PRODUCT INFORMATION.....</b>                   | <b>8</b>  |
| <b>3.1</b>   | <b>PRODUCT FUNCTION AND INTENDED USE .....</b>            | <b>8</b>  |
| <b>3.2</b>   | <b>RATINGS AND SYSTEM DETAILS.....</b>                    | <b>9</b>  |
| <b>3.3</b>   | <b>INDEPENDENT OPERATION MODES.....</b>                   | <b>10</b> |
| <b>3.4</b>   | <b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b> | <b>10</b> |
| <b>3.5</b>   | <b>SUBMITTED DOCUMENTS.....</b>                           | <b>10</b> |
| <b>4.</b>    | <b>TEST SET-UP AND OPERATION MODES.....</b>               | <b>11</b> |
| <b>4.1</b>   | <b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>         | <b>11</b> |
| <b>4.2</b>   | <b>TEST OPERATION AND TEST SOFTWARE.....</b>              | <b>11</b> |
| <b>4.3</b>   | <b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>  | <b>11</b> |
| <b>4.4</b>   | <b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>     | <b>12</b> |
| <b>4.5</b>   | <b>TEST SETUP DIAGRAM .....</b>                           | <b>12</b> |
| <b>5.</b>    | <b>TEST RESULTS .....</b>                                 | <b>14</b> |
| <b>5.1</b>   | <b>TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>     | <b>14</b> |
| <b>5.1.1</b> | <i>Antenna Requirement .....</i>                          | <i>14</i> |
| <b>5.1.2</b> | <i>Field strength of fundamental.....</i>                 | <i>15</i> |
| <b>5.1.3</b> | <i>20dB and 99% Bandwidth.....</i>                        | <i>16</i> |
| <b>5.1.4</b> | <i>Spurious Emission .....</i>                            | <i>19</i> |
| <b>5.2</b>   | <b>MAINS CONDUCTED EMISSIONS .....</b>                    | <b>20</b> |
| <b>5.2.1</b> | <i>Conducted Emissions Line and Neutral.....</i>          | <i>20</i> |
| <b>6.</b>    | <b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>                | <b>21</b> |
| <b>7.</b>    | <b>LIST OF TABLES .....</b>                               | <b>34</b> |
| <b>8.</b>    | <b>LIST OF PHOTOGRAPHS.....</b>                           | <b>34</b> |

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix 1: Photo Documentation**

(File Name: 50081304 001APPENDIX P)

**Appendix D: Test Result of Radiated Emissions**

(File Name: 50081304 001APPENDIX D)

Test Specifications

**Table 1: Applied Standard and Test Levels**

| <b>Radio</b>  |
|---|
| FCC CFR47 Part 15: Subpart C Section 15.207 and 15.209<br>RSS-210 Issue 8, December 2010<br>RSS-Gen, Issue 4, November 2014<br>ANSI C63.10:2013 |

## 2. Test Sites

### 2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

FCC Registration No.: 799772  
IC Canada Registration No.: 9465A-1  
TAF Accredited NCC Test Lab. No.:0759  
TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th



**Testing Laboratory**  
**0759**

## 2.2 List of Test and Measurement Instruments

**Table 2: List of Test and Measurement Equipment**

| Kind of Equipment             | Manu-facturer  | Type         | S/N         | Last Calibration | Next Calibration |
|-------------------------------|----------------|--------------|-------------|------------------|------------------|
| Test Software                 | Farad          | EZ_EMG       | Ver. TUV3A1 | N/A              | N/A              |
| EMI Test Receiver             | R&S            | ESR7         | 101062      | 2016/09/12       | 2017/09/12       |
| Spectrum Analyzer             | R&S            | FSV 40       | 100921      | 2016/04/21       | 2017/04/21       |
| Spectrum Analyzer             | Agilent        | N9010A       | MY53470241  | 2016/04/25       | 2017/04/24       |
| Preamplifier (30MHz -1GHz)    | HP             | 8447F        | 2805A03335  | 2016/07/29       | 2017/07/29       |
| Preamplifier (18 GHz -40 GHz) | COM-POWER      | PAM-840      | 461257      | 2016/12/01       | 2017/12/01       |
| Pre-Amplifier (1GHz~18GHz)    | EM Electronics | EM01G18G     | 060558      | 2016/11/17       | 2017/11/17       |
| Bilog Antenna                 | TESEQ          | CBL6111D     | 29804       | 2016/06/23       | 2017/06/23       |
| Horn Antenna                  | ETS-Lindgren   | 3117         | 138160      | 2016/05/03       | 2017/05/03       |
| Horn Antenna (18GHz~40GHz)    | COM-POWER      | AH840        | 101029      | 2016/10/11       | 2017/10/11       |
| Loop Antenna                  | Schwarzbeck    | FMZB 1513    | 1513-076    | 2016/05/11       | 2017/05/11       |
| EMI Test Receiver             | R&S            | ESC17        | 100797      | 2016/12/30       | 2017/12/30       |
| Spectrum Analyzer             | R&S            | FSL3         | 101943      | 2015/09/07       | 2017/09/07       |
| Temp. & Humid. Chamber        | Giant Force    | GCT-099-40-S | MAF0103-007 | 2015/07/13       | 2017/07/12       |
| LISN (1 phase)                | R&S            | ENV216       | 101243      | 2016/06/02       | 2017/06/02       |
| LISN                          | R&S            | ENV216       | 101262      | 2016/06/16       | 2017/06/16       |

## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are  $\pm 3$ dB.

**Table 3:** Emission Measurement Uncertainty

| Parameter  | Uncertainty            |
|--|------------------------|
| Radio Frequency                                      | $\pm 1 \times 10^{-7}$ |
| RF power, conducted                                  | $\pm 1.5$ dB           |
| Adjacent channel power                               | $\pm 3$ dB             |
| Radiated emission of transmitter, valid up to 26 GHz | $\pm 6$ dB             |
| Radiated emission of receiver, valid up to 26 GHz    | $\pm 6$ dB             |
| Temperature  | $\pm 2$ °C             |
| Humidity   | $\pm 10$ %             |

## 3. General Product Information

### 3.1 Product Function and Intended Use

The EUT is a unit that provides electronic animal identification through RFID at 134.2 kHz. There are four types of antennas, of which three are tested because two are the same.  
NOTE: I will find out what the differences are with Nedap.

For details refer to the User Guide, Data Sheet and Circuit Diagram.



## 3.2 Ratings and System Details

**Table 4: Basic Information of EUT**

| Item              | EUT information                        |
|-------------------|--|
| Kind of Equipment | 134 kHz Inductive proximity tag reader |
| Type Designation  | VP1006                                 |
| Type Designation  | Antenna type 1: VP6040                 |
| Type Designation  | Antenna type 1: VP6041 and VP6042      |
| Type Designation  | Antenna type 1: VP6050                 |
| FCC ID            | CGDVELOS2                              |
| Canada ID         | 1444A-VELOS2                           |

**Table 5: Technical Specification of EUT**

| Item                  | Value                                      |
|-----------------------|--|
| Operating Frequencies | 134.2 kHz                                  |
| Channel number        | 1  |
| Operation Voltage     | 24 Vdc                                     |
| Modulation            | No modulation Emission designator 1K03 P0N |

### **3.3 Independent Operation Modes**

Basic operation modes are:

- A. Transmitting

### **3.4 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.5 Submitted Documents**

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## **4. Test Set-up and Operation Modes**

### **4.1 Principle of Configuration Selection**

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

### **4.2 Test Operation and Test Software**

Setup for testing: The Antennae are connected to the Control Box and there is a Quasi-CW signal applied to the antennae

### **4.3 Special Accessories and Auxiliary Equipment**

The product has been tested together with the following additional accessories:

N/A

## 4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

**Diagram of Measurement Configuration for Radiation Test**


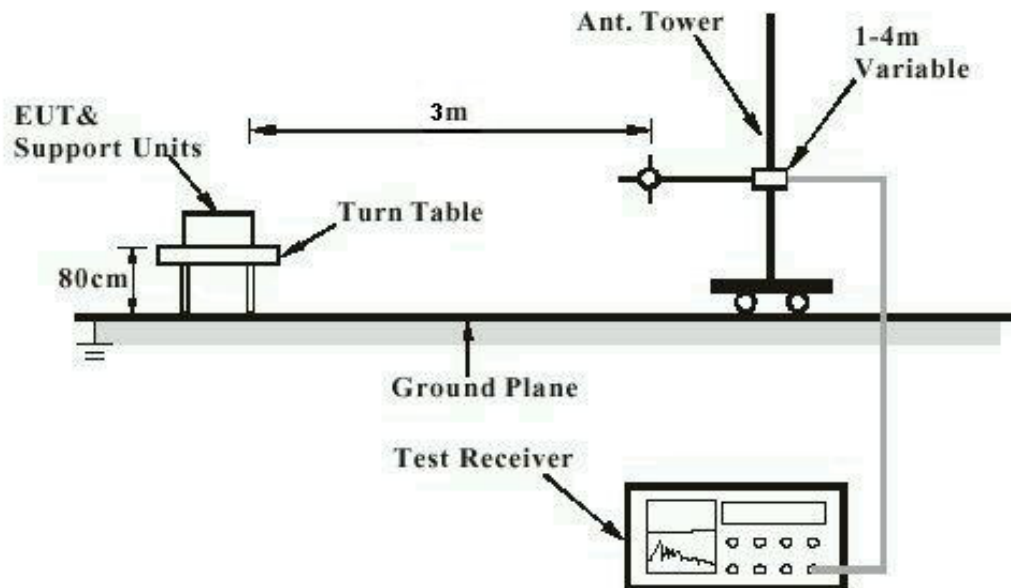


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

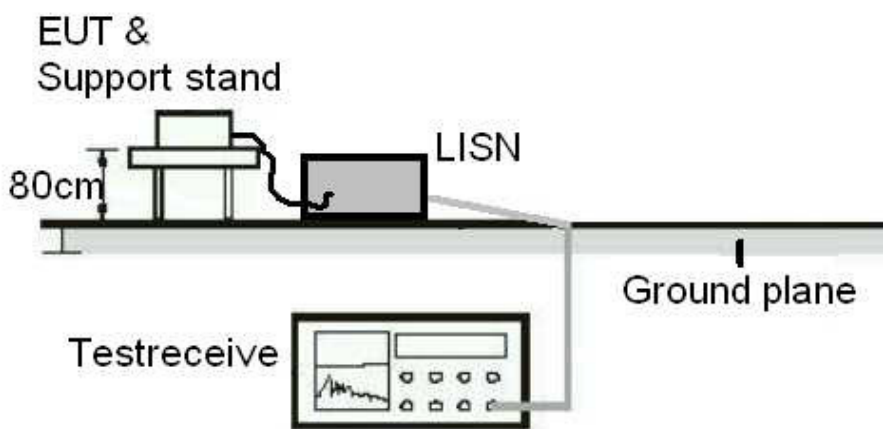

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Passed**

Standard : LP0002(2016): 2.2  
Part 15.203 and RSS-Gen 7.1.4  
Requirement : use of approved antennas only

The antenna cable has a proprietary connector with no possibility of replacement with a non-approved antenna by a normal the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

## 5.1.2 Field strength of fundamental

**RESULT:**
**Passed**

Test standard : FCC Part 15.209  
 RSS-210 (08-2016) B.6  
 LP0002(2016) 3.3.1  
 Basic standard : ANSI C63.10:2013

**Test setup**

Test Channel : 134.2 kHz  
 Operation Mode : A  
 Atmospheric pressure : 100-103 kPa

**Table 6: Field strength of fundamental, maximal level found**
**Antenna VP6040**

| Frequency (kHz) | Level(3m) (dBuV/m) | Detector | Limit(3m) (dBuV/m) | Level(300m) (dBuV/m) | Limit(300m) (dBuV/m) | Remark | Result |
|-----------------|--------------------|----------|--------------------|----------------------|----------------------|--------|--------|
| 134.2           | 112.05             | peak     | 155.05             | -2.4                 | 45.05                | --     | Pass   |
| 134.2           | <112.05            | average  | 135.05             | <-2.4                | 25.05                | --     | Pass   |

**Antenna VP6042**

| Frequency (kHz) | Level(3m) (dBuV/m) | Detector | Limit(3m) (dBuV/m) | Level(300m) (dBuV/m) | Limit(300m) (dBuV/m) | Remark | Result |
|-----------------|--------------------|----------|--------------------|----------------------|----------------------|--------|--------|
| 134.2           | 114.74             | peak     | 155.05             | -2.4                 | 45.05                | --     | Pass   |
| 134.2           | <114.74            | average  | 135.05             | <-2.4                | 25.05                | --     | Pass   |

**Antenna VP6050**

| Frequency (kHz) | Level(3m) (dBuV/m) | Detector | Limit(3m) (dBuV/m) | Level(300m) (dBuV/m) | Limit(300m) (dBuV/m) | Remark | Result |
|-----------------|--------------------|----------|--------------------|----------------------|----------------------|--------|--------|
| 134.2           | 133.88             | peak     | 155.05             | -2.4                 | 45.05                | --     | Pass   |
| 134.2           | <133.88            | average  | 135.05             | <-2.4                | 25.05                | --     | Pass   |

Remark: For details refer to Appendix D

Limits:

| Frequency     | Electric Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|---------------|---|--------------------------|
| 9-490 kHz     | 2,400/F (F in kHz)                          | 300                      |
| 490-1,705 kHz | 24,000/F (F in kHz)                         | 30                       |
| 1,705-30 MHz  | 30  | 30                       |

9-90 kHz and 110-490 kHz: Average detector.

### 5.1.3 20dB and 99% Bandwidth

**RESULT:****Passed**

Test standard : RSS Gen  
Basic standard : ANSI C63.10:2013,

**Test setup**

Operation Mode : A

Atmospheric pressure : 100-103 kPa

**Table 7: Test result of 20dB Bandwidth (worst case)**

| Frequency | 20dB Bandwidth |  |
|-----------|----------------|--|
| 134.2 kHz | 1.04 kHz       |  |


**Table 8: Test result of 99% Bandwidth (worst case)**

| Frequency | 99% Bandwidth |  |
|-----------|---------------|--|
| 134.2 kHz | 1.726 kHz     |  |



## Test Plot of 20dB BW


Antenna VP6050

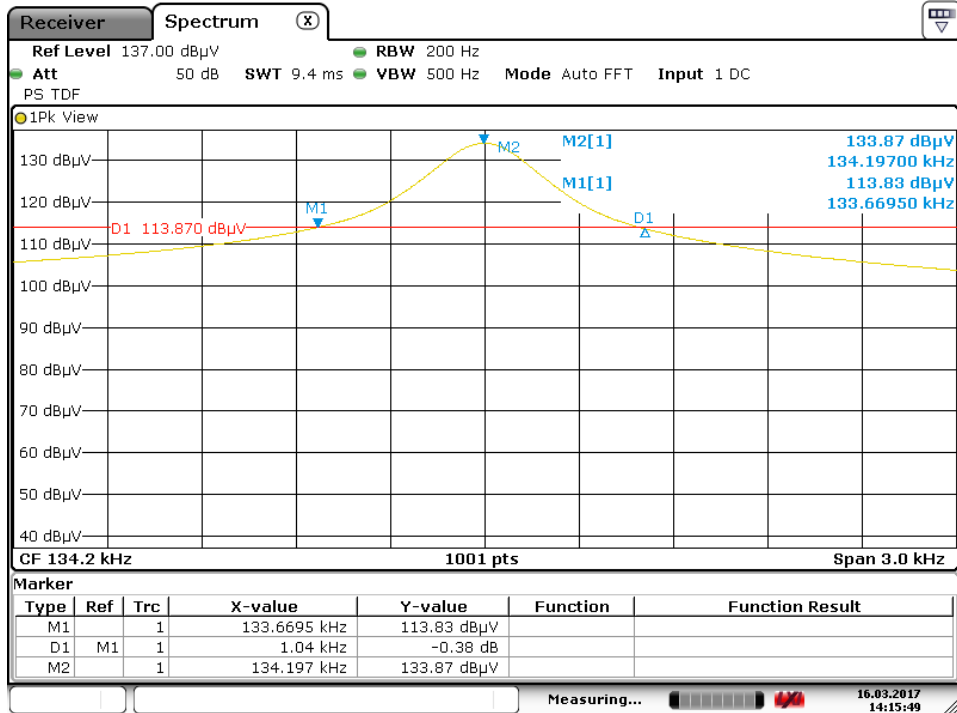

Date: 16.MAR.2017 14:15:49

## Test Plot of 99% BW

Antenna VP6050

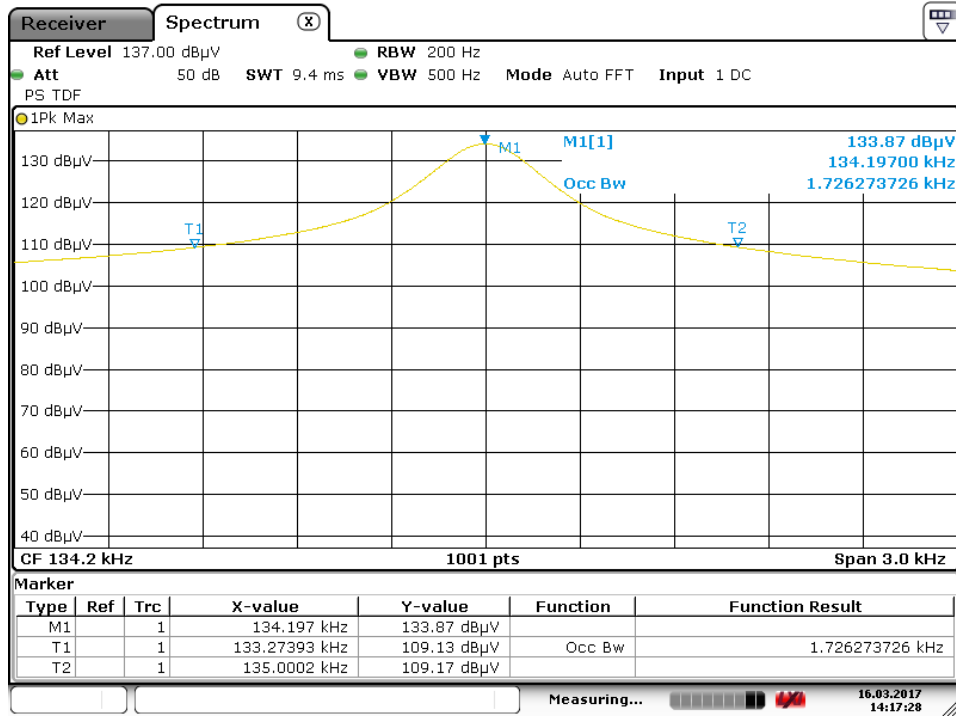

Date: 16.MAR.2017 14:17:28

**Prüfbericht - Nr.: 50081304 001**

Test Report No.

Seite 19 von 34

Page 19 of 34

### 5.1.4 Spurious Emission

**RESULT:****Passed**

Test standard : FCC part 15. 209  
RSS-Gen  
LP0002(2016) 2.8

Basic standard : ANSI C63.10: 2013

Limits : Radiated emissions must comply with the  
radiated emission limits specified in FCC  
15.209(a) AND 2.8

Kind of test site : 3m Semi-Anechoic Chamber

**Test setup**

Test Channel : 134.2 kHz

Operation mode : A

Remark: Testing was carried out within frequency range 9kHz to 1 GHz.

For details refer to Appendix D.

## 5.2 Mains Conducted Emissions

### 5.2.1 Conducted Emissions Line and Neutral

**RESULT:****Passed**

Test standard : FCC Part 15.207  
FCC Part 15.107  
RSS-Gen  
LP0002: 2.3

Limits : Mains Conducted emissions as defined in  
LP0002: 2.3 , must comply with the mains  
conducted emission limits specified in LP0002:  
2.3

Kind of test site : Shielded Room


**Test setup**

Test Channel : Middle  
Operation mode : 134.2 kHz


Remark: For details refer to Appendix D.

## 6. Photographs of the Test Set-Up


**Photograph 1: Set-up for Spurious Emissions TX (Front View) Chamber\_VP6040**

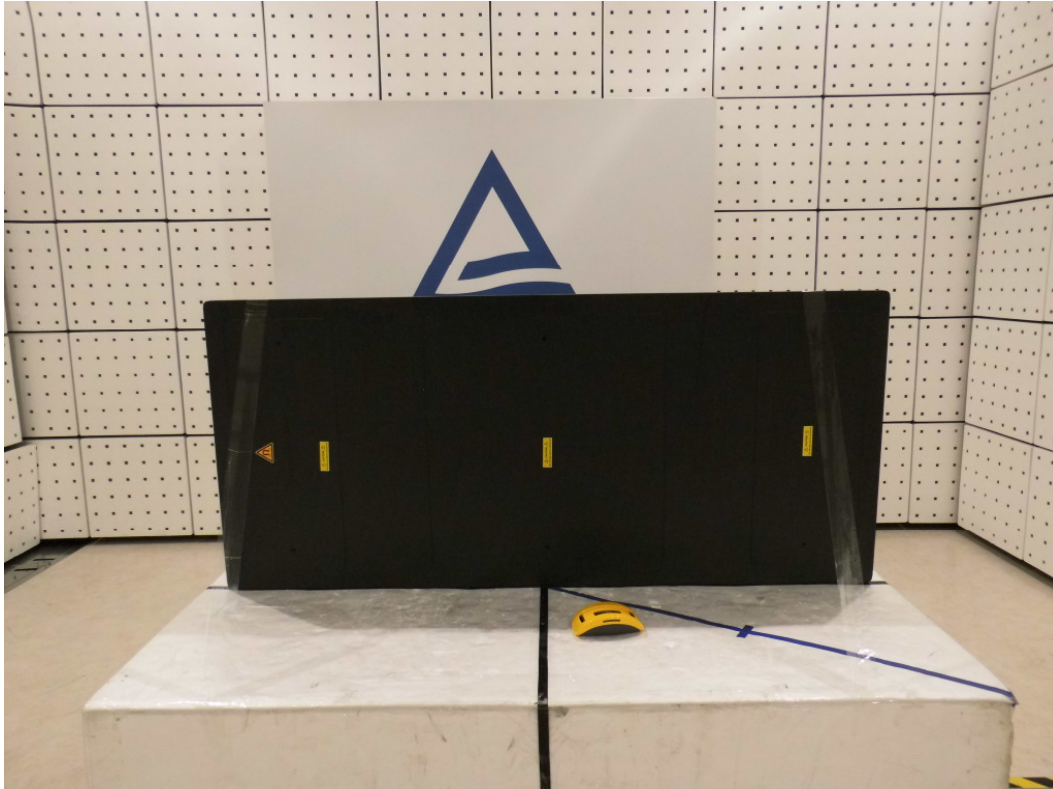

**Photograph 2: Set-up for Spurious Emissions (Back View 1) \_VP6040**

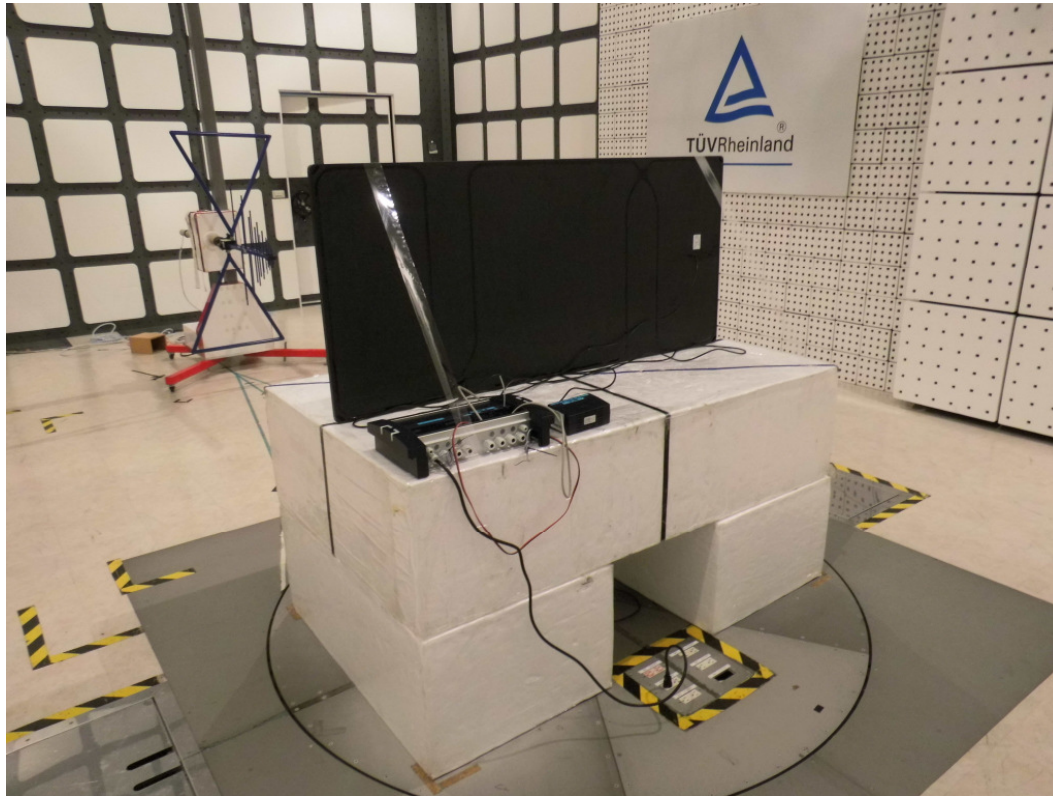


**Photograph 3: Set-up for Spurious Emissions (Back View 2)\_VP6040**

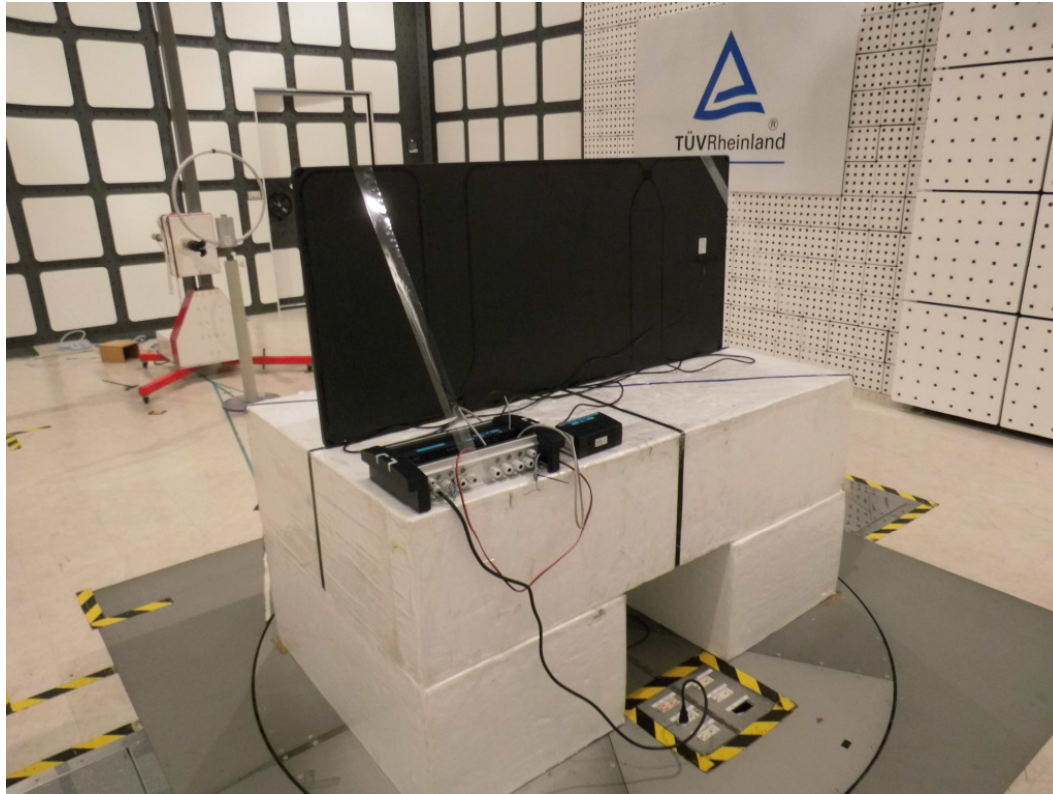




**Photograph 4: Set-up for Mains Conducted testing Back\_VP6040**

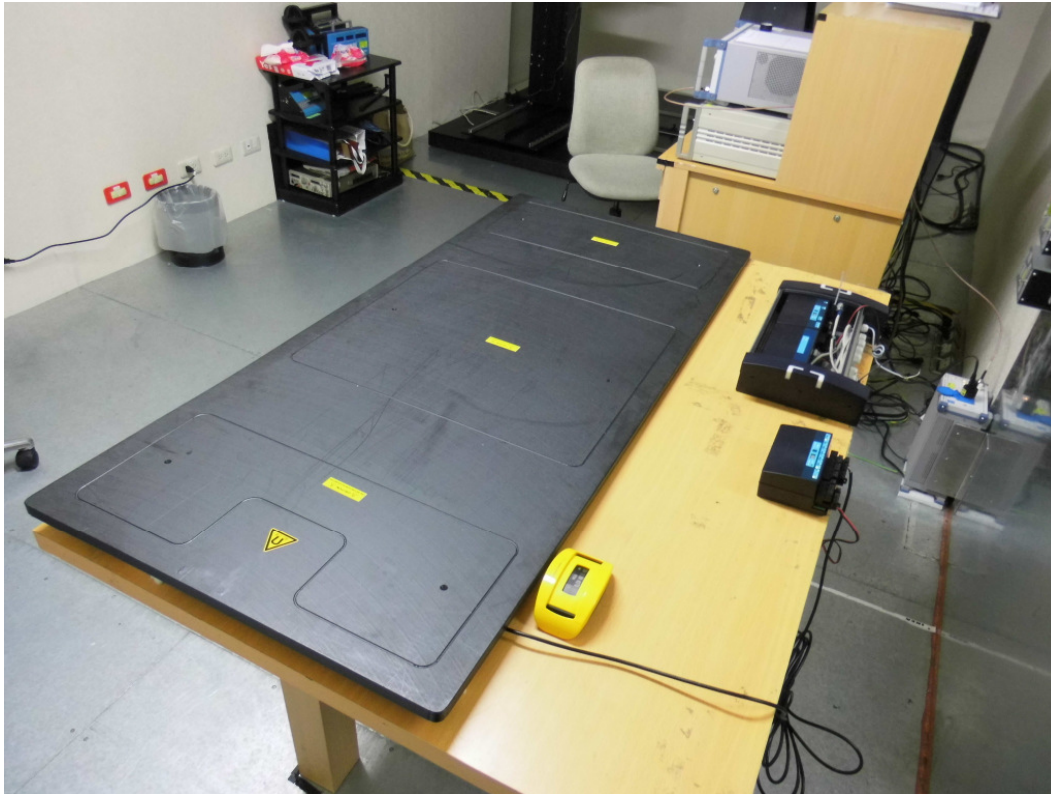





**Photograph 5: Set-up for Mains Conducted testing Front\_VP6040**

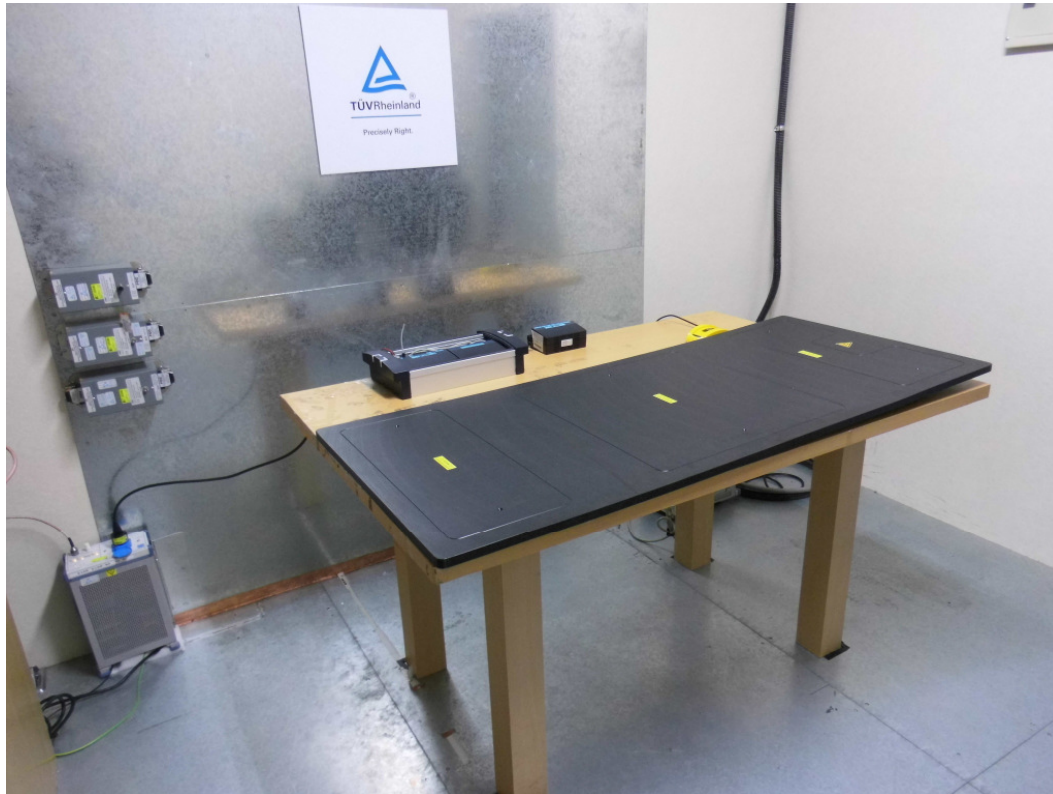


**Photograph 6: Set-up for Spurious Emissions TX (Front View) Chamber\_VP6042**

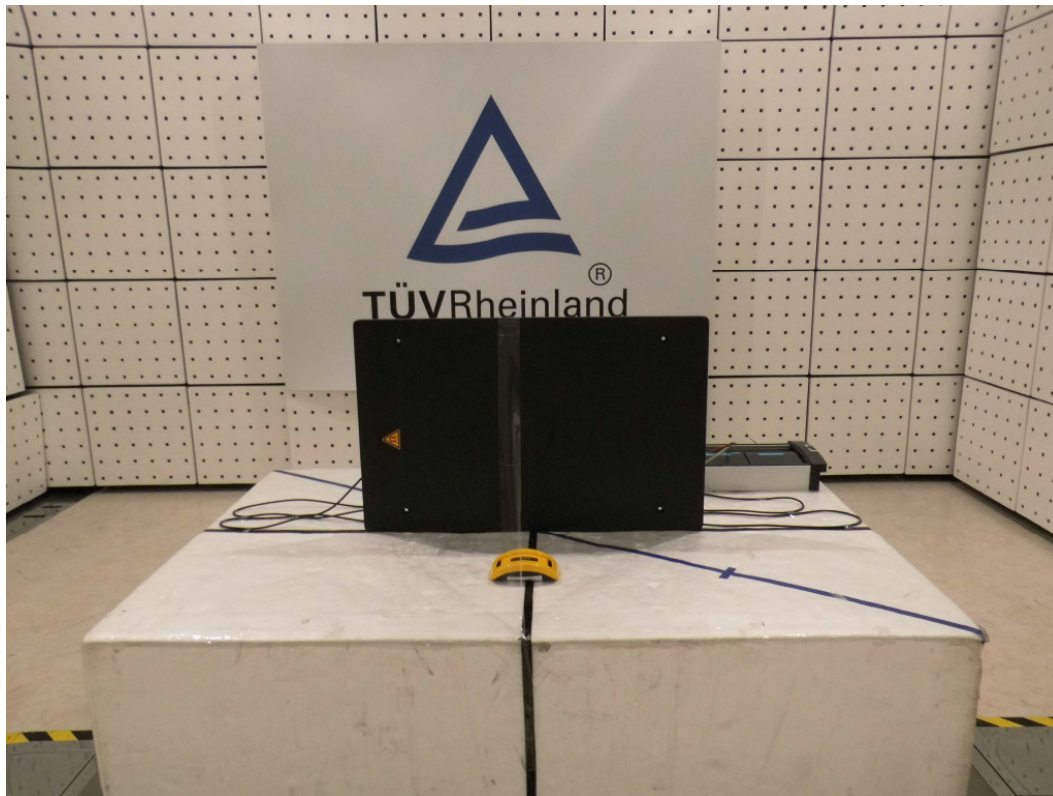

**Photograph 7: Set-up for Spurious Emissions TX (Back View 1)**  
Chamber\_VP6042

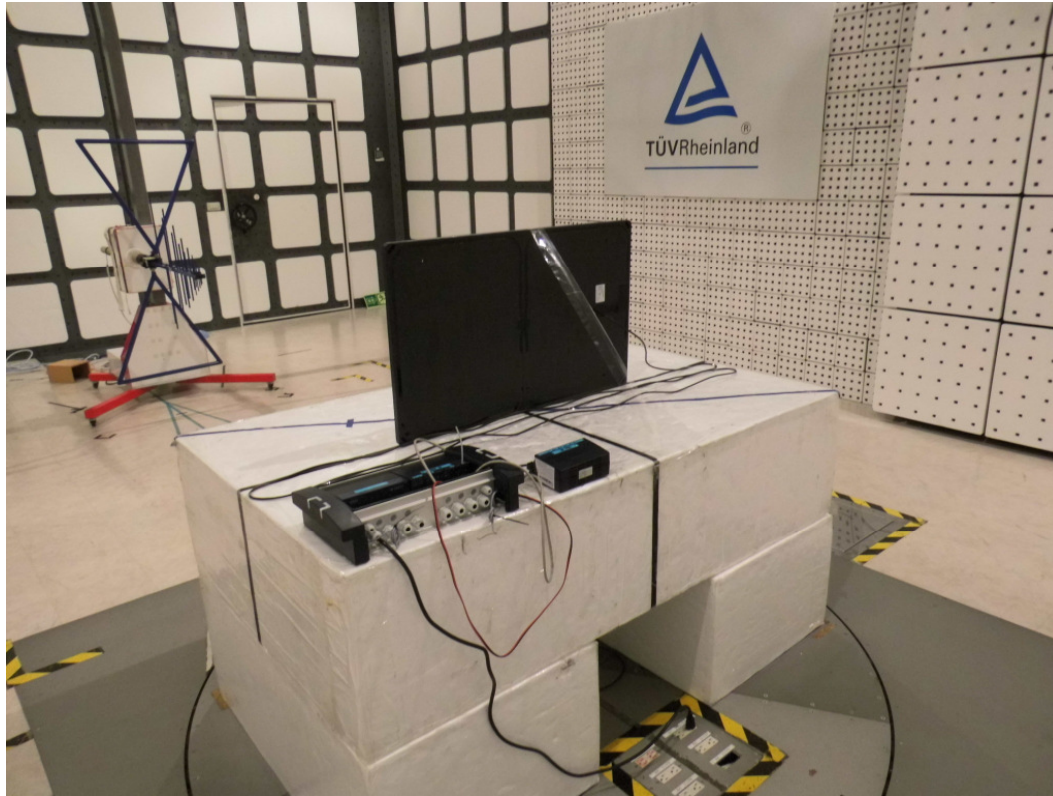

**Photograph 8: Set-up for Spurious Emissions TX (Back View 2)**  
Chamber\_VP6042

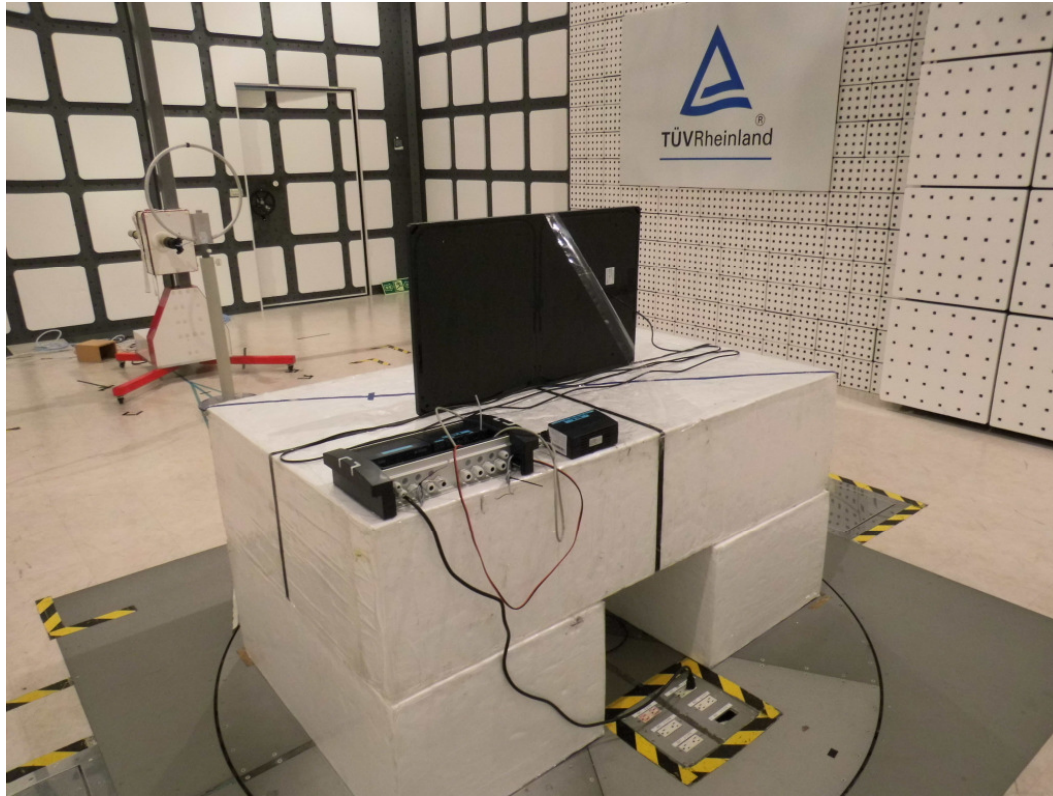




**Photograph 9: Set-up for Mains Conducted testing Front\_VP6042**




**Photograph 10: Set-up for Mains Conducted testing Back\_VP6042**

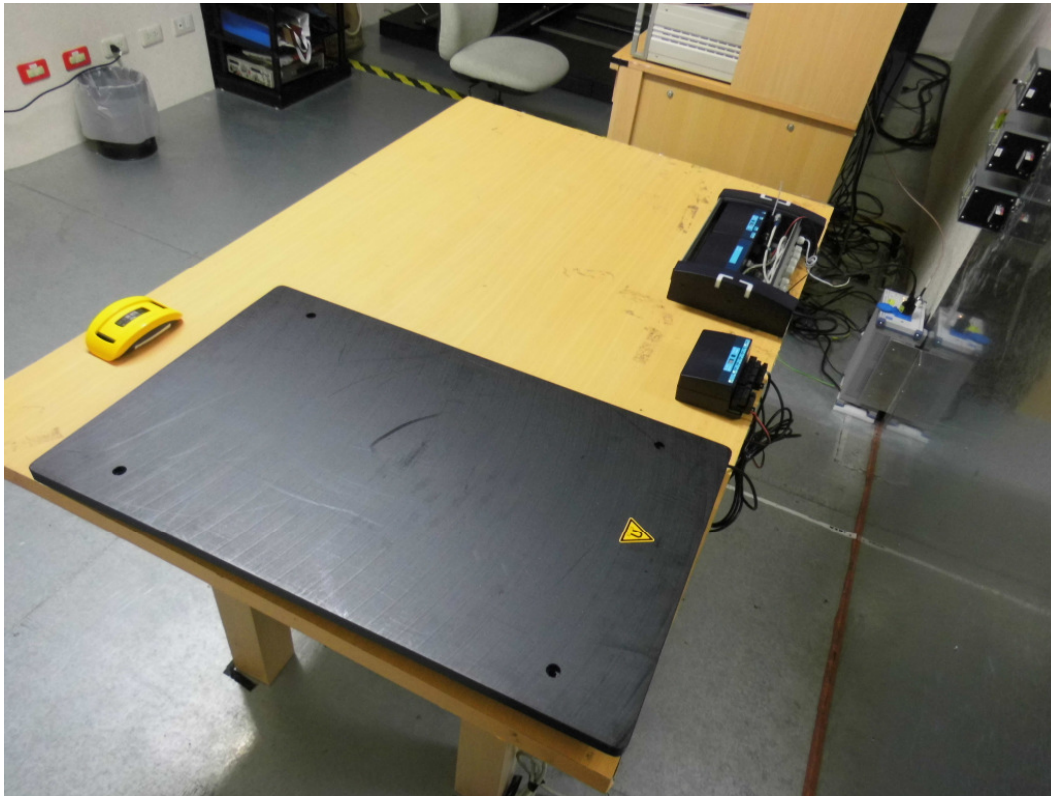

**Photograph 11: Set-up for Spurious Emissions TX (Front View)**  
**Chamber\_VP6050**




**Photograph 12: Set-up for Spurious Emissions TX (Back View 1)**  
Chamber\_VP6050

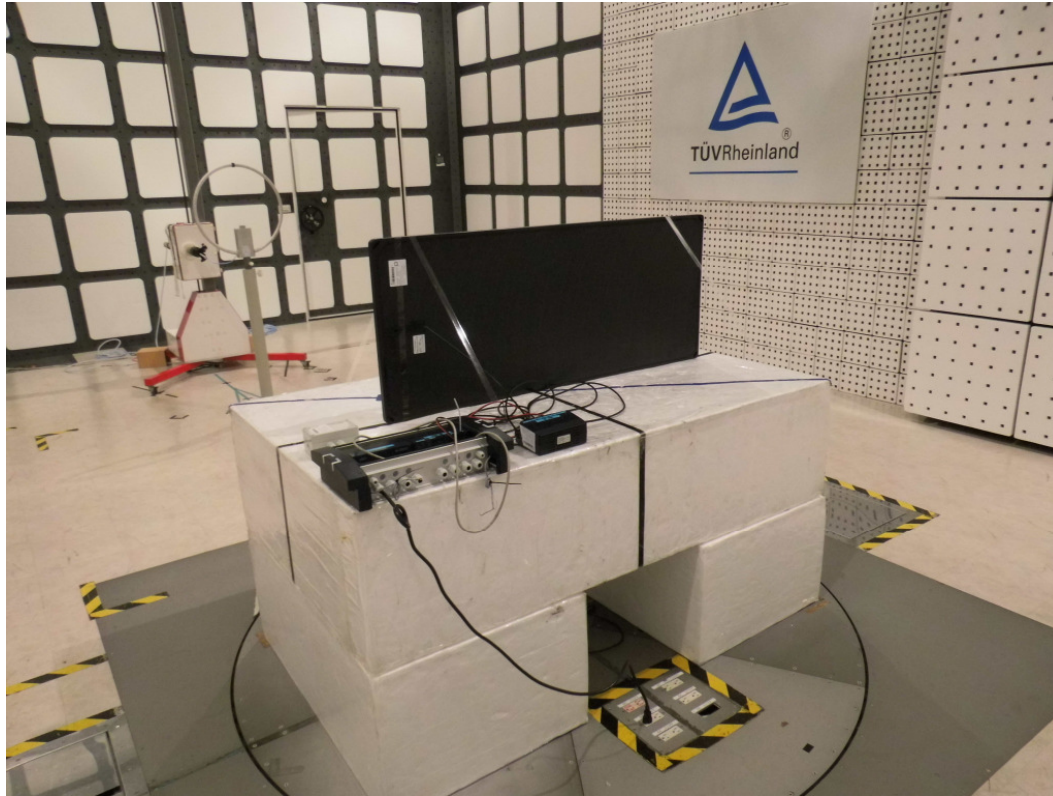



**Photograph 13: Set-up for Spurious Emissions TX (Back View 1)**  
Chamber\_VP6050

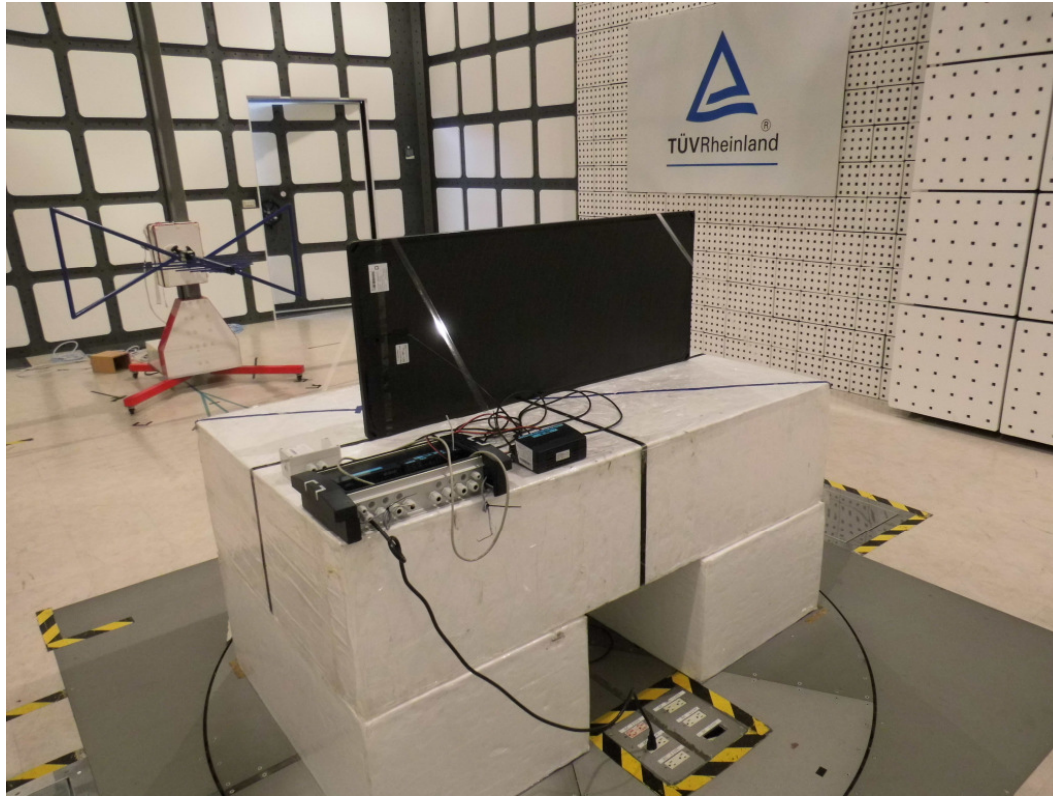

## 7. List of Tables

|  |    |
|--|----|
| Table 1: Applied Standard and Test Levels .....                  | 4  |
| Table 2: List of Test and Measurement Equipment .....            | 6  |
| Table 3: Emission Measurement Uncertainty.....                   | 7  |
| Table 4: Basic Information of EUT .....                          | 9  |
| Table 5: Technical Specification of EUT .....                    | 9  |
| Table 6: Field strength of fundamental, maximal level found..... | 15 |
| Table 7: Test result of 20dB Bandwidth (worst case).....         | 16 |
| Table 8: Test result of 99% Bandwidth (worst case).....          | 16 |

## 8. List of Photographs

|  |    |
|--|----|
| Photograph 1: Set-up for Spurious Emissions TX (Front View) Chamber_VP6040 .....   | 21 |
| Photograph 2: Set-up for Spurious Emissions (Back View 1) _VP6040 .....            | 22 |
| Photograph 3: Set-up for Spurious Emissions (Back View 2)_VP6040 .....             | 23 |
| Photograph 4: Set-up for Mains Conducted testing Back_VP6040 .....                 | 24 |
| Photograph 5: Set-up for Mains Conducted testing Front_VP6040 .....                | 25 |
| Photograph 6: Set-up for Spurious Emissions TX (Front View) Chamber_VP6042 .....   | 26 |
| Photograph 7: Set-up for Spurious Emissions TX (Back View 1) Chamber_VP6042.....   | 27 |
| Photograph 8: Set-up for Spurious Emissions TX (Back View 2) Chamber_VP6042.....   | 28 |
| Photograph 9: Set-up for Mains Conducted testing Front_VP6042 .....                | 29 |
| Photograph 10: Set-up for Mains Conducted testing Back_VP6042 .....                | 30 |
| Photograph 11: Set-up for Spurious Emissions TX (Front View) Chamber_VP6050 .....  | 31 |
| Photograph 12: Set-up for Spurious Emissions TX (Back View 1) Chamber_VP6050 ..... | 32 |
| Photograph 13: Set-up for Spurious Emissions TX (Back View 1) Chamber_VP6050 ..... | 33 |