

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>19022705C.r02</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	89003402	Seite 1 von 29 Page 1 of 29
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	1541649	<b>Auftragsdatum:</b> <i>Order date:</i>	2020-03-13	
<b>Auftraggeber:</b> <i>Client:</i>	Nedap N.V., Parallelweg 2 7141 DC Groenlo, Netherlands, A. Haytema			
<b>Prüfgegenstand:</b> <i>Test item:</i>	134.2 kHz Inductive RFID Card Reader / Motor controller			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	VP1006B in combination with VP6012 antenna and Single Loop Walk Through antenna			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Compliance with regulatory requirements			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	47 CFR PART 15 (10-1-19 EDITION), Subpart 15C RSS-Gen (Issue 5 April 2018) General Requirements for Compliance of Radio Apparatus and RSS-210 (Issue 10 Dec 2019) Licence-exempt Radio Apparatus			

<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	2020-03-16
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	-
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2020-03-20 / 2020-04-02
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	Leek
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland Nederland B.V. Leek Laboratory
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass



<b>geprüft von / tested by:</b>		<b>genehmigt von / reviewed &amp; authorized by:</b>			
<i>Datum /date:</i> 2020-04-17		Richard van der Meer, Expert		<i>Datum /date:</i> 2020-04-17	
		Erik van der Wal, Expert			
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b> issue date is equal to authorized date					

<b>Zustand des Prüfgegenstandes bei Anlieferung: 2</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>
<p>* Legende: 1 = sehr gut      2 = gut      3 = befriedigend      4 = ausreichend      5 = mangelhaft  P(ass) = entspricht o.g. Prüfgrundlage(n)      F(ail) = entspricht nicht o.g. Prüfgrundlage(n)      N/A = nicht anwendbar      N/T = nicht getestet</p> <p>Legend: 1 = very good      2 = good      3 = satisfactory      4 = sufficient      5 = poor  P(ass) = passed a.m. Test specification(s)      F(ail) a.m. test specification(s)      N/A = not applicable      N/T = not tested</p>	

**Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.**  
*This test report only relates to the above mentioned testsample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This report does not entitle to carry any test mark*

V04

Test Report No.:

**19022705C.r02**

Page 2 of 29

## TEST SUMMARY

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
§15.209 / RSS-Gen Table 5	Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.207 / RSS-Gen Table 4	AC Power Line Conducted Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

### Revisions Revisions

Revision Revision	Datum Date	Anmerkung Remark	Verfasser Author
-	2020.04.17	First release	R. van der Meer

Note: Latest revision report will replace all previous reports

## Contents

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
1.1.1	<i>Complementary Materials .....</i>	<i>4</i>
1.1.2	<i>Special Accessories .....</i>	<i>4</i>
1.1.3	<i>Equipment modifications .....</i>	<i>4</i>
<b>2.</b>	<b>TEST SITES .....</b>	<b>5</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>5</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT.....</b>	<b>6</b>
<b>2.3</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>8</b>
<b>3.1</b>	<b>COUNTERMEASURES TO ACHIEVE COMPLIANCE .....</b>	<b>8</b>
<b>3.2</b>	<b>OPERATION MODES .....</b>	<b>8</b>
<b>3.3</b>	<b>PHYSICAL CONFIGURATION FOR TESTING .....</b>	<b>9</b>
<b>3.4</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>11</b>
<b>4.</b>	<b>TEST RESULTS .....</b>	<b>12</b>
4.1.1	<i>20dB and 99% Bandwidth.....</i>	<i>12</i>
4.1.2	<i>Radiated Emissions of Transmitter .....</i>	<i>16</i>
4.1.3	<i>Radiated field strength measurements H-field, 0.009-30 MHz. ....</i>	<i>18</i>
	<i>Test equipment used (for reference see test equipment listing).....</i>	<i>18</i>
<b>2</b>	<b>AC POWER LINE CONDUCTED MEASUREMENTS.....</b>	<b>23</b>
2.1.1	<i>AC Power Line Conducted Emission of Transmitter.....</i>	<i>24</i>
	<i>Plots of the AC Power-line Conducted Emissions .....</i>	<i>25</i>

*Test Report No.:*

**19022705C.r02**

*Page 4 of 29*

## **1. General Remarks**

### **1.1.1 Complementary Materials**

There is no attachment to this test report.

### **1.1.2 Special Accessories**

None.

### **1.1.3 Equipment modifications**

None

## 2. Test Sites

### 2.1 Test Facilities

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meters. The site is listed with the FCC and ISED and accredited by RvA (Cert #L484). The 3 meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter. H-field measurements have been done in the Semi-Anechoic chamber to identify emissions from the EUT and final testing been performed on the outside facilities at 3m, 5m and 10m distance.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under Designation Number NL0005 (test site registration number: 786213). The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under CABID number NL0002 (test site registration number: 2932G-2). The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

Temperature (\*) : +15°C to +35°C  
Relative humidity(\*) : 20 % to 75 %  
Supply voltage : 120 Vac.

*(\*)When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.*

Test Report No.:

**19022705C.r02**

Page 6 of 29

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
<b>For Radiated Emissions</b>					
Measurement Receiver	Rohde & Schwarz	ERC7	2790497	07/2019	07/2020
Measurement Receiver H-field outside fasc.	Rohde & Schwarz	ESCI	2789083	03/2020	03/2021
RF Cable S-AR	Gigalink	APG0500	2789217	03-10/2020	03-10/2021
Test facility	Comtest	FCC listed: 786213 IC: 2932G-2	2789009	03-15/2020	03-15/2022
Spectrum Analyzer	Rohde & Schwarz	FSV	2790106	07/2018	07/2020
Antenna mast+control	Innco	CO3000	9002463	N/A	N/A
Temperature-Humiditymeter	Extech	SD500	2789214	06/2019	06/2020
Biconilog Testantenna	Teseq	CBL 6111D	2789237	11/2019	11/2020
Magnetic Loop Antenna, Active	Chase	HLA-6120	A01491	12/2017	12/2020
Magnetic Loop Antenna, Passive	EMCO	6509	2788774	12/2017	12/2020
120Vac source	EMtest	DPA500N	2789197	11/2019	11/2021

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
<b>For AC Powerline Conducted Emissions</b>					
Pulse limiter	R&S	ESH3-Z2	2788823	09/2019	09/2020
120Vac source	EMtest	DPA500N	2789197	11/2019	11/2021
LISN	Rohde & Schwarz	ESH2-Z5	2788791	06/2018	06/2020
Measurement Receiver	Rohde & Schwarz	ESCS30	2789421	11/2019	11/2020
Shielded room for Conducted emissions	--	--	2789207	NA	NA
Temperature-Humiditymeter	Extech	SD500	2789211	06/2019	06/2020

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing. NA= Not Applicable

### Accreditation

The reported tests were performed under ISO17025 accreditation, unless otherwise specified as 'not under Accreditation'.

An overview of all TÜV Rheinland Nederland B.V. accreditations, notifications and designations, please visit our website [www.tuv.com/nl](http://www.tuv.com/nl). You can find the relevant declarations under the download link.

Test Report No.:

**19022705C.r02**

Page 7 of 29

## 2.3 Measurement Uncertainty

**Table 2: Emission Measurement Uncertainty**

Measurement Type	Frequency	Uncertainty
Radiated Emission	9kHz - 30MHz	±5.0dB
	30MHz - 1GHz	±5.0dB
AC Power Line Conducted Emissions	150kHz - 30MHz	±3.5dB

### **3. General Product Information**

The EUT is used for electronic animal identification through RFID. The EUT has the capability of operating on 134.2 kHz. There are nine types of antennas, of which two are tested (the smallest and the largest). For details refer to the User Guide, data sheet and circuit diagram.

#### Technical Specifications

<b>Technical Specifications</b>	<b>Value</b>
Operating Frequency	134.2 kHz
Channel number	1
Operation Voltage	25 Vdc
Modulation	None
Antenna Type tested	VP6012 and Single Loop Walk Through
Antenna Gain	-(loop antenna)

#### **3.1 Countermeasures to achieve compliance**

No additional measures were employed to achieve compliance.

#### **3.2 Operation Modes**

Testing was performed at 134.2 kHz, the only operating frequency at Maximum Power Level of 99 (0 -99%).



Test Report No.:

**19022705C.r02**

Page 9 of 29

### 3.3 Physical Configuration for Testing

The EUT was tested on a stand-alone basis as per Figure 1.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2013.

List of used cables					
No.	Function	From	To	Length	Remarks
1	AC Power	Mains	AUX3	> 1 m	-
2	DC power	AUX3	AUX2	< 3 m	-
3	DC power	AUX2	EUT	> 3 m	-
4	RF Output	EUT	AUX1a/1b	> 3 m	-

See Figure 1 & 2 on the next page.

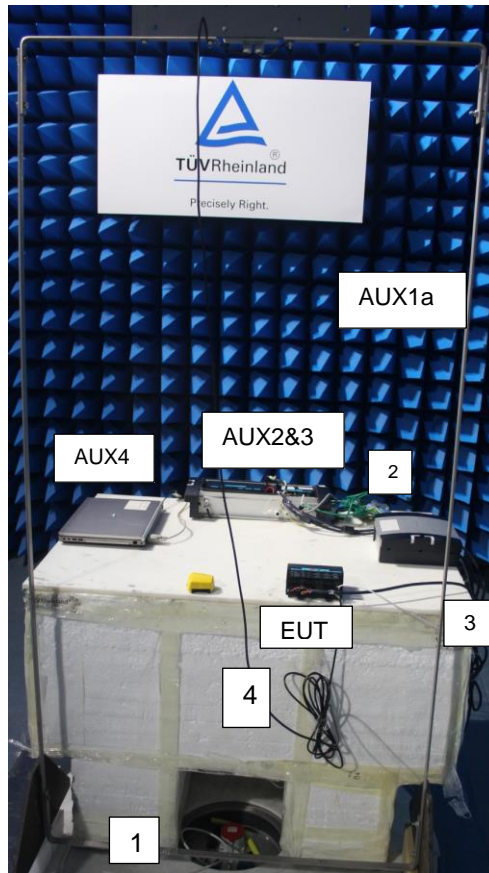


Figure 1: Test Setup Photos – EUT in combination with Single Walk Through Antenna

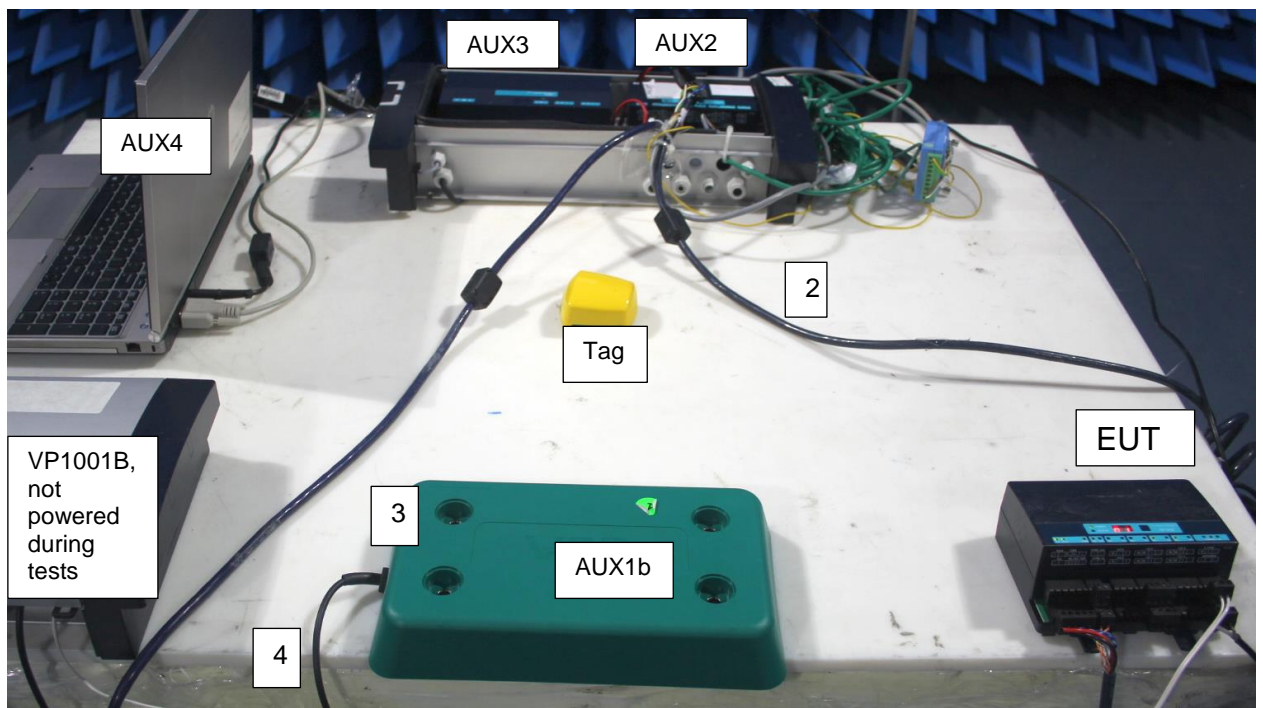


Figure 2: Test Setup Photos – EUT in combination with VP6012 antenna

Test Report No.:

**19022705C.r02**

Page 11 of 29

### 3.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

AUX1 Antenna  
Auxiliary 1a & 1b : Antenna Single Loop Walk Through and V-Sence  
Manufacturer : Nedap N.V.  
Brand : Nedap  
Model : ---  
Serial number : ---  
Part number : 9835733 and VP6012  
Remark : -

AUX2 Interface  
Auxiliary 2 : Interface bridge milking  
Manufacturer : Nedap N.V.  
Brand : Nedap  
Model : VP8002  
Part number : -  
Voltage input rating : 25Vdc

AUX3 Power supply  
Auxiliary 3 : Power supply (AC/DC switched power supply)  
Manufacturer : Nedap N.V.  
Brand : Nedap  
Model : VP2001B  
Voltage input rating : 100..240V/ 50/60 Hz  
Voltage output rating : 25Vdc 4 Amp

Auxiliary 4 : Laptop  
Manufacturer : HP  
Brand : HP  
Models : NC6400  
Serial number : Nedap NCV1007  
Remark: not used during test, used only to check correct  
operation of the system

Test Report No.:

**19022705C.r02**

Page 12 of 29

## 4. Test Results

### 4.1.1 20dB and 99% Bandwidth

#### RESULT: Pass

Tested by: R. van der Meer  
Date of testing: 2020-03-23

Requirements:

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

Test procedure 20dB bandwidth:  
ANSI C63.10-2013 section 11.8.1

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 200 Hz, video bandwidth to 1kHz and the span wide enough to capture the modulated carrier.

For 99% Bandwidth:

Test procedure: RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.


Test Report No.:

**19022705C.r02**

Page 13 of 29

**20dB and 99% Bandwidth**

with Antenna	Operating Frequency [MHz]	99% Bandwidth [kHz]	20dB Bandwidth [kHz]	Plot number
AUX1a Single Walk Through	0.1342	2.32	1.29	A1/A2
AUX1b VP6012	0.1342	1.90	1.08	B1/B2

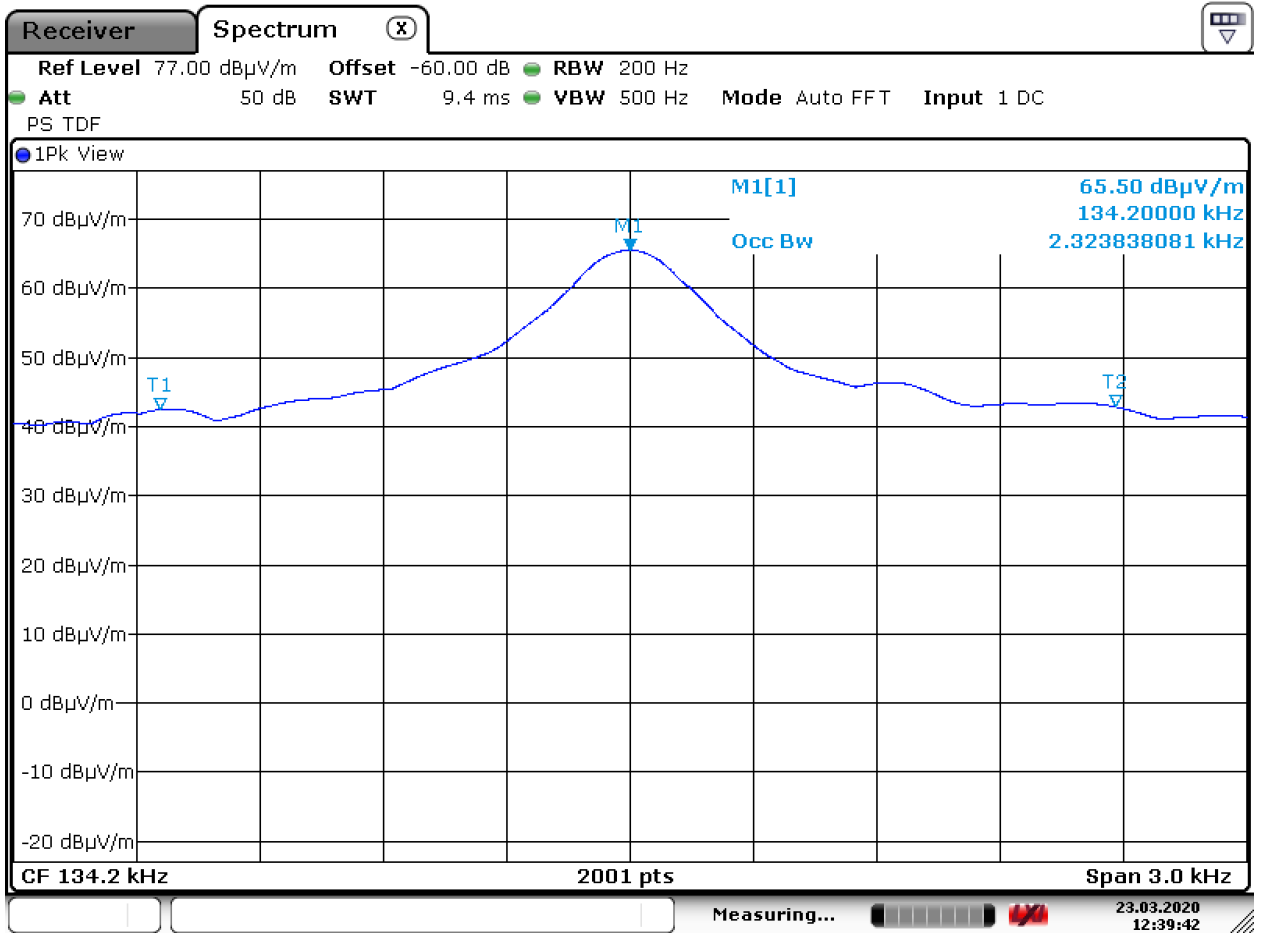

Date: 23.MAR.2020 12:39:42


Plot A1, 99% dB BW, EUT with Single Walk Through antenna,  
without tag (is worst case)



Test Report No.:


19022705C.r02

Page 15 of 29

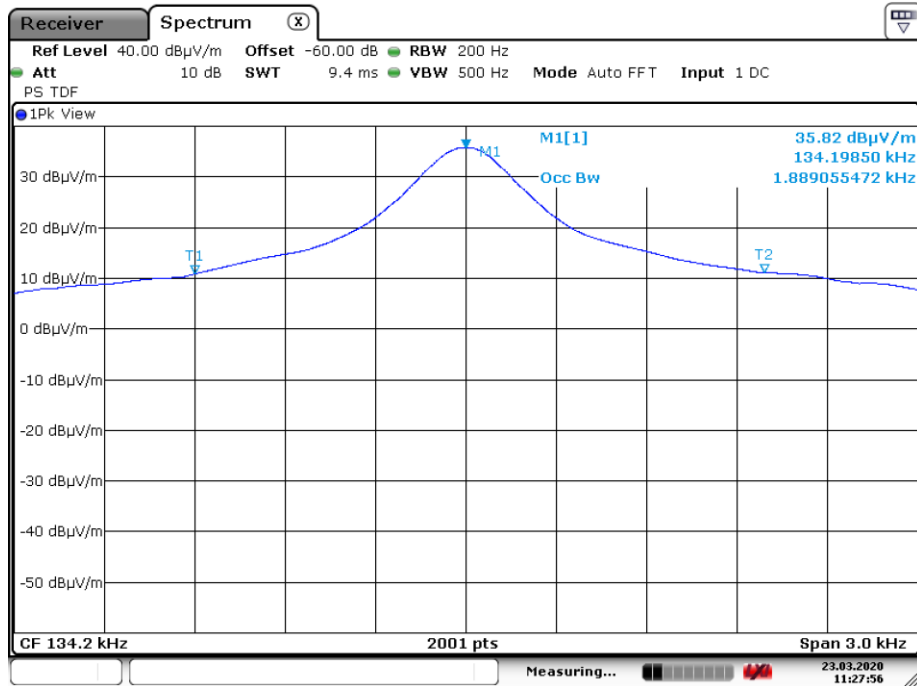

Date: 23.MAR.2020 11:27:56

Plot B1, 99% dB BW, EUT with VP6012, without tag (is worst case)

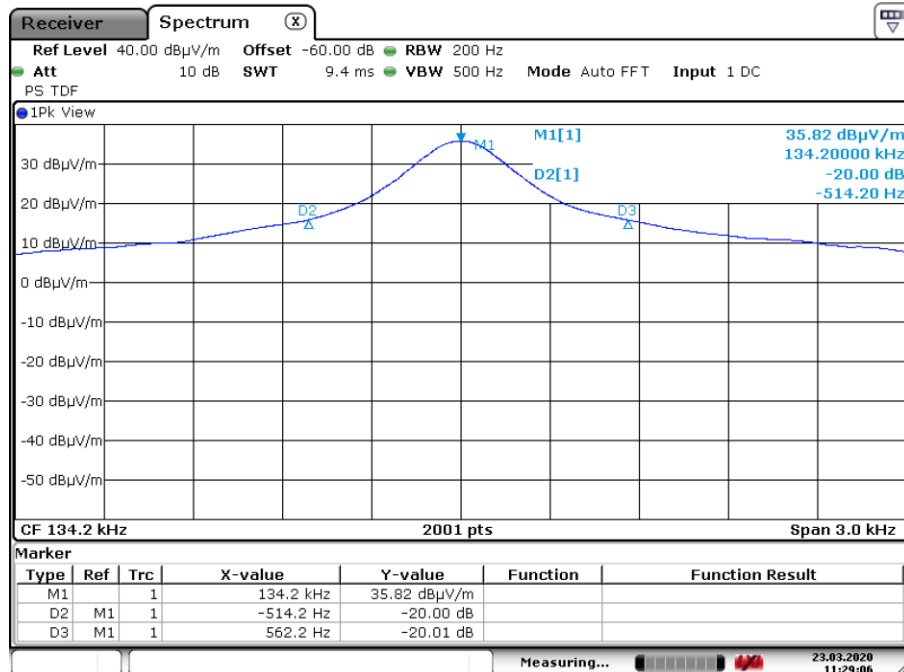

Date: 23.MAR.2020 11:29:07

Plot B2, 20 dB BW, EUT with VP6012, without tag (is worst case)

Test Report No.:

**19022705C.r02**

Page 16 of 29

## 4.1.2 Radiated Emissions of Transmitter

### RESULT: Pass

Tested by: R. van der Meer  
Date of testing: 2020-03-20 / 2020-04-02

Frequency range: 9kHz - 1GHz

Requirements:  
FCC 15.209 and RSS-Gen

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following tables:

Frequency (MHz)	Field strength (microvolts/meter)	Field strength (dB $\mu$ V/m)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	43.5-13.8	300
0.490-1.705	24000/F(kHz)	33.8-22.9	30
1.705-30.0	30	29.5	30

Table 2a. Field strength limits

Frequency (MHz)	Field strength ( $\mu$ V/meter)	Field strength (dB $\mu$ V/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0 (Av), 74 (Pk)	3

Table 2b applicable limits

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen Table 7, must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen Table 5&6.



*Test Report No.:*

**19022705C.r02**

*Page 17 of 29*

Test procedure:

ANSI C63.10-2013.

Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 9 kHz to 1 GHz. Radiated emission testing was performed at a distance of 3 meters in a 5 meter semi-anechoic chamber. Final radiated emission measurements below 30MHz were made at 3m, 5m and 10m distance on the outside open field facility. The measured values were corrected to the 30m distance using the extrapolation factor of 40dB/decade as per FCC Part 15.31(f)(2) or by determining the proper extrapolation factor by using the measurement results at 3m and 10m distance..

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Test Report No.:

**19022705C.r02**

Page 18 of 29

**4.1.3 Radiated field strength measurements H-field, 0.009-30 MHz.**

Frequency (MHz)	Measurement results	Measurement results (for info only)	Measurement results (for info only)	Detector	Extrapolation factor	Measurement results (calculated)	Limits	Pass/Fail
	dBµV @3m	dBµV @5m	dBµV @10m					
0.1342 (fundamental)	104.1 (x)	98.8 (x)	87.0 (x)	Pk	80	24.1	45.1	Pass
	98.4 (y)	88.1 (y)	83.2 (y)					
	97.2 (z)	93.2 (z)	90.2 (z)					
0.1342 (fundamental)	102.6 (x)	97.9 (x)	85.2 (x)	Av	80	2.6	25.1	Pass
	97.0 (y)	83.4 (y)	76.2 (y)					
	95.4 (z)	90.2 (z)	87.0 (z)					
0.2684 *H	77.5	-	-	Pk	80	-2.5	39.0	Pass
0.2684 *H	75.9	-	-	Av	80	-4.1	19.0	Pass
0.4026 *H	74.2	-	-	Pk	80	-5.8	35.5	Pass
0.4026 *H	72.1	-	-	Av	80	-7.9	15.5	Pass
1.152 *5	60.3	-	-	Pk	40	20.3	29.5@30m	Pass
15.036 *5	50.2	-	-	Pk	40	10.2	29.5@30m	Pass

Table 3a Radiated emissions of the EUT with Single Loop Walk Through Antenna

Frequency (MHz)	Measurement results	Measurement results (for info only)	Measurement results (for info only)	Detector	Extrapolation factor	Measurement results (calculated)	Limits	Pass/Fail
	dBµV @3m	dBµV @5m	dBµV @10m					
0.1342 (fundamental)	98.2 (x)	89.0 (x)	75.7 (x)	Pk	80	18.2	45.1	Pass
	87.0 (y)	80.7 (y)	67.0 (y)					
	92.9 (z)	87.4 (z)	73.0 (z)					
0.1342 (fundamental)	85.1 (x)	73.3 (x)	67.3 (x)	Av	80	5.1	25.1	Pass
	76.3 (y)	72.2 (y)	55.6 (y)					
	83.0 (z)	78.7 (z)	68.1 (z)					
0.2684 *H	81.4	-	-	Pk	80	1.4	39.0	Pass
0.2684 *H	73.8	-	-	Av	80	-6.2	19.0	Pass
0.4026 *H	80.7	-	-	Pk	80	0.7	35.5	Pass
0.4026 *H	72.0	-	-	Av	80	-8.0	15.5	Pass
1.37 *5	61.7	-	-	Pk	40	21.7	29.5@30m	Pass
15.558 *5	49.9	-	-	Pk	40	9.9	29.5@30m	Pass

Table 3b Radiated emissions of the EUT with VP6012 antenna (vertical- is worst case)

**Test equipment used (for reference see test equipment listing).**

2789083	2790033	2788774	2789217					
---------	---------	---------	---------	--	--	--	--	--

Test Report No.:

**19022705C.r02**

Page 19 of 29

**Notes:**

1. Calculated measurement results are obtained by using the 40 dB/decade extrapolation factor and the antenna factor and cable loss is included. For instance the corrected value for 0.1342 MHz fundamental frequency is calculated as: Measurement result + Antenna Factor + Cable loss – Extrapolation Factor =>  
 $104.1 \text{ dB}\mu\text{V} - 80 \text{ dB} = 24.1 \text{ dB}\mu\text{V}/\text{m}$ .
2. In the frequency range 9 kHz – 10 MHz Peak detector used during measurements with a resolution bandwidth of 9kHz was used. Most Peak values were already within Av limits. For the frequency range 10 MHz – 30 MHz a Quasi peak detector used during measurements with a resolution bandwidth of 9kHz was used.
3. Field strength values of radiated emissions at frequencies in the frequency range 0.009 – 30 MHz not listed in Tables 3a and 3b are more than 20 dB below the applicable limit. The reported value is the worst case found at the reported frequency.
4. Restricted bands were investigated and were found to be below the levels as reported in Tables 3a and 3b.
5. Pk value within Qp limit.
6. Measurement uncertainty is  $\pm 5.0\text{dB}$ .
7. VP1001B and aux items for programming were also on the test table during testing because of the complex wiring system, but deactivated.

Test Report No.:

**19022705C.r02**

Page 20 of 29

#### 4.1.4 Radiated Spurious Emissions, 30MHz - 1GHz

Frequency [MHz]	EUT Orientation	Antenna Orientation	Level QP [dBµV/m]	Limit QP [dBµV/m]	Verdict [Pass/Fail]
31.2	Vertical	Vertical	31.6	40.0	Pass
50.6	Vertical	Vertical	29.7	40.0	Pass
128.6	Vertical	Vertical	22.2	43.5	Pass
177.5	Vertical	Vertical	28.1	43.5	Pass
279.8	Horizontal	Horizontal	28.8	46.0	Pass
370.0	Vertical	Vertical	32.0	46.0	Pass


Table 4a Radiated emissions of the EUT with Single Loop Walk Through Antenna

Frequency [MHz]	EUT Orientation	Antenna Orientation	Level QP [dBµV/m]	Limit QP [dBµV/m]	Verdict [Pass/Fail]
31.2	Vertical	Vertical	29.8	40.0	Pass
50.6	Vertical	Vertical	22.4	40.0	Pass
128.6	Vertical	Vertical	20.2	43.5	Pass
177.5	Vertical	Vertical	25.5	43.5	Pass
320.5	Vertical	Vertical	31.1	46.0	Pass
378.7	Vertical	Vertical	30.9	46.0	Pass

Table 4b Radiated emissions of the EUT with VP6012 antenna


- Note:
- Level QP = Reading QP + Factor
  - Tested in modes as described in section 3.2, the 6 highest values noted.
  - \*<sup>R</sup> refers to a frequency in a restricted band, \*<sup>H</sup> refers to a harmonic of the fundamental
  - Quasi Peak detector used with a bandwidth of 120 kHz.
  - Measurement uncertainty is +/- 5.0 dB.
  - a selection of plots are provided on the next pages
  - VP1001B and aux items for programming were also on the test table during testing because of the complex wiring system, but deactivated

### 4.1.5 Plots of the emissions

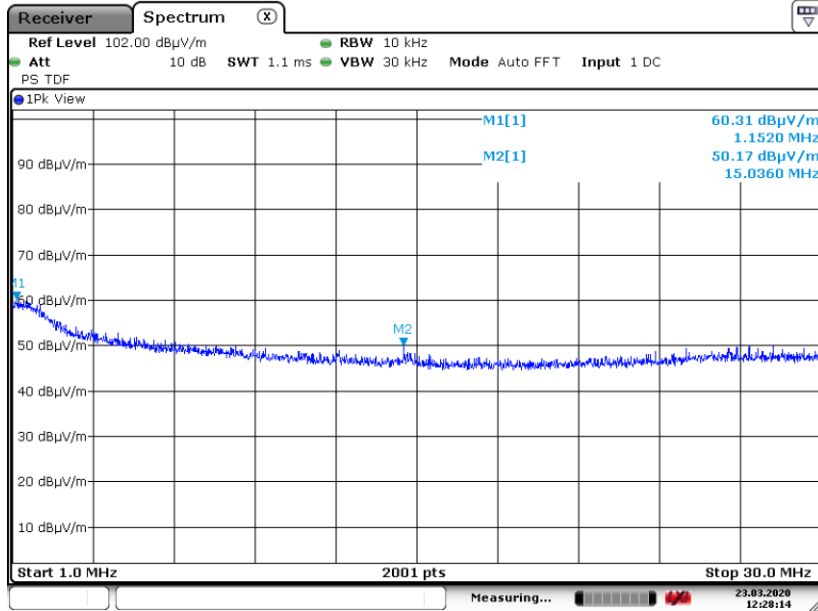


Date: 23.MAR.2020 12:28:14

Plot of the emissions in the range 1 – 30 MHz (Peak detector values shown), EUT with Single Loop Walk Through antenna

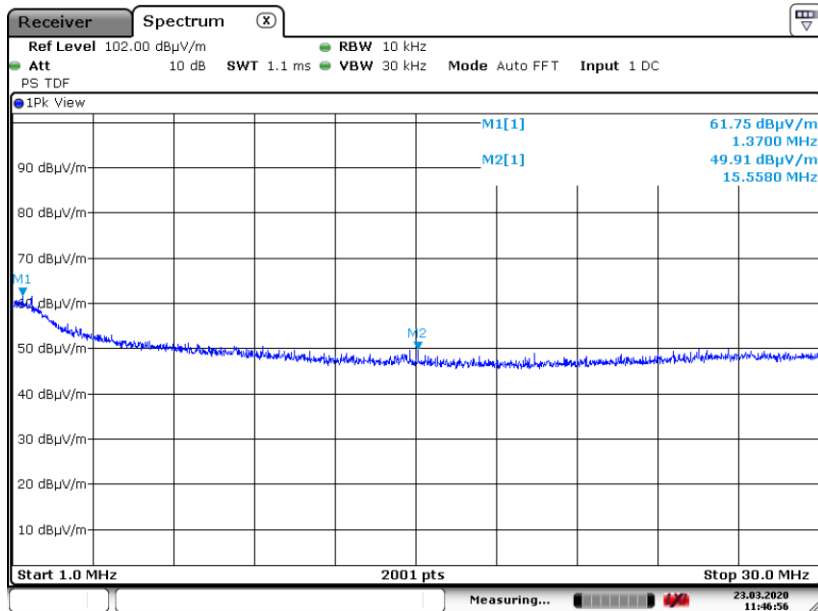


Date: 23.MAR.2020 11:46:56

Plot of the emissions in the range 1 – 30 MHz (Peak detector values shown), EUT with VP6012 antenna

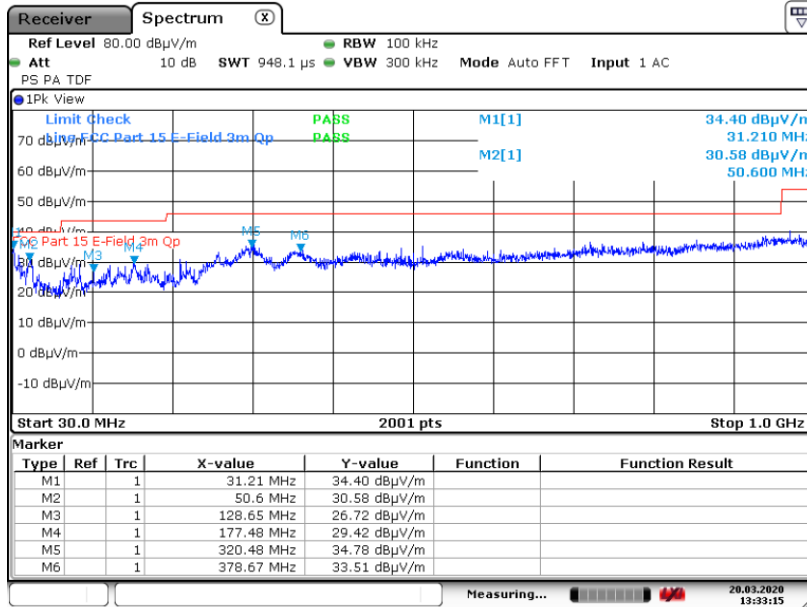

Date: 20.MAR.2020 13:33:15

Plot of the emissions in the range 30 – 1000 MHz (Peak detector values shown), EUT with VP6012, Test Antenna Vertical

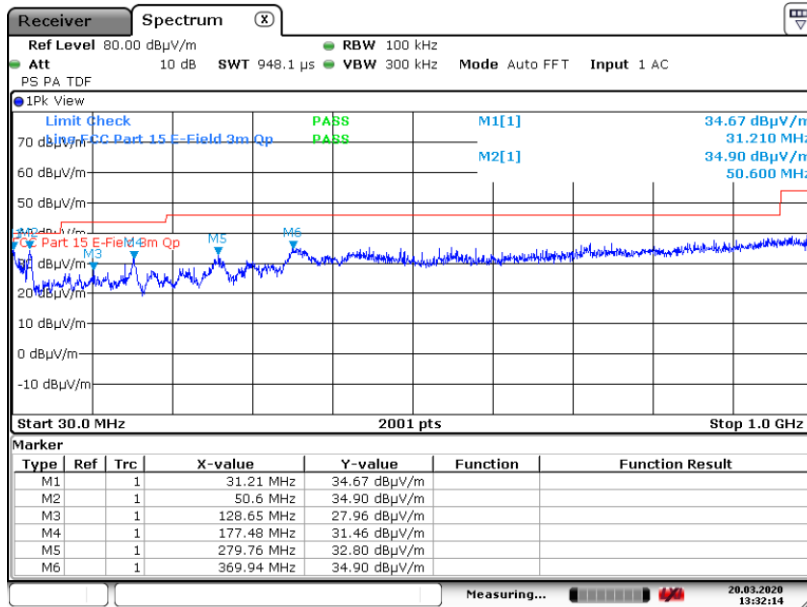

Date: 20.MAR.2020 13:32:14

Plot of the emissions in the range 30 – 1000 MHz (Peak detector values shown), EUT with Single Loop Walk Through antenna, Test Antenna Vertical

Test Report No.:

**19022705C.r02**

Page 23 of 29

## 2 AC Power Line Conducted Measurements

**RESULT: Pass.**

Tested by:

R. van der Meer

Date of testing:

2020-03-30

Requirements: for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V) Quasi-Peak	Conducted Limit (dB $\mu$ V) Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	46	50

\*Decreases with the logarithm of the frequency.

Test procedure:

ANSI C63.10-2013.

Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a 50  $\mu$ H / 50  $\Omega$  LISN. The frequency range from 150kHz to 30MHz was searched. The six highest EUT emissions relative to the limit were noted. The EUT was positioned at least 80cm from the LISN.

Test Report No.:

**19022705C.r02**

Page 24 of 29

### 2.1.1 AC Power Line Conducted Emission of Transmitter

Frequency (MHz)	Measurement results (dBµV) L1		Measurement results (dBµV) L2/Neutral		Limits (dBµV)		Verdict (Pass/Fail)
	QP	AV	QP	AV	QP	AV	
	0.310	42.4	*	42.4	*	60.0	
0.395	50.0	36.0	51.2	36.0	57.9	47.9	Pass
0.450	51.6	35.0	50.0	35.0	56.9	46.9	Pass
0.460	38.9	*	38.0	*	56.7	46.7	Pass
1.135	34.0	*	31.1	*	56.0	46.0	Pass
8.320	37.0	*	37.1	*	60.0	50.0	Pass

The results of the AC power line conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.207(a) and RSS-Gen section 8.8, at the 120 Volts/ 60 Hz AC mains connection terminals of the EUT (with VP6012 antenna), are depicted in the table above.

Frequency (MHz)	Measurement results (dBµV) L1		Measurement results (dBµV) L2/Neutral		Limits (dBµV)		Verdict (Pass/Fail)
	QP	AV	QP	AV	QP	AV	
	0.310	44.9	*	44.8	*	60.0	
0.400	52.4	35.0	52.4	35.0	57.9	47.9	Pass
0.435	38.6	*	40.1	*	57.1	47.1	Pass
0.600	32.2	*	31.7	*	56.0	46.0	Pass
1.110	35.1	*	34.9	*	56.0	46.0	Pass
15.565	41.5	*	41.4	*	56.0	46.0	Pass

The results of the AC power line conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.207(a) and RSS-Gen section 8.8, at the 120 Volts/ 60 Hz AC mains connection terminals of the EUT (with Single WalkThrough antenna), are depicted in the table above.

Notes:

1. The resolution bandwidth used was 9 kHz.
2. From pre-test the worst case configuration proved to be mode wherein the EUT was not scanning a tag. Worst case values noted.
3. Qp values already within Av limits, therefor Av not tested.
4. Measurement uncertainty is +/- 3.5 dB.
5. VP1001B and aux items for programming were also on the test table during testing because of the complex wiring system, but deactivated so not to influence the testing.
6. Plots are provided on the next pages.





Test Report No.:

**19022705C.r02**

Page 26 of 29


7 GHI

30. Mar 20 10:45

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	30M	5k	9k	PK	20ms	0dB	LN OFF	

dBuV      ◇ Max : 395.00 kHz 53.5 dBuV

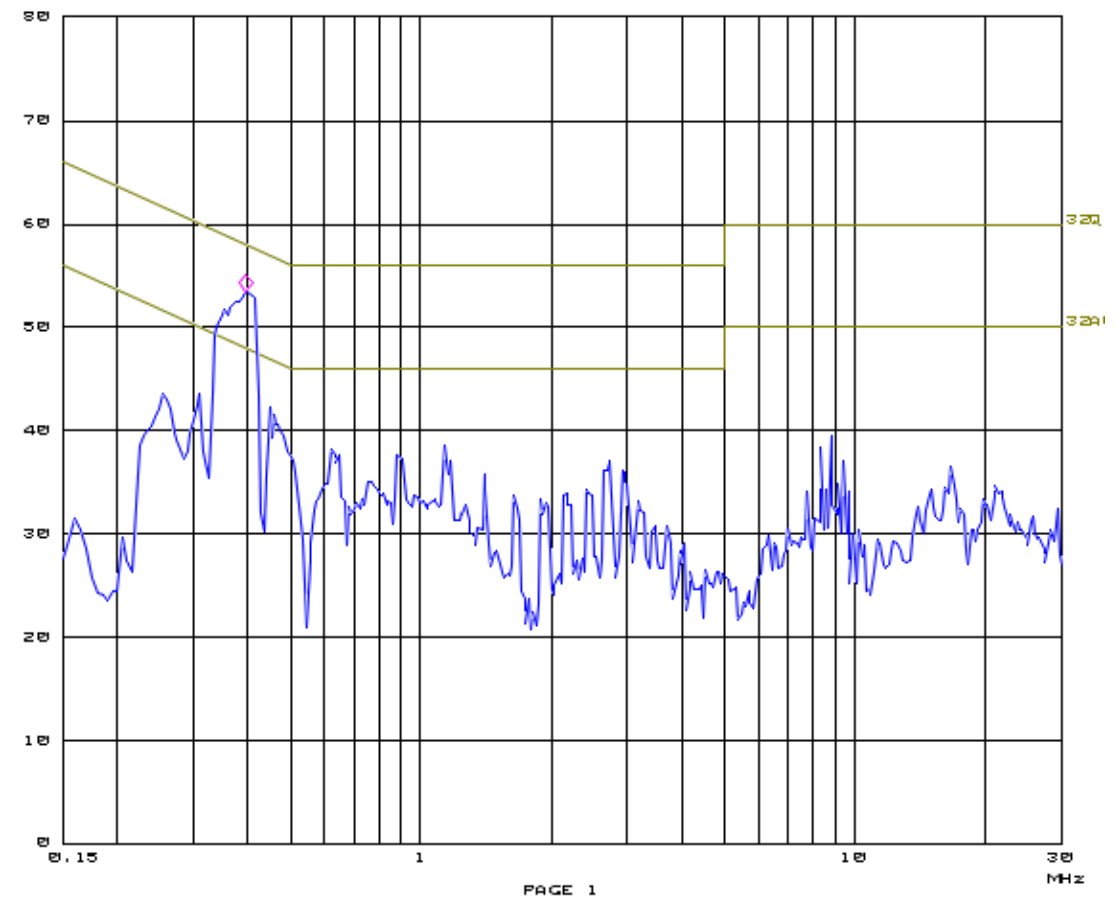

Plot of the AC Power-line Conducted emissions on L2/N, EUT with VP6012

Test Report No.:

19022705C.r02


Page 27 of 29

7GHI

30. Mar 20 10:52

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK	20ms	0dB	OFF

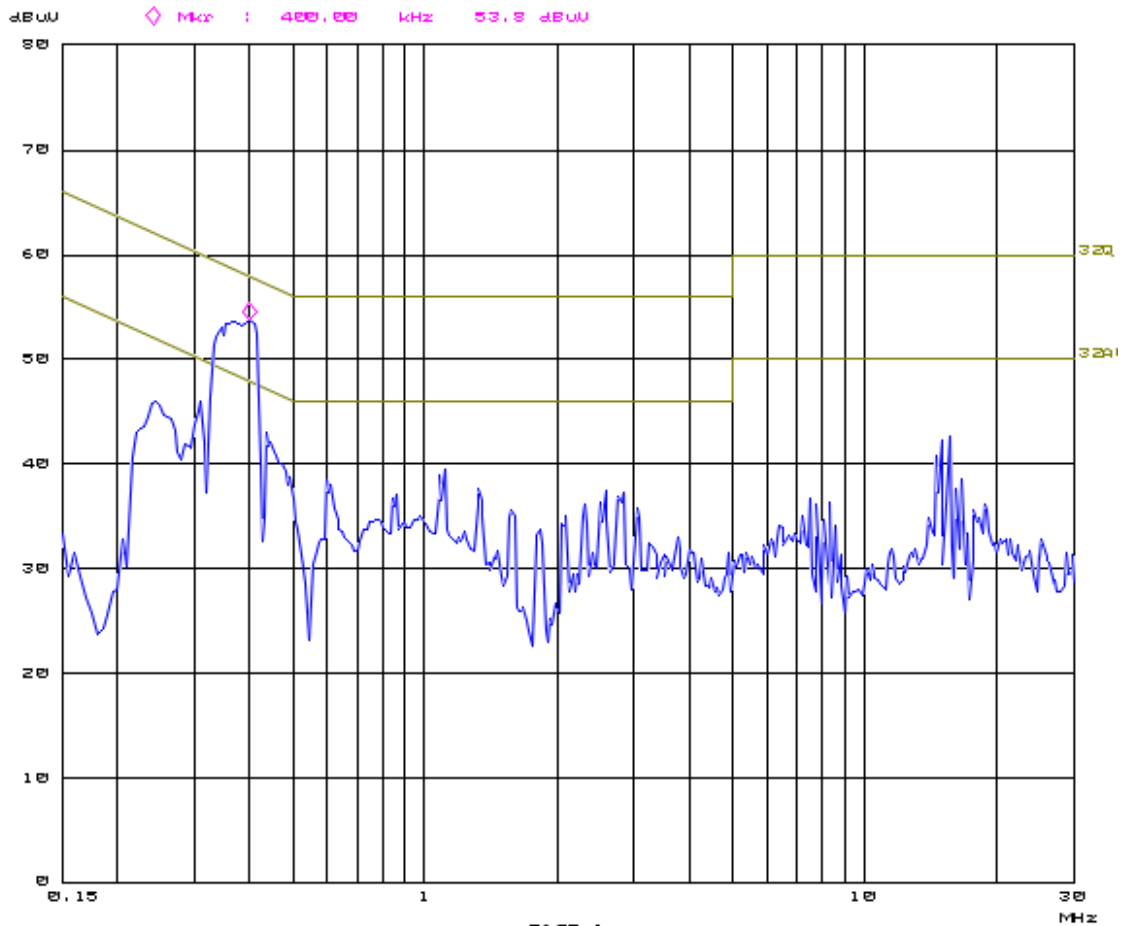

Plot of the AC Power-line Conducted emissions on L1, EUT with Single Walk Through Antenna





*Test Report No.:*

**19022705C.r02**

*Page 29 of 29*

**End of report**