

**TEST REPORT CONCERNING THE COMPLIANCE OF A
REAL TIME READER FOR A COW POSITIONING SYSTEM,
BRAND Nedap , MODEL VP4102**

**WITH 47 CFR PART 15 (10-1-12) AND THE
REQUIREMENTS OF INDUSTRY CANADA:
RSS-GEN (ISSUE 3, DECEMBER 2010) AND
RSS-210 (ISSUE 8, DECEMBER 2010)**

**13012902.fcc01
December 17, 2013**

FCC listed : 90828
Industry Canada : 2932G-2
R&TTE, LVD, EMC Notified Body : 1856

TÜV Rheinland EPS
P.O. Box 37
9350AA Leek
Eiberkamp 10
9351VT Leek
The Netherlands
Telephone: +31 594 505005
Telefax: +31 594 504804

E-mail: info@tuv-eps.com
Web: www.tuv-eps.com

MEASUREMENT/TECHNICAL REPORT

Brand: Nedap
Model: VP4102

FCC ID: CGDVP4102
IC: 1444A-VP4102

This report concerns: Original grant/certification Class 2 Permissive Change Verification	
Equipment type:	DSC Remote Control Transmitter
Report prepared by:	
Name	: Richard van der Meer
Company name	: TÜV Rheinland EPS
Address	: Eiberkamp 10
Postal code/city	: 9351VT / Leek
Mailing address	: P.O. Box 37
Postal code/city	: 9350AA / Leek
Country	: The Netherlands
Telephone number	: + 31 594 505 005
Telefax number	: + 31 594 504 804
E-mail	: info@tuv-eps.com

The data taken for this test and report herein was done in accordance with 47 CFR Part 15 (10-1-12 edition) RSS-GEN (ISSUE 3, DECEMBER 2010), RSS-210 (ISSUE 8, DECEMBER 2010) and the measurement procedures of ANSI C63.4-2009. TÜV Rheinland EPS B.V. at Leek, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: December 17, 2013

Signature:



O. Hoekstra
Senior Engineer Telecom TÜV Rheinland EPS B.V.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Description of test item

Test item (EUT) : Real time Reader for a Cow Positioning System
Manufacturer : N.V. Nederlandsche Apparatenfabriek "Nedap"
Brand : Nedap
Model(s) : VP4102
Serial number(s) : --
Receipt date : November 07, 2013


Applicant information


Applicant's representative : Mr. J. Hulshof
Company : N.V. Nederlandsche Apparatenfabriek "Nedap"
Address : Parallelweg 2
Postal code : 7141 DC
City : Groenlo
Country : The Netherlands
Telephone number : +31 544 471 162
Telefax number : +31 544 463 475

Test(s) performed

Location : Leek
Test(s) started : November 07, 2013
Test(s) completed : December 04, 2013
Purpose of test(s) : Equipment Authorization (Original grant/certification)

Test specification(s) : 47 CFR Part 15 (10-1-12 edition) and
RSS-GEN (ISSUE 3, DECEMBER 2010) AND
RSS-210 (ISSUE 8, DECEMBER 2010)

Test engineer(s) : R. van der Meer 

Report written by : R. van der Meer 

Report date : December 17, 2013

This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland EPS
The test results relate only to the item(s) tested.

Table of contents

1	General information.....	5
1.1	Product description.....	5
1.1.1	Introduction.....	5
1.2	Related submittal(s) and/or Grant(s).....	5
1.2.1	General.....	5
1.3	Tested system details.....	5
1.3.1	Special Accessories and Auxiliary Equipment.....	6
1.3.2	Description of input and output ports.....	7
1.4	Test summary.....	10
1.5	Test methodology.....	10
1.6	Test facility.....	11
1.7	Test conditions.....	11
2	System test configuration.....	12
2.1	Justification.....	12
2.2	EUT mode of operation.....	12
2.3	Test frequencies.....	12
2.4	Testsoftware.....	12
2.5	Special accessories.....	12
2.6	Equipment modifications.....	12
2.7	Product Labeling.....	12
2.8	Block diagram of the EUT.....	12
2.9	Schematics of the EUT.....	12
2.10	Part list of the EUT.....	12
3	Radiated emission data.....	13
3.1	Radiated field strength measurements (30 MHz – 4.35 GHz, E-field).....	14
3.2	Radiated field strength measurements (30 MHz – 4.35 GHz, E-field), Average values.....	16
4	Conducted emission data.....	17
4.1	AC Power Line Conducted Emission data of the EUT.....	17
4.1.1	Test equipment used (for reference see test equipment listing).....	18
5	Plots of measurement data.....	21
5.1	Bandwidth of the emission.....	21
5.2	RF On time.....	26
6	List of utilized test equipment.....	28

1 General information.

1.1 Product description.

1.1.1 Introduction.

The Real time Reader for a Cow Positioning System, brand Nedap, model VP4102 in the frequencyband 433.3 MHz – 434.5 MHz.

The content of this report and measurement results have not been changed other than the way of presenting the data.

1.2 Related submittal(s) and/or Grant(s).

1.2.1 General.

This test report supports the original certification in equipment authorization files under registration number.
FCC ID: CGDVP4102 and IC: 1444A-VP4102.

1.3 Tested system details.

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT	:	Real time Reader for a Cow Positioning System
Manufacturer	:	N.V. Nederlandsche Apparatenfabriek "Nedap"
Brand	:	Nedap
Model	:	VP4102
Serial number	:	--
Voltage input rating	:	
Voltage output rating	:	n.a.
Current input rating	:	--
Antenna	:	External
Operating frequency	:	433.3 – 434.5 MHz Channel 1: 433.3 MHz Channel 2: 433.6 MHz Channel 3: 433.8 MHz Channel 4: 434.0 MHz Channel 5: 434.2 MHz Channel 6: 434.5 MHz
Modulation	:	FSK
Remarks	:	n.a.



Photo 1. Photograph of the tested sample

1.3.1 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. AUX1
Product: Laptop Computer
Brand: HP
Model: Compaq nc6400
Serial Number: CND6412LVT
Remark: property applicant, host for testsoftware

2. AUX2
Product: Power supply for EUT
Manufacturer: Nedap
Brand: Nedap
Model: VP2002 and VP8001-2
Rated Voltage: --
Serial number: --
Remarks: --

3. AUX3
Product: Ethernet switch
Manufacturer: Netgear
Brand: Netgear
Model: FS105v2
Rated Voltage: --
Remarks: communication interface between EUT and AUX1

4. AUX4
Product: Antenna
Manufacturer: PROCOM
Brand: PROCOM
Model: CXL 70-1LW/h
Rated Voltage: --
Remarks: --

1.3.2 Description of input and output ports.

The EUT has input and output ports present for power supply connection, indicators and antenna.

No.	Port	From	To	Remarks
1.	Mains	Mains	AUX1	Unshielded cable <3m
2.	Mains	Mains	AUX3	Unshielded cable <3m
3.	Mains	Mains	AUX2	Unshielded cable <3m
4.	DC power	AUX2	EUT	Shielded cable >30m
5.	Ethernet	AUX1	AUX3	Shielded cable <3m
6.	Ethernet	AUX3	AUX2	Shielded cable <3m
7.	Ethernet	AUX2	EUT	Shielded cable <3m
8.	Antenna	EUT	AUX4	Shielded cable <30m

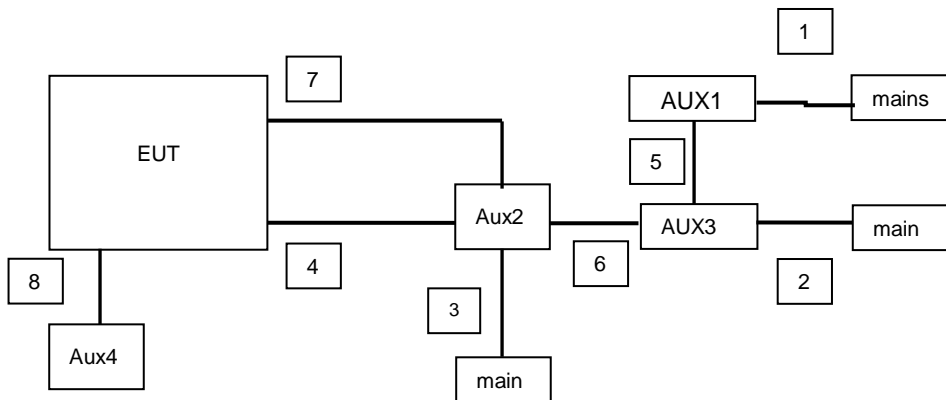
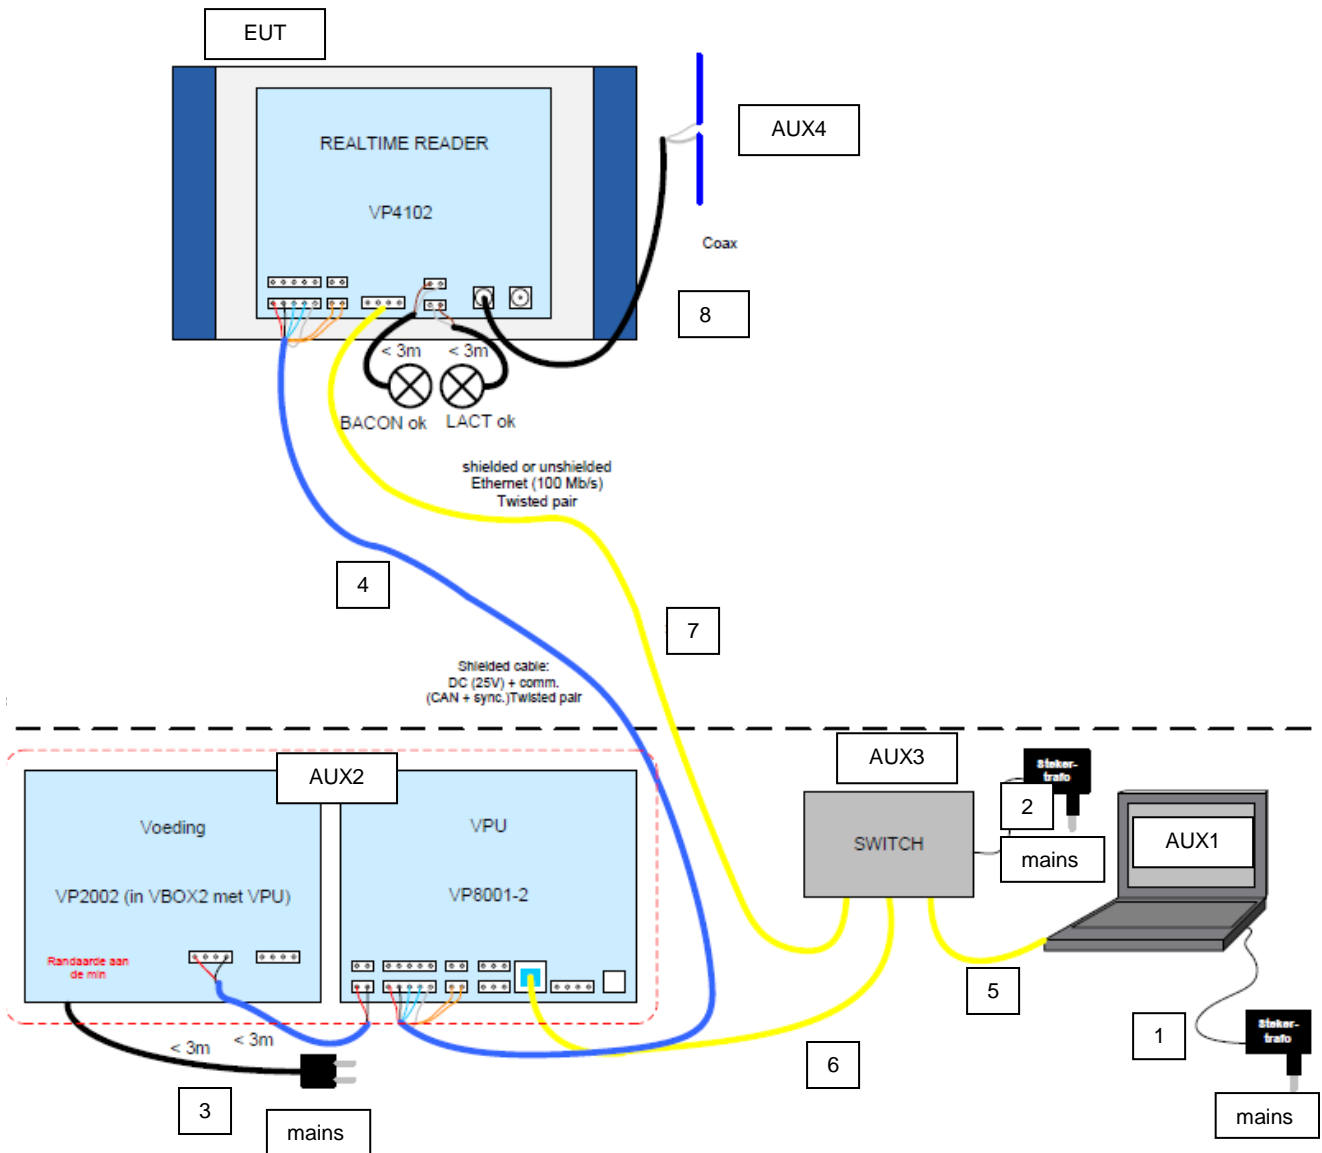


Figure 1. Basic set-up



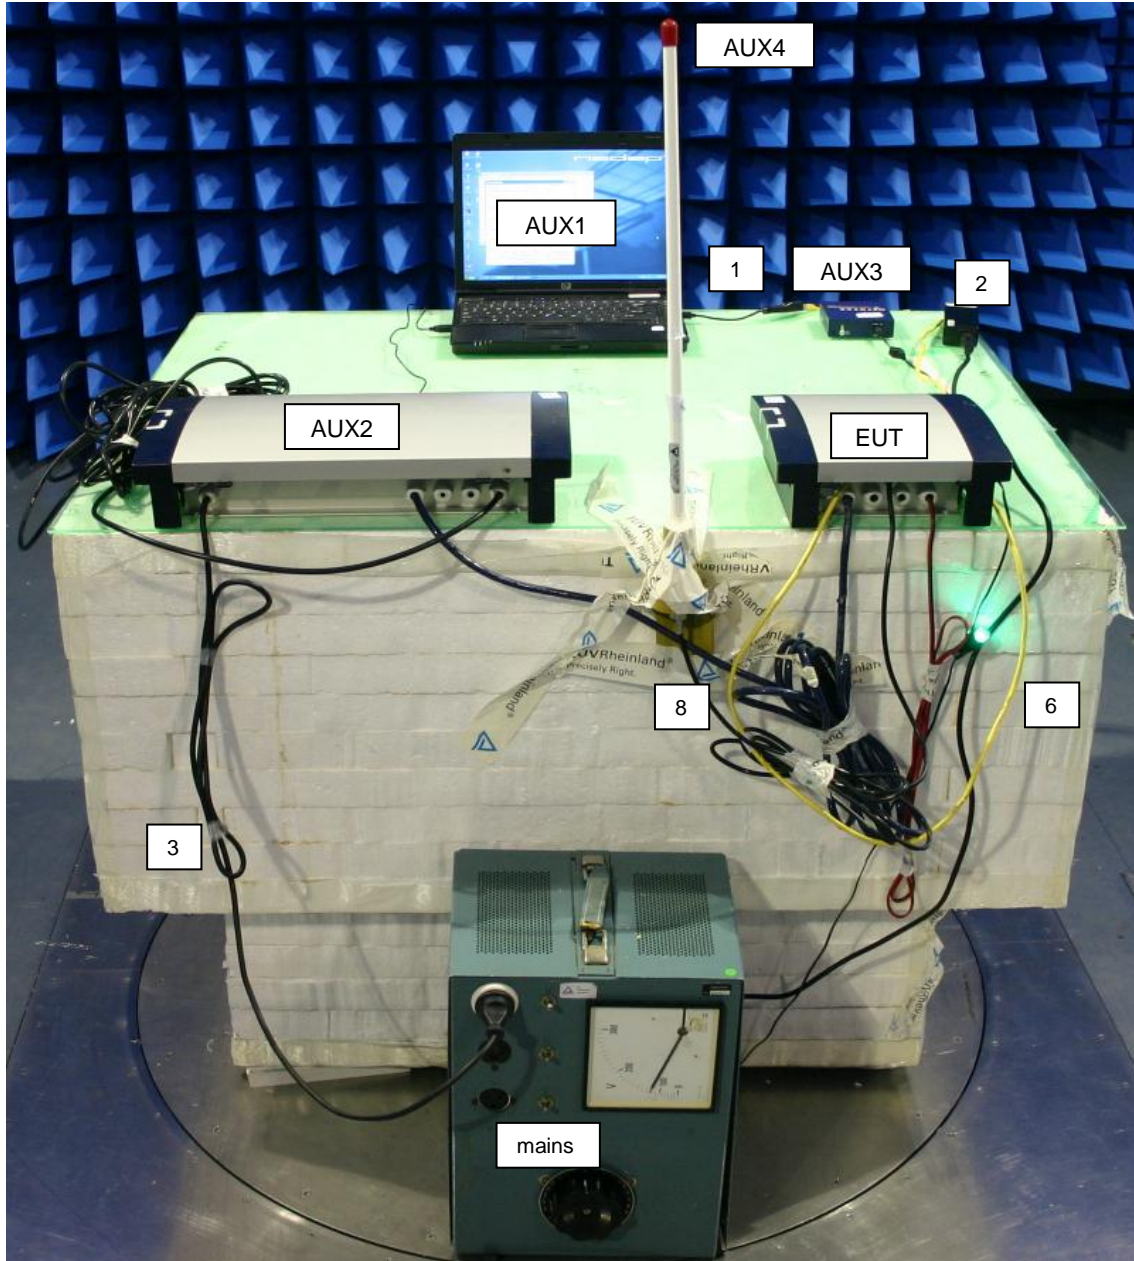


Figure 2. photograph of the basic set-up

1.4 Test summary

The EUT was tested in accordance with the specifications given in the table below.

Test Standard		Description	Page	Pass / Fail / Not Applicable
47 CFR Part 15 (10-1-12 Edition)	RSS-210 Issue 8, December 2010			
15.207(a)	RSS-Gen(7.2.4)	Conducted emissions	17 – 20	Pass
15.209, 15.231(e)*	RSS-Gen(4.9 and 7.2.5) and RSS-210(2.5)	Radiated emissions	13 – 16	Pass
15.215(c)	RSS-Gen(4.6.1)	Bandwidth of the emission	21 - 25	Pass
15.231(e)*	RSS-210 (A.1.1.5)	RF on/off time	26 - 27	Pass

Table: Test specifications

Testmethods: ANSI C63.4:2009, RSS-Gen Issue 3, December 2010 and RSS-210 annex A section A1.1.5 and Table B limits.

1.5 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 (10-1-12)), sections 15.31, 15.35, 15.205, 15.209, 15.231 and RSS-GEN (ISSUE 3, DECEMBER 2010) RSS-210 (ISSUE 8, DECEMBER 2010).

The test methods, which have been used, are based on ANSI C63.4: 2009.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters.

Radiated emission tests below 30 MHz were performed at a measurement distance of 3 meters.

To calculate the field strength level from these results to the appropriate distance at which the limit is specified, the appropriate extrapolation factor is used.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

1.6 Test facility.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland EPS, located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

1.7 Test conditions.

Normal test conditions:

Temperature (*)	: +15°C to +35°C
Relative humidity(*)	: 20 % to 75 %
Supply voltage	: 120Vac – 60Hz
Air pressure	: 950 – 1050 hPa

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

2 System test configuration.

2.1 Justification.

The EUT was not modified for testing purposes.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4- 2009.

2.2 EUT mode of operation.

The EUT has been tested in modulated transmit mode, i.e. the EUT is transmitting while continuously transmitting data. All test set ups have been documented in pictures in the documentation package which will be submitted to the Commission.

2.3 Test frequencies

Measurements are made with the EUT set to 3 frequencies in it's operating range, 1 near the bottom (433.3 MHz), 1 near the center (433.8 MHz) and 1 near the top (434,5 MHz).

2.4 Testsoftware

Testsoftware was provided by the applicant to enable settings required for testing.

Testsoftware: VP4102 Commander
Version: 11-9-2013
Special note on settings: TX Power= 8

2.5 Special accessories.

No special accessories are used and/or needed to achieve compliance.

2.6 Equipment modifications.

No modifications have been made to the equipment in order to achieve compliance.

2.7 Product Labeling

The product labeling information is available in the technical documentation package.

2.8 Block diagram of the EUT.

The block diagram is available in the technical documentation package.

2.9 Schematics of the EUT.

The schematics are available in the technical documentation package.

2.10 Part list of the EUT.

The part list is available in the technical documentation package.

3 Radiated emission data.

RESULT: Pass

Date of testing: 2013-11-07
Frequency range: 30MHz - 4.35GHz

Requirements:

FCC 15.205, FCC 15.209, FCC 15.231(e) and IC RSS-Gen(4.9, 7.2.2 and 7.2.5) and RSS-210(2.5)

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Test procedure:

ANSI C63.4-2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

Correction factors are incorporated in the spectrum analyzers as an automated function.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

3.1 Radiated field strength measurements (30 MHz – 4.35 GHz, E-field)

Frequency (MHz)	Detector	Polarization	Results @3m (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
105.66	Qp	Vertical	31.6	43.5	Pass
350.10	Qp	Vertical	29.6	46.0	Pass
359.80	Qp	Vertical	29.7	46.0	Pass
400.54	Qp	Vertical	31.0	46.0	Pass
Fundamentals:					
433.30	Pk	Vertical	88.5	92.86	Pass
433.80	Pk	Vertical	89.8	92.87	Pass
434.50	Pk	Vertical	90.7	92.88	Pass
Harmonics:					
866.60	Qp	Vertical	37.8	46.0	Pass
867.60	Qp	Vertical	39.2	46.0	Pass
869.00	Qp	Vertical	34.0	46.0	Pass
Frequency (MHz)	Detector	Polarization	Results Pk @3m (dBm eirp)	Limits @3m (dBm eirp)*	Pass/Fail
1329	Pk	Horizontal	-55.3	-21.2 Pk/ -41.2 Av	Pass
1861	Pk	Vertical	-54.4	-21.2 Pk/ -41.2 Av	Pass
2169	Pk	Horizontal	-45.9	-21.2 Pk/ -41.2 Av	Pass
2610	Pk	Horizontal	-44.9	-21.2 Pk/ -41.2 Av	Pass

*Derived from the expression dBm eirp= E (dBµV/m) – 95.2 dB

Table 1 Radiated emissions of the EUT.

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.205, 15.209, 15.231(e), RSS-210 (Annex 1) and RSS-Gen (4.9, 7.2.2 and 7.2.5) are depicted in Table 1. See notes on page 15.

Notes:

1. Field strength values of radiated emissions at frequencies not listed in the Table 1 above are more than 20 dB below the applicable limit.
2. The frequency of 1329 MHz falls within a restricted band as specified in section 15.205. Therefore the limit specified in section 15.209 has been applied.
3. Measurements were performed up to the 10th harmonic of the transmit frequency of 434.5 MHz.
4. A resolution bandwidth of 120 kHz was used below 1000 MHz.
5. Above 1000 MHz a Peak detector was used with a bandwidth of 1 MHz.
6. Where measured Peak values were below the Average limit by at least 3dB measurement with Average detector was not performed.
7. Measurement uncertainty is ± 5.0 dB.

Used test equipment and ancillaries:

99580/99847	99855	99877	12483	99608	99609	99699		

3.2 Radiated field strength measurements (30 MHz – 4.35 GHz, E-field), Average values

Frequency (MHz)	Measurement results @3m (dBµV)	Polarization	Detector	Duty Cycle Correction factor (dB)	Results after correction (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
Fundamentals:							
433.30	88.5	Vertical	Av	-20.17	68.33	72.86	Pass
433.80	89.8	Vertical	Av	-20.17	69.63	72.87	Pass
434.50	90.7	Vertical	Av	-20.17	70.53	72.88	Pass

Table 2 Radiated emissions of the EUT, Average values.

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.35, 15.205, 15.209, 15.231, RSS-210 and RSS-Gen are depicted in Table 2.

Notes:

1. Table 2 show calculated average values from the pulsed emissions measurement data from section 3.1 Peak values, corrected with the worst case duty cycle factor over 100 msec (see Note 2 on this page).
2. The values noted in Table 1 are after application of a duty cycle correction, according to part 15.35c of – 20.17 dB. Duty cycle calculated from: Duty cycle correction (dB) = 20 log (9.8 msec / 100 msec) = -20.17 dB. See page 26 of this document for the RF On-time of 9.8 msec.

4 Conducted emission data.

4.1 AC Power Line Conducted Emission data of the EUT.

RESULT: Pass.

Date of testing: November 06, 2013

Requirements: Except when the requirements applicable to a given device state otherwise, for any license-exempt radio communication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the following table. The tighter limit applies at the frequency range boundaries.

Frequency of Emission (MHz)	Conducted Limit (dB μ V) Quasi-Peak	Conducted Limit (dB μ V) Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	46	50

*Decreases with the logarithm of the frequency.

Frequency (MHz)	Measurement results dB(μV) Neutral		Measurement results dB(μV) Line 1		Limits dB(μV)		Pass/Fail
	QP	AV	QP	AV	QP	AV	
0.154	45.8	27.3	45.9	27.5	66.0	56.0	Pass
0.227	38.5	18.2	38.6	21.8	62.4	52.4	Pass
0.465	33.8	21.2	31.6	18.7	56.5	46.5	Pass
2.344	26.2	13.5	25.8	12.5	56.0	46.0	Pass
6.698	37.1	37.1	36.1	32.8	60.0	50.0	Pass
11.260	40.8	37.8	40.1	33.8	60.0	50.0	Pass

Table 3 Conducted emission measurements

The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15 section 15.207 & RSS-Gen, section 7.2.4, at the 120 Volts AC mains connection terminals of the AUX2 which connected to the EUT, are depicted in Table 3.

Notes:

1. The test data shown is the worst case. The six highest values are recorded.
2. The values of conducted emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
3. Measurement uncertainty is ±3.5dB.
4. Tested on 120 Vac.
5. See pages 19 and 20 for the plots.


4.1.1 Test equipment used (for reference see test equipment listing).

12512	99161	99852	99699	13313	99848	
-------	-------	-------	-------	-------	-------	--



06. Nov 13 09:55

```
Scan Settings (1 Range)
|----- Frequencies -----|----- Receiver Settings -----|
  Start      Stop      Step      IF BW  Detector  M-Time  Atten  Preamp
  150k       30M       0.8%     9k     PK        1ms    AUTO  LN    OFF
Final Measurement: x QP
                   Meas Time: 1 s
```

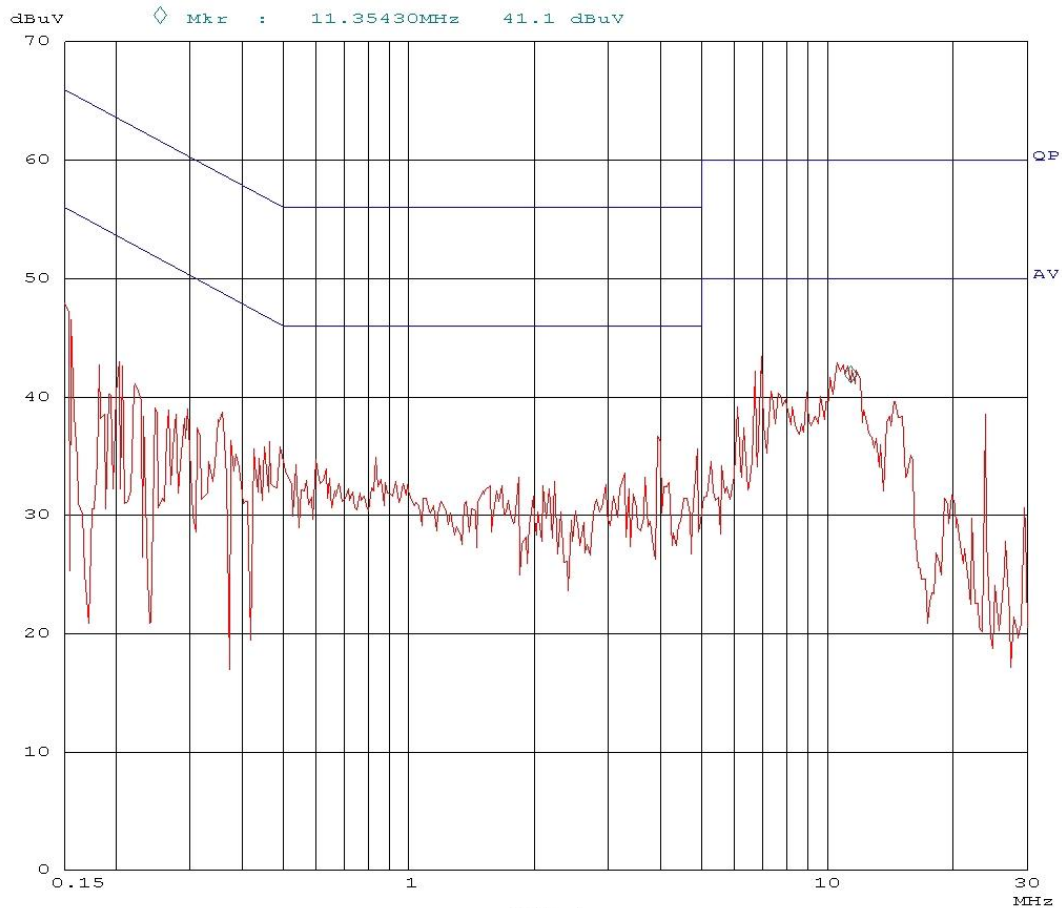


Conducted emissions on L1

06. Nov 13 08:56

```

Scan Settings (1 Range)
|----- Frequencies -----|----- Receiver Settings -----|
  Start      Stop      Step      IF BW  Detector  M-Time  Atten  Preamp
  150k       30M       0.8%     9k     PK        1ms    AUTO  LN    OFF

Final Measurement: x QP
                   Meas Time: 1 s
  
```

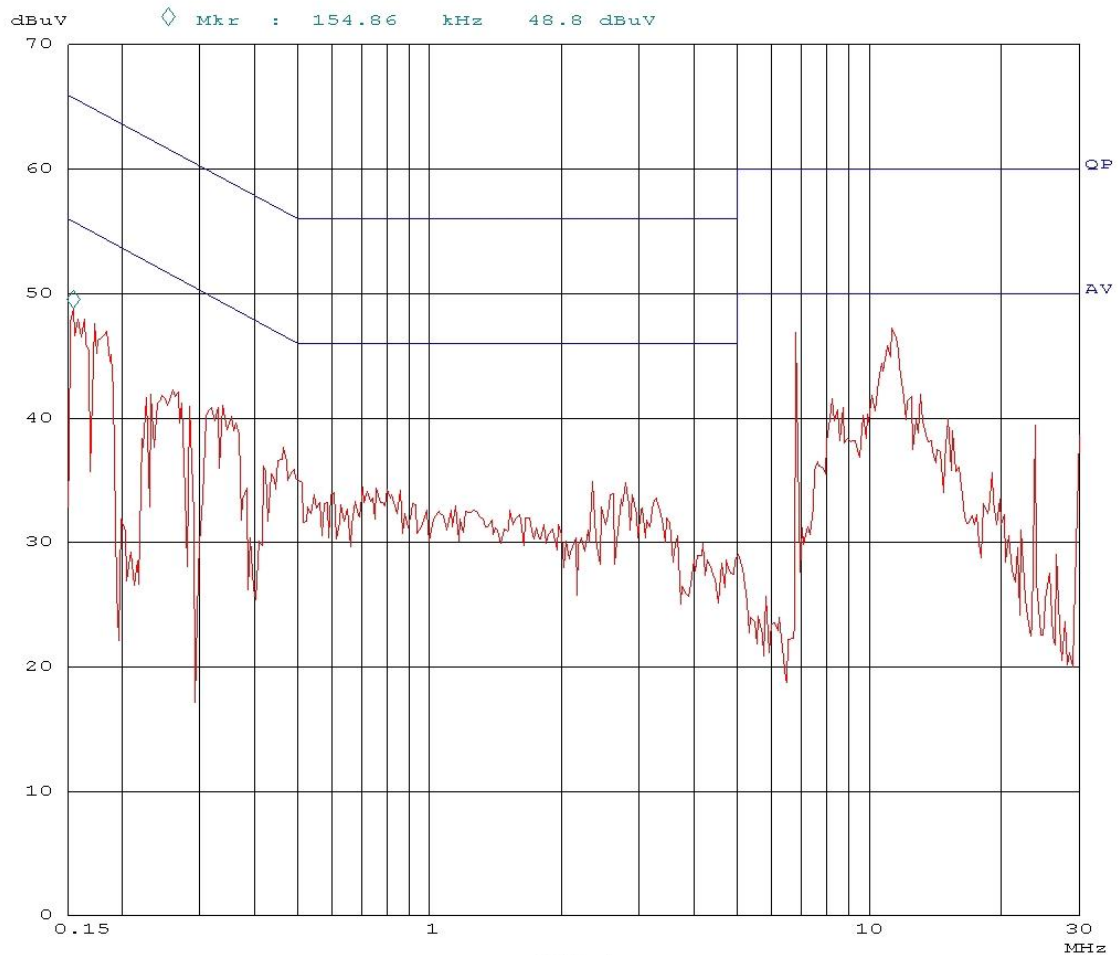

5 Plots of measurement data

5.1 Bandwidth of the emission

RESULT: Pass

Date of testing: 2013-07-08

Requirement:


The bandwidth of emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier. For this EUT operating at the lowest operating frequency of 433.30 MHz (Channel 1) the allowable bandwidth of emissions would be:
 $0.25\% * 433.30 \text{ MHz} = 1083.25 \text{ kHz}$.

Testresult:

The measured bandwidth of the emissions as measured with a spectrum analyzer was: **133.20 kHz** (see Plot1a on the next page). The test was performed on a modified EUT, where constant transmission was enabled.



Ref 124 dBµV *Att 10 dB *RBW 10 kHz Marker 1 [T1] VBW 30 kHz 88.90 dBµV SWT 2.5 ms 433.274800000 MHz

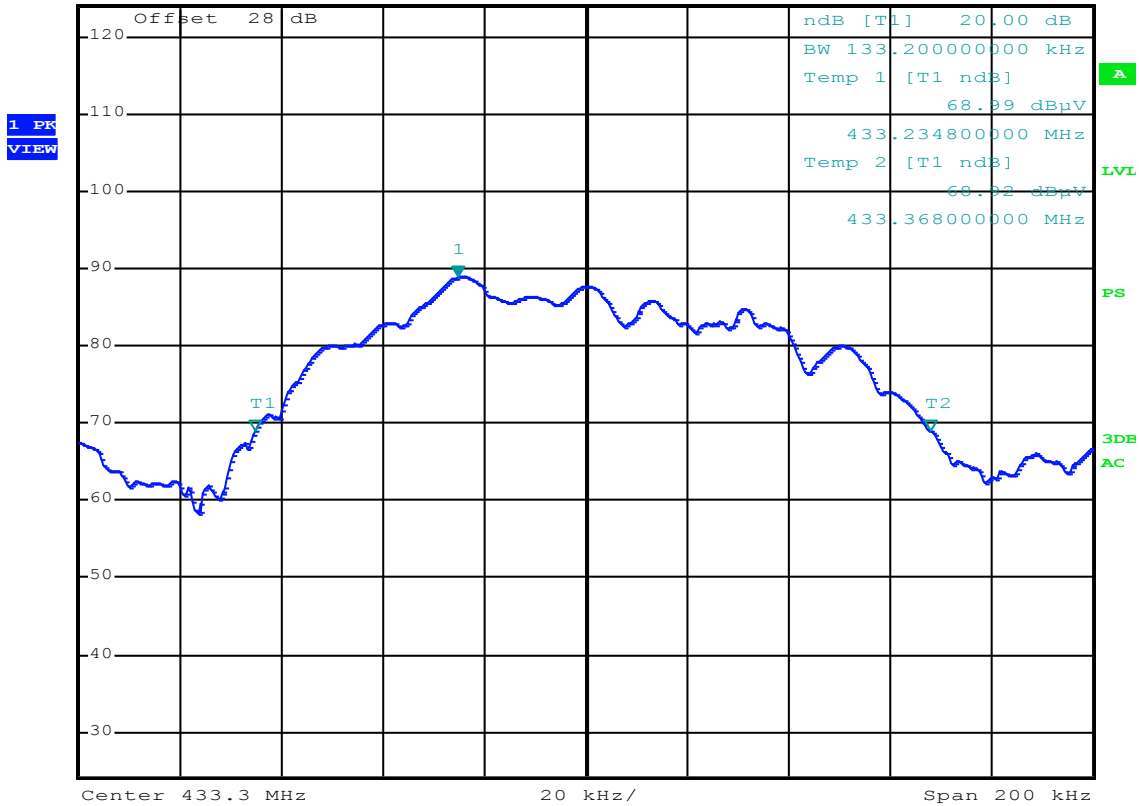

Date: 4.DEC.2013 13:52:44

Plot1a: plot of the emission at Channel 1. Measured value is 133.20 kHz as measured on a spectrum analyzer.




*RBW 10 kHz Marker 1 [T1] 88.92 dBµV
 VBW 30 kHz
 SWT 2.5 ms 433.275600000 MHz

Ref 124 dBµV

*Att 10 dB

SWT 2.5 ms

433.275600000 MHz

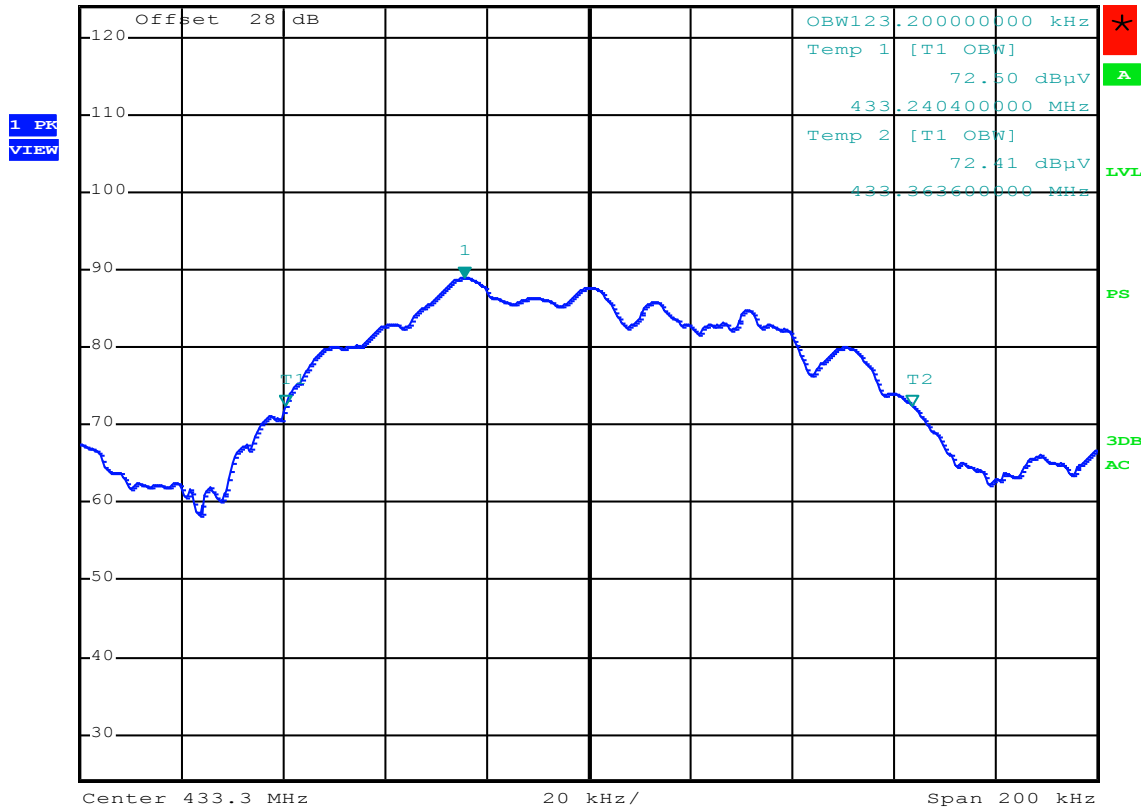

Date: 4.DEC.2013 13:53:08


Plot1b: plot of the 99% emission bandwidth Channel 1. Measured value is 123.20 kHz as measured on a spectrum analyzer.

Requirement:

For this EUT operating at the highest operating frequency of 434.50 MHz (Channel 6) the allowable bandwidth of emissions would be:
 $0.25\% * 434.50 \text{ MHz} = 1086.25 \text{ kHz}$.


Testresult:

The measured bandwidth of the emissions as measured with a spectrum analyzer was: **133.20 kHz** (see Plot2a).
 The test was performed on a modified EUT, where constant transmission was enabled.

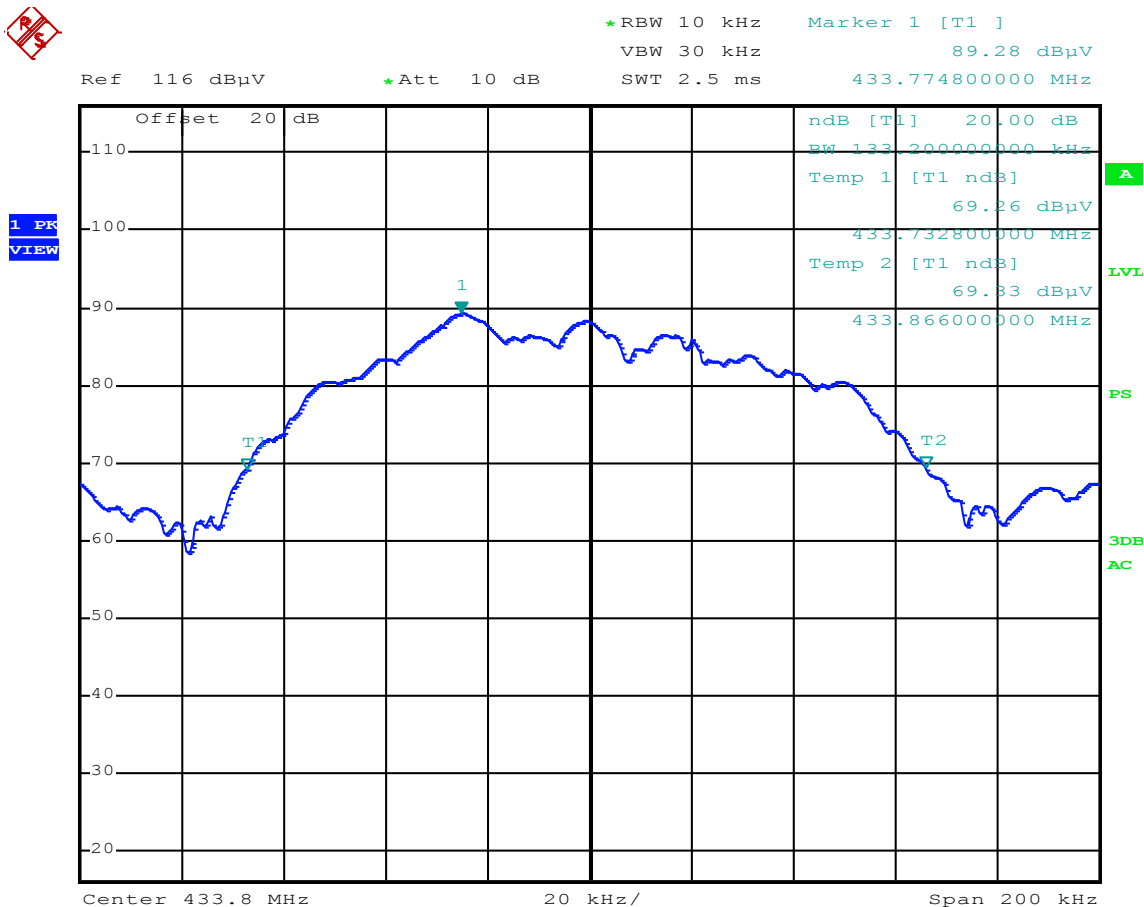

Date: 4.DEC.2013 13:41:35

Plot2a: plot of the emission at Channel 6. Measured value is 133.20 kHz as measured on a spectrum analyzer.

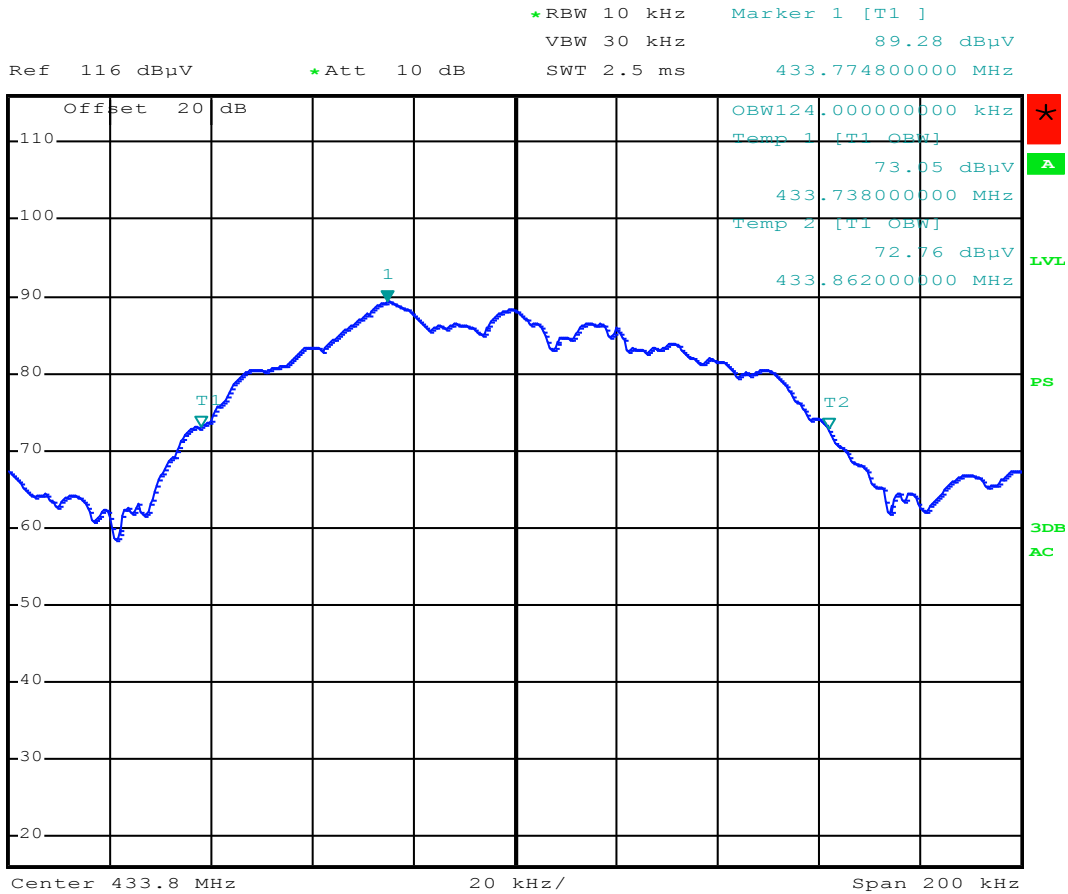

Date: 4.DEC.2013 13:42:01

Plot 2b: plot of the 99% emission bandwidth Channel 4. Measured value is 124.00 kHz as measured on a spectrum analyzer.

5.2 RF On time

RESULT: PASS


Date of testing: 2013-11-07 and 2013-11-20

Requirement:

The duration of each transmission is confined within 1 second, and the required silent period is at least 10 seconds or 30 times the duration of transmissions according to 15.231(e) and RSS-210 (Annex A1.1.5).


Testresult:

Plot 3 below shows the EUT's RF On Time. Plot 4 on page 21 shows that the time between transmissions is more than 30 times the RF On time and far more than 10 seconds.
 The RF On time in 100 ms is: 9.8 ms.

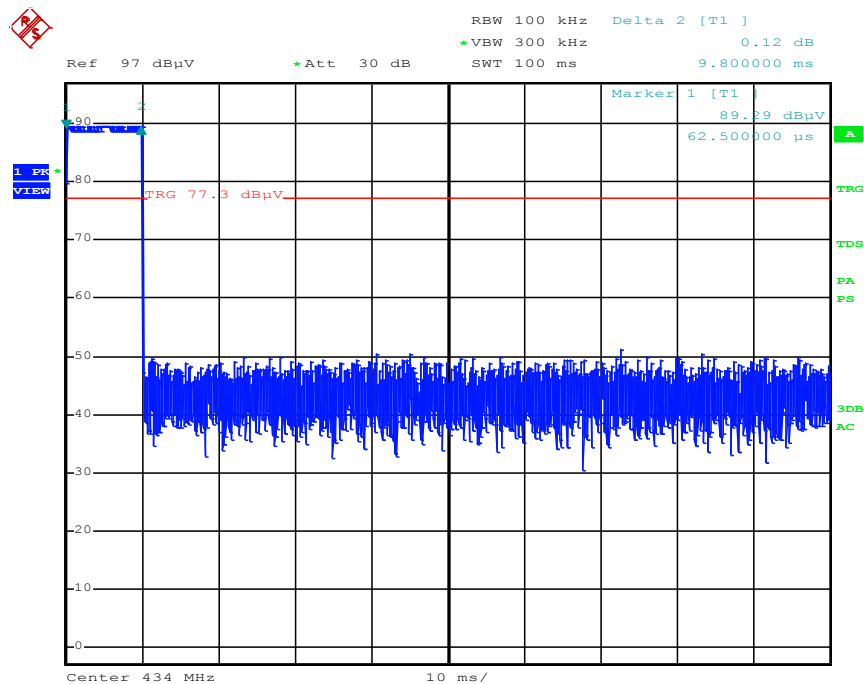

Date: 7.NOV.2013 11:26:16

Plot 3: RF On Time of the transmitter as measured on a spectrum analyzer.

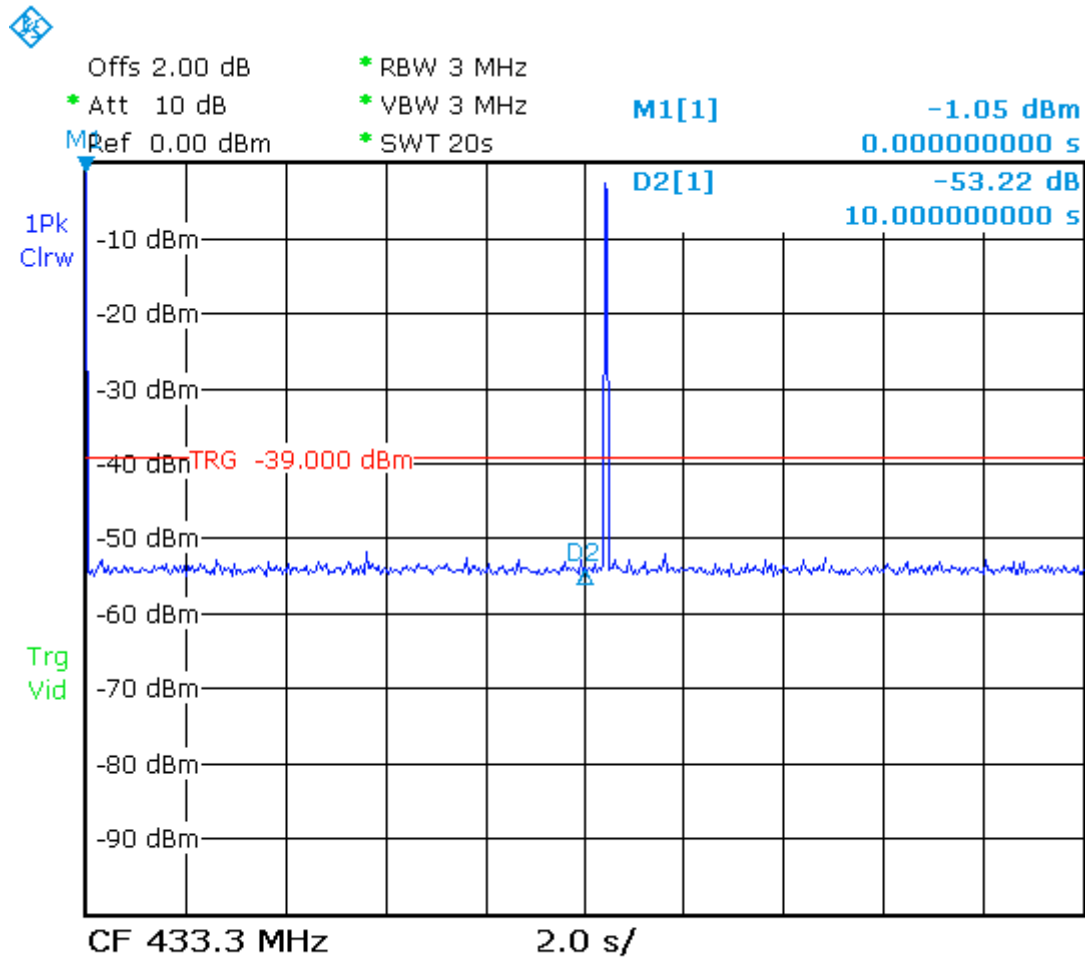

Date: 20.NOV.2013 11:06:56

Plot 4: RF Off Time as measured on a spectrum analyzer.

The RF Off time is more than 10 seconds as required by section 15.231(e) as shown in plot 4 above where the RF On is indicated with marker 1. Marker D2 indicates the 10 seconds period, while the whole plot covers 20 seconds.



6 List of utilized test equipment.

Inventory number	Description	Brand	Model	Last cal.	Next cal.
12483	Guide horn antenna	Emco	3115	04/2013	04/2014
12512	LISN FCC 50 uH / 50 ohm	Emco	3725/2	01/2012	01/2014
13313	Pulse limiter	R&S	ESH3-Z2	01/2013	01/2014
99161	Variac 250V 6A	RFT	LTS006	NA	NA
99220	Variac	RFT	LSS020	NA	NA
99848	Shielded room for Conducted emissions	--	--	NA	NA
99877	Biconilog Testantenna	Teseq	CBL 6111D	06/2013	06/2014
99861	Turntable controller	Maturo	SCU/088/8090811	NA	NA
99733	Spectrum analyzer	R&S	FSV	05/2013	05/2014
99852/ 99855/ 99857	Temperature-Humiditymeter	EXtech	SD500	02/2013	02/2014
99580/ 99847	Test facility	Comtest	FCC listed: 90828 IC listed: 2932G-2	12/2011	12/2014
99608	Controller	EMCS	DOC202	NA	NA
99609	Antenna mast	EMCS	AP-4702C	NA	NA
99699	Measuring receiver	R&S	ESCI	03/2013	03/2014
99858	RF Cable S-AR	Gigalink	APG0500	01/2013	01/2014

NA= Not Applicable