



FCC/IC Test Report

FOR:

Manufacturer: Nikon Corporation

Model Number: WR-1

Product Description: Wireless Remote Controller

FCC ID: CGJ4149EA

IC ID: 4634A-4149EA

47 CFR Part 15.247 for DTS Systems

IC RSS-210 Issue 8

TEST REPORT #: EMC_CET10-153-12001_DTS

DATE: 2012-12-10



**FCC listed
A2LA Accredited**

**IC recognized #
3462B-1**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: +1 (408) 586 6200 ♦ Fax: +1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571



TABLE OF CONTENTS

1 Assessment.....4

2 Administrative Data.....5

2.1 Identification of the Testing Laboratory Issuing the Test Report.....5

2.2 Identification of the Client.....5

2.3 Identification of the Manufacturer.....5

3 Equipment under Test (EUT).....6

3.1 Specification of the Equipment under Test6

3.2 Identification of the Equipment under Test (EUT)7

3.3 Identification of Accessory equipment.....7

3.4 Dates of Testing.....7

3.5 Environmental conditions during Test:.....7

4 Subject of Investigation8

5 Summary of Measurement Results9

6 Measurements10

6.1 Measurement Method: 10

6.2 Radiated Measurement Procedure 10

6.3 Sample Calculations for Radiated Measurements 12

6.3.1 *Field Strength Measurements:*..... 12

6.4 Conducted Measurement Procedure 13

6.5 Maximum Peak Conducted Output Power..... 14

6.5.1 *Limits:* 14

6.5.2 *Test Conditions:* 14

6.5.3 *Test Procedure:*..... 14

6.5.4 *Test Result:*..... 15

6.5.5 *Test Data/plots:*..... 16

6.6 Emission Bandwidth..... 18

6.6.1 *Limits:* 18

6.6.2 *Test Conditions:* 18

6.6.3 *Test Procedure:*..... 18

6.6.4 *Test Result:*..... 18

6.6.5 *Test Data/plots:*..... 19

6.7 Maximum Power Spectral Density Level in the Fundamental Emission..... 23

6.7.1 *Limits:* 23

6.7.2 *Test Conditions:* 23

6.7.3 *Test Procedure:*..... 23

6.7.4 *Test results:*..... 23

6.7.5 *Test Data/plots:*..... 25

6.8 Unwanted Emissions into Non-Restricted Frequency Bands- Conducted 27

6.8.1 *Reference and Limits:*..... 27

6.8.2 *Test Conditions:* 27

6.8.3 *Test procedure:*..... 27

6.8.4 *Test Result:*..... 27

6.8.5 *Test data/ plots:*..... 29



- 6.9 Unwanted Emissions into Restricted Frequency Bands- Radiated..... 32
 - 6.9.1 Limits: §15.247/15.20532
 - 6.9.2 Measurement Procedure:.....33
 - 6.9.3 Test Data/plots:.....34
- 6.10 Transmitter Spurious Emissions- Radiated 36
 - 6.10.1 Limits:36
 - 6.10.2 Test Result:.....36
 - 6.10.3 Test data/ plots:.....37
- 7 Test Equipment and Ancillaries used for tests45**
- 8 Test Setup Diagrams46**
- 9 Revision History48**



1 Assessment

The following device was tested against the applicable criteria specified in FCC rules Parts 15.247 and 15.209 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Issue 8 and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
Nikon Corporation	Wireless Remote Controller	WR-1

Responsible for Testing Laboratory:

2012-12-10	Compliance	Sajay Jose (Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2012-12-010	Compliance	Zack Gray (Test Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Test Lab Manager:	Sajay Jose
Test Engineer:	Zack Gray

2.2 Identification of the Client

Client:	Nikon Corporation
Street Address:	6-3, Nishi-Ohi 1-Chome, Shinagawa-ku
City/Zip Code	Tokyo, 140-8601
Country	Japan
Contact Person:	Yoshiaki Harada
Phone No.	+81-(0)3-3773-8395
e-mail:	Harada.Yoshiaki@nikonoa.net

2.3 Identification of the Manufacturer

Manufacturer's Name:	NEC Engineering, Ltd.
Manufacturers Address:	1753, Shimonumabe, Nakahara-ku
City/Zip Code	Kawasaki
Country	Japan

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Model No:	WR-1
HW Revision :	1.0
SW Revision:	1.0
FCC-ID:	CGJ4149EA
IC-ID:	4634A-4149EA
Product Description:	Wireless Remote Controller
Integrated Radios:	Texas Instruments CC2520
Frequency Range and mode of test:	2405-2475MHz
No. of channels:	15
Type(s) of Modulation:	O-QPSK
Antenna Type and Gain:	PCB Trace Antenna Gain: 2.67 dBi for all channels (as stated by manufacturer)
Max. Output Powers:	Conducted: 11.16 dBm Radiated: 13.83 dBm
Rated Power Supply Range:	DC Battery: 2.4V (low) / 3V (nominal) / 3.6V (high) Camera DC connector cable: 3.5V (low) / 6V (nominal) / 7V (high)
Rated Operating Temperature Range:	-20°C – 50°C
Test Sample Status:	Prototype

3.2 Identification of the Equipment under Test (EUT)

EUT #	Serial Number	HW Version	SW Version	Notes/Comments
1	CS04007A (EUT labeled FCC #1)	1.0	1.0	Radiated Sample
2	CS04009A (EUT labeled FCC #2)	1.0	1.0	Radiated Sample
3	None (EUT labeled FCC #3)	1.0	1.0	Conducted Sample

3.3 Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number
1	Testing Jig	NEC Engineering, Ltd.	WR-R10 Testing Jig A	None

3.4 Dates of Testing

Nov 2, 2012 – Nov 21, 2012

3.5 Environmental conditions during Test:

The following environmental conditions were maintained during the course of testing:

Ambient Temperature: 20-25°C

Relative humidity: 40-60%

4 Subject of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS-210 Issue 8.

This test report is to support a request for new equipment authorization under the FCC ID: **CGJ4149EA** and IC ID: **4634A-4149EA**

All testing was performed on the product referred to in Section 3 as EUT.

This test report contains full radiated and conducted testing results as per

- 47 CFR Part 15: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter A- General, Part 15- Radio Frequency Devices.
- RSS-210 Issue 8: Spectrum Management and Telecommunications- Radio Standards Specification. Low-power Licence-exempt radio communication devices (All frequency bands): Category 1 equipment.

During the testing process the EUT was tested on low, mid and high channels in 802.15.4 mode. For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all 3 orthogonal orientations of the EUT.

5 Summary of Measurement Results

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.247(e) RSS210 A8.2(b)	Power Spectral Density	Nominal	802.15.4	■	□	□	□	Complies
§15.247(a)(1) RSS210 A8.1(b)	Carrier Frequency Separation	Nominal	802.15.4	□	□	■	□	-
§15.247(a)(1) RSS210 A8.1(d)	Number of Hopping Channels	Nominal	802.15.4	□	□	■	□	-
§15.247(a)(1)(iii) RSS210 A8.3(1)	Time of occupancy	Nominal	802.15.4	□	□	■	□	-
§15.247(a)(1) RSS210 A8.2(a)	Spectrum Bandwidth	Nominal	802.15.4	■	□	□	□	Complies
§15.247(b)(1) RSS210 A8.4(2)	Maximum Output Power	Nominal	802.15.4	■	□	□	□	Complies
§15.247(d) RSS210 A8.5	Band edge compliance-Conducted	Nominal	802.15.4	□	□	□	■	-
§15.247(d) RSS210 A8.5	Band edge compliance-Radiated	Nominal	802.15.4	■	□	□	□	Complies
§15.247(d) RSS210 A8.5	TX Spurious emissions-Conducted	Nominal	802.15.4	■	□	□	□	Complies
§15.247(d) RSS210 A8.5	TX Spurious emissions-Radiated	Nominal	802.15.4	■	□	□	□	Complies
§15.209(a) RSS Gen	TX Spurious Emissions Radiated<30MHz	Nominal	802.15.4	■	□	□	□	Complies
§15.107(a)	Conducted Emissions <30MHz	Nominal	802.15.4	□	□	■	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

1. Band Edge compliance-conducted is NOT PERFORMED as the device passes radiated measurement.
2. Conducted Emissions <30MHz is NA for battery powered devices.

6 Measurements

6.1 Measurement Method:

All radiated and conducted testing is performed according to guidelines in FCC publication KDB558074 D01: Measurement Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under 15.247, Jan 2012.

6.2 Radiated Measurement Procedure

ANSI C63.4 (2009) Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements. Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C. When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

ANSI C63.4 (2009) Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

NOTES

1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.

3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

Measurement Uncertainty: ± 3 dB



6.3 Sample Calculations for Radiated Measurements

6.3.1 Field Strength Measurements:


Field Strength measurements are directly taken from the Spectrum Analyzer/ Receiver, taking into account the cable loss between the Receiving Antenna and the Spectrum Analyzer/ Receiver. Antenna Factor is accounted for by the test SW.

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} + \text{Cable Loss (dB)}$$

Eg:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Field Strength Result (dB μ V/m)
1000	95.5	3.5	99.0

6.4 Conducted Measurement Procedure

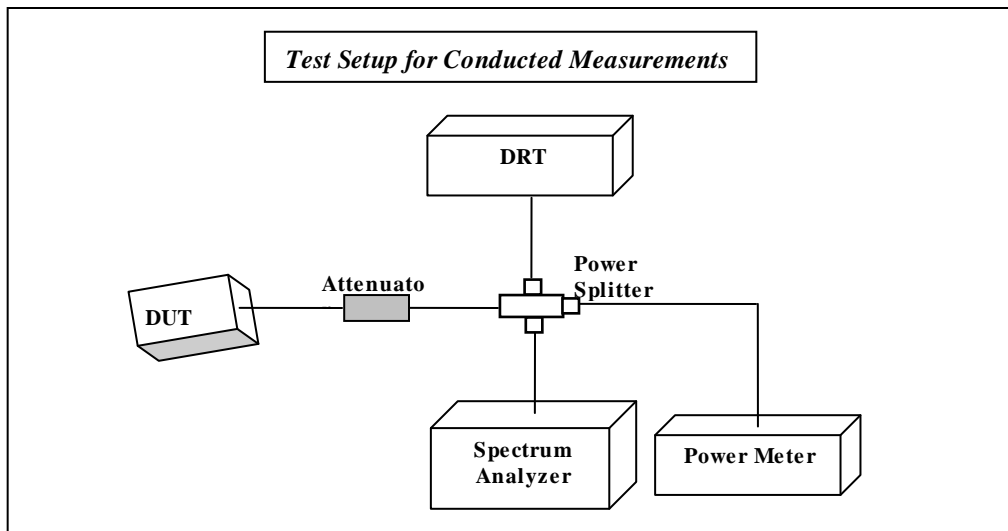

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to connect the EUT at the required channel (OR) alternatively use the EUT to set to transmit at a specific mode.
3. Measurements are to be performed with the EUT set to the low, middle and high channels.
Measurement Uncertainty: $\pm 0.5\text{dB}$

6.5 Maximum Peak Conducted Output Power

6.5.1 Limits:

6.5.1.1 §15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

6.5.1.2 RSS 210- A8.4(2)

Nominal Peak Output Power < 30 dBm (1W)

EIRP < 36dBm

6.5.2 Test Conditions:

Tnom: 23°C; Vnom: 6V DC

6.5.3 Test Procedure:

Measurement according to FCC KDB 558074 D01 DTS Meas Guidance

Spectrum Analyzer settings:

RBW=5MHz, VBW=10MHz, Detector: Peak- Max Hold.

Sweep Time: Auto

Span=Zero

Reported Antenna Gain (dBi): 2.67 dBi for all channels.



6.5.4 Test Result:

Measured Maximum Peak Conducted Output Power (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2475 Channel 25
	Peak	Peak	Peak
802.15.4	11.16	10.64	10.46

Calculated Maximum Peak Radiated Output Power (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2475 Channel 25
802.15.4	13.83	13.31	13.13


Note: Radiated EIRP is calculated as
Conducted Measurement + Antenna Gain

6.5.4.1 Measurement Verdict:
 Pass.




6.5.5 Test Data/plots:

Maximum Peak Conducted Output Power: 2405 MHz

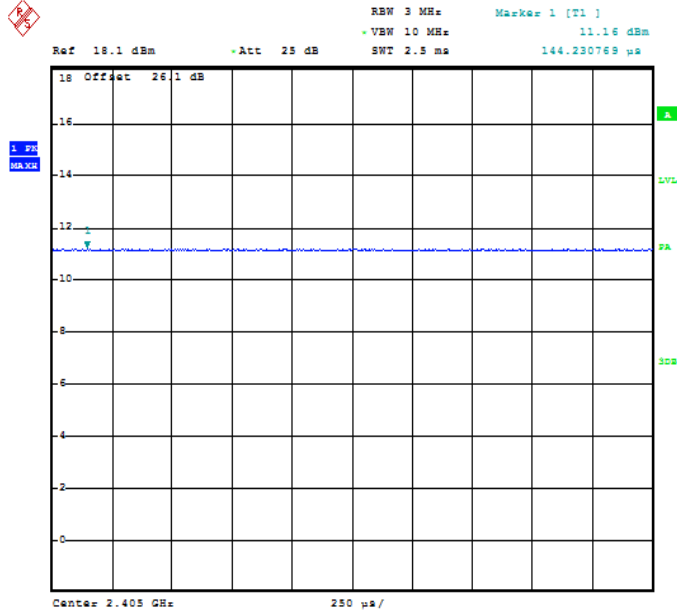

Date: 12.NOV.2012 14:40:00


Maximum Peak Conducted Output Power: 2440 MHz

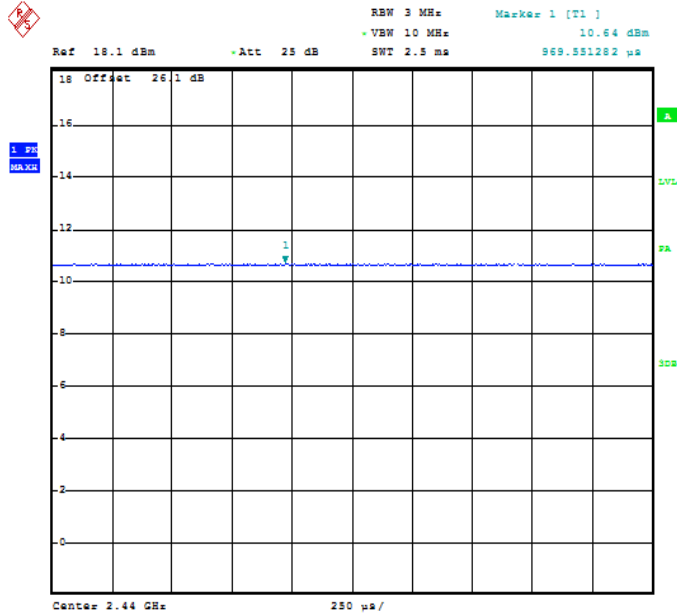

Date: 12.NOV.2012 14:41:36



Maximum Peak Conducted Output Power: 2475 MHz

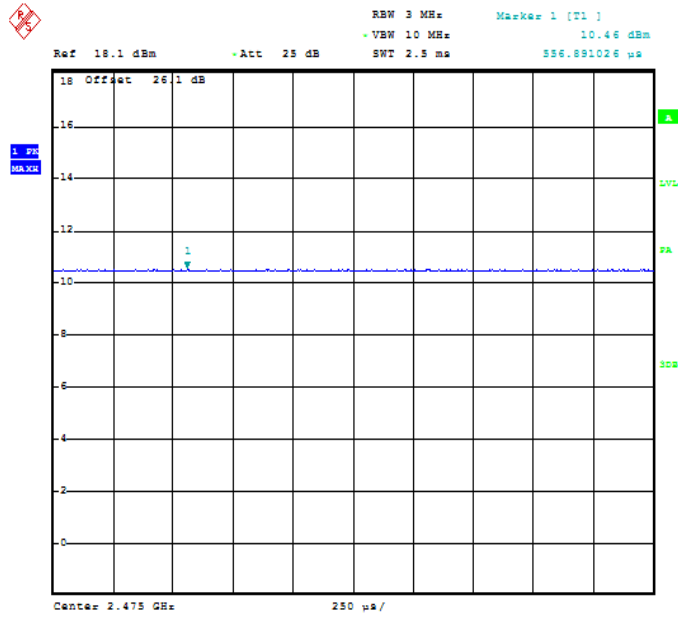

Date: 12.NOV.2012 14:43:19



6.6 Emission Bandwidth

6.6.1 Limits:

6.6.1.1 §15.247 (a)(2)

6.6.1.2 RSS 210- A8.2(a)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.6.2 Test Conditions:

Tnom: 23°C; Vnom: 6V

6.6.3 Test Procedure:

Measurement according to FCC KDB 558074 D01 Meas Guidance

Spectrum Analyzer settings:

RBW=50 kHz, VBW=200 kHz, Detector: Peak- Max hold;

Sweep Time: Auto

Span=10 MHz

Measurement Uncertainty: ±100 kHz

6.6.4 Test Result:

Emission Bandwidth (MHz)						
Mode	Frequency (MHz)					
	2405 Channel 11		2440 Channel 18		2475 Channel 25	
	6dB	20dB/ 99%	6dB	20dB/ 99%	6dB	20dB/ 99%
802.15.4	3.333	4.583	2.873	4.617	2.276	3.910


6.6.4.1 Measurement Verdict:

Pass.




6.6.5 Test Data/plots:

6dB Bandwidth: 2405 MHz

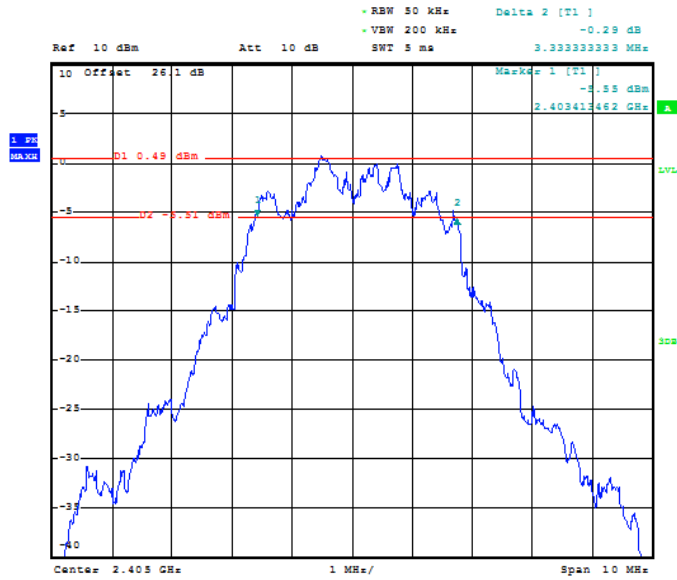

low
 Date: 8.NOV.2012 01:41:47


6dB Bandwidth: 2440 MHz

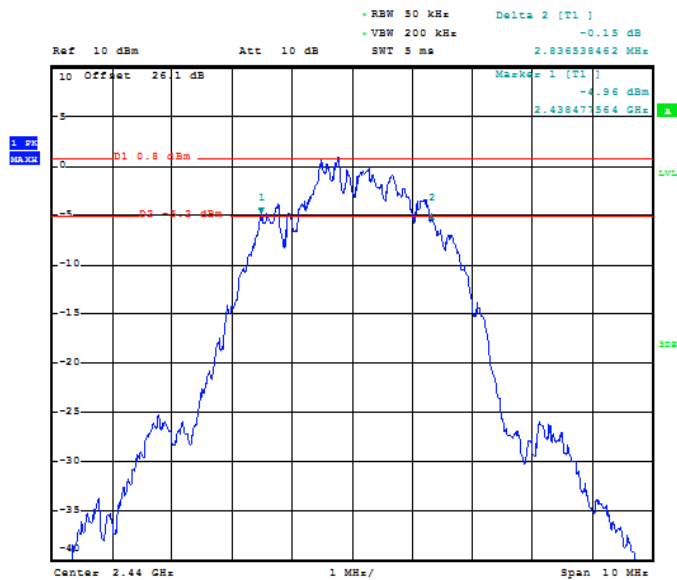

low
 Date: 8.NOV.2012 01:22:30




6dB Bandwidth: 2475 MHz

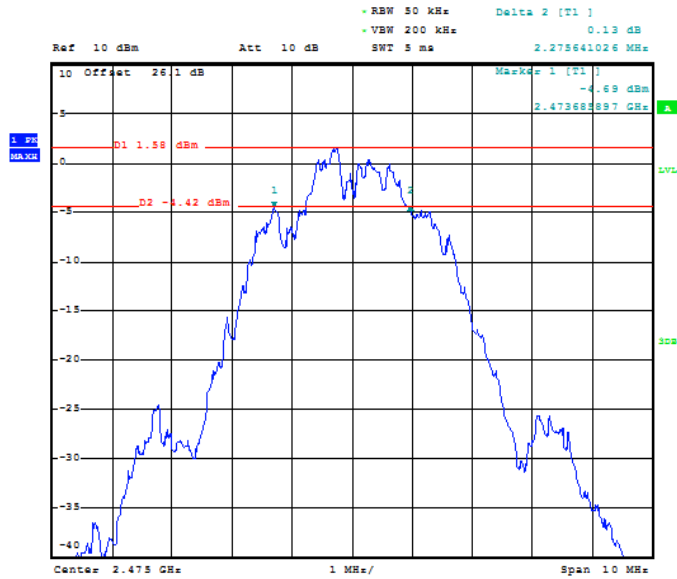

low
Date: 8.NOV.2012 01:35:04




20dB Bandwidth: 2405 MHz

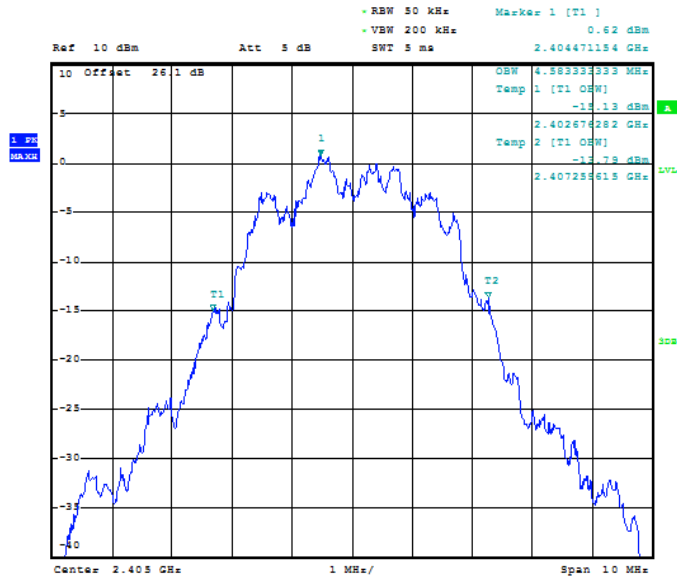

low
Date: 7.NOV.2012 23:12:18


20dB Bandwidth: 2440 MHz

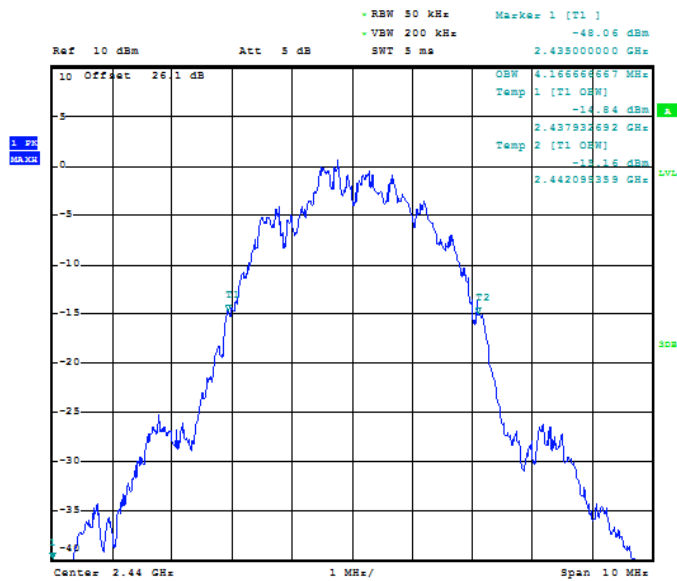

low
Date: 7.NOV.2012 23:14:32



20dB Bandwidth: 2475 MHz

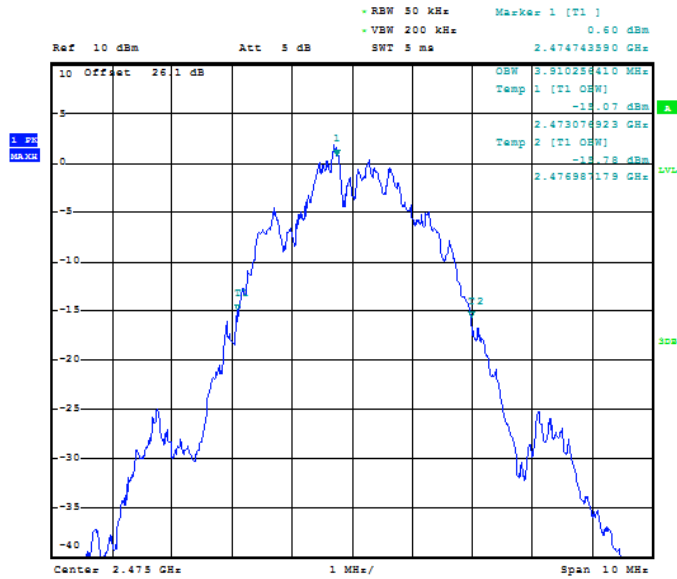

low
Date: 8.NOV.2012 01:37:33



6.7 Maximum Power Spectral Density Level in the Fundamental Emission

6.7.1 Limits:

6.7.1.1 § 15.247 (e)

6.7.1.2 RSS 210- A8.2(b)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.7.2 Test Conditions:

Thom: 23°C; Vnom: 6V

6.7.3 Test Procedure:

1. Determine the highest peak level for a sweep with RBW=100k VBW=300kHz and Span = 5-30% greater than the EBW.
2. Scale the max. observed peak power level to an equivalent level in 3 kHz by adjusting the measured power by a bandwidth correction factor (BWCF) where: $BWCF = 10\log(3\text{kHz}/100\text{kHz} = -15.2 \text{ dB})$.

6.7.4 Test results:

Measured Conducted Power Spectral Density (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2475 Channel 25
802.15.4	6.66	6.37	6.58
Measurement Uncertainty: ±0.5dB			

Corrected Conducted Power Spectral Density (dBm)			
Mode	Frequency (MHz)		
	2405 Channel 11	2440 Channel 18	2475 Channel 25
802.15.4	-8.54	-8.83	-8.62
Measurement Uncertainty: ±0.5dB			

Test Report #: EMC_CET10-153-12001_DTS_Rev1 **FCC ID:** CGJ4149EA
Date of Report : 2012-12-10 **IC ID:** 4634A-4149EA




6.7.4.1 Measurement Verdict:

Pass.




6.7.5 Test Data/plots:

Power Spectral Density: 2405 MHz

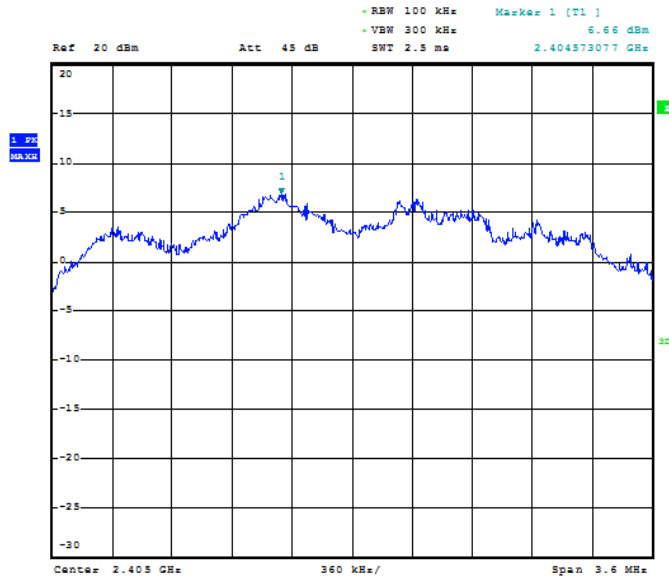

low
Date: 22.NOV.2012 09:01:43


Power Spectral Density: 2440 MHz

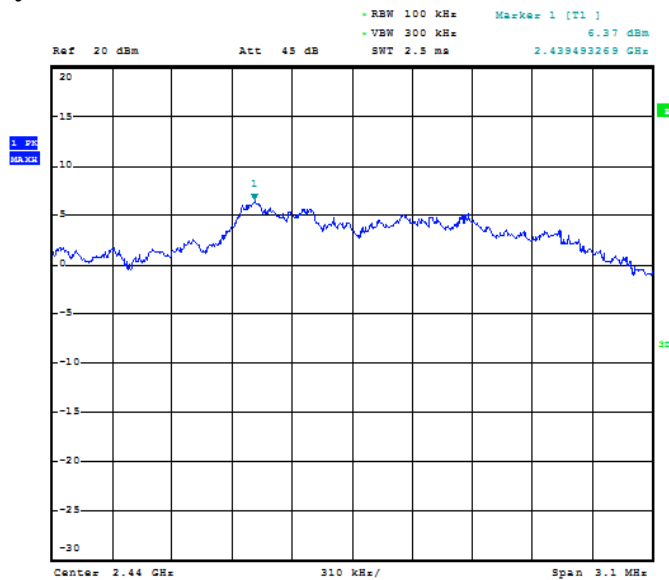

low
Date: 22.NOV.2012 02:59:26



Power Spectral Density: 2475 MHz

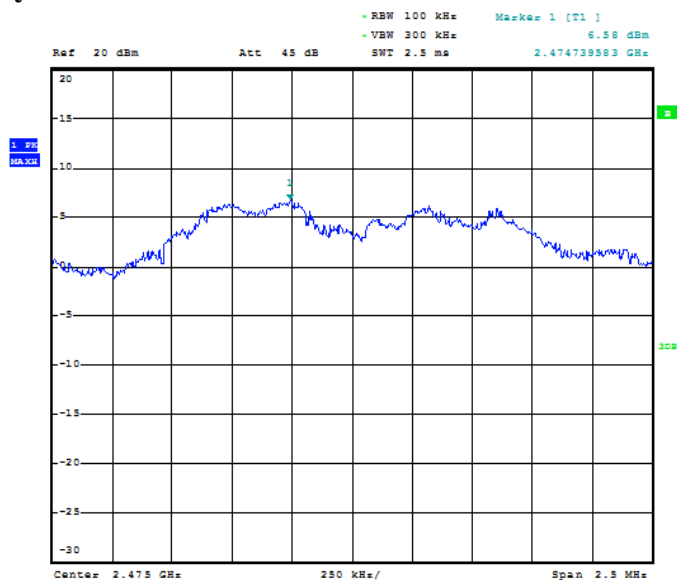

low
Date: 22.NOV.2012 02:58:05



6.8 Unwanted Emissions into Non-Restricted Frequency Bands- Conducted

6.8.1 Reference and Limits:

6.8.1.1 § 15.247 (d)

6.8.1.2 RSS 210-A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

30dBm for the transmitter.

-20dBc in the frequency range 30MHz- 25GHz.

6.8.2 Test Conditions:

Thom: 23°C; Vnom: 6V

6.8.3 Test procedure:

Spectrum Analyzer settings:

RBW=100kHz, VBW=300kHz, Detector: Peak- Max hold;

Sweep Time: Auto

Span=Full range

6.8.4 Test Result:

Conducted Spurious Emissions			
Channel	Frequency (MHz)	Amplitude (dBm)	Limits
		802.15.4	
Low	2405	6.66	30dBm
	Spurious	All other peaks >20dB below limit	-20dBc
Mid	2440	6.37	30 dBm
	Spurious	All other peaks >20dB below limit	-20dBc
High	2475	6.58	30 dBm
	Spurious	All other peaks >20dB below limit	-20dBc
Measurement Uncertainty: ±1.0 dB			

Test Report #: EMC_CET10-153-12001_DTS_Rev1 **FCC ID:** CGJ4149EA
Date of Report : 2012-12-10 **IC ID:** 4634A-4149EA



6.8.4.1 Measurement Verdict:

Pass.



6.8.5 Test data/ plots:


Conducted Spurious Emission: 2405 MHz

Reference Level Measurement



low
Date: 22.NOV.2012 08:01:43

Unwanted Emissions Measurement

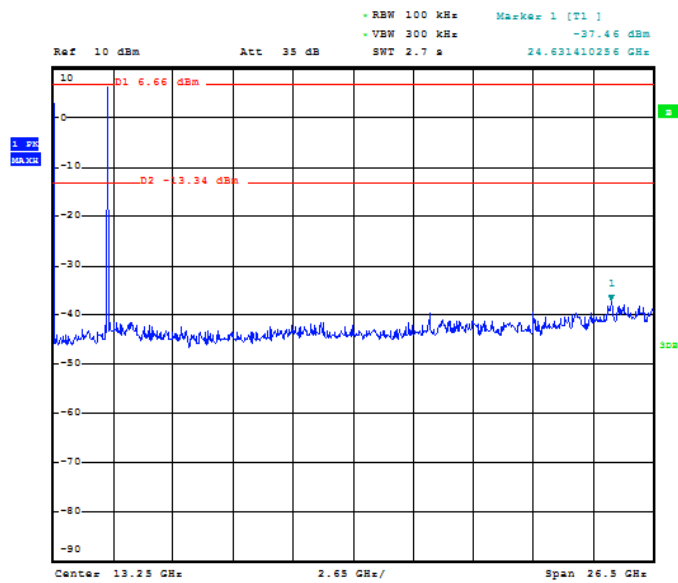


low
Date: 22.NOV.2012 08:05:16




Conducted Spurious Emission: 2440 MHz

Reference Level Measurement

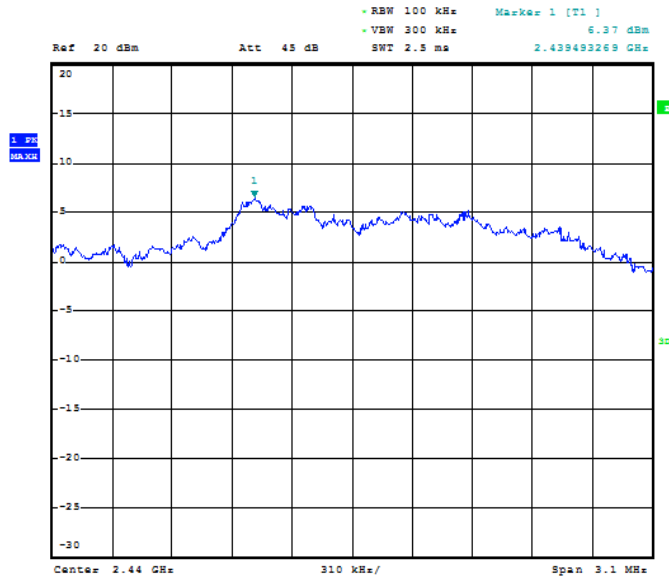

low
Date: 22.NOV.2012 02:59:26

Unwanted Emissions Measurement

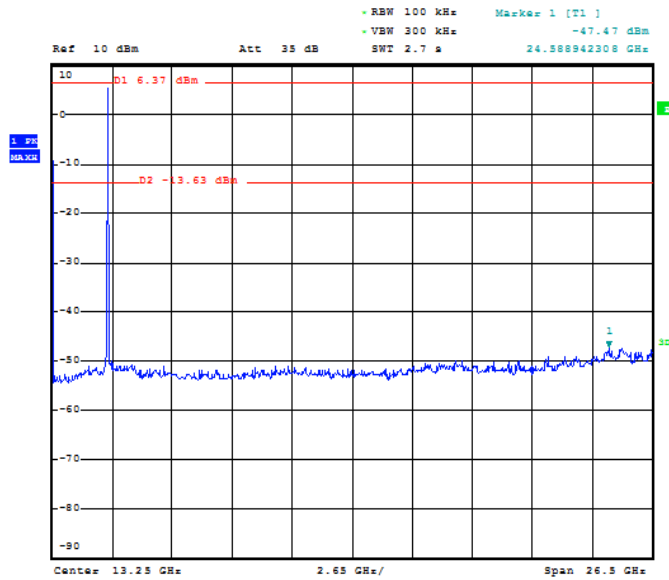


low
Date: 22.NOV.2012 03:06:42




Conducted Spurious Emission: 2475 MHz

Reference Level Measurement

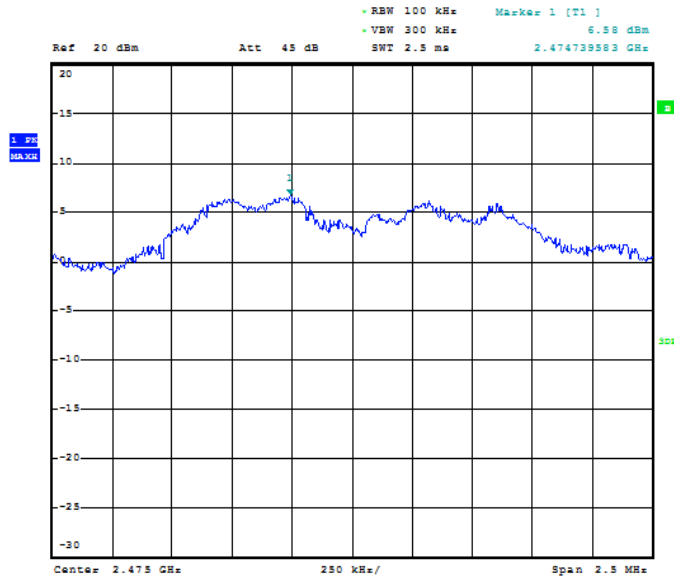

low
Date: 22.NOV.2012 02:58:05

Unwanted Emissions Measurement

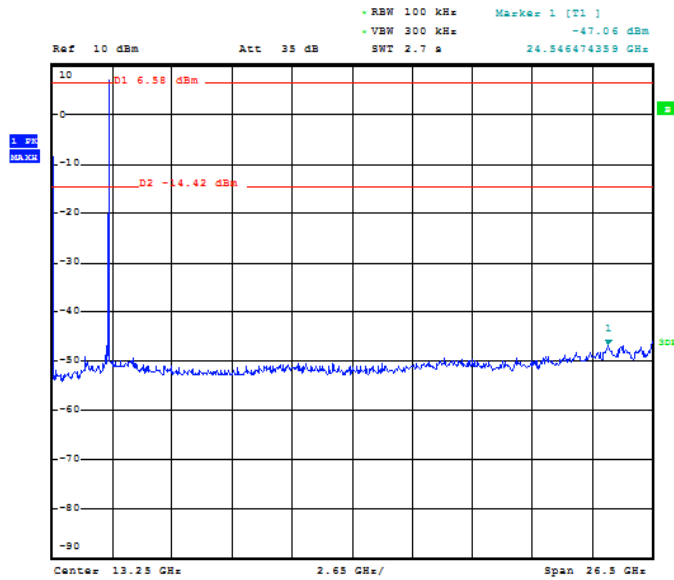

low
Date: 22.NOV.2012 03:12:58



6.9 Unwanted Emissions into Restricted Frequency Bands - Radiated

**6.9.1 Limits: §15.247/15.205
 RSS-210 A8.5**

15.247 (d) Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

15.205 (a) Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

15.209 (a) Emission Limits:

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Report #: EMC_CET10-153-12001_DTS_Rev1 **FCC ID:** CGJ4149EA
Date of Report : 2012-12-10 **IC ID:** 4634A-4149EA



6.9.2 Measurement Procedure:

Peak measurements are made using a peak detector and RBW=1MHz.

*PEAK LIMIT= 74dB μ V/m

Average measurements performed using a peak detector and according to video averaging procedure with RBW=1MHz and VBW=10Hz.

*AVG. LIMIT= 54dB μ V/m

Measurement Uncertainty: ± 3.0 dB


6.9.2.1 Measurement Verdict:

Pass.




6.9.3 Test Data/plots:

Lower band edge PEAK – 2405 MHz

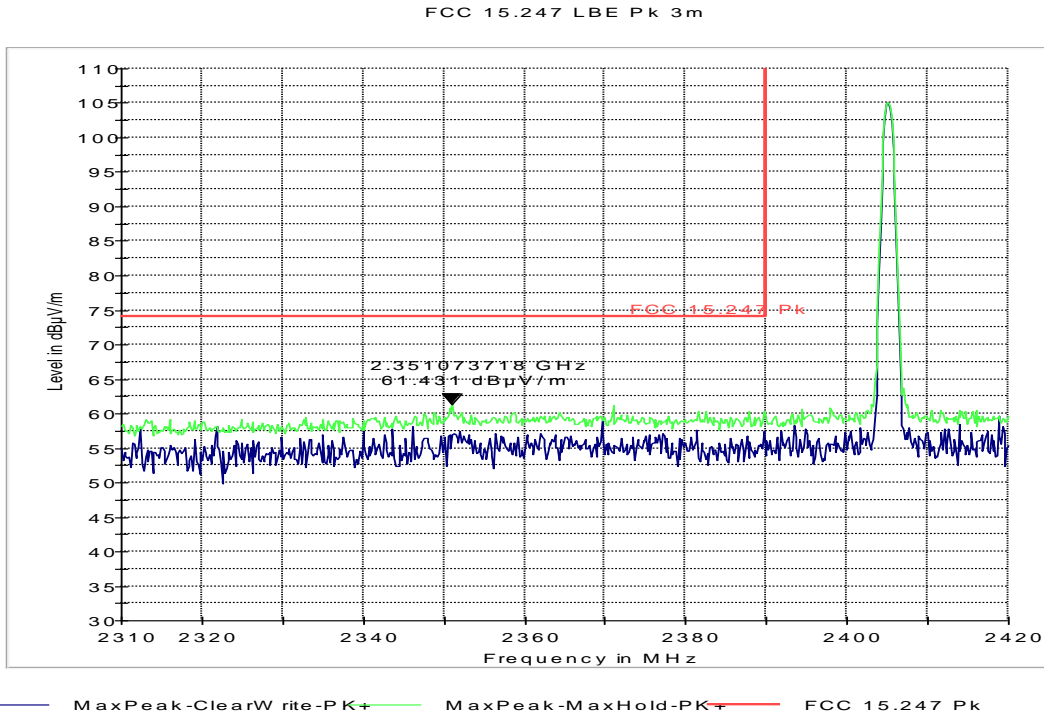


Lower band edge AVERAGE – 2405 MHz

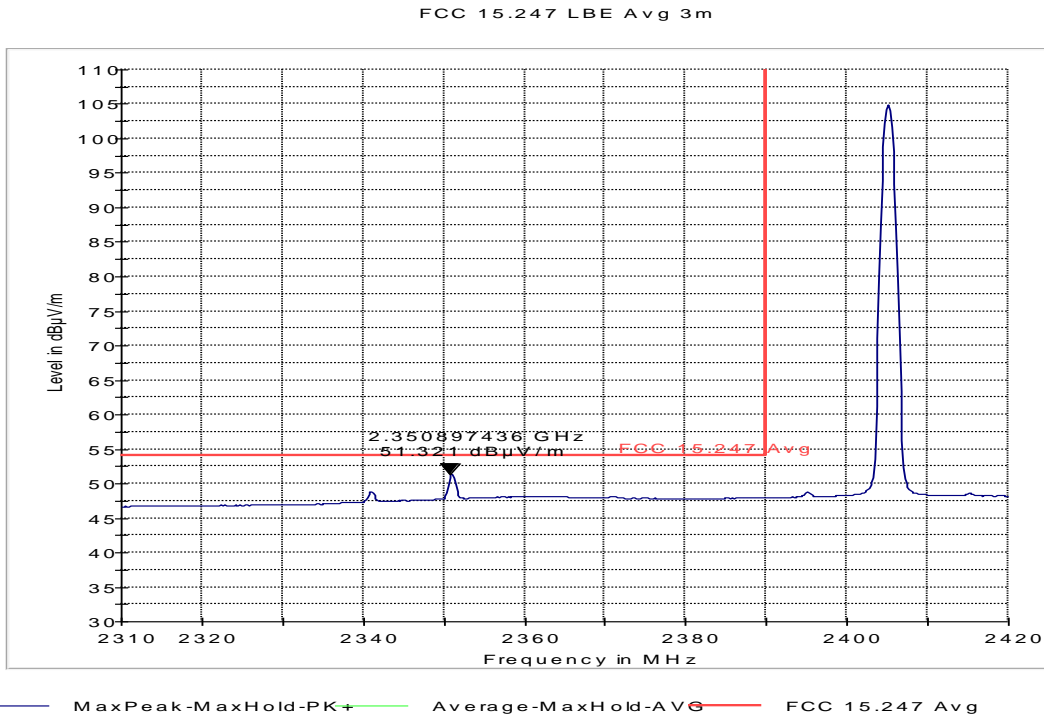



Higher band edge PEAK – 2475 MHz


FCC 15.247 HBE Pk 3m

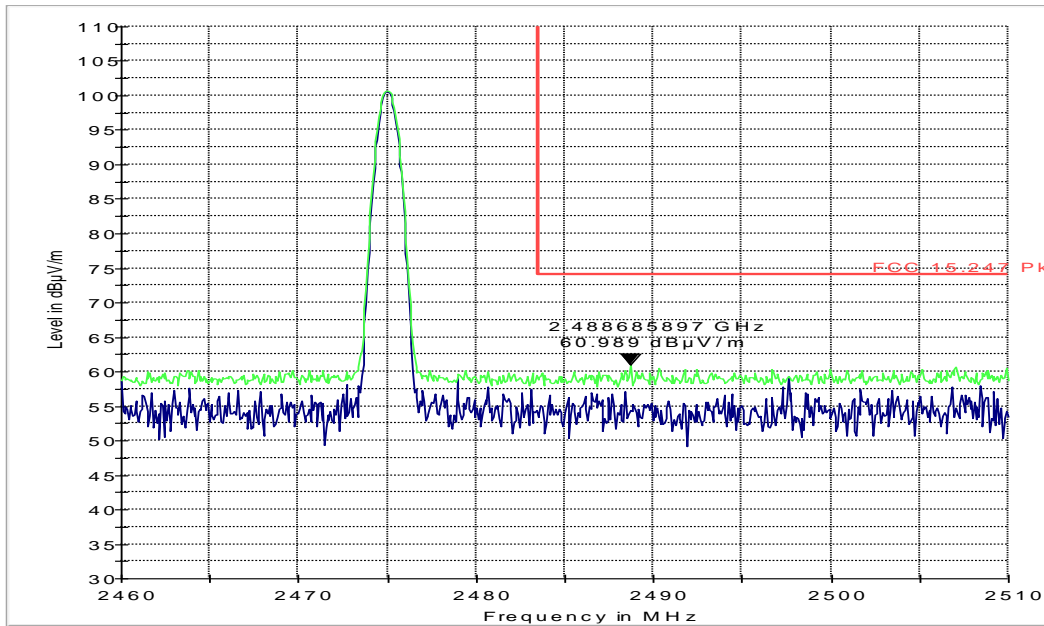

— MaxPeak-ClearWrite-PK+ — MaxPeak-MaxHold-PK+ — FCC 15.247 Pk

Higher band edge AVERAGE- 2475 MHz

FCC 15.247 HBE Avg 3m

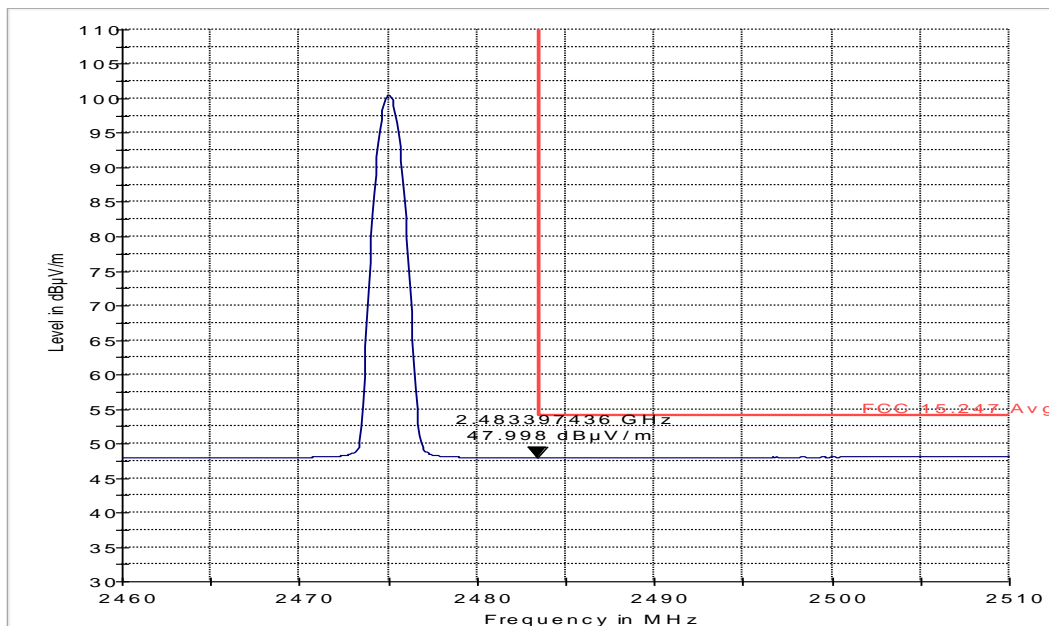

— MaxPeak-MaxHold-PK+ — FCC 15.247 Avg

6.10 Transmitter Spurious Emissions- Radiated

6.10.1 Limits: §15.247/15.205 RSS 210-A8.5

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)
30–88	100 (40dB $\mu\text{V/m}$)
88–216	150 (43.5 dB $\mu\text{V/m}$)
216–960	200 (46 dB $\mu\text{V/m}$)
Above 960	500 (54 dB $\mu\text{V/m}$)

6.10.2 Test Result:

Test mode: Modulation: O-QPSK

Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT.

Measurement Uncertainty: $\pm 3.0\text{dB}$

6.10.2.1 Measurement Result

Pass.




6.10.3 Test data/ plots:

Transmitter Radiated Spurious Emission:<30MHz

Note: Worst case representation for all modes of operation in this frequency range-
Limits adjusted for 3m measurement.

FCC 15 9kHz - 30 MHz

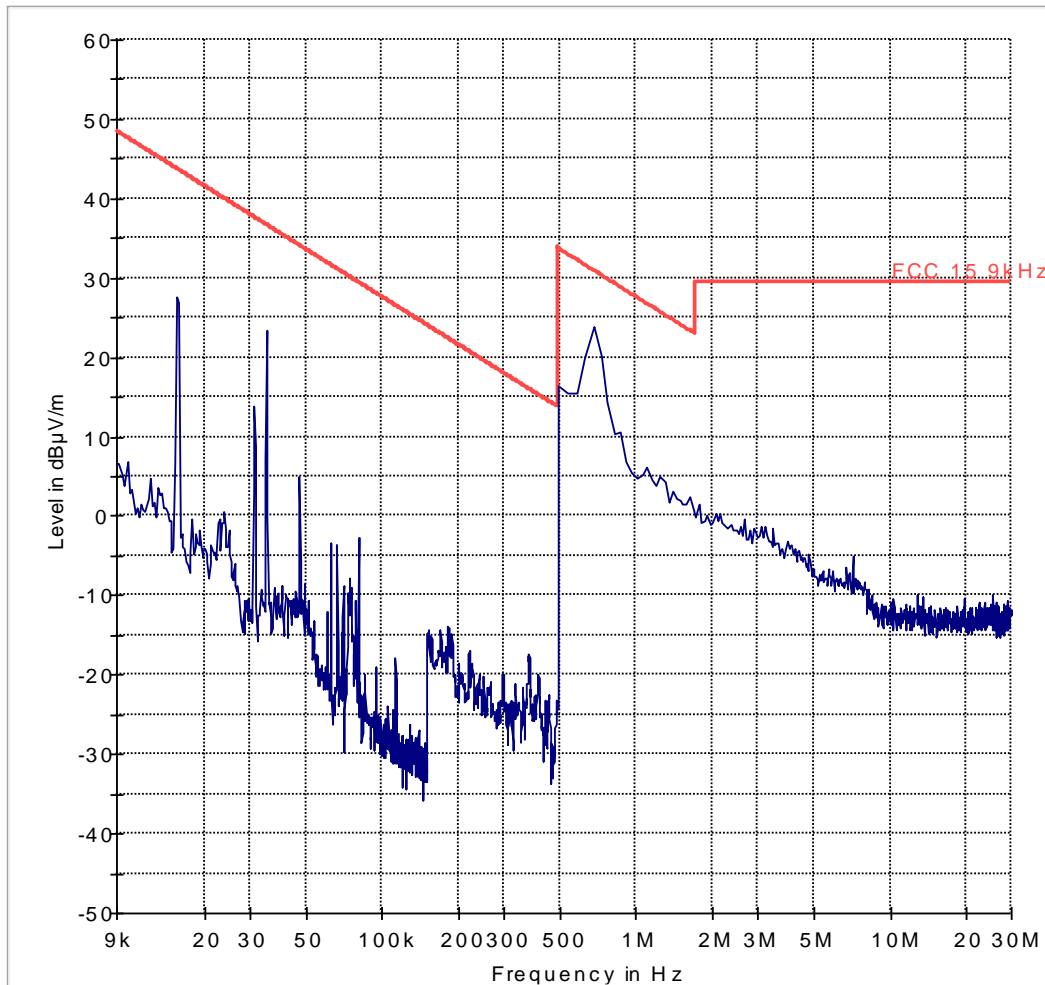


— FCC 15 9kHz — Preview Result 1-PK+



Transmitter Radiated Spurious Emission- Ch11 (2405 MHz): 30M-1GHz

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
228.883974	40.3	100.0	120.000	123.0	H	223.0	13.2	5.7	46.0
232.683333	43.2	100.0	120.000	123.0	H	223.0	13.5	2.8	46.0
308.624359	44.0	100.0	120.000	100.0	H	1.0	15.2	2.1	46.0
373.293590	37.5	100.0	120.000	100.0	H	1.0	18.0	8.5	46.0
379.917307	40.3	100.0	120.000	99.0	H	2.0	18.3	5.7	46.0
394.887179	44.2	100.0	120.000	100.0	H	22.0	18.7	1.9	46.0
429.232051	43.8	100.0	120.000	100.0	H	315.0	18.4	2.2	46.0
432.379488	43.6	100.0	120.000	100.0	H	315.0	18.4	2.4	46.0

FCC 15 30-1000MHz

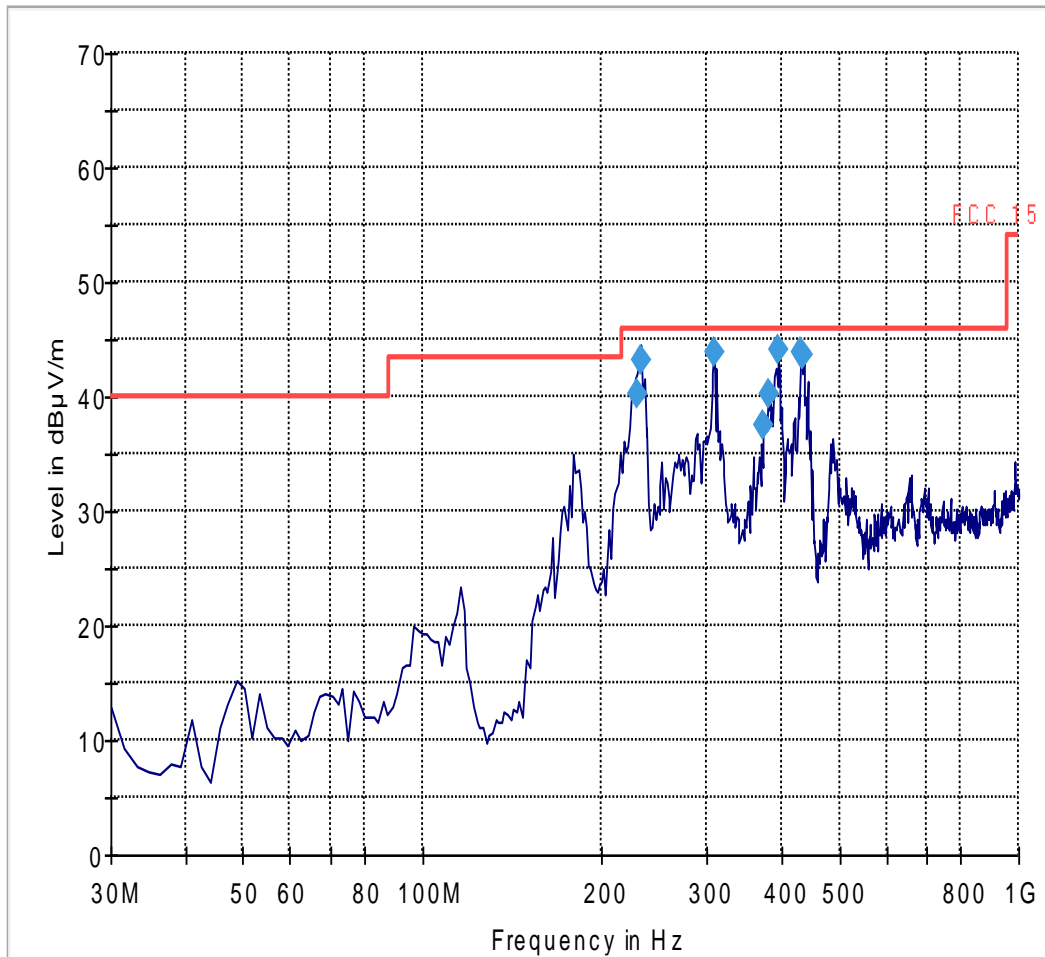


— FCC 15 — Preview Result 1-PK+ ◆ Final Result 1-QPK



Transmitter Radiated Spurious Emission- Ch11 (2405 MHz): 1G-18GHz

FCC 15 1-18GHz

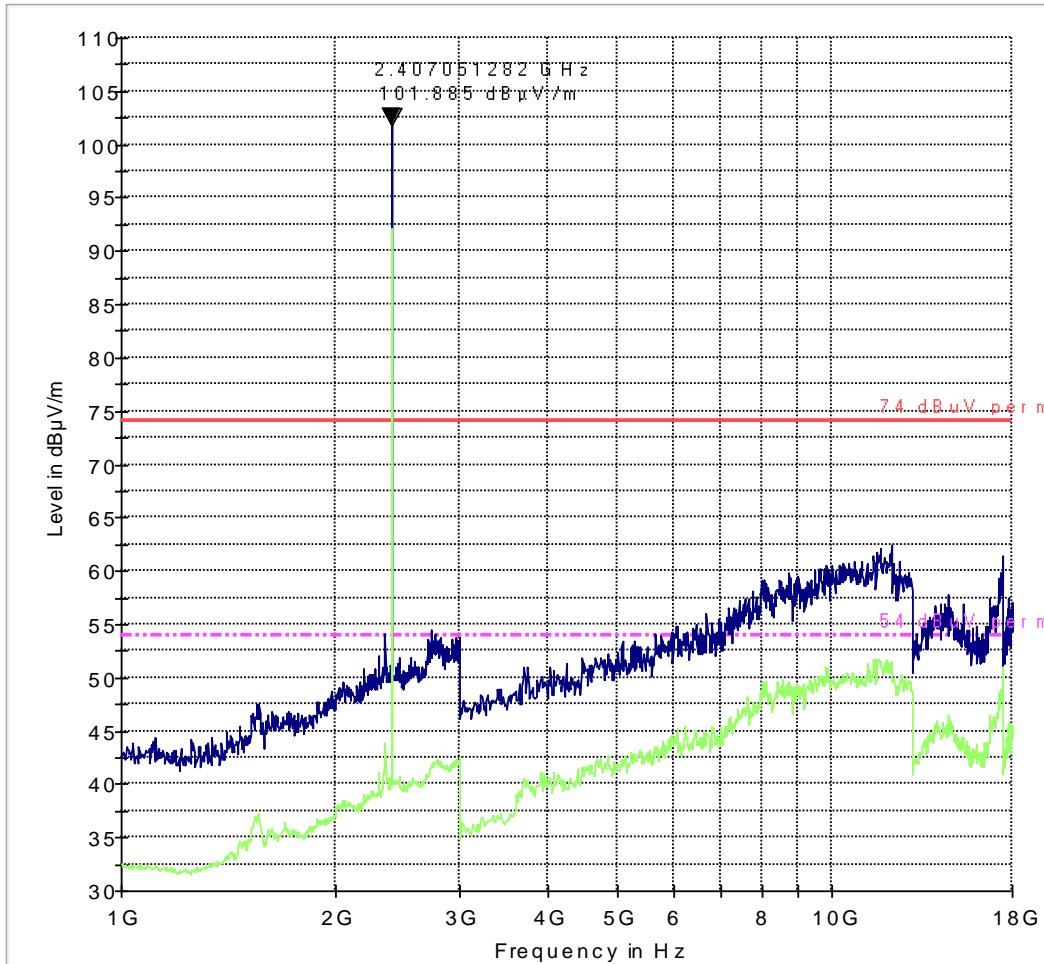


- 74 dBuV per m
- 54 dBuV per m
- Preview Result 1-PK+
- Preview Result 2-AVG



Transmitter Radiated Spurious Emission- Ch18 (2440 MHz): 30M-1GHz

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
228.970513	40.5	100.0	120.000	123.0	H	225.0	13.3	5.5	46.0
232.671795	43.6	100.0	120.000	123.0	H	225.0	13.5	2.4	46.0
308.664743	43.3	100.0	120.000	100.0	H	1.0	15.2	2.7	46.0
313.900000	38.1	100.0	120.000	100.0	H	1.0	15.4	7.9	46.0
386.016026	40.7	100.0	120.000	100.0	H	15.0	18.8	5.3	46.0
391.100641	42.3	100.0	120.000	100.0	H	8.0	18.8	3.8	46.0
429.045513	43.8	100.0	120.000	100.0	H	315.0	18.4	2.2	46.0
431.565384	42.9	100.0	120.000	100.0	H	315.0	18.4	3.2	46.0

FCC 15 30-1000MHz

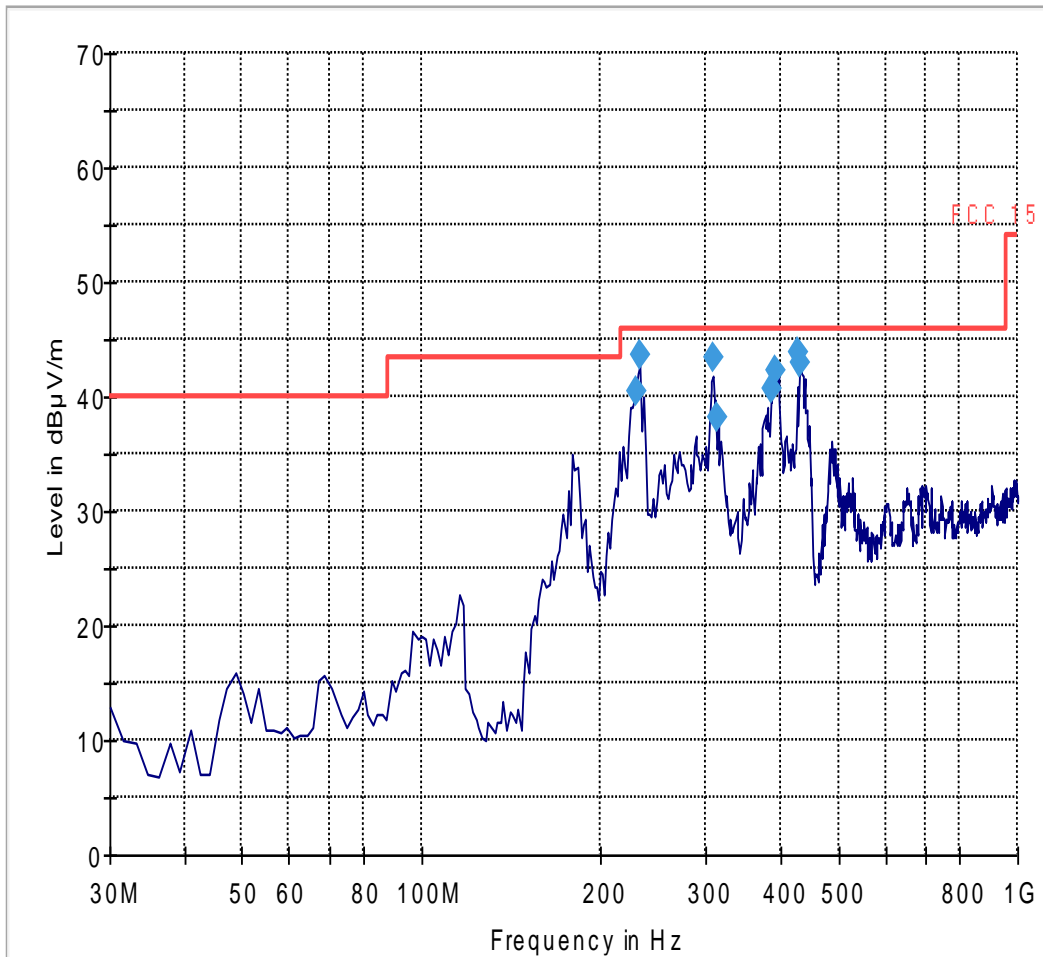


— FCC 15 — Preview Result 1-PK+ ◆ Final Result 1-QPK



Transmitter Radiated Spurious Emission- Ch18(2440 MHz): 1G-18GHz

FCC 15 1-18GHz

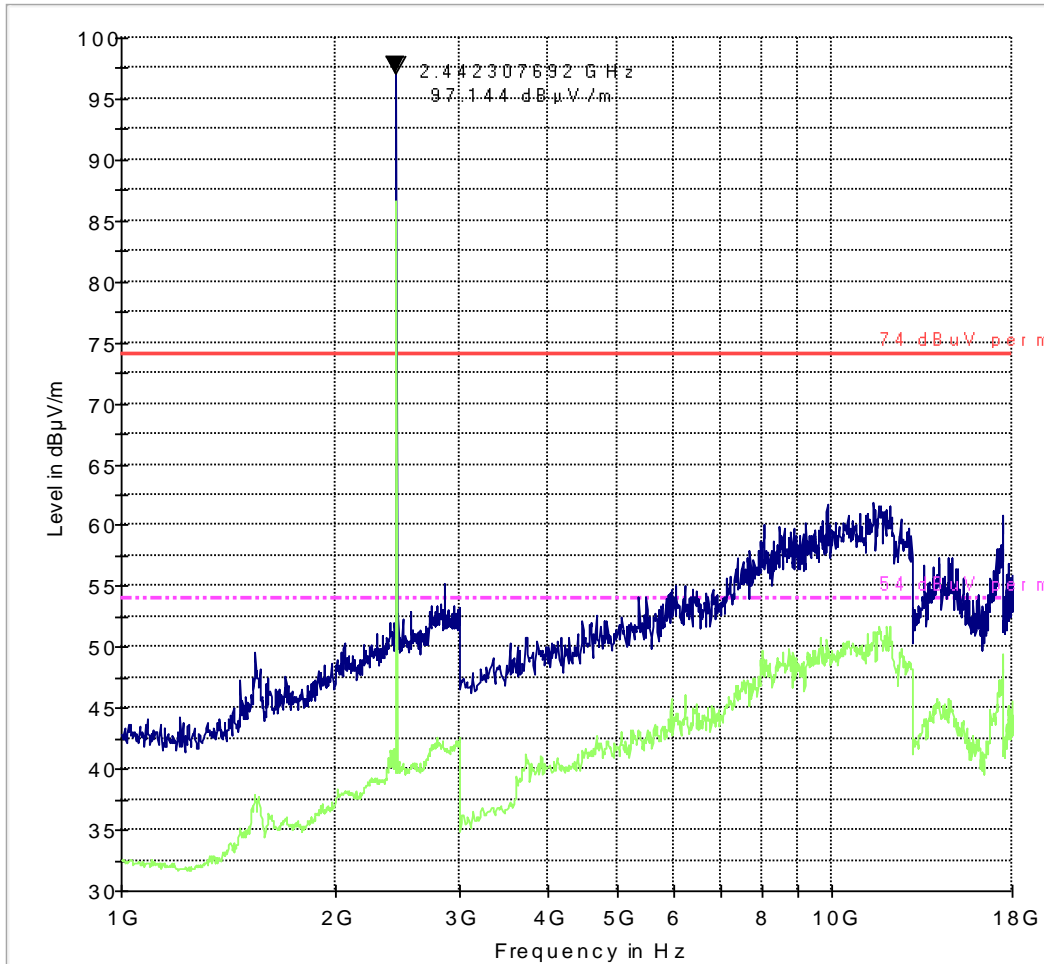


- 74 dBuV per m
- 54 dBuV per m
- Preview Result 1-PK+
- Preview Result 2-AVG



Transmitter Radiated Spurious Emission- Ch18 (2440 MHz): 18G-26GHz

Note: Worst case representation for all channels of operation in this band.

FCC 15 18-26GHz

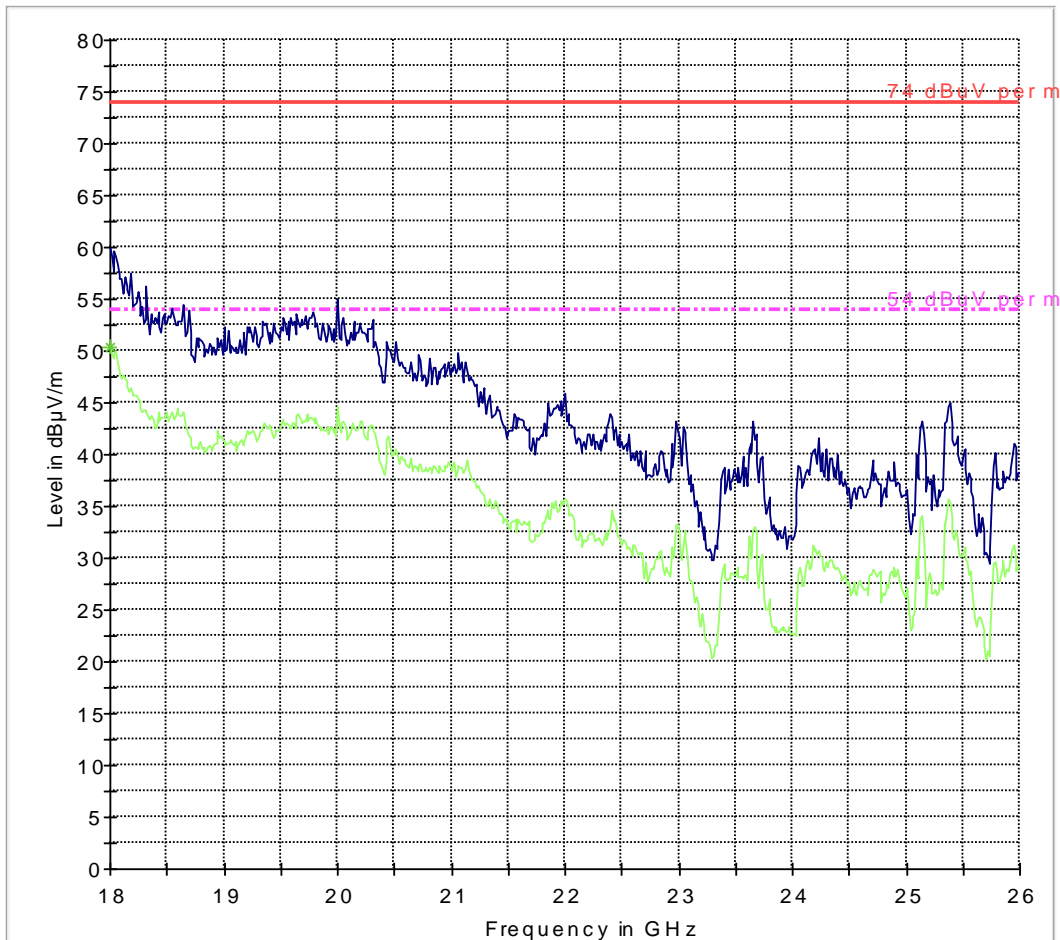


- 74 dBuV per m
- Preview Result 1-PK+
- * Data Reduction Result 2 [6]-AVG
- - - 54 dBuV per m
- Preview Result 2-AVG



Transmitter Radiated Spurious Emission- Ch25 (2475 MHz): 30M-1GHz

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
227.460257	39.6	100.0	120.000	123.0	H	235.0	13.2	6.5	46.0
232.683333	41.5	100.0	120.000	123.0	H	225.0	13.5	4.6	46.0
308.460897	42.9	100.0	120.000	100.0	H	0.0	15.2	3.1	46.0
373.218590	38.3	100.0	120.000	100.0	H	165.0	18.0	7.7	46.0
388.132051	40.8	100.0	120.000	100.0	H	22.0	18.9	5.2	46.0
391.027564	41.8	100.0	120.000	99.0	H	14.0	18.8	4.2	46.0
429.057051	43.7	100.0	120.000	100.0	H	319.0	18.4	2.3	46.0
432.281411	43.2	100.0	120.000	100.0	H	319.0	18.4	2.8	46.0

FCC 15 30-1000MHz

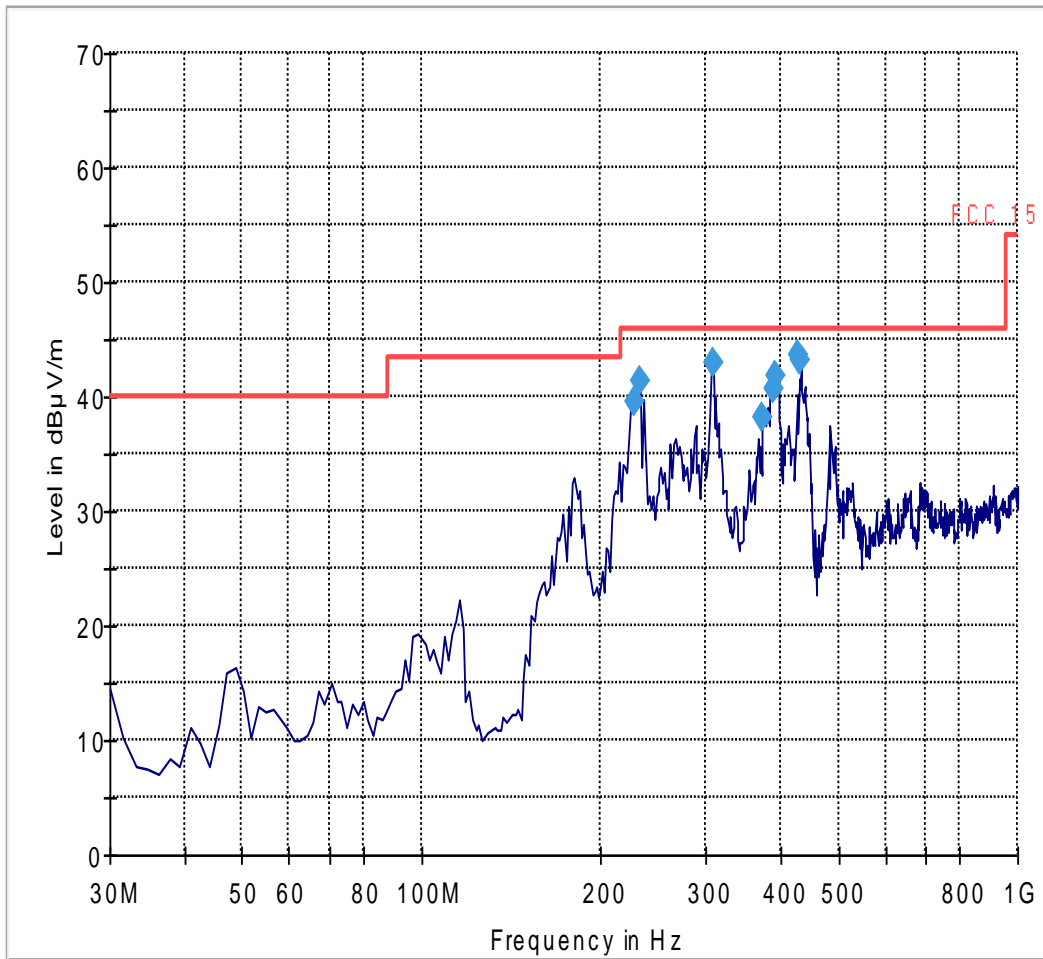


— FCC 15 — Preview Result 1-PK+ ◆ Final Result 1-QPK



Transmitter Radiated Spurious Emission- Ch25 (2475 MHz): 1G-18GHz

FCC 15 1-18GHz

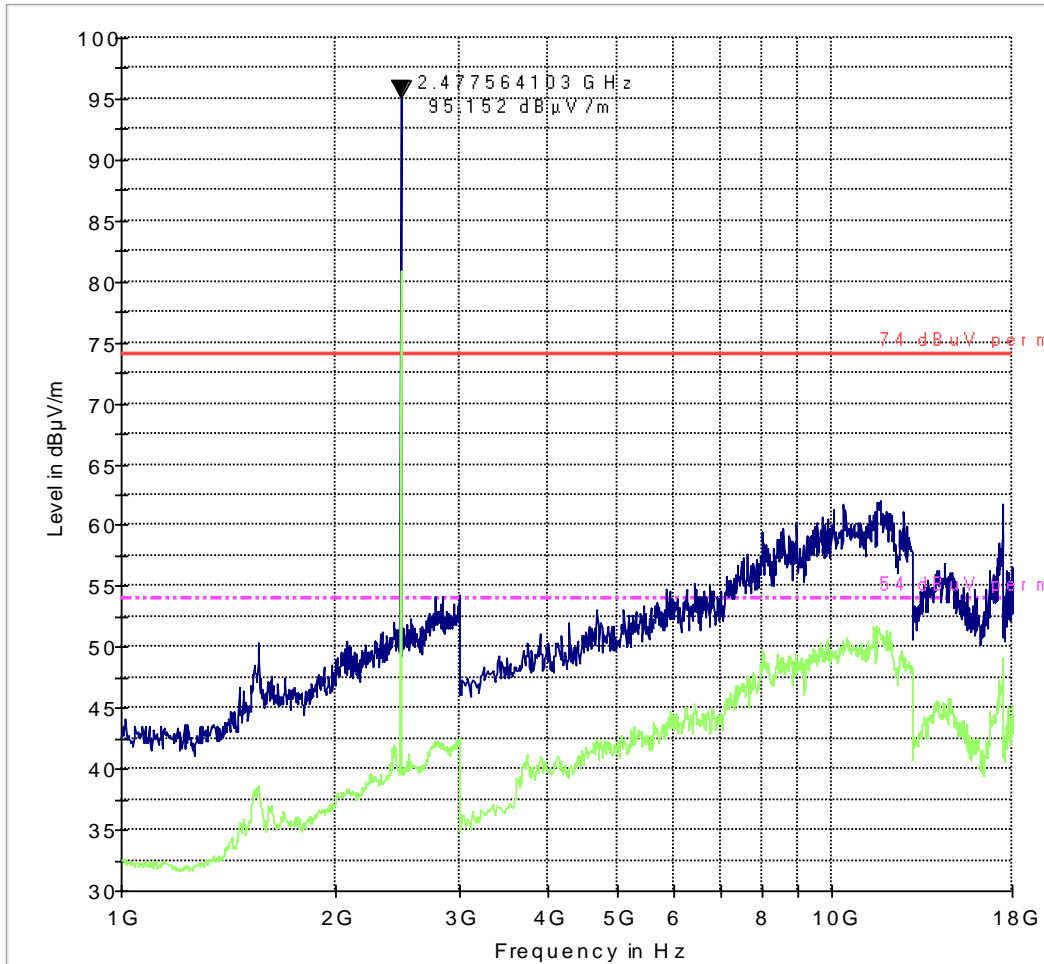

74 dBuV per m 54 dBuV per m
Preview Result 1-PK+ Preview Result 2-AVG



7 Test Equipment and Ancillaries used for tests


No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
3m Semi- Anechoic Chamber:						
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESU 40	100251	May 2012	1 Year
	Spectrum Analyzer	Rohde&Schwarz	FSU	200302	May 2011	2 Years
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHz HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	3 Years
	Binconilog Antenna	ETS	3149	J000123908	Feb 2012	3 years
	Horn Antenna	EMCO	3115	35114	Mar 2012	3 Years
Ancillary equipment						
	Multimeter	Klein Tools	MM200	001	Apr 2011	2 Years
	Humidity Temperature Logger	Dickson	TM320	03280063	Mar 2012	1 Year
	Digital Barometer	VWR	35519-055	91119547	Nov 2011	2 Years
	DC Power Supply	HP	E3610A	KR83023316	N/A	N/A
	DC Power Supply	Protek	3003B	H012771	N/A	N/A
	Communication Antenna	IBP5-900/1940	Kathrein	N/A	N/A	N/A


Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month.

Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

8 Test Setup Diagrams

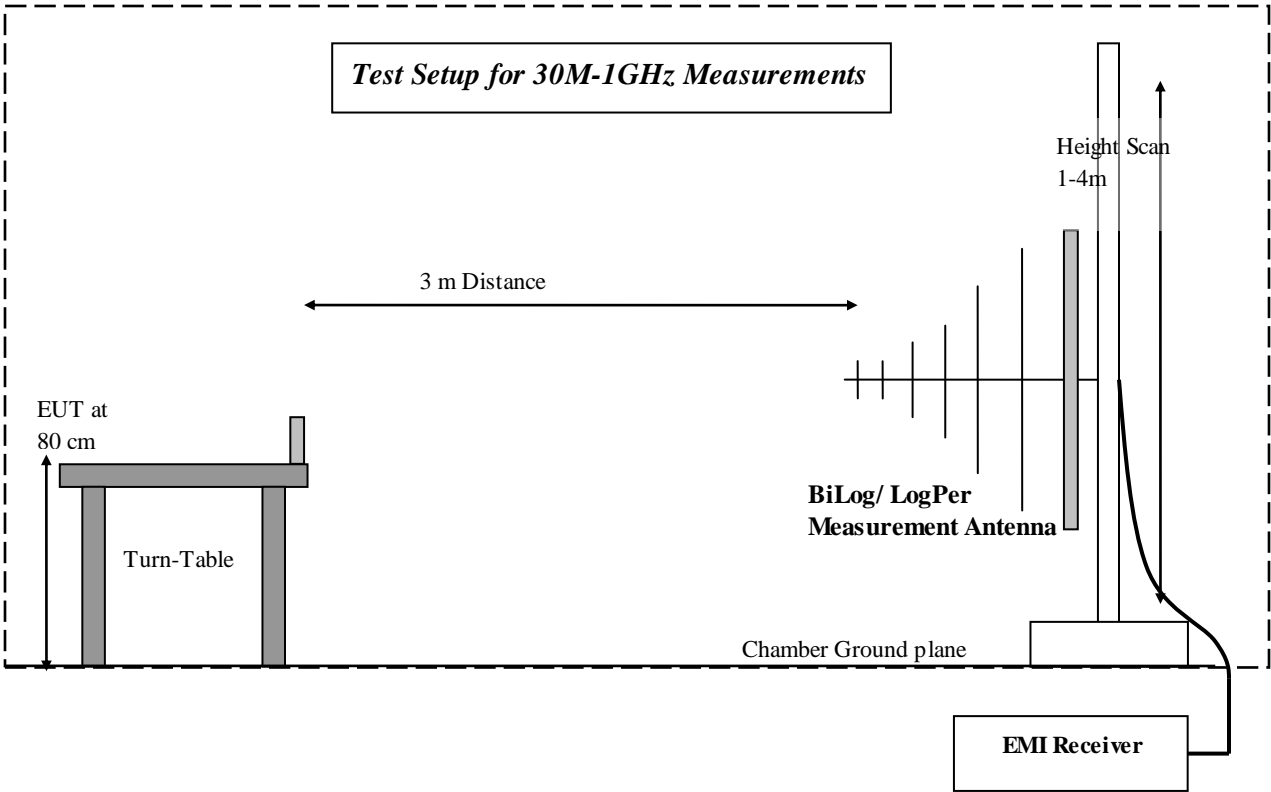

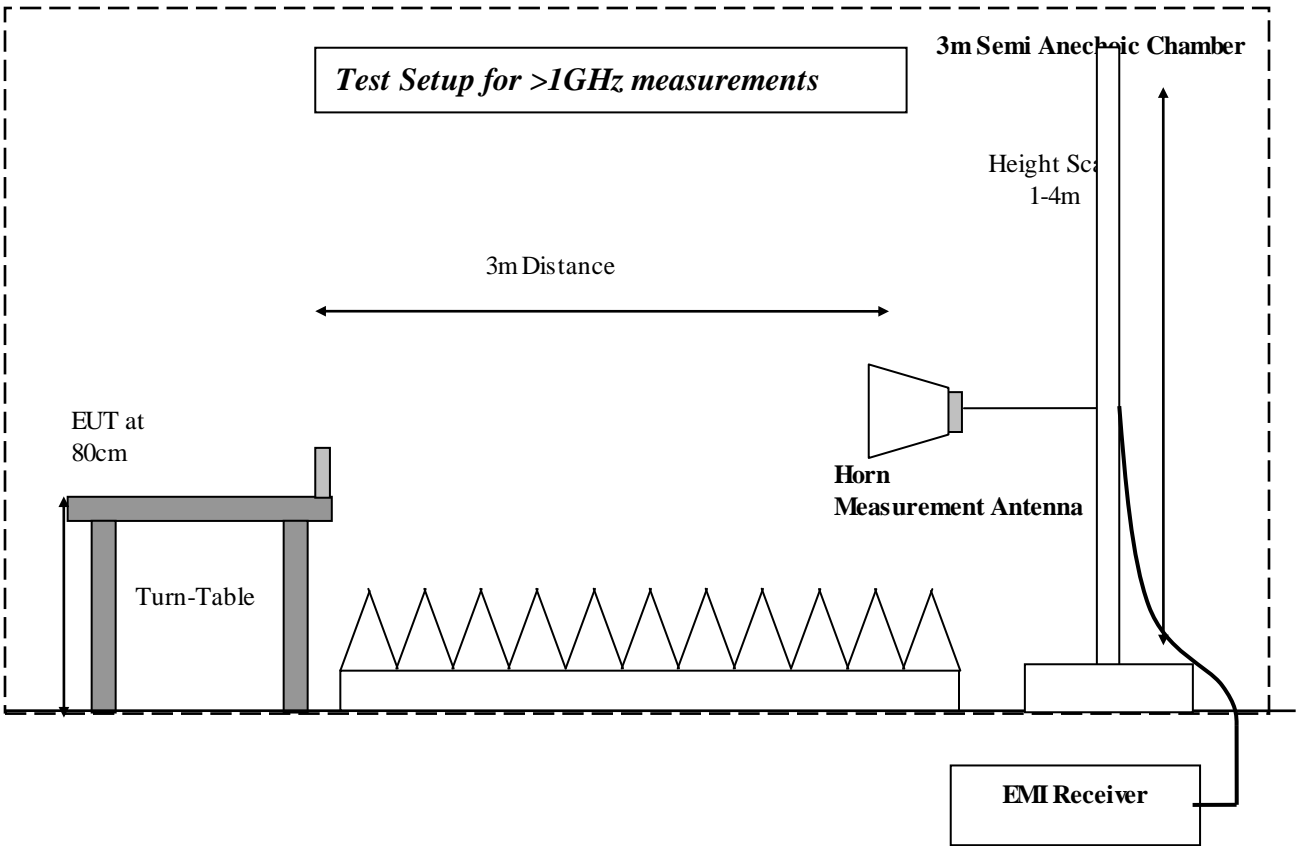

Test Report #: EMC_CET10-153-12001_DTS_Rev1 **FCC ID:** CGJ4149EA
Date of Report : 2012-12-10 **IC ID:** 4634A-4149EA



9 Revision History

Date	Report Name	Changes to report	Report prepared by
2012-12-05	EMC_CET10-153-12001_DTS	First Version	Z Gray
2012-12-10	EMC_CET10-153-12001_DTS_Rev1	Added battery voltage levels, p. 6 Changed 'Zigbee' to '802.15.4', p. 8	Z Gray