

APPLICANT: CHIAYO ELECTRONICS CO., LTD.
FCC ID: CINM-200

TABLE OF CONTENTS LIST

TEST REPORT CONTAINING:

PAGE 1..... GENERAL INFORMATION
PAGE 2.....DESCRIPTIONS
PAGE 3A-3C.....MODULATAION LIMITING GRAPHS
PAGE 4.....RF POWER TEST PROCEDURE
PAGE 5.....AUDIO FREQUENCY RESPONSE GRAPH
PAGE 6.....OCCUPIED BANDWIDTH
PAGE 7.....OCCUPIED BANDWIDTH PLOT
PAGE 8.....OCCUPIED BANDWIDTH PLOT - CW
PAGE 9.....RADIATED EMISSIONS TEST DATA
PAGE 10.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 11.....FREQUENCY STABILITY TEST DATA
PAGE 12.....EQUIPMENT LIST

EXHIBITS CONTAINING:

EXHIBIT 1.....FCC ID LABEL SAMPLE
EXHIBIT 2.....SKETCH OF LABEL LOCATION
EXHIBIT 3.....BLOCK DIAGRAM
EXHIBIT 4.....SCHEMATIC
EXHIBIT 5.....TUNING PROCEDURE
EXHIBIT 6.....CIRCUIT DESCRIPTION
EXHIBIT 7.....USER'S MANUAL
EXHIBIT 8.....TEST SET UP PHOTOGRAPH
EXHIBIT 9A.....EXTERNAL PHOTO - FRONT VIEW
EXHIBIT 9B.....EXTERNAL PHOTO - REAR VIEW
EXHIBIT 9C.....INTERNAL PHOTO - TOP VIEW
EXHIBIT 9D.....INTERNAL PHOTO - COMPONENT VIEW
EXHIBIT 9E.....INTERNAL PHOTO - COPPER VIEW

APPLICANT: CHIAYO ELECTRONICS CO., LTD.
FCC ID: CINM-200
REPORT #: C\CHIAYO\1134T1\1134T1RPT.doc
TABLE OF CONTENTS LIST

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.1033(c)(1) CHIAYO ELECTRONICS CO., LTD. will manufacture the in
2.1033(c)(2) quantity, for use under FCC RULES PART 74.801, LOW
POWER AUXILIARY STATIONS.

CHIAYO ELECTRONICS CO., LTD.
30, LANE 27, SEC. 4, JEN AI ROAD
TAIPEI, TAIWAN R.O.C.,

2.1033 TECHNICAL DESCRIPTION

(c)(3) Instruction book. The instruction manual is in-
cluded as Exhibit 7.

(c)(4) Type of Emission: 86K0F3E

Bn = 2M + 2DK
M = 20000
D = 23kHz(Peak Deviation)
K = 1
Bn = 2(20k) + 2(23k)(1) = 86k

ALLOWED AUTHORIZED BANDWIDTH = 200kHz.
74.861(e)(5)

(c)(5) Frequency Range: Part 74: 174-216 MHz
TEST FREQ = 202.1 MHz.

(c)(6) Power Range and Controls:UNIT has no controls.

(c)(7) Maximum Output Power Rating: .00043 Watts into 50
ohms resistive load.

(c)(8) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY
4.5V BATTERY
Vce = 4.5 Volts
Ice = 28 mA.

(c)(9) Tune-up procedure. The tune-up procedure is included
as Exhibit # : 5.

(c)(10) Complete Circuit Diagrams: The circuit diagram is
included as EXHIBIT # 4. The block diagram
is included as EXHIBIT # 3.

APPLICANT: CHIAYO ELECTRONICS CO., LTD.
FCC ID: CINM-200
REPORT #: C\CHIAYO\1134T1\1134T1RPT.doc
PAGE #: 1

2.1033(c)11) Photo or Drawing of Label:
See EXHIBIT # 1.

Sketch of Label Location :
See EXHIBIT # : 2.

2.1033(c)12) Photos of Equipment:
See EXHIBIT #'S 9A-9E.

(c)(13) Description of all circuitry and devices provided
for determining and stabilizing frequency.

Description of any circuits or devices employed
for suppression of spurious radiation, for limit-
ing modulation, and for limiting power.

This circuitry is described on Exhibit 6.

Limiting Modulation:
The transmitter audio circuitry is contained
in IC701, IC702.

Limiting Power:
There is no provision for changing the output power.


(13) Digital modulation. This unit does not use
digital modulation.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is sub-
mitted below.

2.1046 RF power output.


RF power measured is:
OUTPUT POWER: .00043 WATTS

Modulation Limiting
Chiayo Electronics
M-200

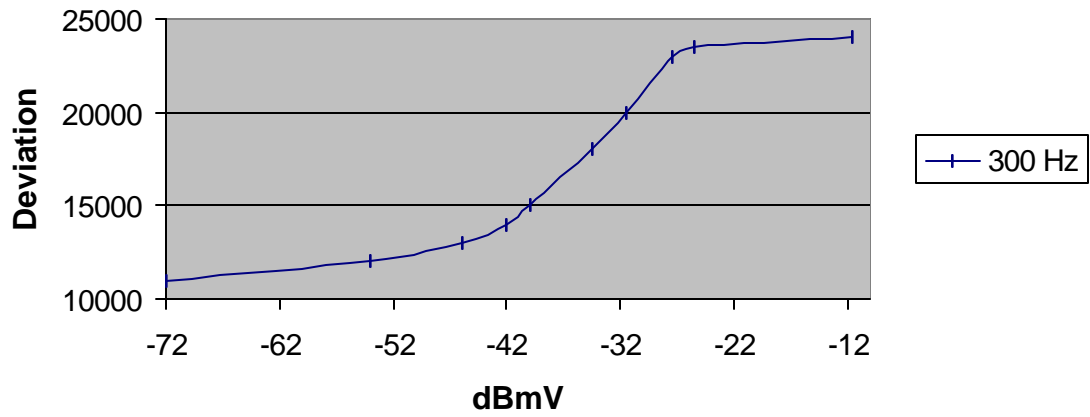


CHIAYO ELECTRONICS
FCC ID : CINM-200
JOB : 1134T1
PAGE # : 3A

Modulation Limiting
Chiayo Electronics
M-200

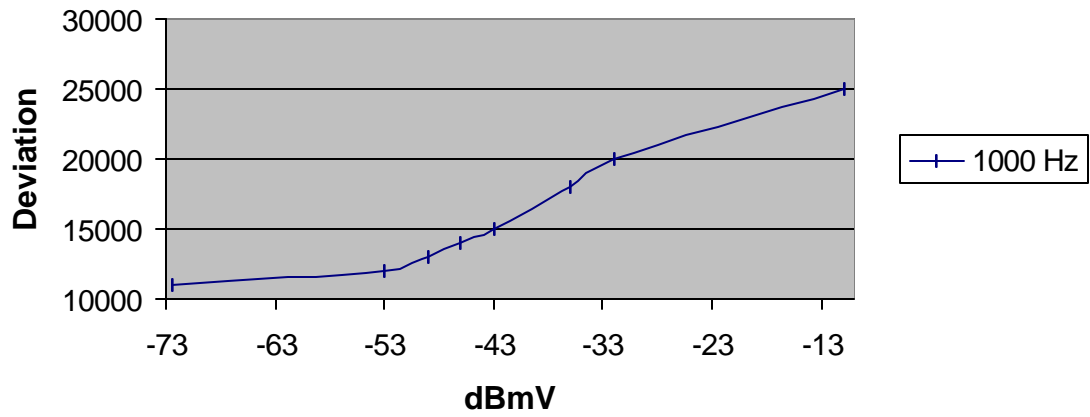


CHIAYO ELECTRONICS
FCC ID : CINM-200
JOB : 1134T1
PAGE # : 3B

Modulation Limiting
Chiayo Electronics
M-200

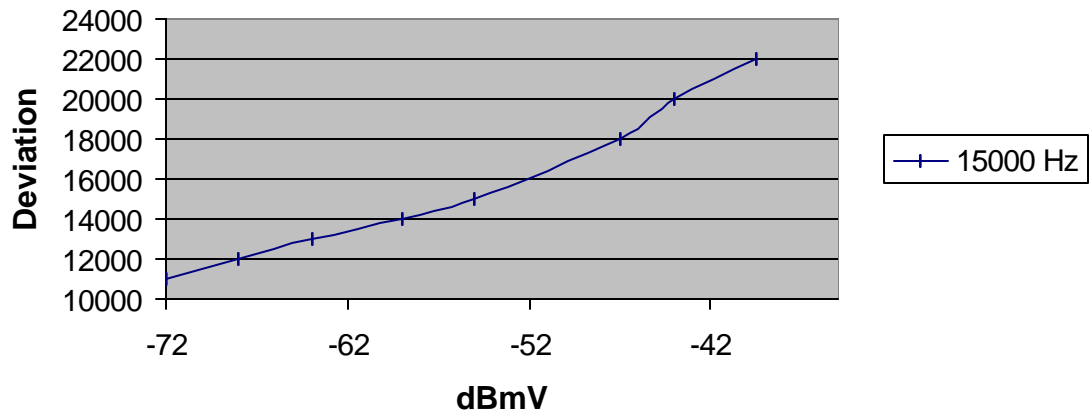

CHIAYO ELECTRONICS
FCC ID : CINM-200
JOB : 1134T1
PAGE # : 3C

R.F. POWER OUTPUT TEST PROCEDURE

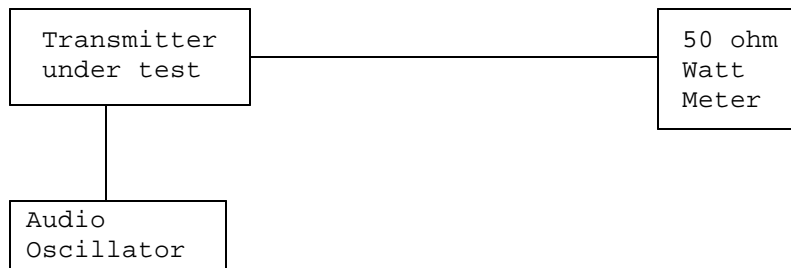

2.1047(a)(b) Modulation characteristics:


AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page.

AUDIO LOW PASS FILTER

The audio low pass filter is not required in this unit.

APPLICANT: CHIAYO ELECTRONICS CO., LTD.
FCC ID: CINM-200
REPORT #: C\CHIAYO\1134T1\1134T1RPT.doc
PAGE #: 4

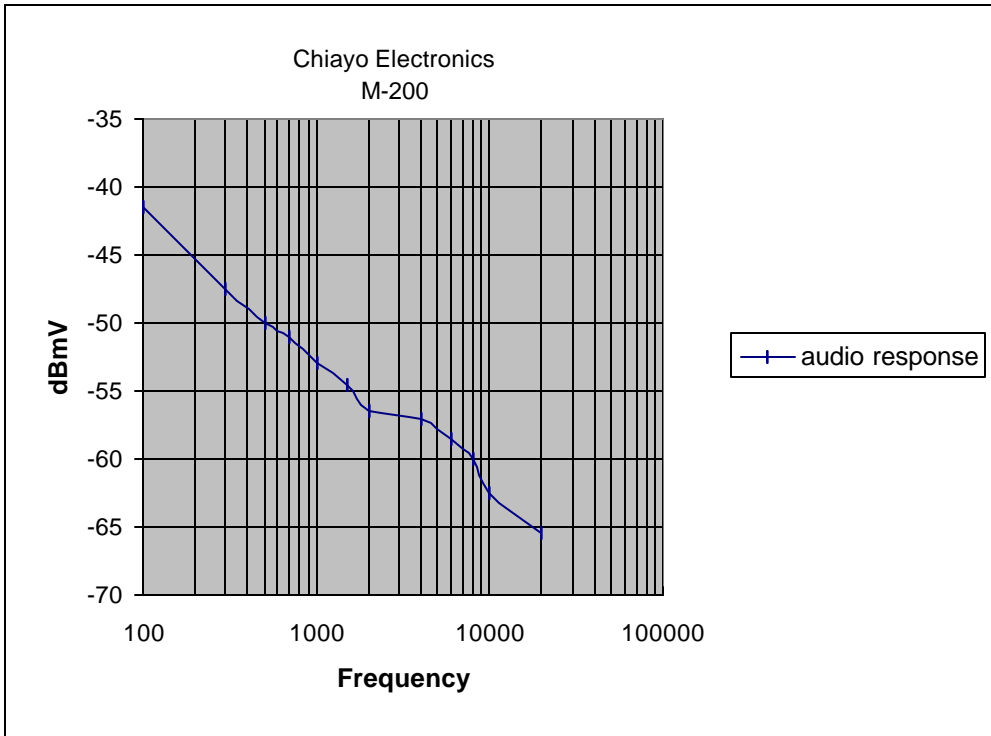

CHIAYO ELECTRONICS
FCC ID : CINM-200
JOB : 1134T1
PAGE # : 5


2.1049(c) Occupied Bandwidth:

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% $43 \log(P_o)$ dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots are on the following two pages.

Wireless Microphone transmitter:

Test procedure diagram


OCCUPIED BANDWIDTH MEASUREMENT

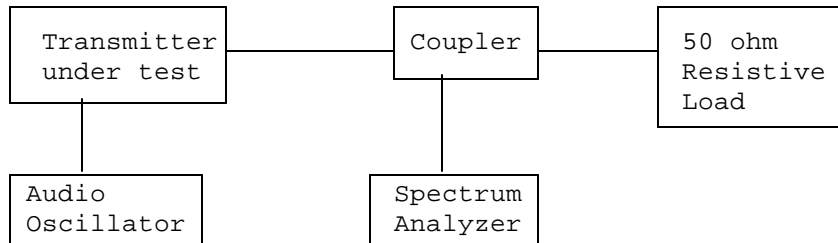


REQUIREMENT: PART 74: 200kHz EMISSION BANDWIDTH.

APPLICANT: CHIAYO ELECTRONICS CO., LTD.
FCC ID: CINM-200
REPORT #: C\CHIAYO\1134T1\1134T1RPT.doc
PAGE #: 6

OCCUPIED BANDWIDTH PLOT

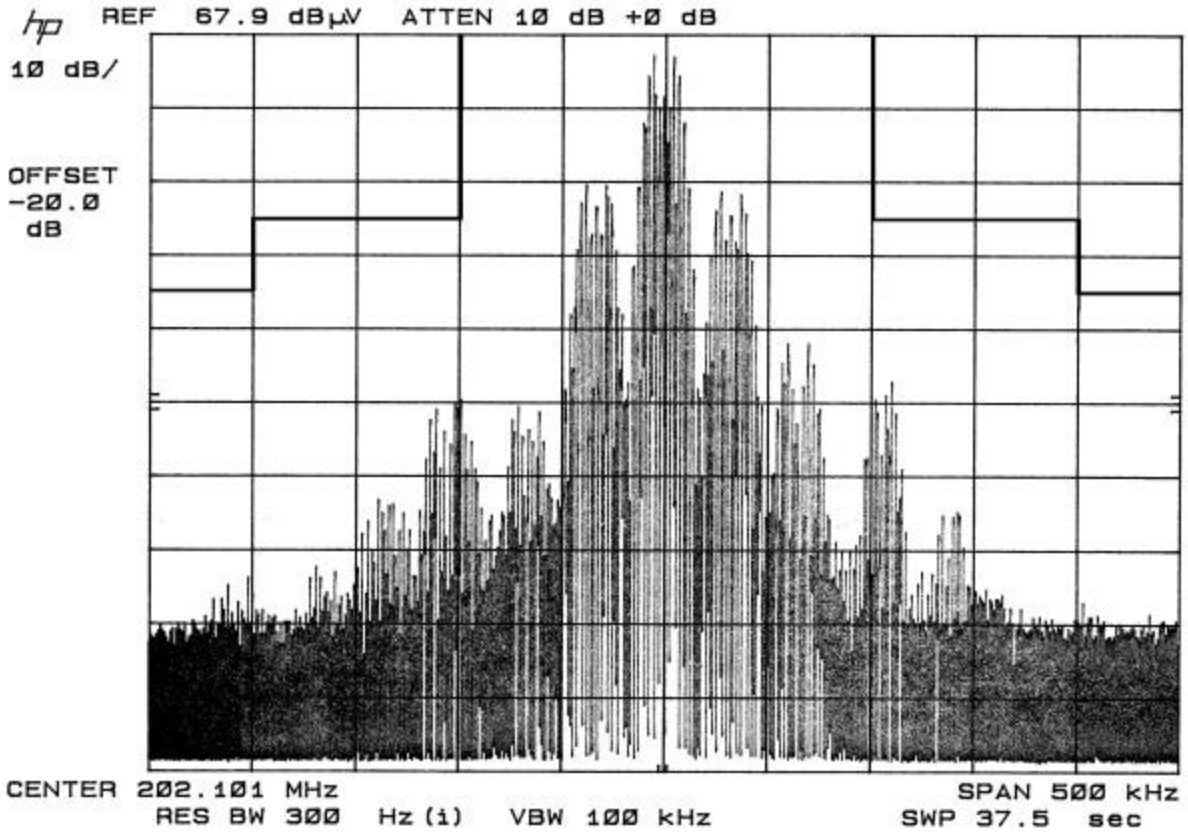

OCCUPIED BANDWIDTH PLOT - CW

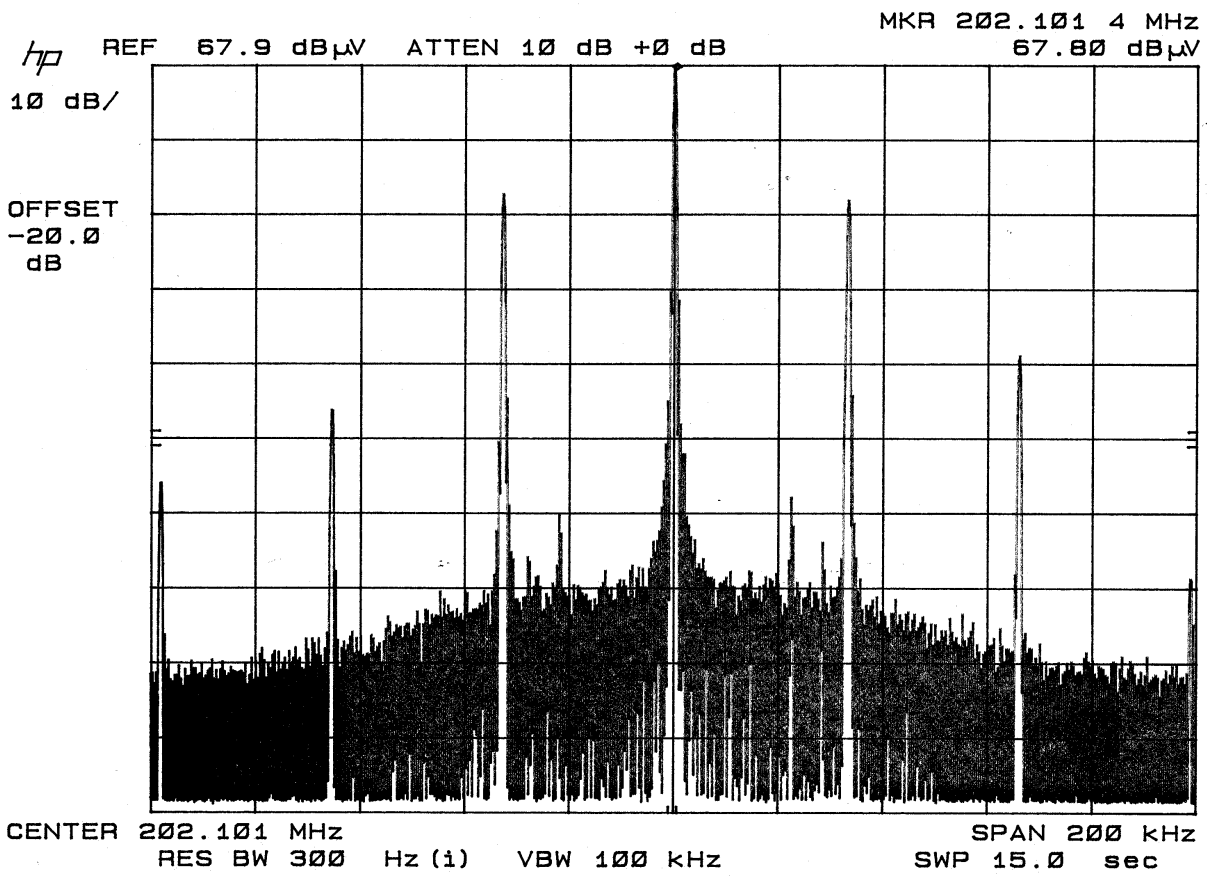

2.1051 Spurious emissions at antenna terminals(conducted):
Not Applicable no antenna connector.

2.1053(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be 43 +10log(Po) dB below the
mean power output of the transmitter.

$$43 + 10 \log(.00043) = 9.33 \text{ dB}$$


TEST DATA:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuv	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuv/m	ATTN dBc	Margin dB
202.1	202.10	80.1	H	1.81	11.76	93.67	00.00	00.00
202.1	252.60	27.0	H	2.01	12.28	41.29	52.38	43.05
202.1	252.60	16.5	V	2.01	12.28	30.79	62.88	53.55
202.1	303.10	21.2	H	2.22	13.75	37.17	56.50	47.17
202.1	303.10	16.9	V	2.22	13.75	32.87	60.80	51.47
202.1	404.20	7.8	H	2.81	15.95	26.56	67.11	57.78
202.1	808.40	9.1	H	4.02	21.68	34.80	58.87	49.54
202.1	1,010.50	14.9	V	1.96	24.08	40.94	52.73	43.40

METHOD OF MEASUREMENT: The procedure used was TIA/EIA STANDARD 603.
The spectrum was scanned from 30 to at least the tenth harmonic of the
fundamental using a HP model 8566B spectrum analyzer and an appro-
priate antenna. Measurements were made at the open field test site of
TIMCO ENGINEERING INC. located at 849 NW SR 45 Newberry, Florida
32669.

APPLICANT: CHIAYO ELECTRONICS CO., LTD.
FCC ID: CINM-200
REPORT #: C\CHIAYO\1134T1\1134T1RPT.doc
PAGE #: 9

Method of Measuring Radiated Spurious Emissions

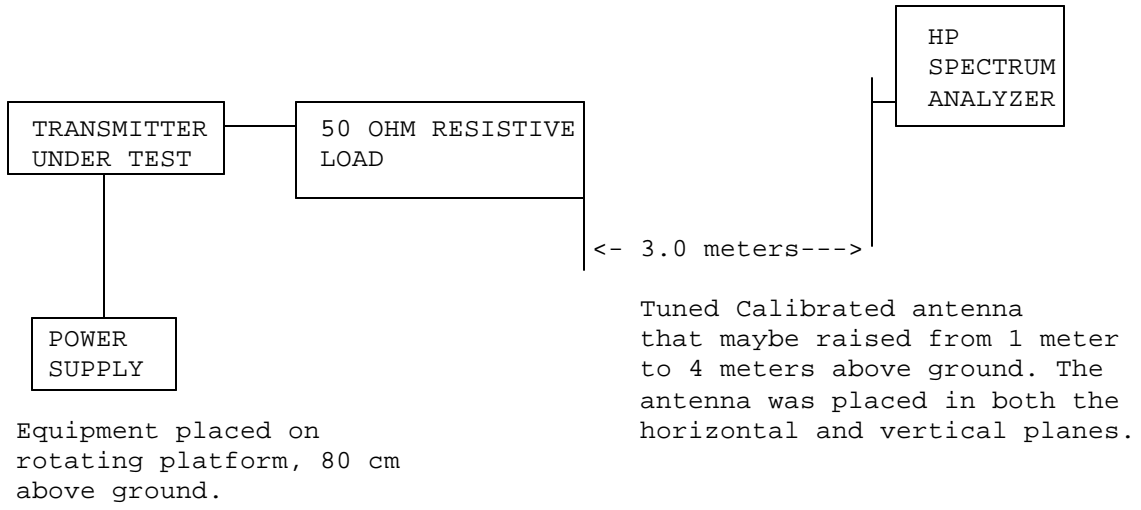

2.1055 Frequency stability:

74.861(e)(4)

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm)(74.861 e.4) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 202.102 410

TEMPERATURE °C	FREQUENCY MHz	PPM
-30	202.103 682	6.29
-20	202.104 187	8.30
-10	202.105 704	16.30
0	202.105 740	16.48
10	202.105 432	14.95
20	202.104 932	12.48
30	202.103 695	6.36
40	202.102 069	-1.69
50	202.100 044	-11.71

-15%END BATT. Volt(4.5)= 4.5VDC 202.102 384 -0.13

+15%END BATT. Volt(3.8)= 3.8VDC 202.102 416 0.03

RESULTS OF MEASUREMENTS:

The maximum frequency variation over the temperature range was 16.48 to -11.71 ppm. The maximum frequency variation over the voltage range was 0.03ppm.

APPLICANT: CHIAYO ELECTRONICS CO., LTD.

FCC ID: CINM-200

REPORT #: C\CHIAYO\1134T1\1134T1RPT.doc

PAGE #: 11

TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 8/31/01 Due 8/31/02
- 2.X Biconnical Antenna: Eaton Model 94455-1, S/N 1057,
Cal. 10/1/01 Due 10/1/02
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
Cal. 4/26/01 Due 4/26/03
- 4.X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
Char. 3/15/00 Due 3/15/01
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
Char. 3/15/00 Due 3/15/01
- 6.X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319 Cal. 4/27/99 Due 4/27/00
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
No Cal Required
8. Horn 40-60GHz: ATM Part #19-443-6R No Cal Required
9. Line Impedance Stabilization Network: Electro-Metrics Model
EM-7820, w/NEMA Adapter S/N 2682 Cal. 3/16/01 Due 3/16/02
- 10.X Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
Char. 1/27/01 Due 1/27/02
- 11.X Frequency Counter: HP Model 5385A, S/N 3242A07460
Char. 11/20/00 Due 11/20/01
11. Peak Power Meter: HP Model 8900C, S/N 2131A00545
Char. 1/26/01 Due 1/26/02
- 13.X Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464
Cal. 11/15/01 Due 11/15/02
15. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Char. 6/10/00 Due 6/10/01
16. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Char. 11/24/00 Due 11/24/01
17. AC Voltmeter: HP Model 400FL, S/N 2213A14499
Cal. 10/9/01 Due 10/09/02
- 18.X Digital Multimeter: Fluke Model 77, S/N 43850817
Cal. 11/16/00 Due 11/16/01
18. Oscilloscope: Tektronix Model 2230, S/N 300572
Char. 2/1/01 Due 2/1/02

APPLICANT : CHIAYO ELECTRONICS CO., LTD
FCC ID : CINM-200
REPORT # : C\DHIAYO\1134T1\1134T1RPT.DOC
PAGE # : 12