

APPLICANT: CHIAYO ELECTRONICS CO., LTD.

FCC ID: CINSQ-916

TABLE OF CONTENTS LIST

TEST REPORT CONTAINING:

PAGE	1-2.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE	3.....	RF POWER TEST PROCEDURE & AUDIO FREQUENCY RESPONSE GRAPH
PAGE	4.....	MODULATION LIMITING PLOTS 1000 Hz & 2500 Hz
PAGE	5.....	MODULATION LIMITING PLOT 15000 Hz
PAGE	6.....	OCCUPIED BANDWIDTH
PAGE	7.....	RADIATED EMISSIONS TEST DATA
PAGE	8.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	9-11.....	EQUIPMENT LIST

EXHIBITS CONTAINING:

EXHIBIT	1.....	CLASS II PERMISSIVE CHANGE REQUEST LETTER
EXHIBIT	2.....	BLOCK DIAGRAM
EXHIBIT	3.....	SCHEMATICS
EXHIBIT	4.....	TUNING PROCEDURE
EXHIBIT	5.....	USER'S MANUAL
EXHIBIT	6.....	PARTS LIST
EXHIBIT	7.....	TEST SET UP PHOTOGRAPH
EXHIBIT	8.....	EXTERNAL PHOTOGRAPHS
EXHIBIT	9.....	INTERNAL PHOTOGRAPHS

APPLICANT: CHIAYO ELECTRONICS CO., LTD.

FCC ID: CINSQ-916

REPORT #: C:\CHIAYOCIN\33UT3\33UT3TestReport.doc

TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

- 2.1033(c)(1) CHIAYO ELECTRONICS CO., LTD. will manufacture the
2.1033(c)(2) CINSQ-916 in quantity, for use under FCC RULES PART
74.801, LOW POWER AUXILIARY STATIONS.

CHIAYO ELECTRONICS CO., LTD.
30, LANE 27, SEC. 4, JEN AI ROAD
TAIPEI, TAIWAN R.O.C.,

2.1033 TECHNICAL DESCRIPTION

- (c)(3) Instruction book. The instruction manual is included
as Exhibit 6.

- (c)(4) Type of Emission: 126KF3E

Bn = 2M + 2DK
M = 20000
D = 45kHz(Peak Deviation)
K = 1
Bn = 2(20k) + 2(45k)(1) = 130k

ALLOWED AUTHORIZED BANDWIDTH = 200kHz.
74.861(e)(5)

- (c)(5) Frequency Range: Part 74: 614-806 MHz
944-952 MHz
TEST FREQ = 700.30 MHz.

- (c)(6) Power Range and Controls: UNIT has no controls.

- (c)(7) Maximum Output Power Rating: .020 Watts into 50
ohms resistive load.

- (c)(8) DC Voltages and Current into Final Amplifier:


FINAL AMPLIFIER ONLY
9.0V BATTERY
Vce = 9.0 Volts
Ice = 28 mA.

- (c)(9) Tune-up procedure. The tune-up procedure is given
in Exhibit #4.

- (c)(10) Complete Circuit Diagrams: The circuit diagram is
included as EXHIBIT #3. The block diagram is included
as EXHIBIT #2.

- 2.1033(c)11) Photo or Drawing of Label and sketch of location:
Not applicable for this application.
- 2.1033(c)12) Photos of Equipment:
See EXHIBIT #'S 8-9.
- (c)13) Description of all circuitry and devices provided for determining and stabilizing frequency.
- Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.
- This circuitry is described in Exhibit #5.
- Limiting Modulation:
The transmitter audio circuitry is contained in IC101, IC102 and IC103.
- Limiting Power:
There is no provision for limiting power.
- (13) Digital modulation. This unit does not use digital modulation.
- 2.1033(c)14) The data required by 2.1046 through 2.1057 is submitted below.
- 2.1046 RF power output.
- RF power measured is:
OUTPUT POWER: .001 WATTS


R.F. POWER OUTPUT TEST PROCEDURE

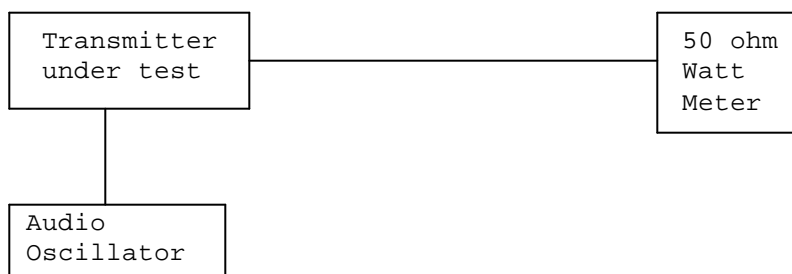

2.1047(a)(b) Modulation characteristics:

AUDIO FREQUENCY RESPONSE


The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown below.

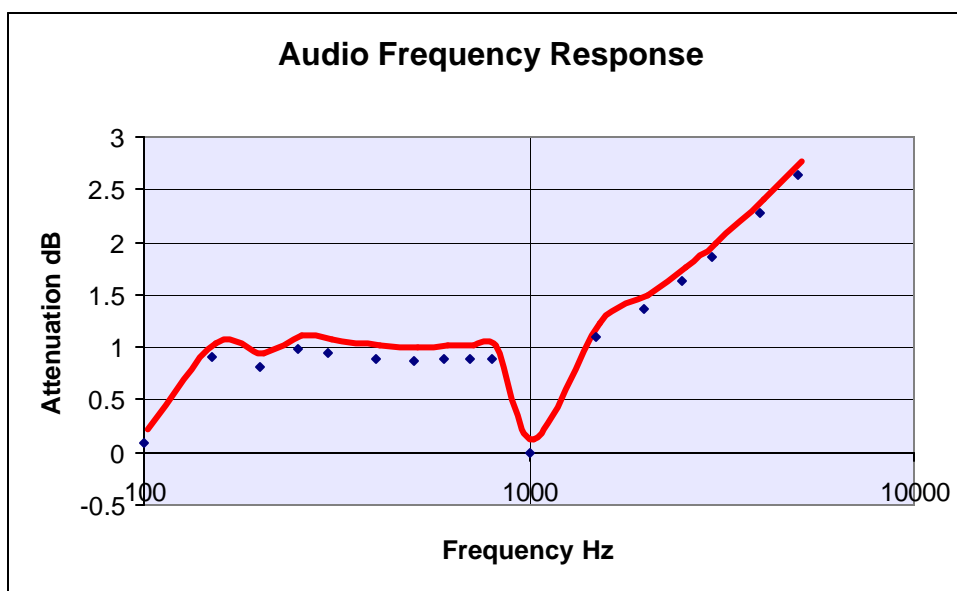


AUDIO LOW PASS FILTER

The audio low pass filter is not required in this unit.


MODULATION LIMITING PLOT - 1000 Hz

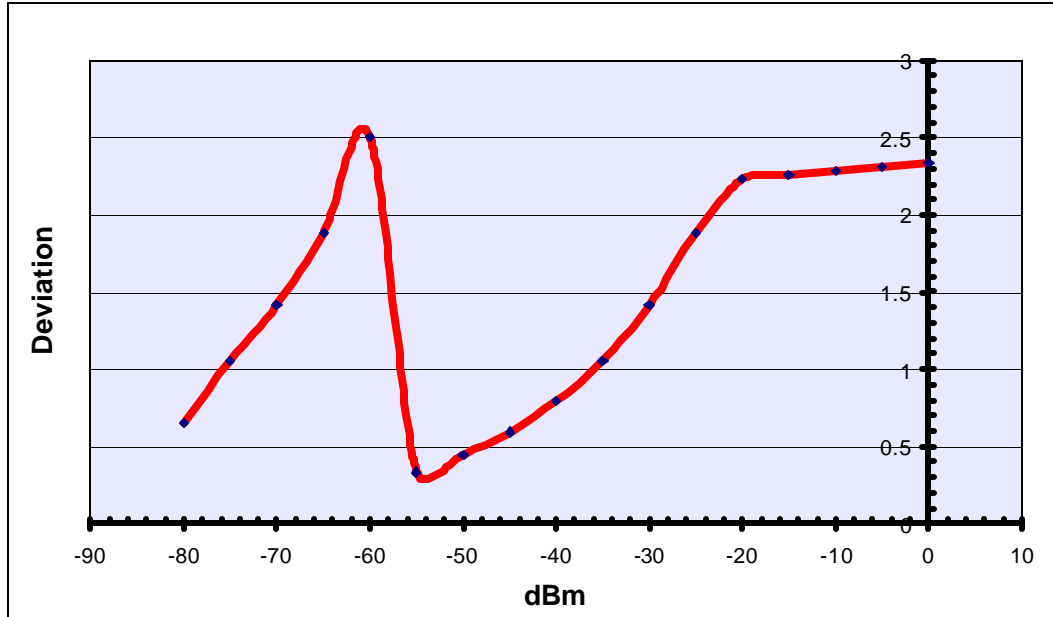

MODULATION LIMITING PLOT - 2500 Hz

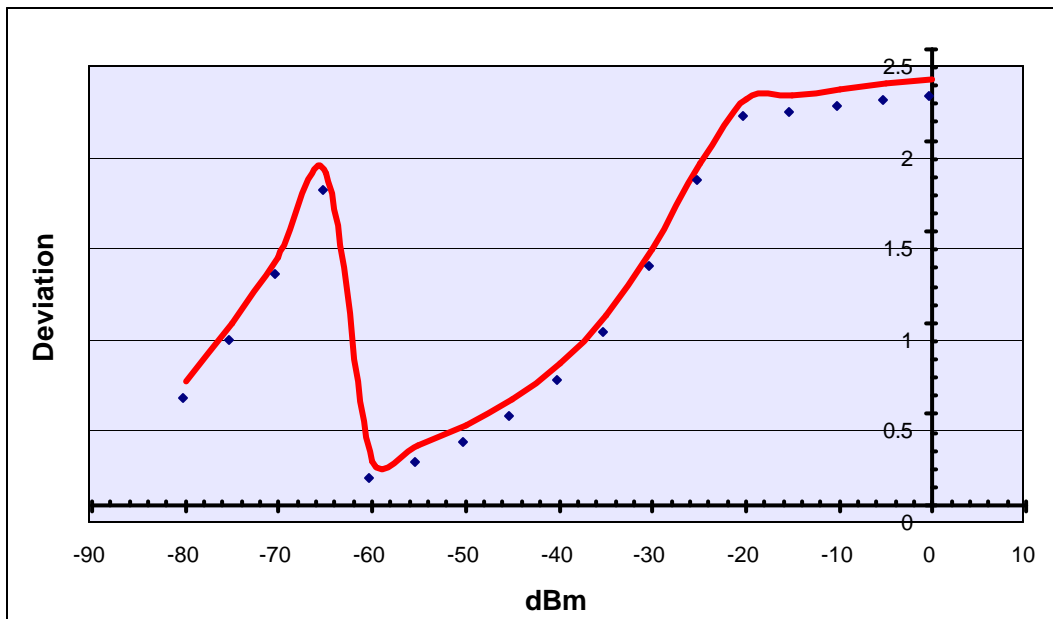


MODULATION LIMITING PLOT - 15000 Hz

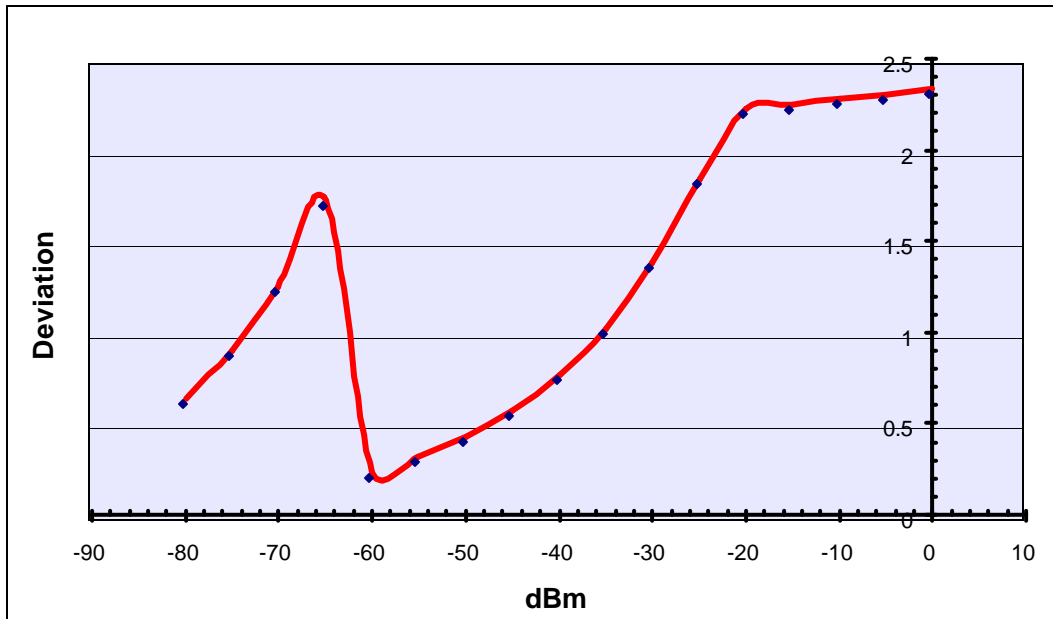

2.1049(c) Occupied Bandwidth:


Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% 43 log(Po) dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

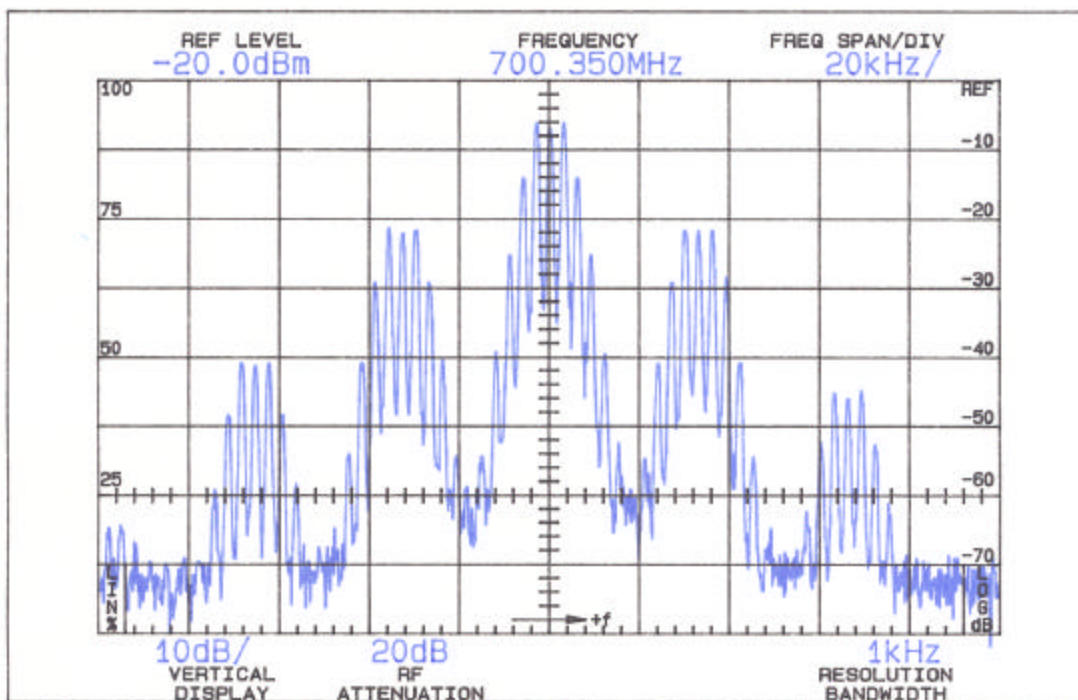

Wireless Microphone transmitter:

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

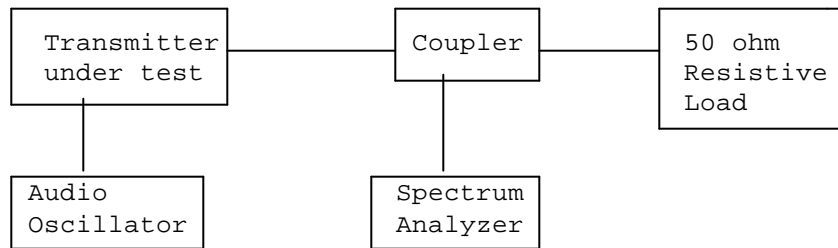

REQUIREMENT: PART 74: 200kHz EMISSION BANDWIDTH.

2.1051 Spurious emissions at antenna terminals(conducted):
Not Applicable no antenna connector.

2.1053(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the
mean power output of the transmitter.


$$43 + 10 \log(0.001) = 13.00 \text{ dB}$$

TEST DATA:

Emission Frequency MHz	Field Strength dBuV/m	ATTN dBc	dBm
700.30	102.37	0	0
1,400.70	55.65	47	-47
2,101.00	56.54	46	-46
2,801.40	49.32	53	-53
3,501.80	57.01	45	-45
4,202.10	56.14	46	-46
4,902.50	54.19	48	-48
5,602.80	50.20	52	-52

METHOD OF MEASUREMENT: The procedure used was TIA/EIA STANDARD 603.
The spectrum was scanned from 30 to at least the tenth harmonic of the
fundamental using a HP model 8566B spectrum analyzer and an appro-
priate antenna. The EUT was tested at the low end of the band, the
middle of the band, and the high end of the band and the measurements
included represent the worse case. Measurements were made at the open
field test site of TIMCO ENGINEERING INC. located at 849 NW SR 45
Newberry, Florida 32669.

Method of Measuring Radiated Spurious Emissions

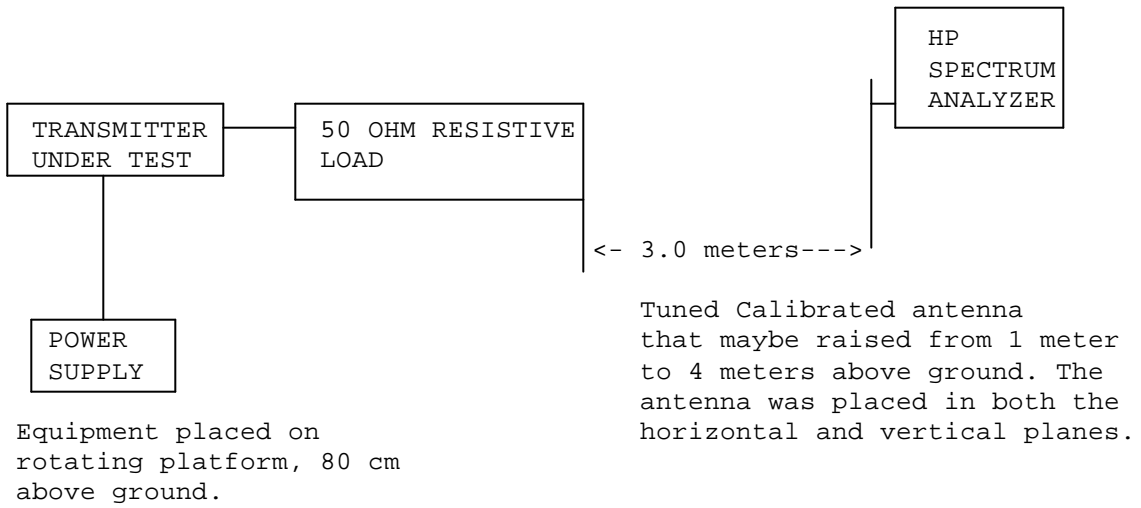

EMC Equipment List

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	3-Meter OATS	TEI	N/A	N/A	Listed 12/22/99	12/22/02
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
	Receiver, Beige Tower Spectrum Analyzer (Tan)	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
	RF Preselector (Tan)	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
	Quasi-Peak Adapter (Tan)	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
X	Receiver, Blue Tower Spectrum Analyzer (Blue)	HP	8568B	2928A04729 2848A18049	CHAR 10/22/01	10/22/03
X	RF Preselector (Blue)	HP	85685A	2926A00983	CHAR 10/22/01	10/22/03
X	Quasi-Peak Adapter (Blue)	HP	85650A	2811A01279	CHAR 10/22/01	10/22/03
X	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CHAR 3/15/00	3/15/02
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CHAR 10/16/01	10/16/03
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 11/24/00	11/24/03
	Double-Ridged Horn Antenna	Electro-Metrics	RGA -180	2319	CAL 12/19/01	12/19/03
	Horn Antenna	Electro-Metrics	EM-6961	6246	CAL 3/21/01	3/21/03
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03

APPLICANT: CHIAYO ELECTRONICS CO., LTD.

FCC ID: CINSQ-916

REPORT #: C:\CHIAYOCIN\33UT3\33UT3TestReport.doc

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/16/01	3/16/03
	Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
	Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 12/12/01	12/12/03
	Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/03
	Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
	AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
	AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
	AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
X	Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	43850817	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	2927J05849	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	79510405	CAL 9/26/01	9/26/03
	Peak Power Meter	HP	8900C	2131A00545	CHAR 1/26/01	1/26/03
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02	1/16/04
	Thermometer	Traulsen	SK-128		CHAR 1/22/02	1/22/04
X	Temp/Humidity gauge	EXTech	44577F	E000901	CHAR 1/22/02	1/22/04
	Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
	Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 1/26/01	1/26/03
	Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	6593	CAL 5/12/02	5/12/04
	Signal Generator	HP	8640B	2308A21464	CAL 11/15/01	11/15/03
	Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
	Near Field Probe	HP	HP11940A	2650A02748	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/ 60-N	Z1	CHAR 3/2/01	3/2/03

APPLICANT: CHIAYO ELECTRONICS CO., LTD.

FCC ID: CINSQ-916

REPORT #: C:\CHIAYOCIN\33UT3\33UT3TestReport.doc

Page 11 of 12

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
	BandReject Filter	Lorch Microwave	6BR6-2442/ 300-N	Z1	CHAR 3/2/01	3/2/03
	BandReject Filter	Lorch Microwave	5BR4-10525/ 900-S	Z1	CHAR 3/2/01	3/2/03
	High Pas Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/03
	Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/03
	Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
	Frequency Counter	HP	5385A	3242A07460	CHAR 12/11/01	12/11/03
	Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
	Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
	Egg Timer	Unk			CHAR 8/31/01	8/31/03
	Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
	Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
	Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
	Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
	Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
	Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04