


A.3 SAR Measurement Data

A.3.1 Back Position

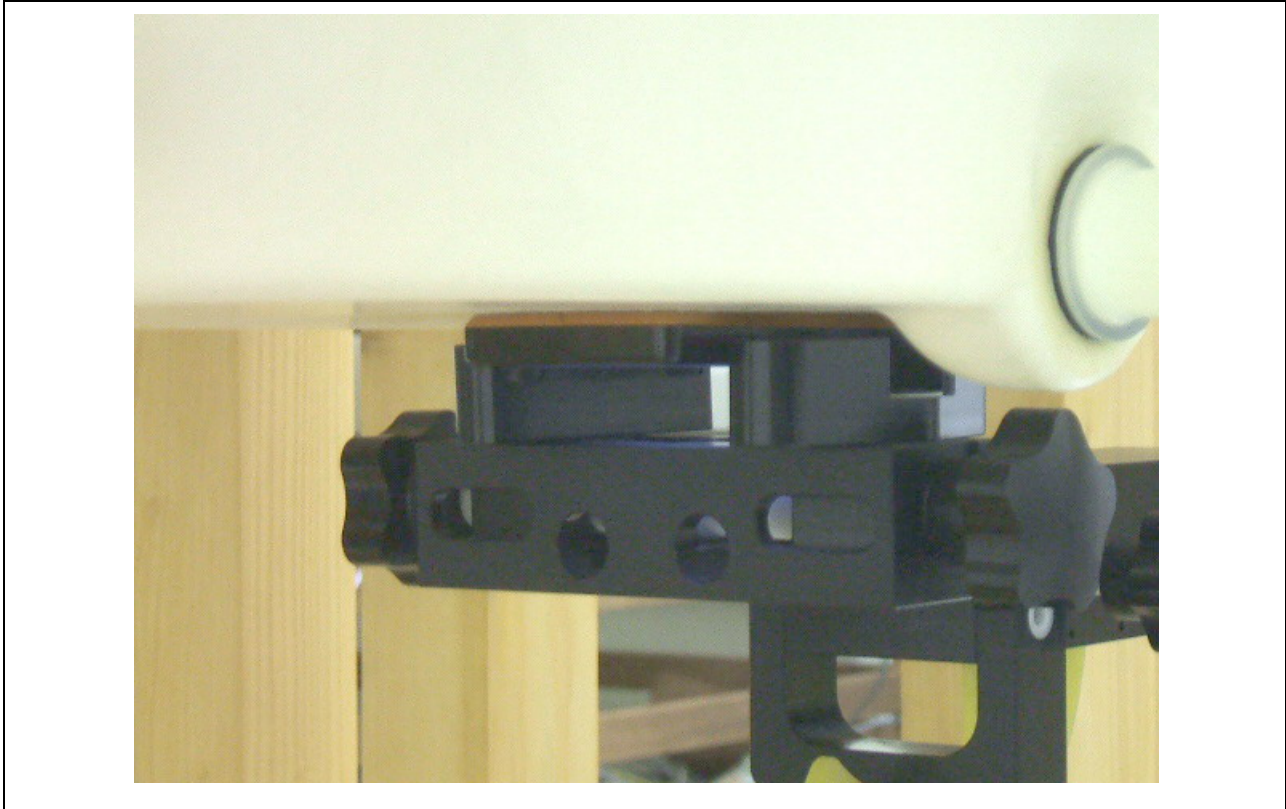

802.11b (1 Mbps) – Duty Cycle: 100 %						Date : June 29, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Average)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
0 mm	Fixed	1	2412	--	--	1.6	**	--
		6	2437	10.58	10.53		0.750	23.0
		11	2462	--	--		**	--
802.11g (6 Mbps) – Duty Cycle: 100 %								
0 mm	Fixed	1	2412	--	--	1.6	**	--
		6	2437	9.48	9.46		0.559	23.0
		11	2462	--	--		**	--


- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. Please refer to attachment for the result presentation in plot format.

A.3.2 Front Position



802.11b (1 Mbps) – Duty Cycle: 100 %						Date : June 29, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Average)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
0 mm	Fixed	1	2412	--	--	1.6	**	--
		6	2437	10.58	10.53		0.328	23.0
		11	2462	--	--		**	--
802.11g (6 Mbps) – Duty Cycle: 100 %								
0 mm	Fixed	1	2412	--	--	1.6	**	--
		6	2437	9.48	9.46		0.241	23.0
		11	2462	--	--		**	--
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. Please refer to attachment for the result presentation in plot format.								

A.3.3 Side (Right) Position

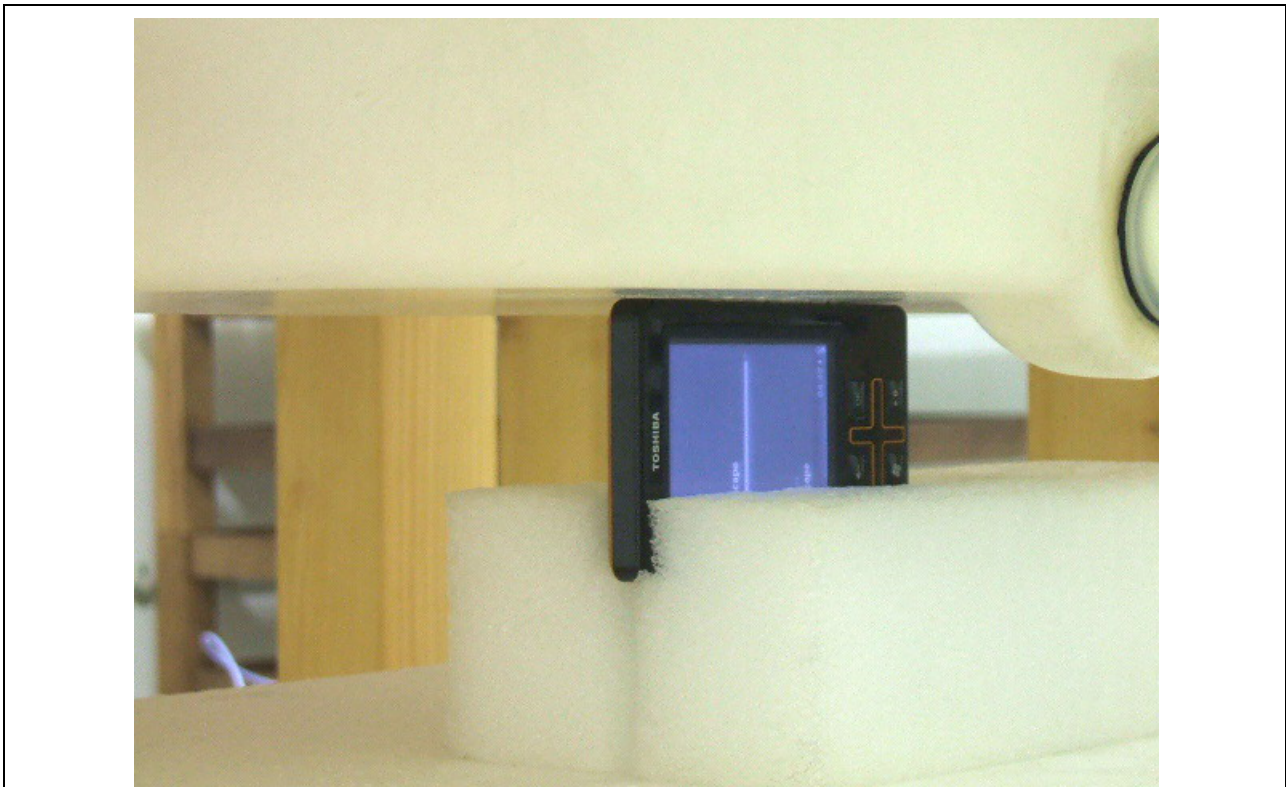

802.11b (1 Mbps) – Duty Cycle: 100 % Date : June 29, 2007

EUT Set-up Configuration		Frequency		Power [dBm] (Average)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
0 mm	Fixed	1	2412	--	--	1.6	**	--
		6	2437	10.58	10.53		0.650	23.0
		11	2462	--	--		**	--


802.11g (6 Mbps) – Duty Cycle: 100 %

0 mm	Fixed	1	2412	--	--	1.6	**	--
		6	2437	9.48	9.46		0.506	23.0
		11	2462	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.4 Top Position

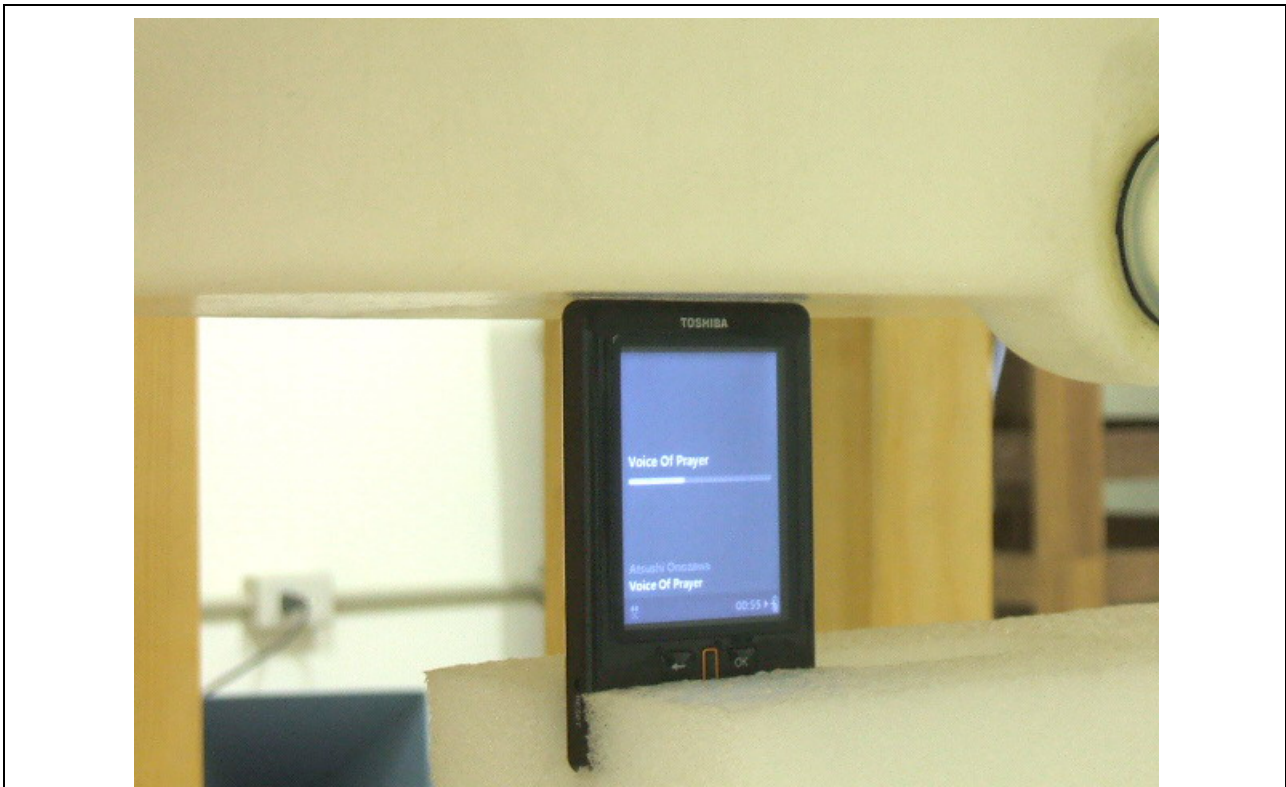

802.11b (1 Mbps) – Duty Cycle: 100 % Date : June 29, 2007

EUT Set-up Configuration		Frequency		Power [dBm] (Average)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
0 mm	Fixed	1	2412	10.84	10.84	1.6	0.908	23.0
		6	2437	10.58	10.53		0.815	23.0
		11	2462	10.64	10.64		0.637	23.0

802.11g (6 Mbps) – Duty Cycle: 100 %

0 mm	Fixed	1	2412	--	--	1.6	**	--
		6	2437	9.48	9.46		0.596	23.0
		11	2462	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. Please refer to attachment for the result presentation in plot format.