

Test Laboratory: The name of your organization

1_EUT Setup Configuration 1

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Low Ch. (Antenna B)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 3.12 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.29 mW/g


Low Ch. (Antenna B)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.12 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.38 mW/g

Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.360 mW/g

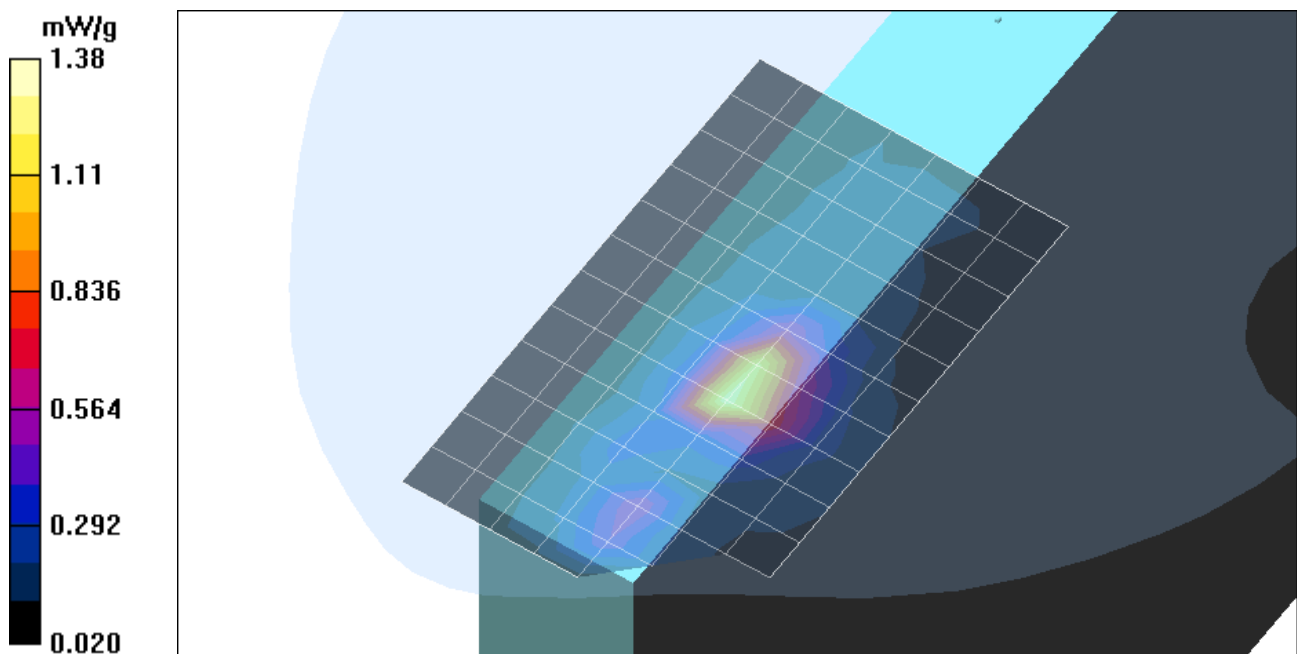

Test Laboratory: The name of your organization

1_EUT Setup Configuration 1

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.28$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Middle Ch. (Antenna B) 2/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 3.3 V/m; Power Drift = 0.19 dB

Maximum value of SAR (measured) = 1.59 mW/g


Middle Ch. (Antenna B) 2/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.3 V/m; Power Drift = 0.19 dB

Maximum value of SAR (measured) = 1.63 mW/g

Peak SAR (extrapolated) = 4.97 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.413 mW/g

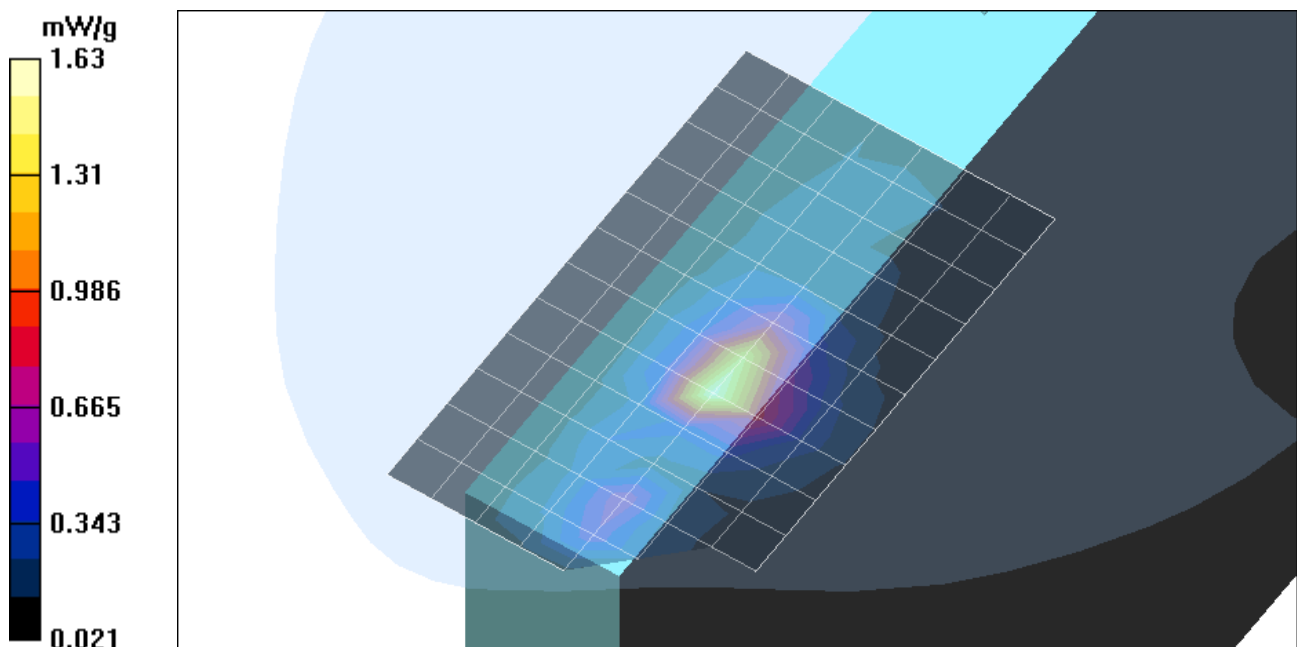

Test Laboratory: The name of your organization

1_EUT Setup Configuration 1

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.32$ mho/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

High Ch. (Antenna B)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 3.78 V/m; Power Drift = -0.15 dB

Maximum value of SAR (measured) = 1.63 mW/g


High Ch. (Antenna B)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.78 V/m; Power Drift = -0.15 dB

Maximum value of SAR (measured) = 1.69 mW/g

Peak SAR (extrapolated) = 4.96 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.435 mW/g

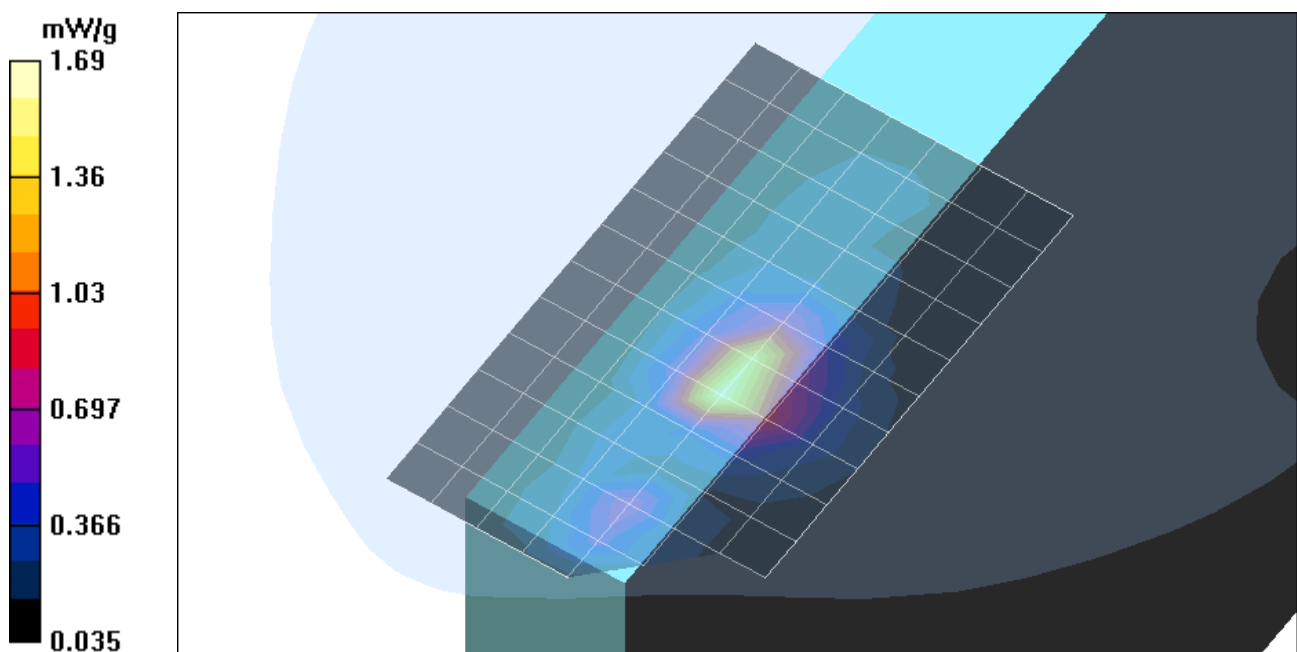

Test Laboratory: The name of your organization

1_EUT Setup Configuration 1

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.32$ mho/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Co-location. High Ch. (Antenna B)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.04 V/m; Power Drift = 0.13 dB

Maximum value of SAR (measured) = 1.72 mW/g


Co-location. High Ch. (Antenna B)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 4.04 V/m; Power Drift = 0.13 dB

Maximum value of SAR (measured) = 1.81 mW/g

Peak SAR (extrapolated) = 5.72 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.464 mW/g

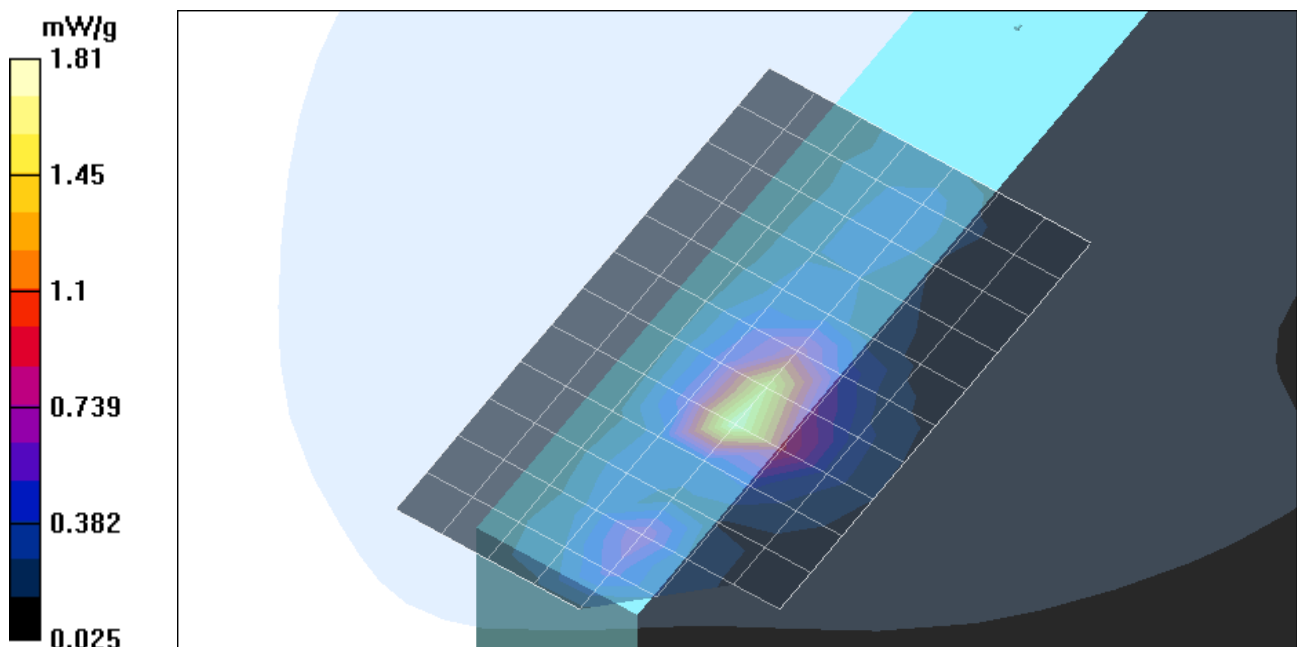

Test Laboratory: The name of your organization

1_EUT Setup Configuration 1

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A


DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Co-location. High Ch. (Antenna B)/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

Reference Value = 4.04 V/m; Power Drift = 0.14 dB

Maximum value of SAR (measured) = 0.763 mW/g

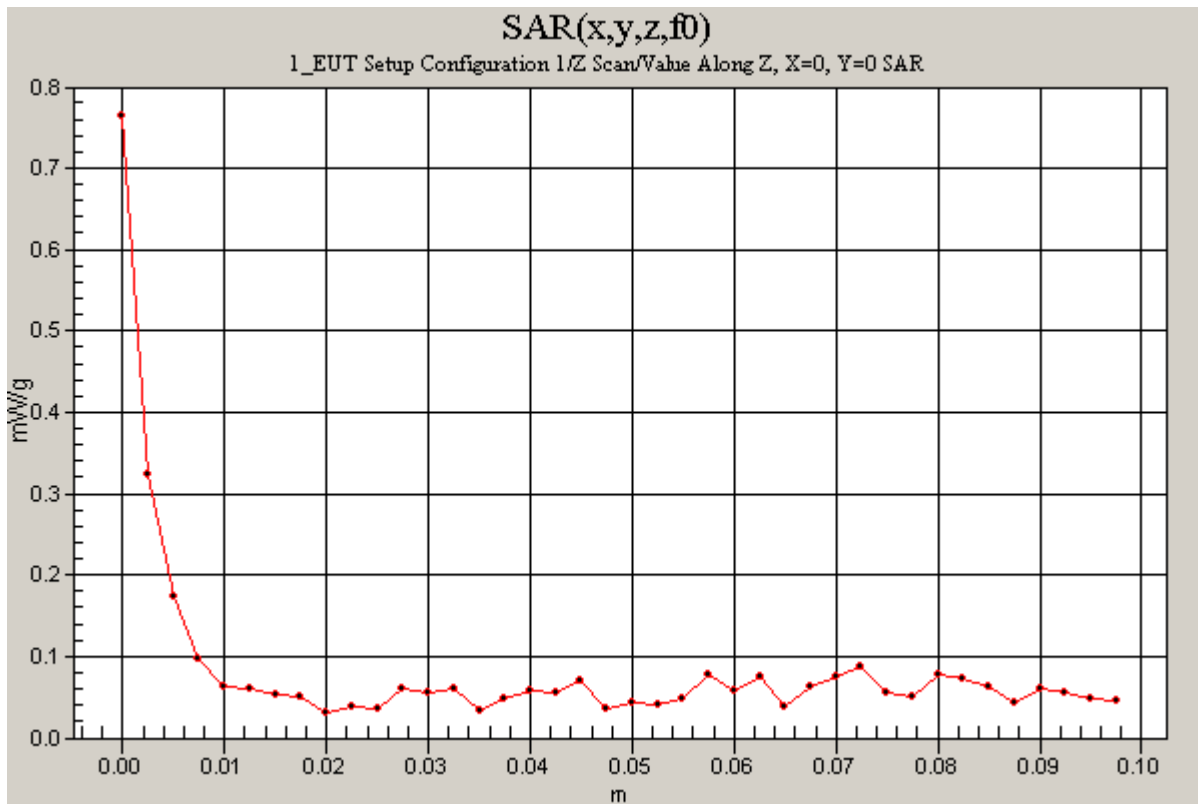

Test Laboratory: The name of your organization

1_EUT Setup Configuration 1

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5760 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5760$ MHz; $\sigma = 6.28$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Turbo mode (Antenna B)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 3.26 V/m; Power Drift = 0.19 dB

Maximum value of SAR (measured) = 1.29 mW/g


Turbo mode (Antenna B)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.26 V/m; Power Drift = 0.19 dB

Maximum value of SAR (measured) = 1.32 mW/g

Peak SAR (extrapolated) = 4.15 W/kg

SAR(1 g) = 0.976 mW/g; SAR(10 g) = 0.350 mW/g

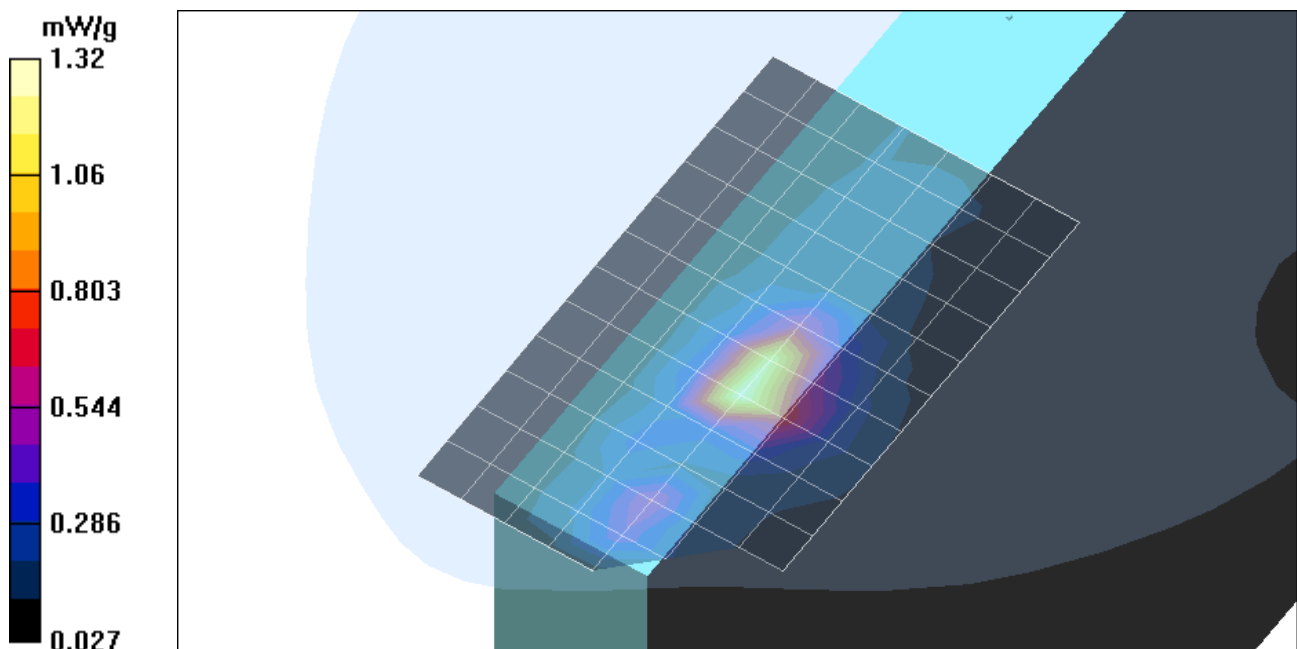

Test Laboratory: The name of your organization

1_EUT Setup Configuration 1

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.29$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Turbo mode, H-Ch. (Antenna B)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 3.74 V/m; Power Drift = -0.13 dB

Maximum value of SAR (measured) = 1.35 mW/g


Turbo mode, H-Ch. (Antenna B)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.74 V/m; Power Drift = -0.13 dB

Maximum value of SAR (measured) = 1.4 mW/g

Peak SAR (extrapolated) = 4.4 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.365 mW/g

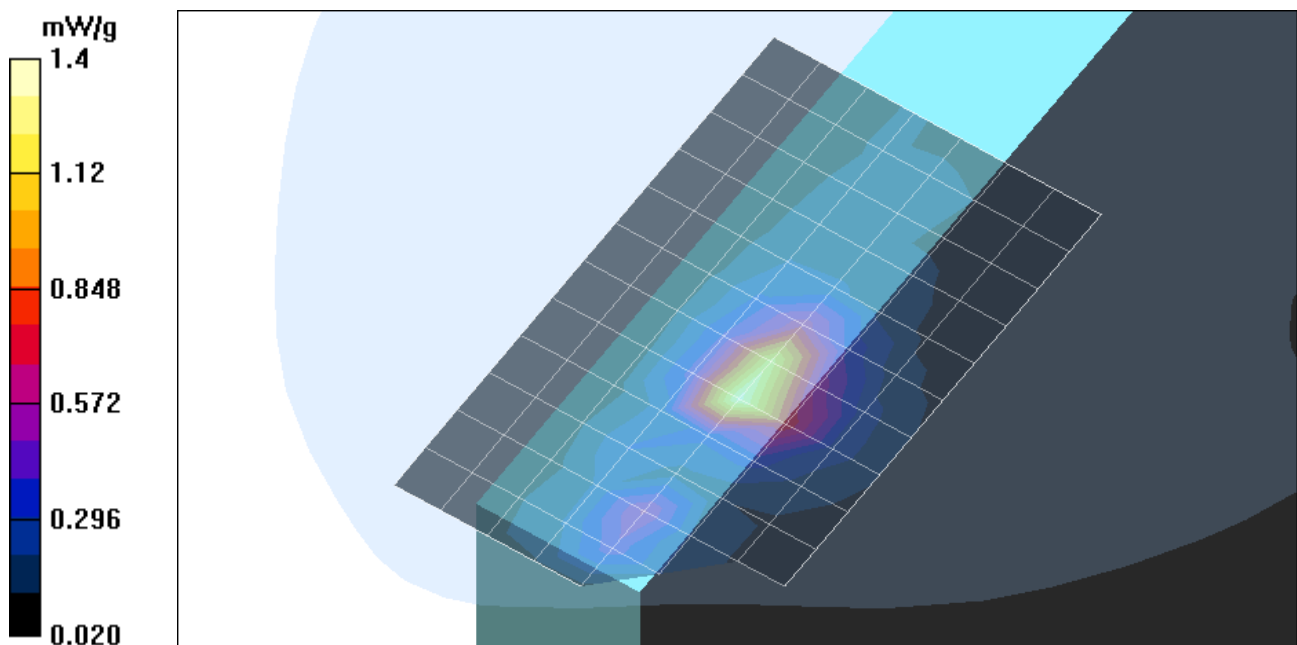

Test Laboratory: The name of your organization

2_EUT Setup Configuration 2

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.23$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Low Ch. (Antenna A)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.54 V/m; Power Drift = 0.13 dB

Maximum value of SAR (measured) = 1.21 mW/g


Low Ch. (Antenna A)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 4.54 V/m; Power Drift = 0.3 dB

Maximum value of SAR (measured) = 1.63 mW/g

Peak SAR (extrapolated) = 5.44 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.386 mW/g

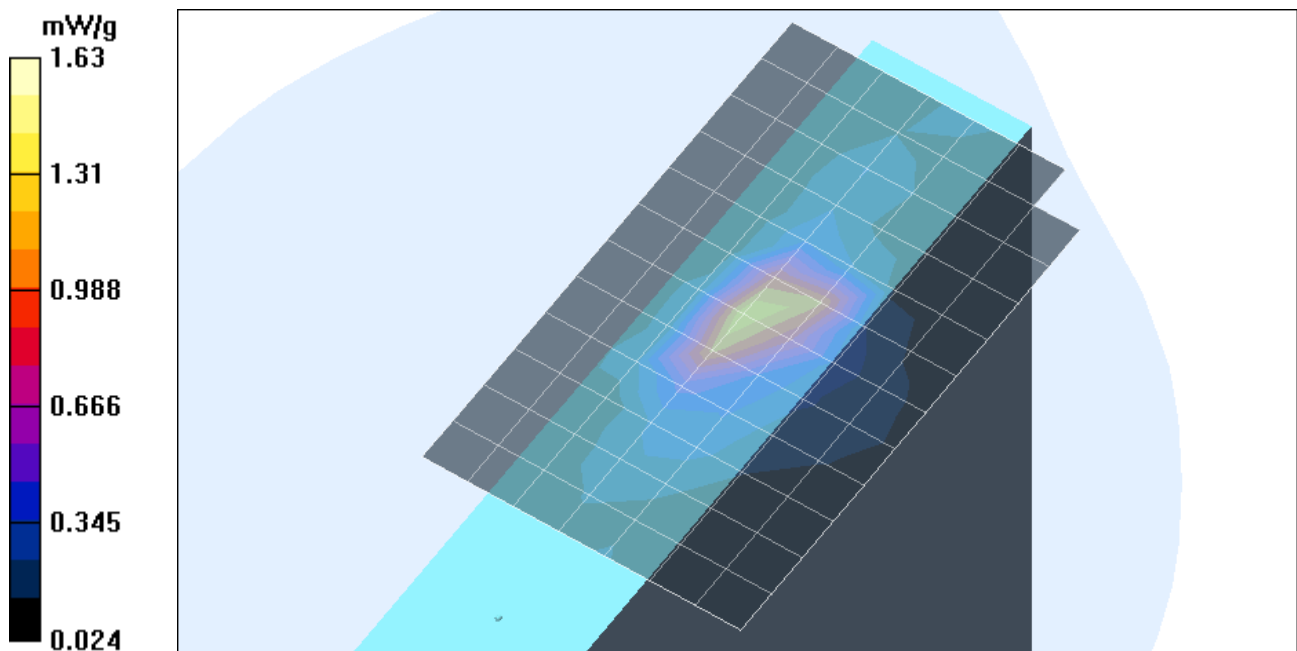

Test Laboratory: The name of your organization

2_EUT Setup Configuration 2

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.28$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Middle Ch. (Antenna A)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 5.03 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.33 mW/g


Middle Ch. (Antenna A)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 5.03 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 1.73 mW/g

Peak SAR (extrapolated) = 5.12 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.414 mW/g

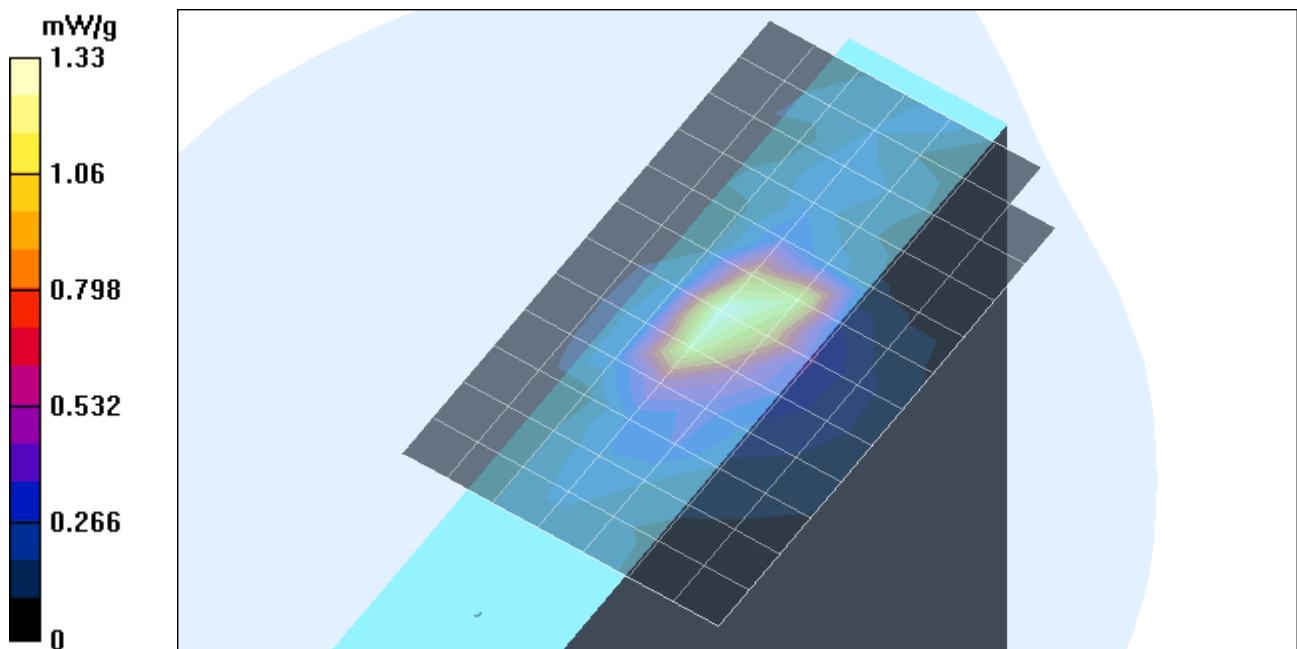

Test Laboratory: The name of your organization

2_EUT Setup Configuration 2

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A


DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Middle Ch. (Antenna A)/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

Reference Value = 5.03 V/m; Power Drift = 0.13 dB

Maximum value of SAR (measured) = 0.799 mW/g

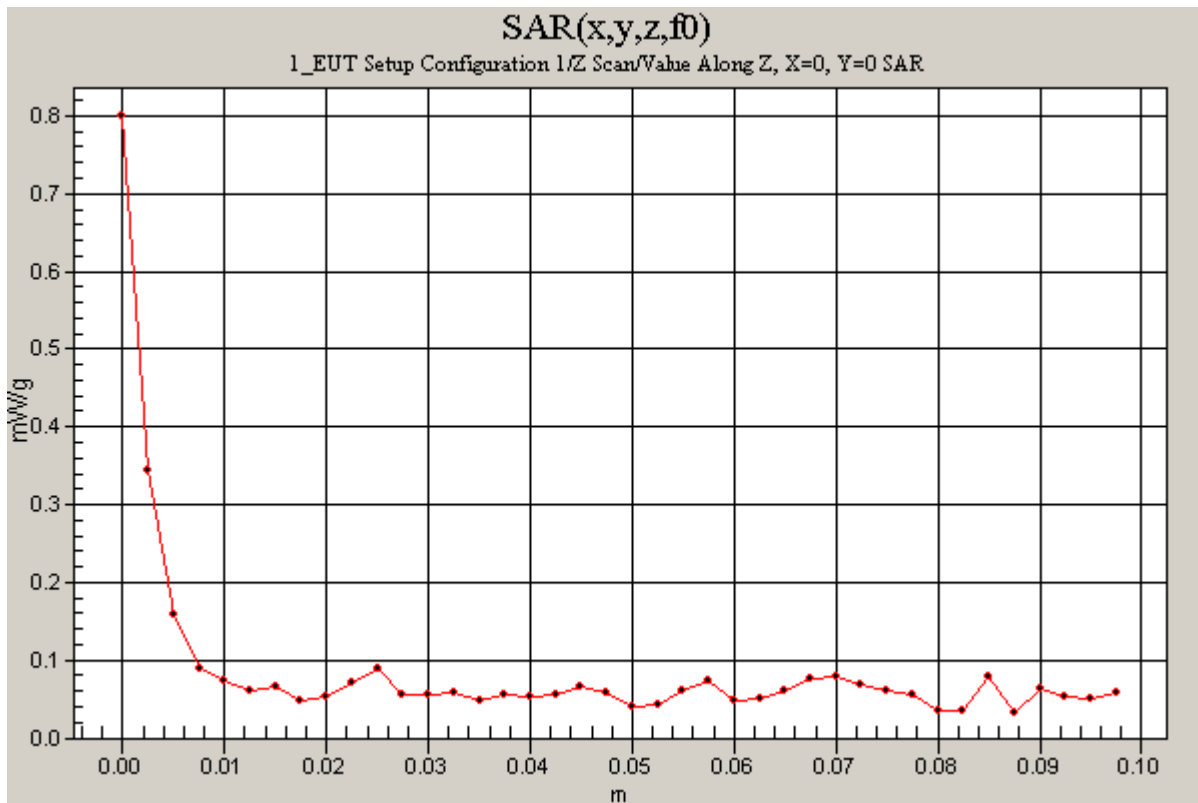

Test Laboratory: The name of your organization

2_EUT Setup Configuration 2

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.32$ mho/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

High Ch. (Antenna A)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.81 V/m; Power Drift = 0.12 dB

Maximum value of SAR (measured) = 0.834 mW/g


High Ch. (Antenna A)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 4.81 V/m; Power Drift = 0.12 dB

Maximum value of SAR (measured) = 1.15 mW/g

Peak SAR (extrapolated) = 4.09 W/kg

SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.311 mW/g

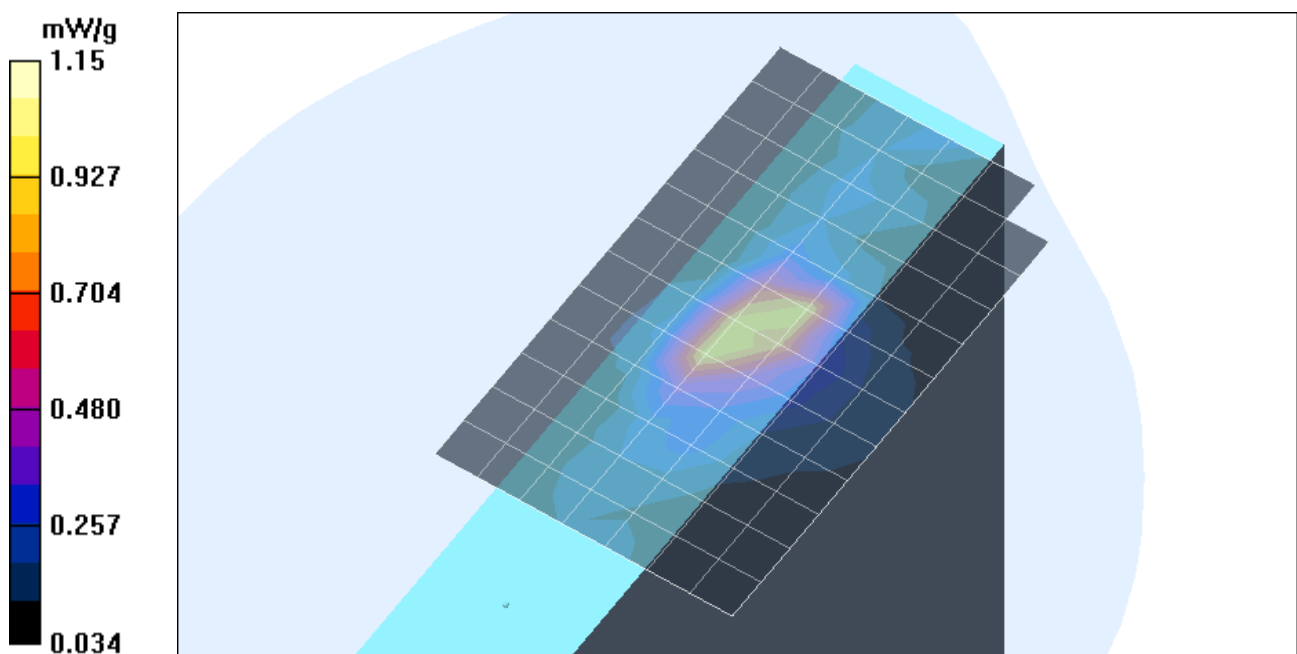

Test Laboratory: The name of your organization

2_EUT Setup Configuration 2

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5760 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5760$ MHz; $\sigma = 6.28$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Turbo, Low Ch. (Antenna A)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.27 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.01 mW/g


Turbo, Low Ch. (Antenna A)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 4.27 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 1.46 mW/g

Peak SAR (extrapolated) = 5.12 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.346 mW/g

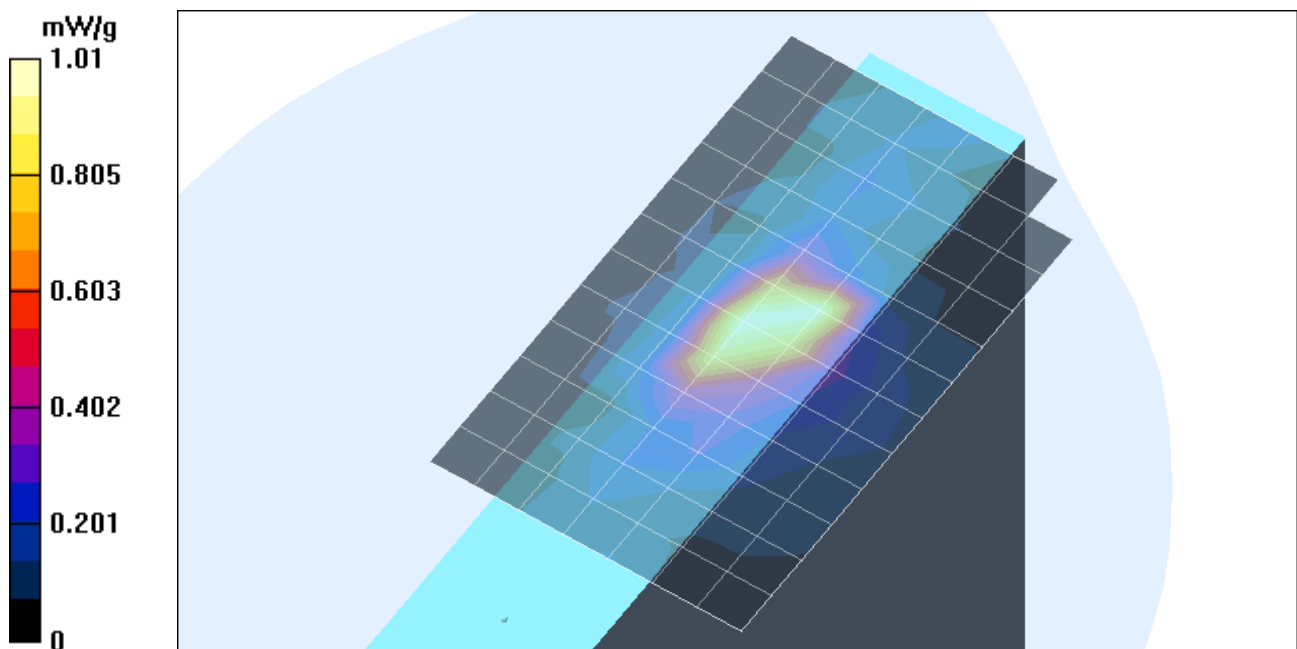

Test Laboratory: The name of your organization

2_EUT Setup Configuration 2

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature =25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5800 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.29$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASy4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Turbo, High Ch. (Antenna A)/Area Scan (8x13x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 4.68 V/m; Power Drift = 0.14 dB

Maximum value of SAR (measured) = 0.943 mW/g


Turbo, High Ch. (Antenna A)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 4.68 V/m; Power Drift = 0.14 dB

Maximum value of SAR (measured) = 1.34 mW/g

Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.323 mW/g

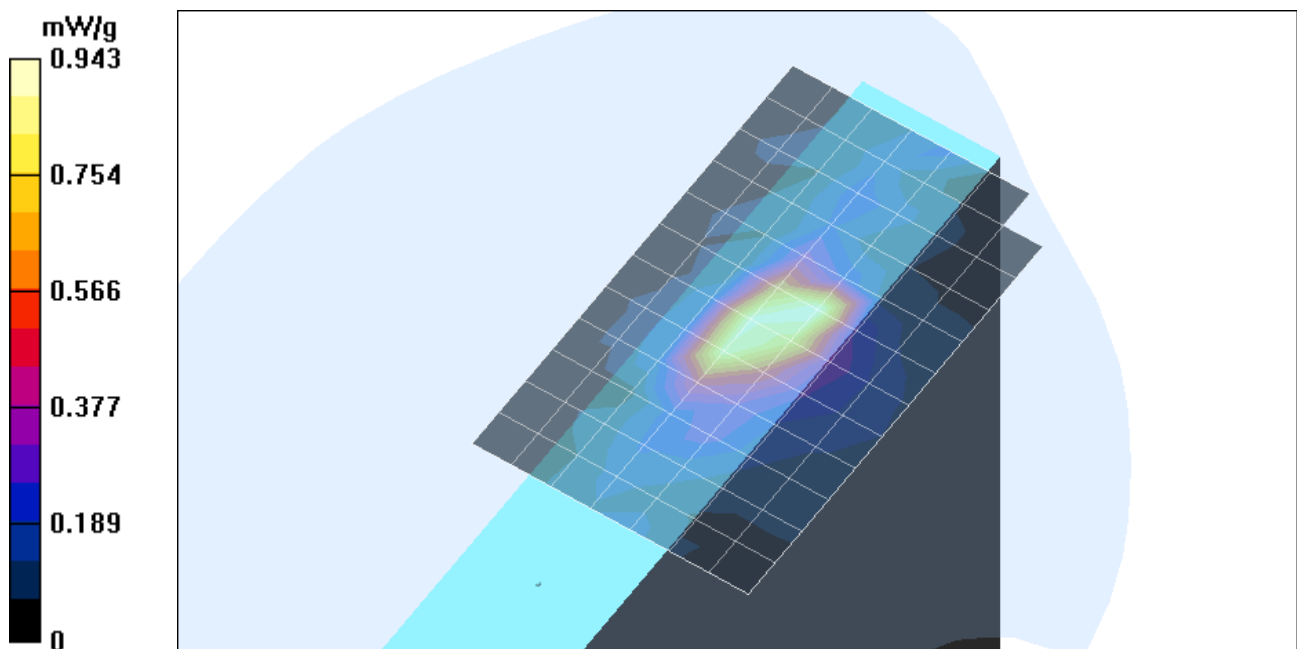

Test Laboratory: The name of your organization

3_EUT Setup Configuration 3

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.28$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Middle Ch. (Antenna B)/Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 2.9 V/m; Power Drift = 0.11 dB

Maximum value of SAR (measured) = 0.197 mW/g


Middle Ch. (Antenna B)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 2.9 V/m; Power Drift = 0.11 dB

Maximum value of SAR (measured) = 0.098 mW/g

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.063 mW/g

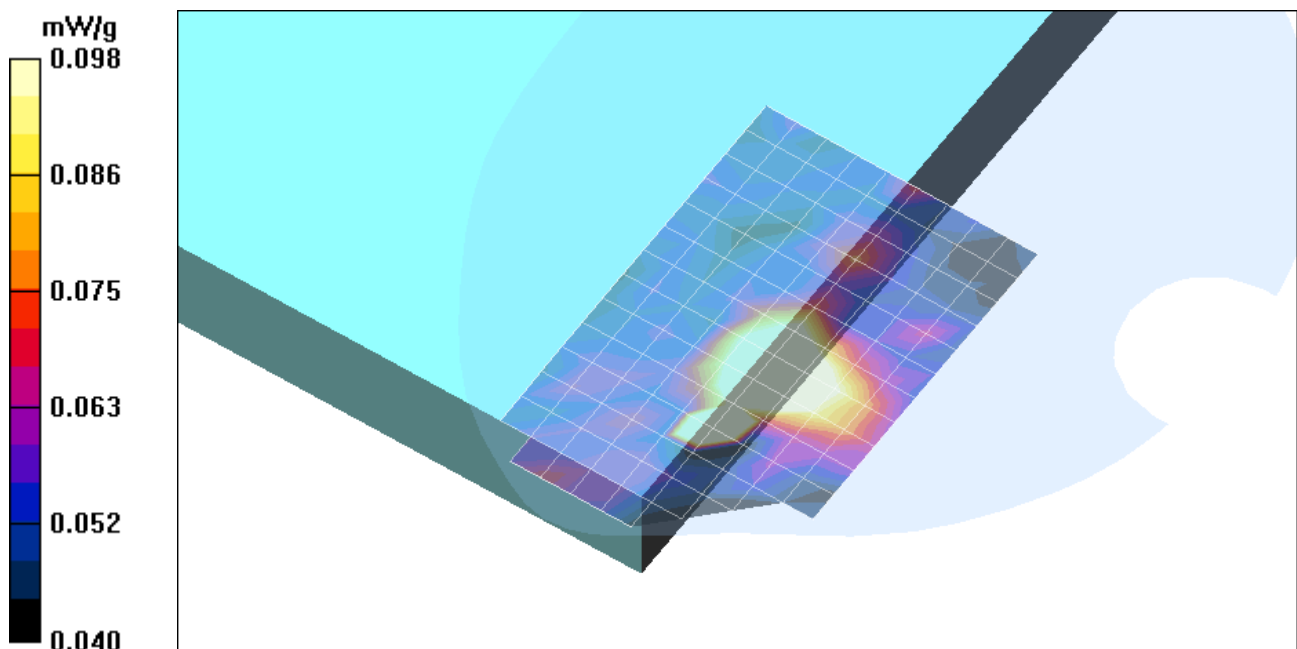

Test Laboratory: The name of your organization

4_EUT Setup Configuration 4

DUT: Toshiba; Type: PA3374U-1MPC; Serial: N/A

Ambient temperature = 25.0 deg. C; Liquid temperature = 24.0 deg. C

Communication System: 5800MHz band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.28$ mho/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(1.1, 1.1, 1.1); Calibrated: 7/29/2003
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 12/23/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASy4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Middle Ch. (Antenna B)/Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 3.93 V/m; Power Drift = 0.12 dB

Maximum value of SAR (measured) = 0.088 mW/g

Middle Ch. (Antenna B)/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.93 V/m; Power Drift = 0.12 dB

Maximum value of SAR (measured) = 0.108 mW/g

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.073 mW/g

