

ii) **WLAN 5180MHz-5240MHz**

[5.2GHz band]

WLAN 11a 6Mbps 5220MHz Right side 0mm Ant.Main

Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.497$ S/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


Area Scan 3 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.929 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.312 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.123 W/kg
Maximum value of SAR (measured) = 0.897 W/kg

Zoom Scan 2 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.312 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.074 W/kg
Maximum value of SAR (measured) = 0.616 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

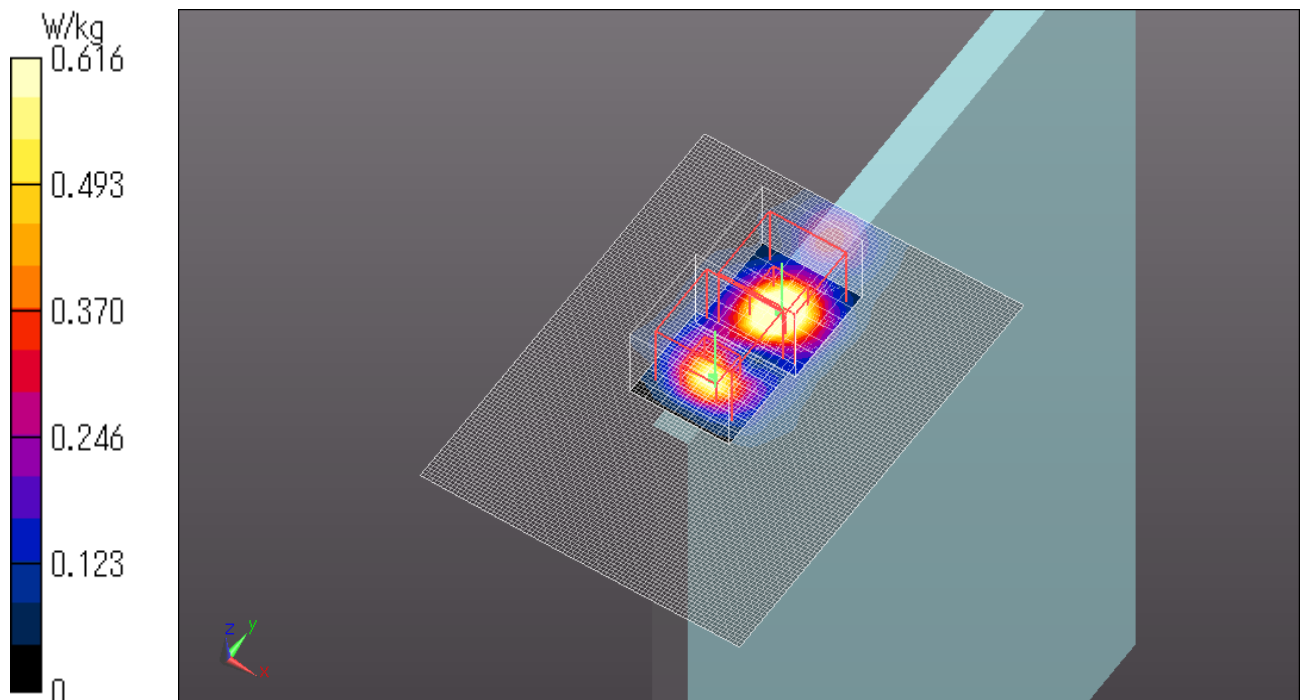

WLAN 11a 6Mbps 5220MHz Bottom side 0mm Ant. Main


Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.497$ S/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 3 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.269 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.935 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.287 W/kg
SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.00846 W/kg
Maximum value of SAR (measured) = 0.0980 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

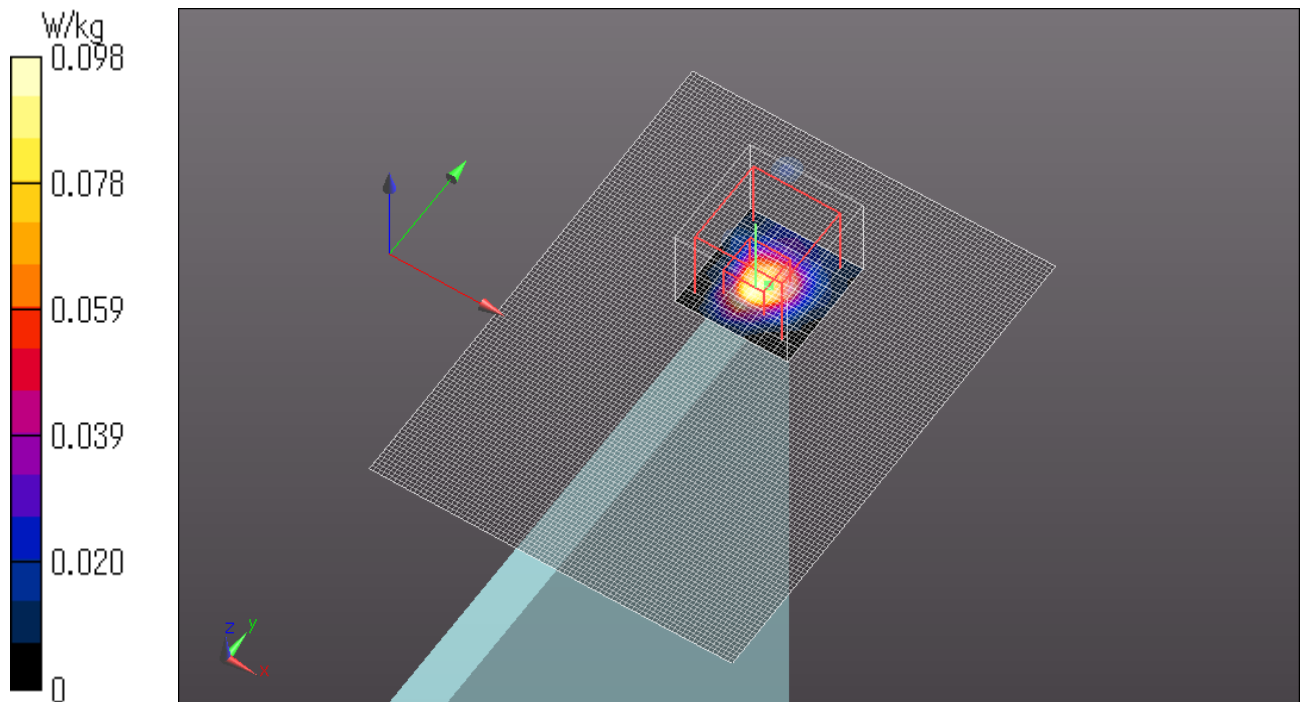

WLAN 11a 6Mbps 5220MHz Rear 0mm Ant. Main


Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.497$ S/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.222 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.846 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 0.493 W/kg
SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.038 W/kg
Maximum value of SAR (measured) = 0.261 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

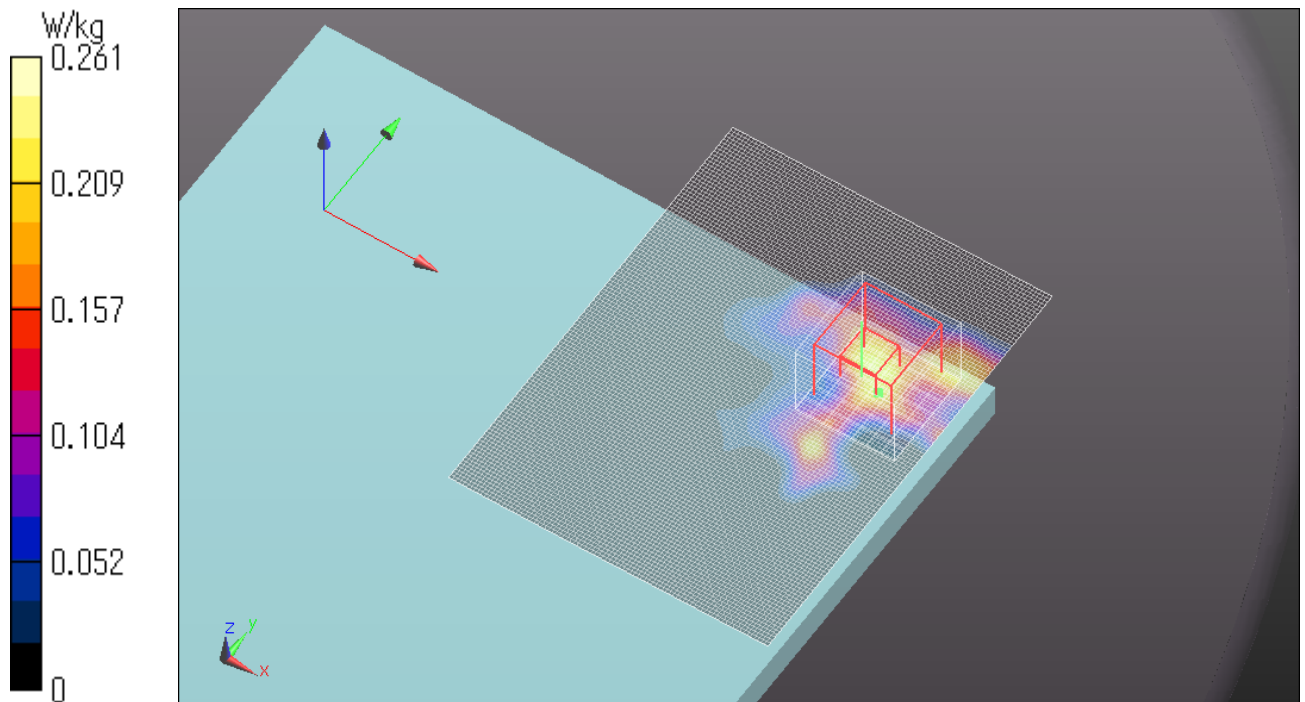

WLAN 11n20 HT4 5220MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.497$ S/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 17.358 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 2.38 W/kg
SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.165 W/kg
Maximum value of SAR (measured) = 1.18 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 17.358 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.098 W/kg
Maximum value of SAR (measured) = 0.786 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

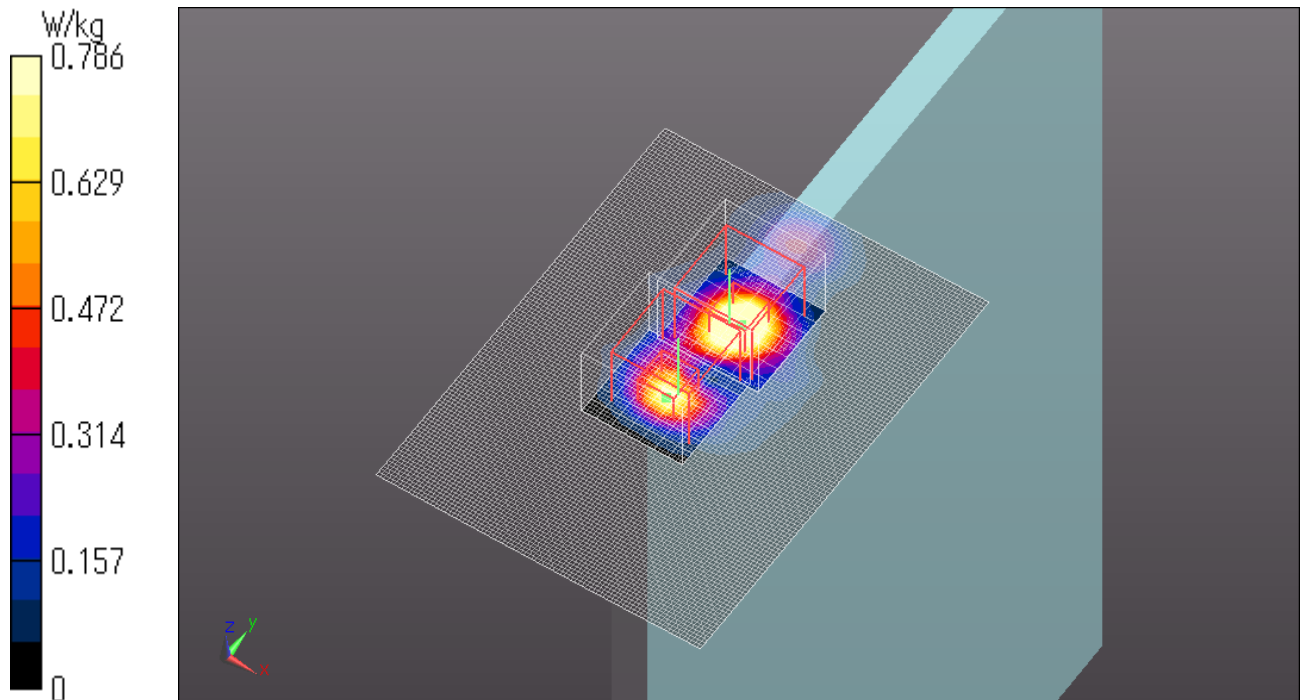

Z Scan at Maximum Body SAR position in WLAN 5180MHz – 5240MHz

WLAN 11n20 HT4 5220MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.497$ S/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 151.0$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;


DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Maximum value of SAR (measured) = 1.21 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

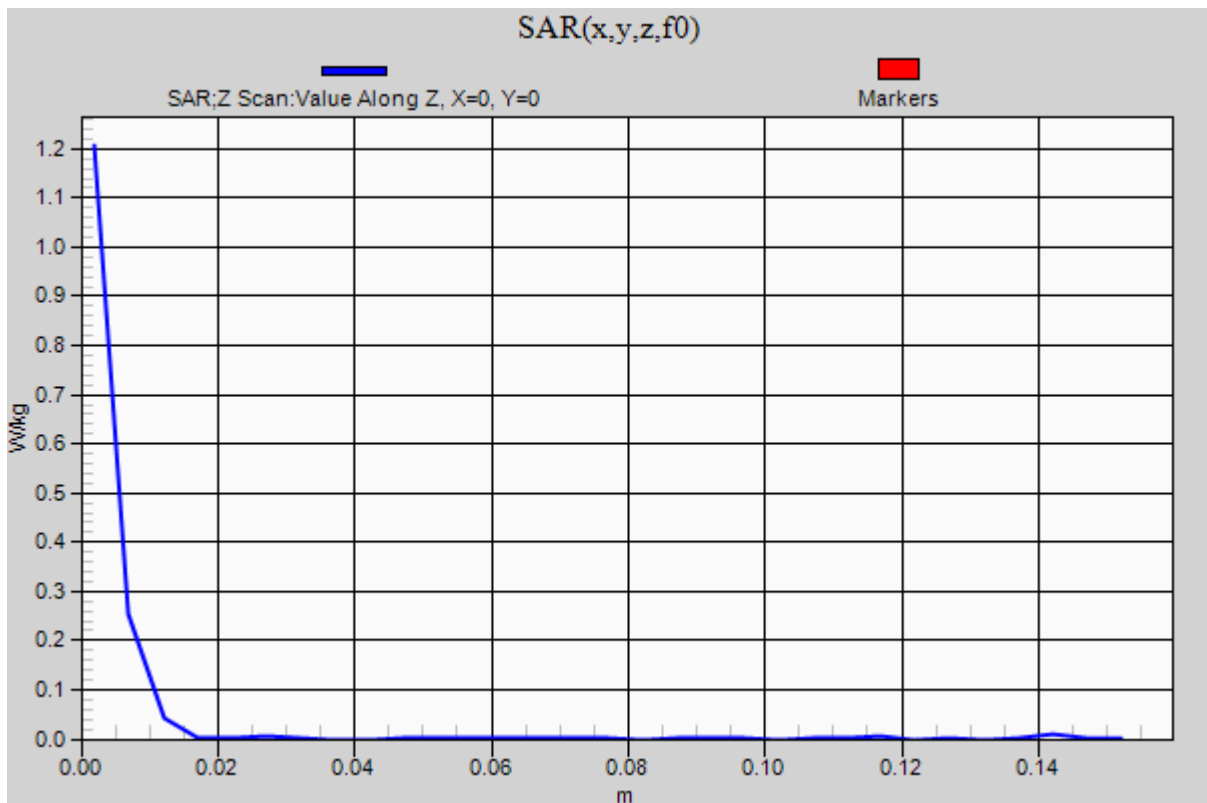

WLAN 11n40 HT4 5230MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5230 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5230$ MHz; $\sigma = 5.507$ S/m; $\epsilon_r = 47.999$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 15.392 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 2.27 W/kg
SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.156 W/kg
Maximum value of SAR (measured) = 1.15 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 15.392 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 1.51 W/kg
SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.102 W/kg
Maximum value of SAR (measured) = 0.815 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

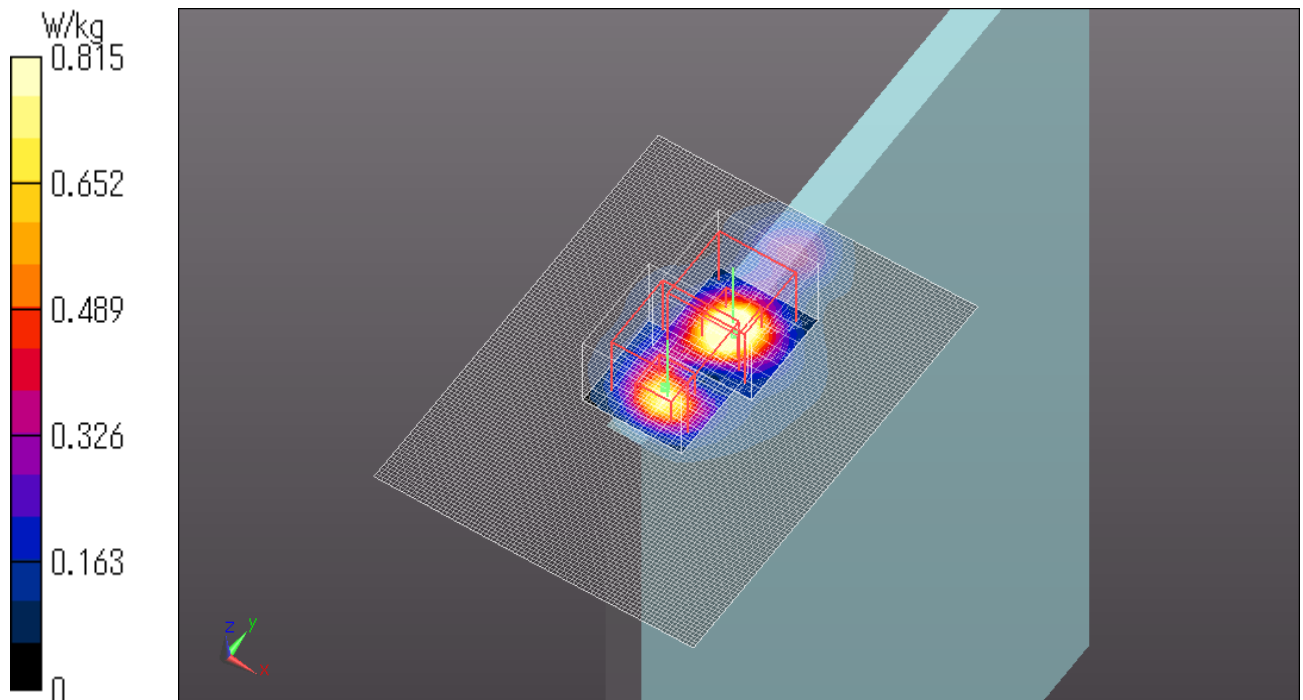

WLAN 11ac80 VHT6 5210MHz Right side 0mm Ant. Main


Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5210 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5210$ MHz; $\sigma = 5.482$ S/m; $\epsilon_r = 47.987$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.194 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 6.485 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.370 W/kg
SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.023 W/kg
Maximum value of SAR (measured) = 0.207 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

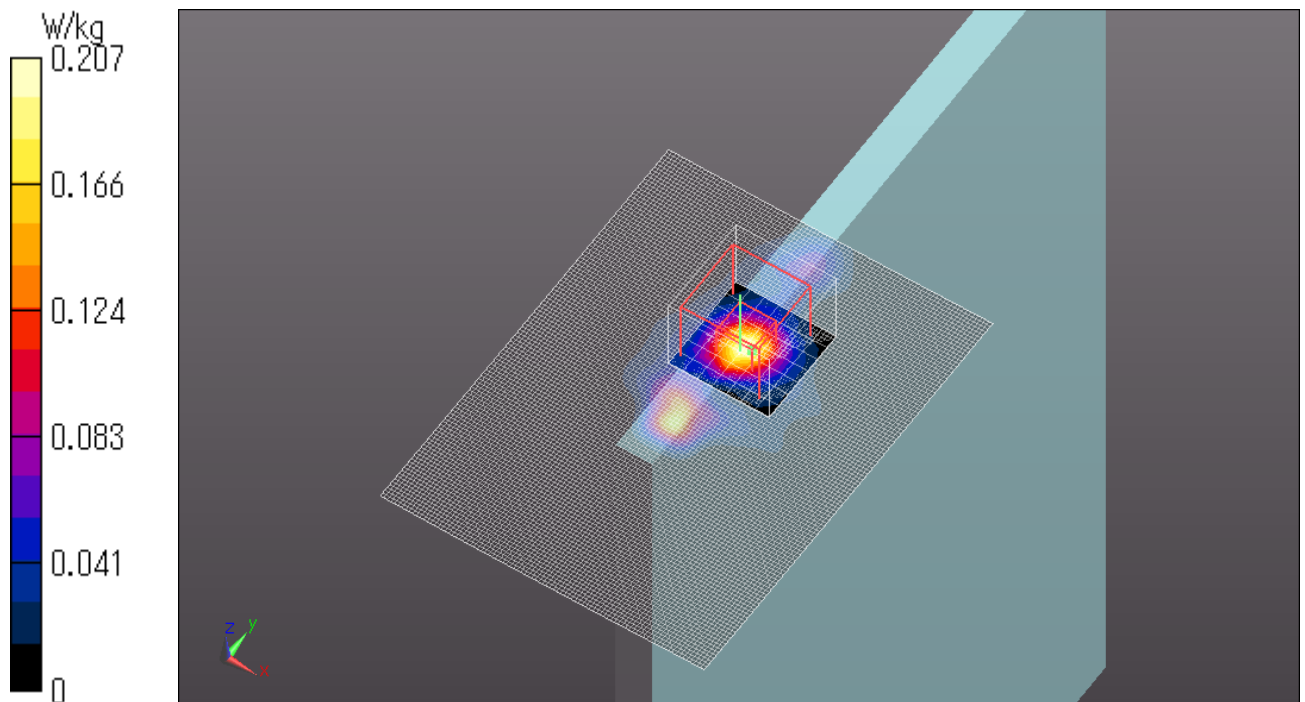

WLAN 11n20 HT4 5200MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.464$ S/m; $\epsilon_r = 47.986$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


Area Scan (91x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.849 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.563 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.119 W/kg
Maximum value of SAR (measured) = 0.833 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.563 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.94 W/kg
SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.072 W/kg
Maximum value of SAR (measured) = 0.591 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

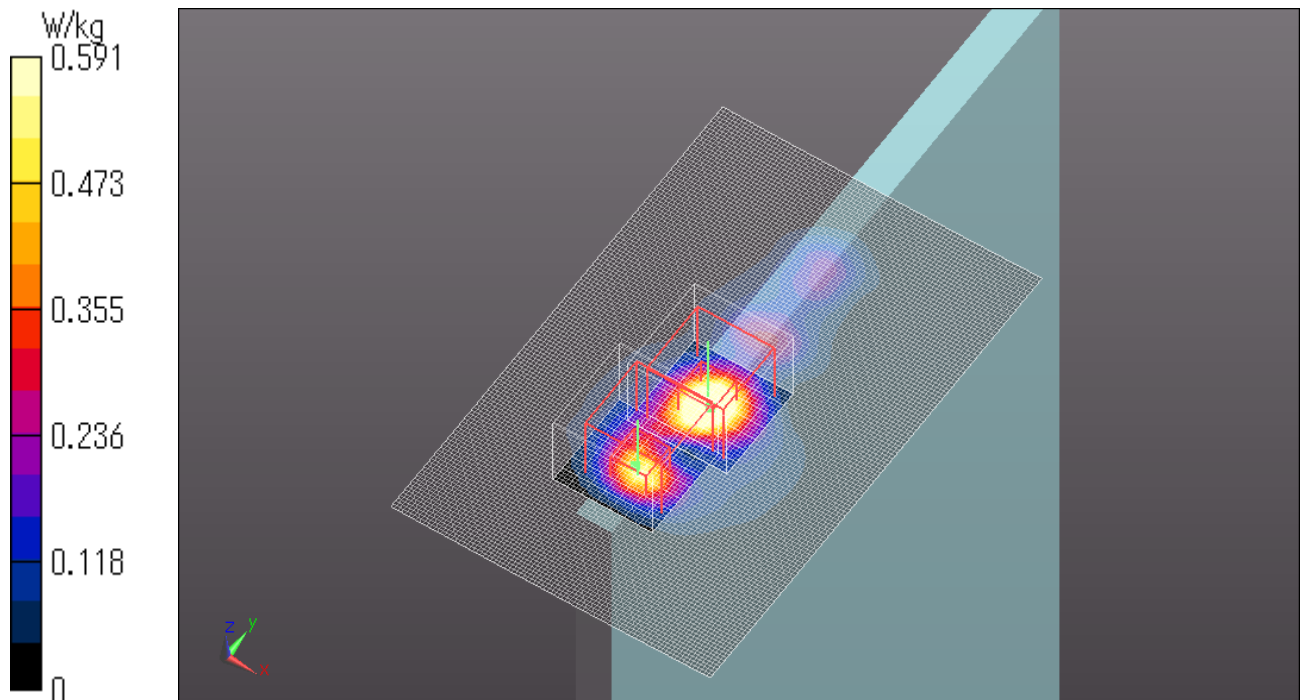

WLAN 11n20 HT4 5240MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5240 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.516$ S/m; $\epsilon_r = 47.992$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


Area Scan (91x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.00 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.837 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.99 W/kg
SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.142 W/kg
Maximum value of SAR (measured) = 0.990 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.837 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.083 W/kg
Maximum value of SAR (measured) = 0.681 W/kg

Date: 2013/06/03

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

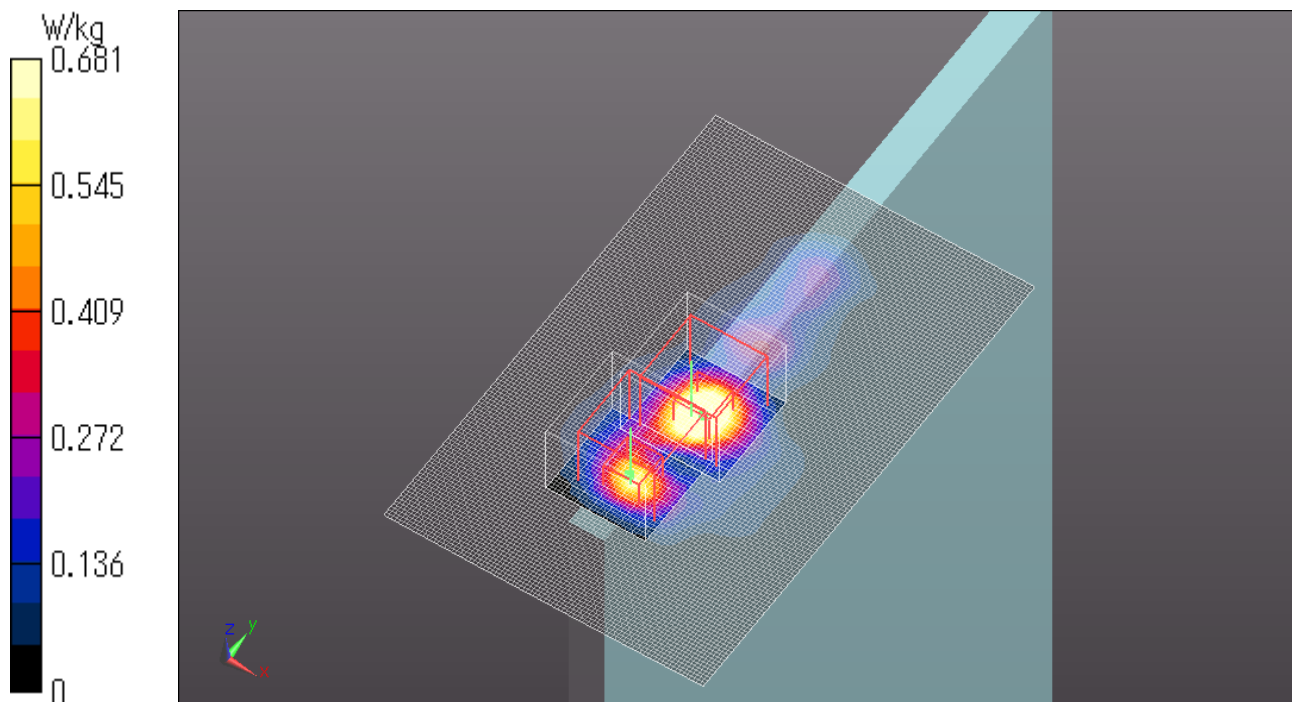

WLAN 11a 6Mbps 5220MHz Right side 0mm Ant. Aux


Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.507$ S/m; $\epsilon_r = 48.677$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 13.671 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.155 W/kg
Maximum value of SAR (measured) = 0.910 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

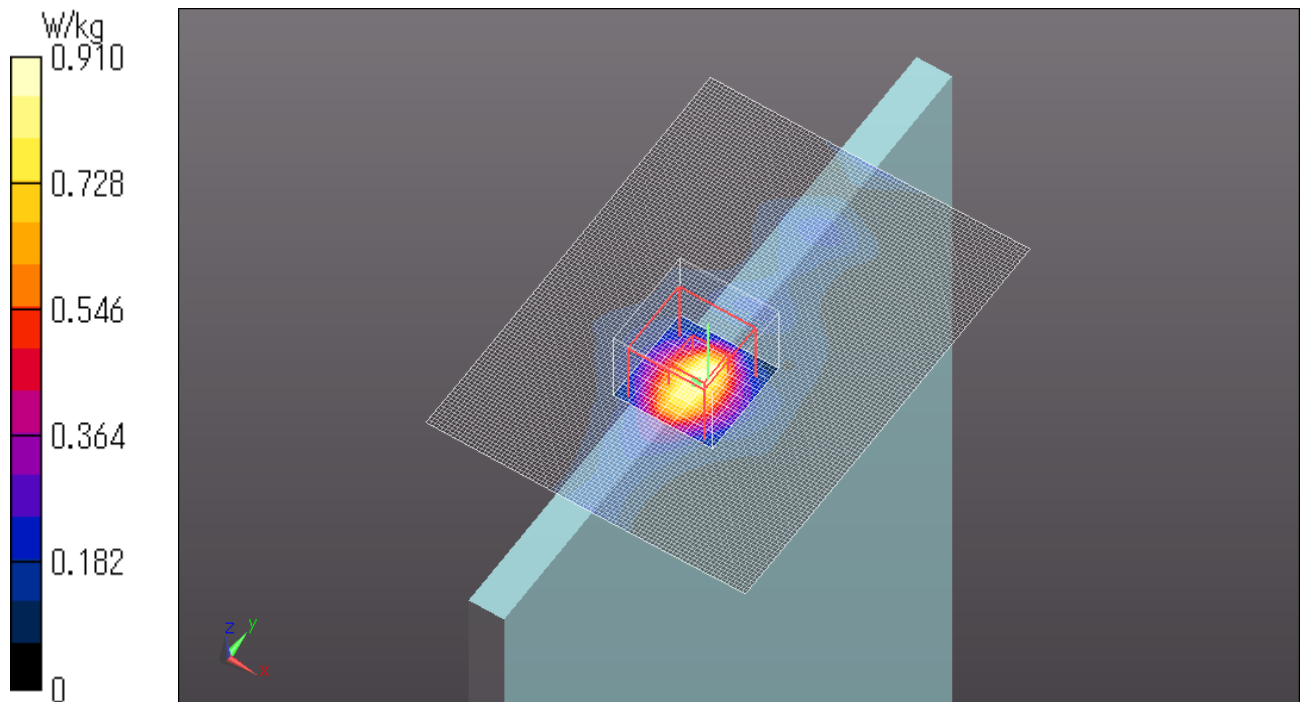

WLAN 11a 6Mbps 5220MHz Rear 0mm Ant. Aux


Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.507$ S/m; $\epsilon_r = 48.677$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.712 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.935 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.30 W/kg
SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.127 W/kg
Maximum value of SAR (measured) = 0.700 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

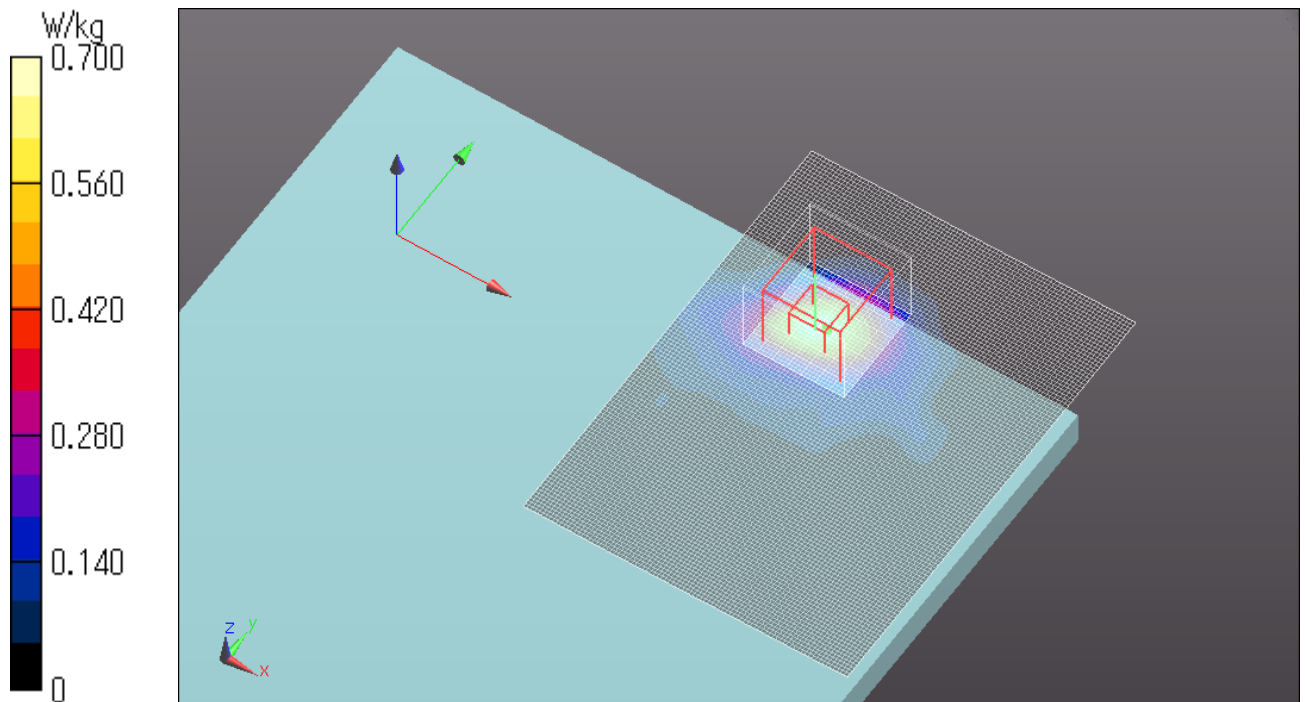

WLAN 11n20 HT4 5220MHz Right side 0mm Ant. Aux


Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5220$ MHz; $\sigma = 5.507$ S/m; $\epsilon_r = 48.677$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.01 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 13.175 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.68 W/kg
SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.141 W/kg
Maximum value of SAR (measured) = 0.821 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

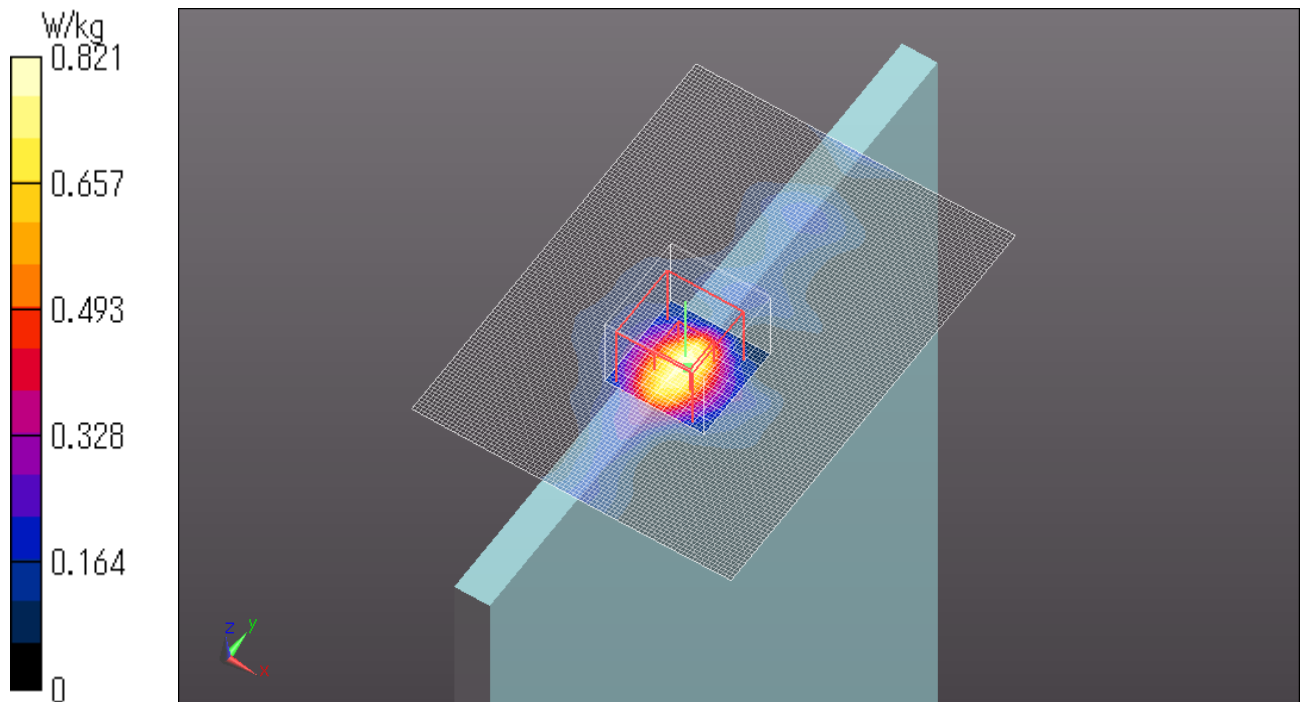


WLAN 11n40 HT4 5230MHz Right side 0mm Ant. Aux

Communication System: UID 0, WLAN 5GHz; Communication System Band: WLAN 5GHz Low; Frequency: 5230 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5230$ MHz; $\sigma = 5.519$ S/m; $\epsilon_r = 48.65$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 13.666 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.165 W/kg
Maximum value of SAR (measured) = 0.986 W/kg

Date: 2013/06/04
Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

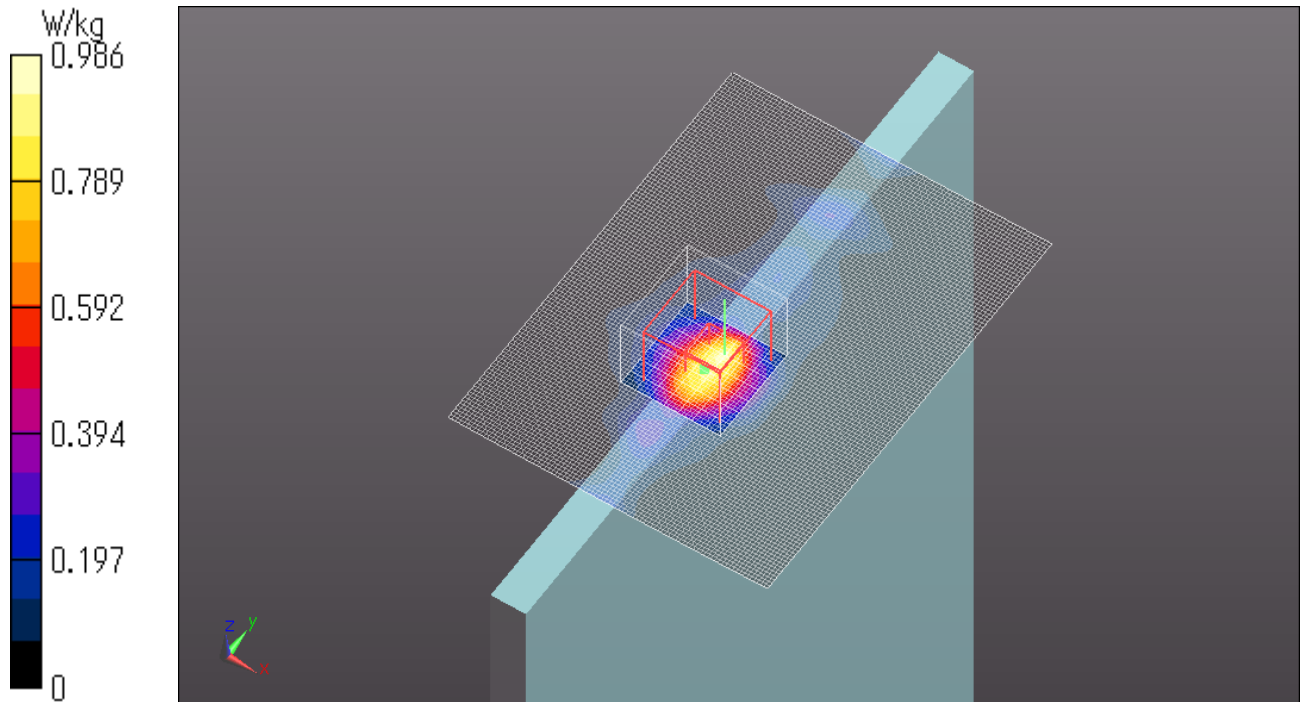

WLAN 11ac80 VHT6 5210MHz Right side 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11ac80 (W52 53); Frequency: 5210 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5210$ MHz; $\sigma = 5.494$ S/m; $\epsilon_r = 48.701$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.125 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.681 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

Area Scan 2 (91x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.130 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.681 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

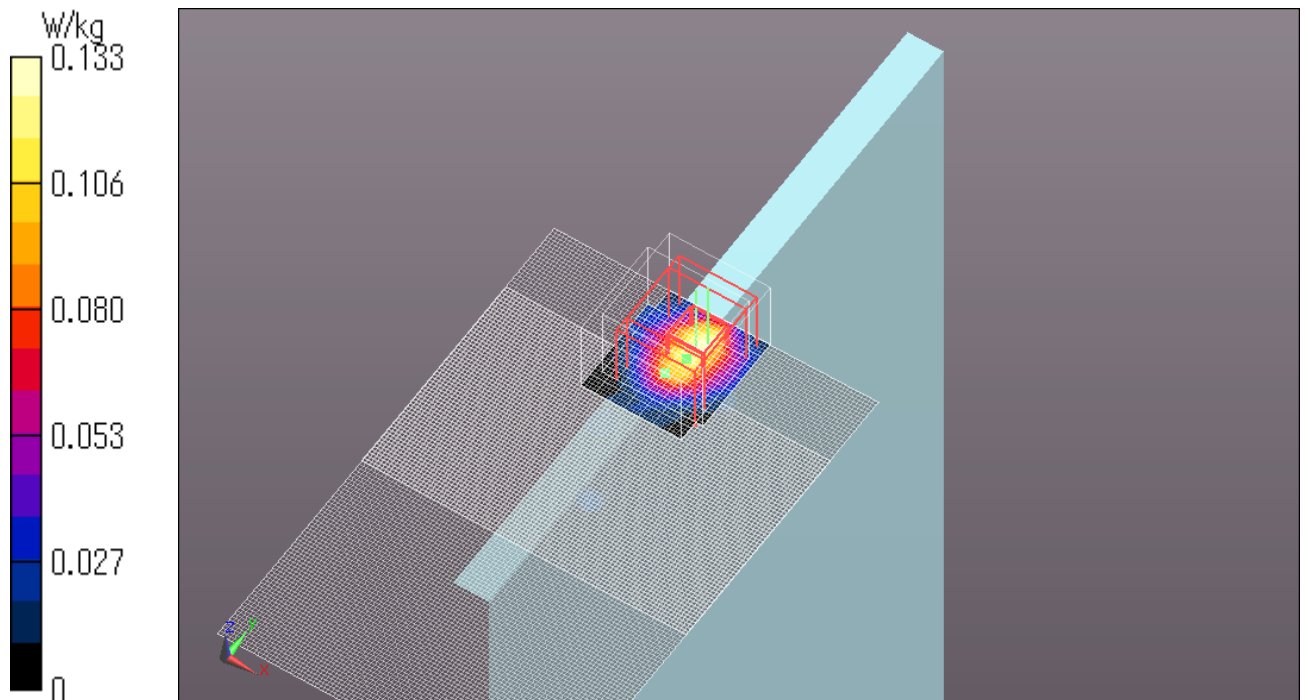

WLAN 11n40 HT4 5190MHz Right side 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5190 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5190$ MHz; $\sigma = 5.465$ S/m; $\epsilon_r = 48.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.287 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.899 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

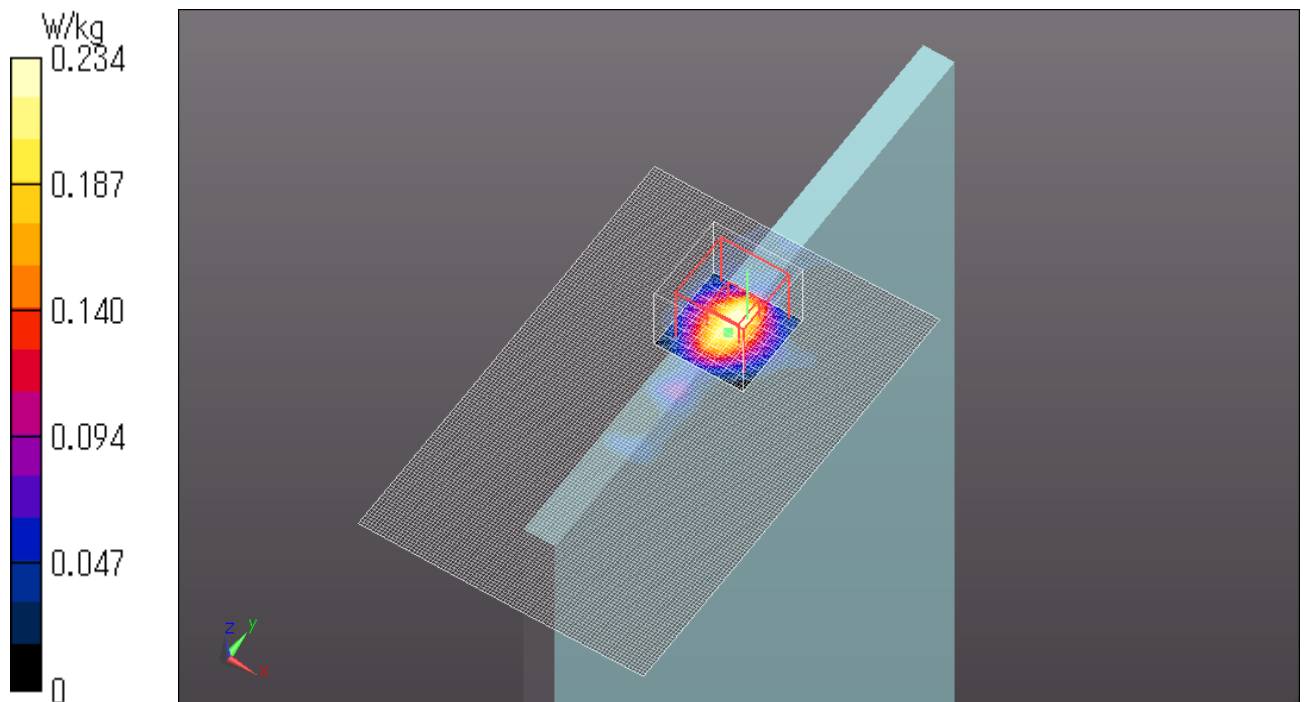

WLAN 11n20 HT8 5220MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5220$ MHz; $\sigma = 5.507$ S/m; $\epsilon_r = 48.677$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.579 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.419 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.419 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.612 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

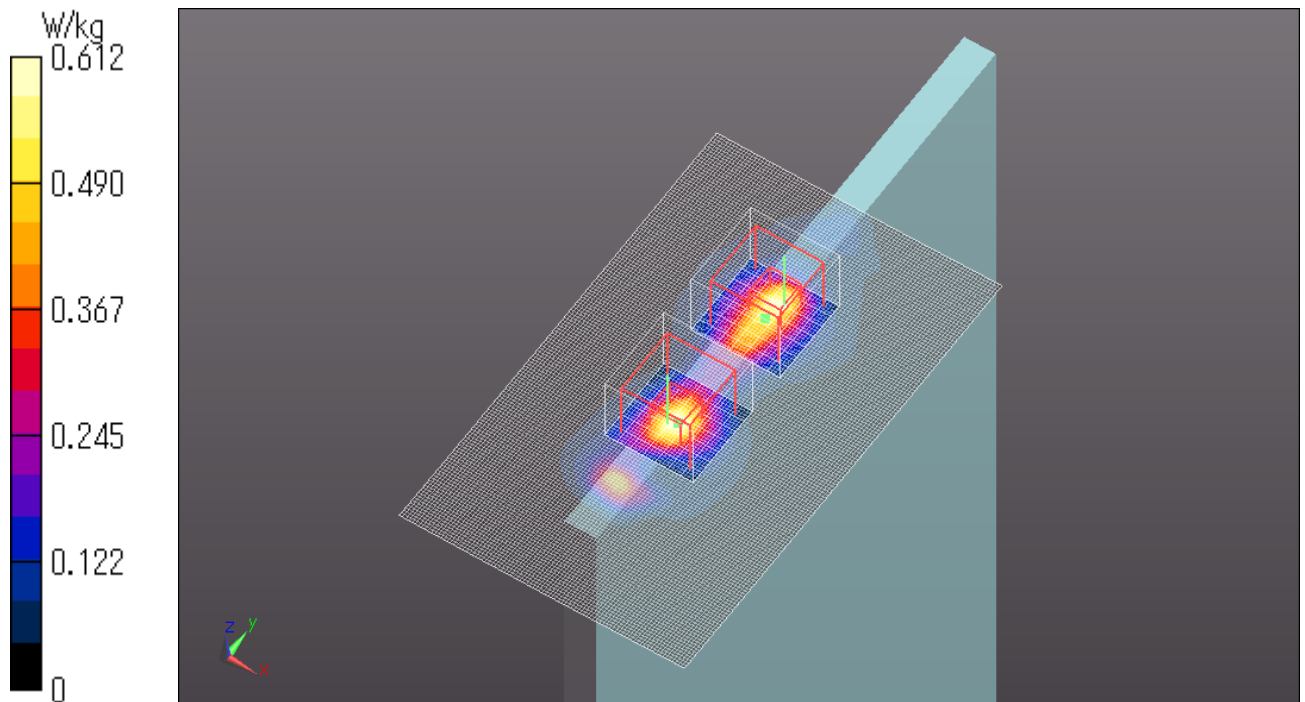

WLAN 11n40 HT8 5230MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5230 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.519$ S/m; $\epsilon_r = 48.65$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.525 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.591 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.535 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 10.591 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

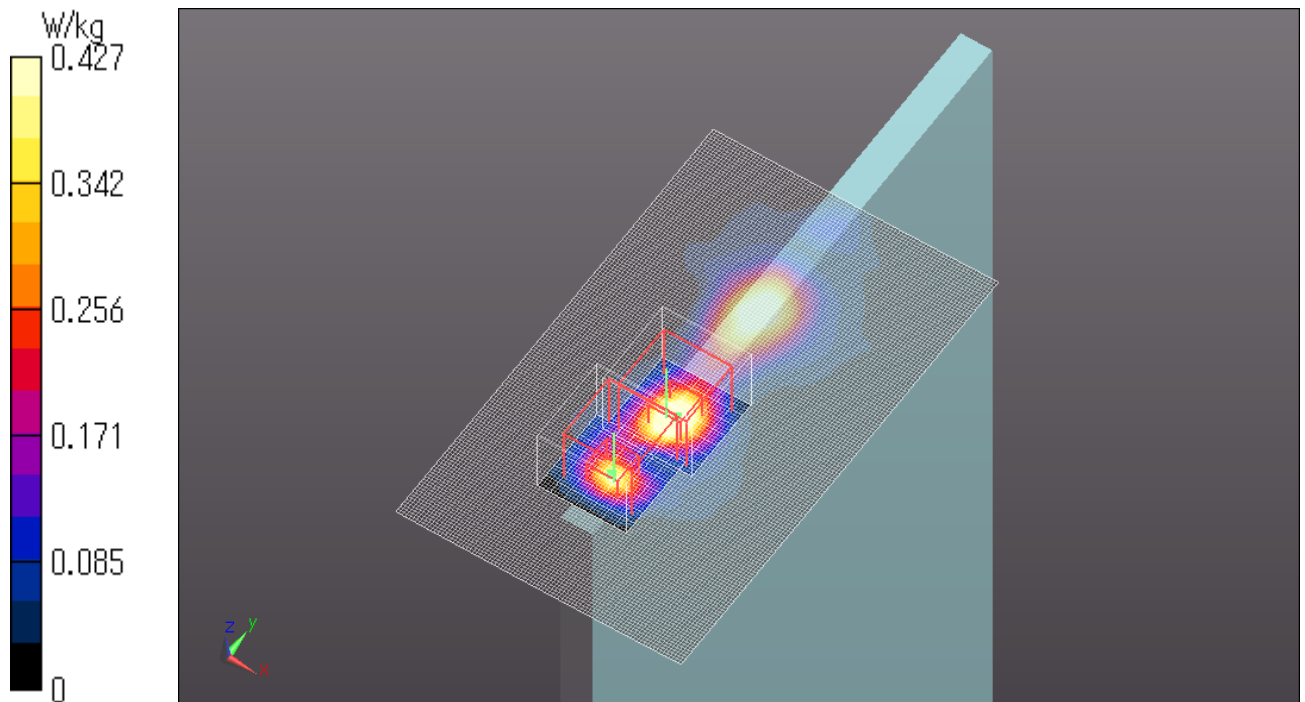

WLAN 11ac80 VHT6 5210MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11ac80 (W52 53); Frequency: 5210 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5210$ MHz; $\sigma = 5.494$ S/m; $\epsilon_r = 48.701$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.63, 4.63, 4.63); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.176 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.517 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

Date: 2013/06/04

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

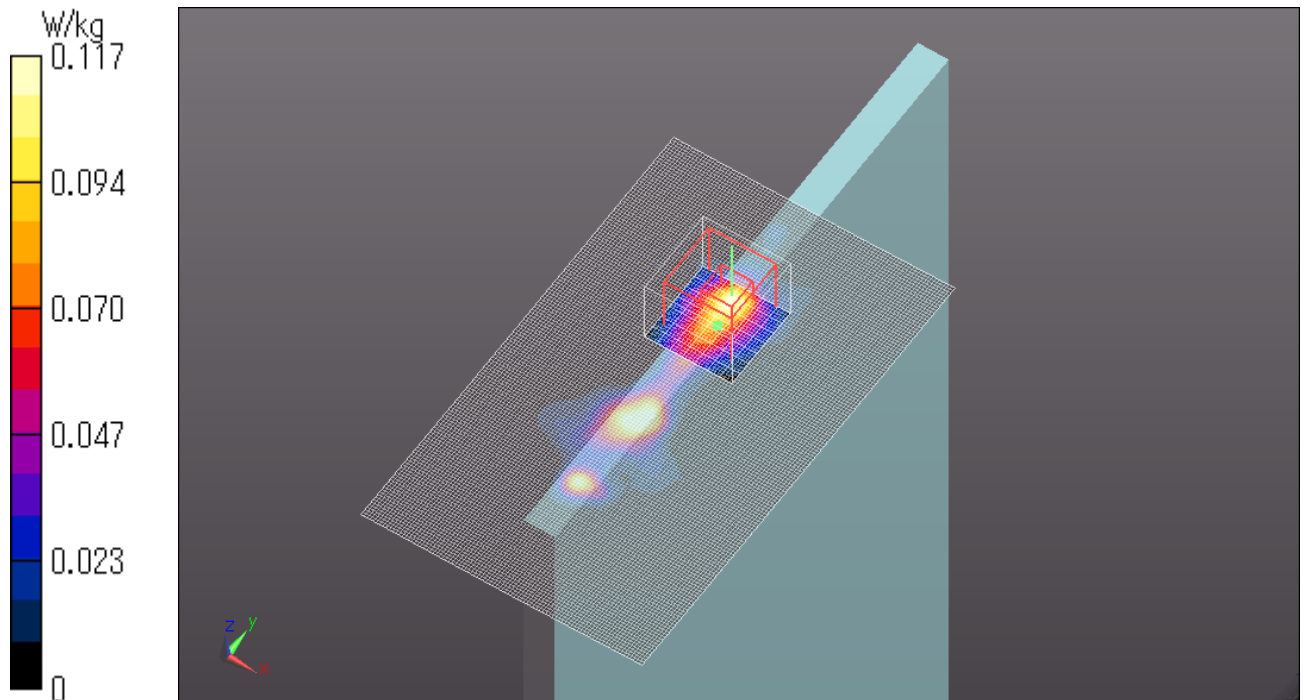

[5.3GHz band]

WLAN 11a 6Mbps 5300MHz Right side 0mm side Ant. Main


Communication System: UID 0, WLAN 11a/b/g/n; Communication System Band: 11a/n ; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 3 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.767 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.304 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.089 W/kg
Maximum value of SAR (measured) = 0.696 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

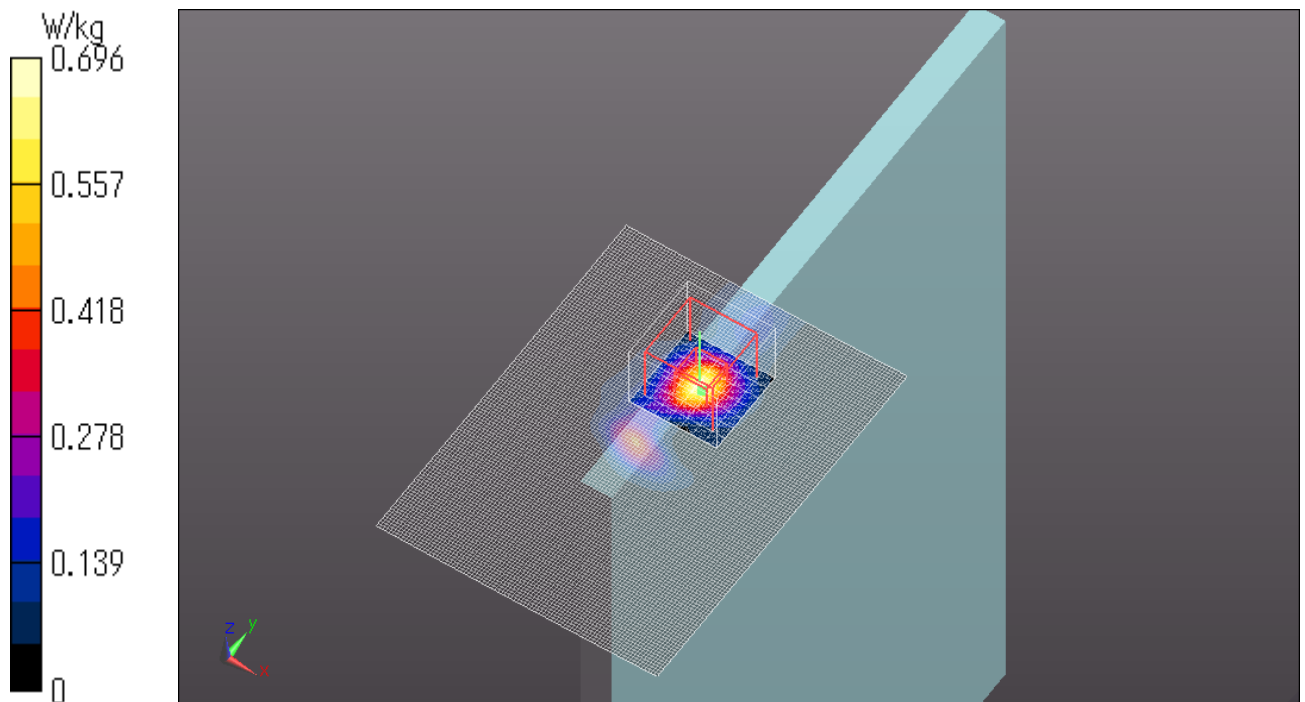

WLAN 11a 6Mbps 5300MHz Bottom side 0mm Ant.Main


Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 3 (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.0274 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.935 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.0120 W/kg
SAR(1 g) = 8.5e-005 W/kg; SAR(10 g) = 5.52e-006 W/kg
Maximum value of SAR (measured) = 0.0183 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

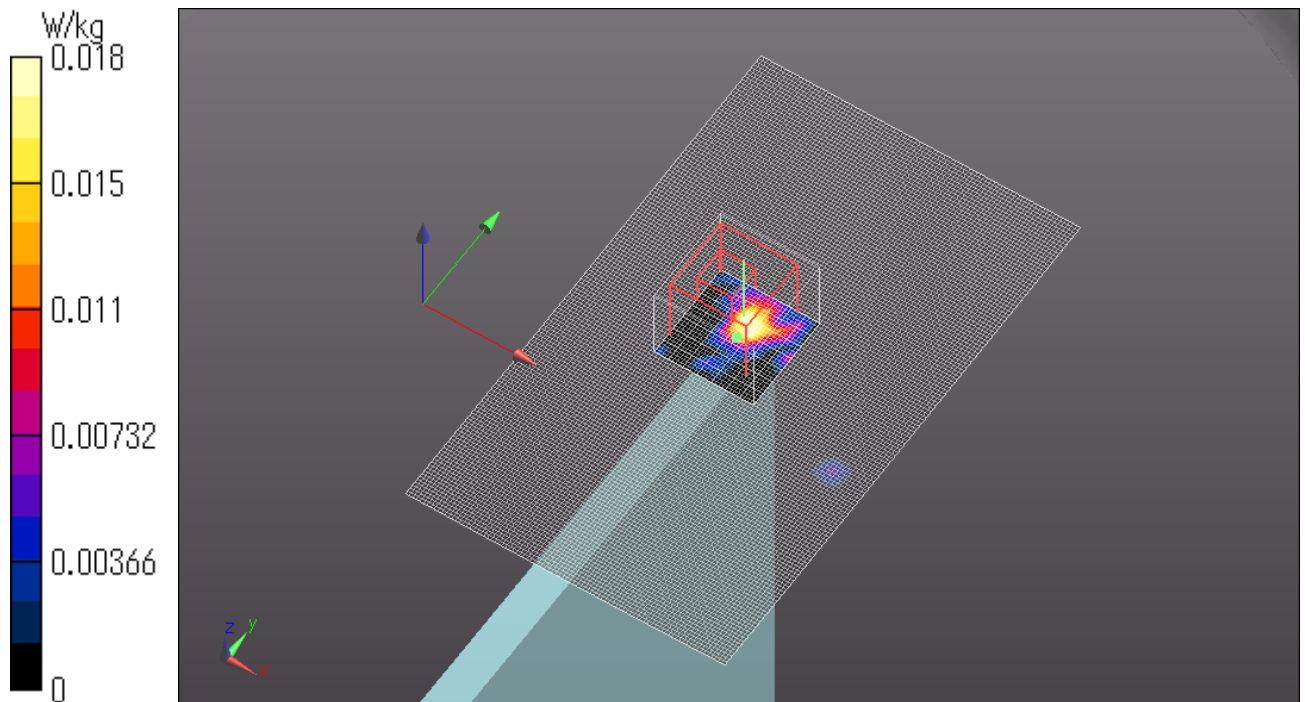

WLAN 11a 6Mbps 5300MHz Rear side 0mm Ant. Main


Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:
Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;
Modulation Compensation:
Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$
Electronics: DAE4 Sn509; Calibrated: 2012/07/13
Phantom: ELI 4.0; Type: QDOVA001BA;
DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.315 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.368 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.482 W/kg
SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.033 W/kg
Maximum value of SAR (measured) = 0.264 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

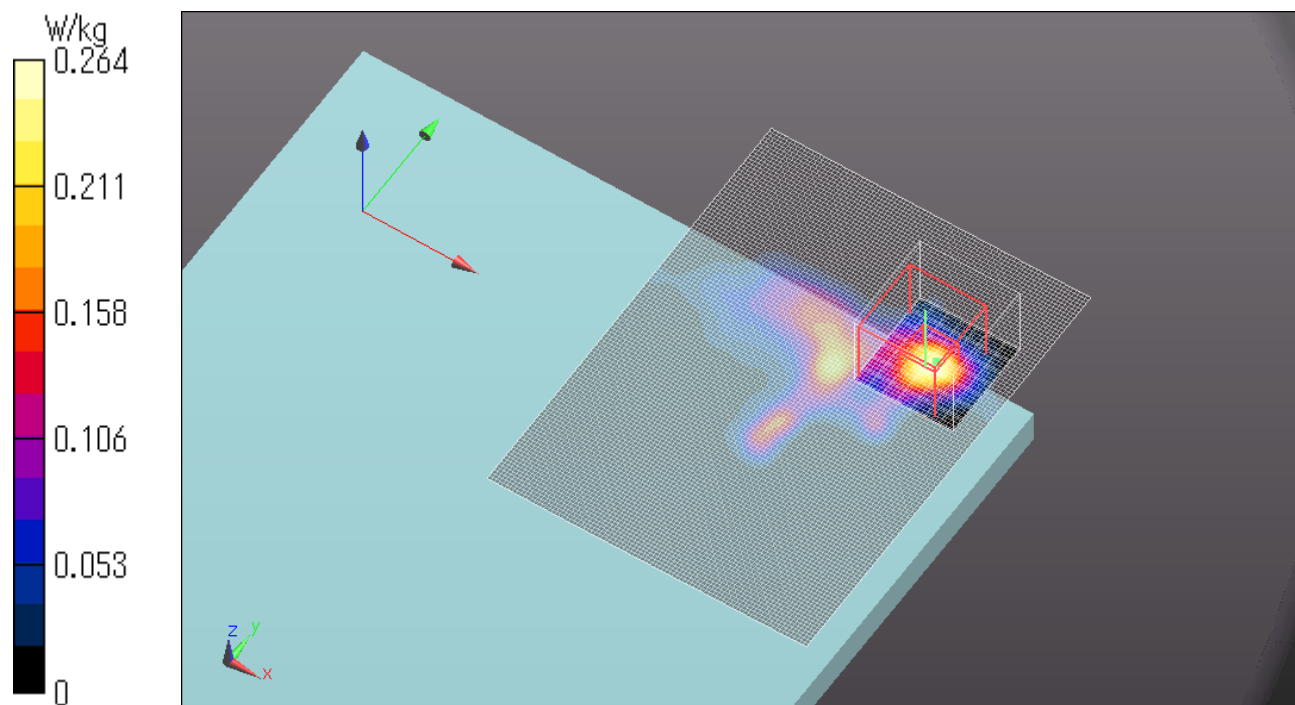

WLAN 11n20 HT4 5300MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 14.098 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.965 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 14.098 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.587 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

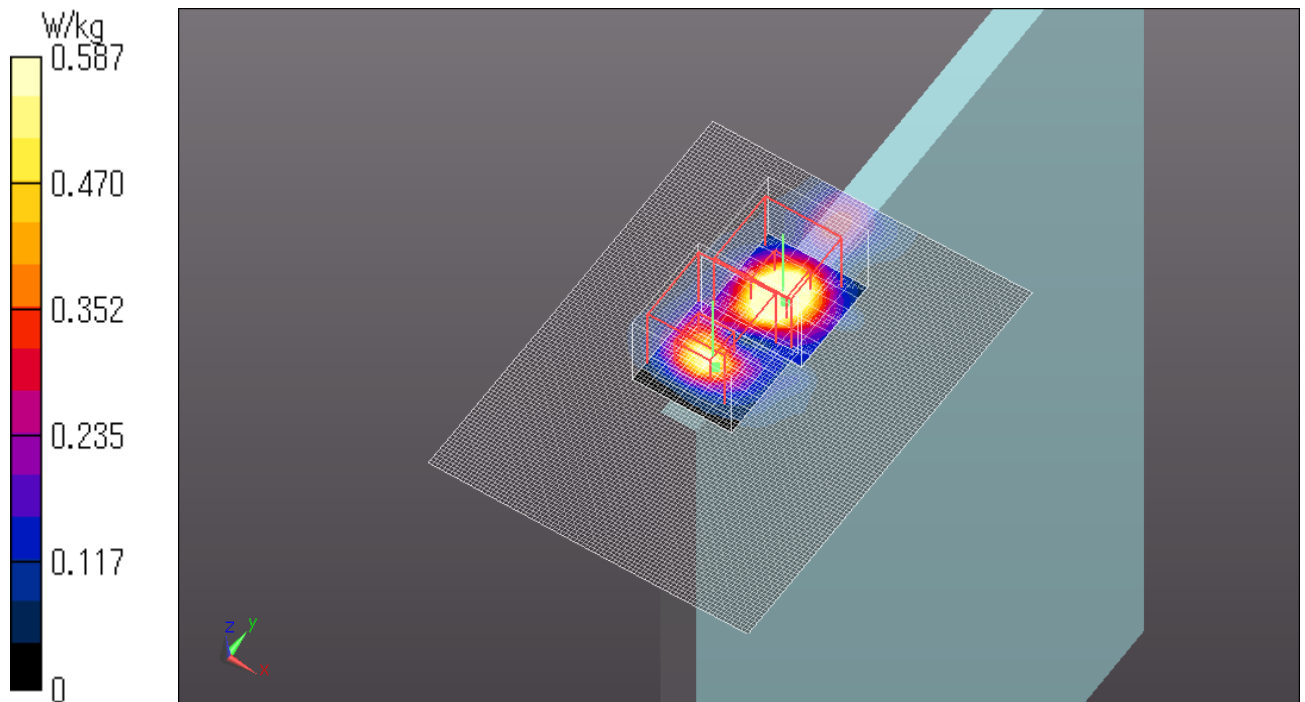

WLAN 11n40 HT4 5310MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5310 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5310$ MHz; $\sigma = 5.616$ S/m; $\epsilon_r = 48.447$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.482 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.255 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

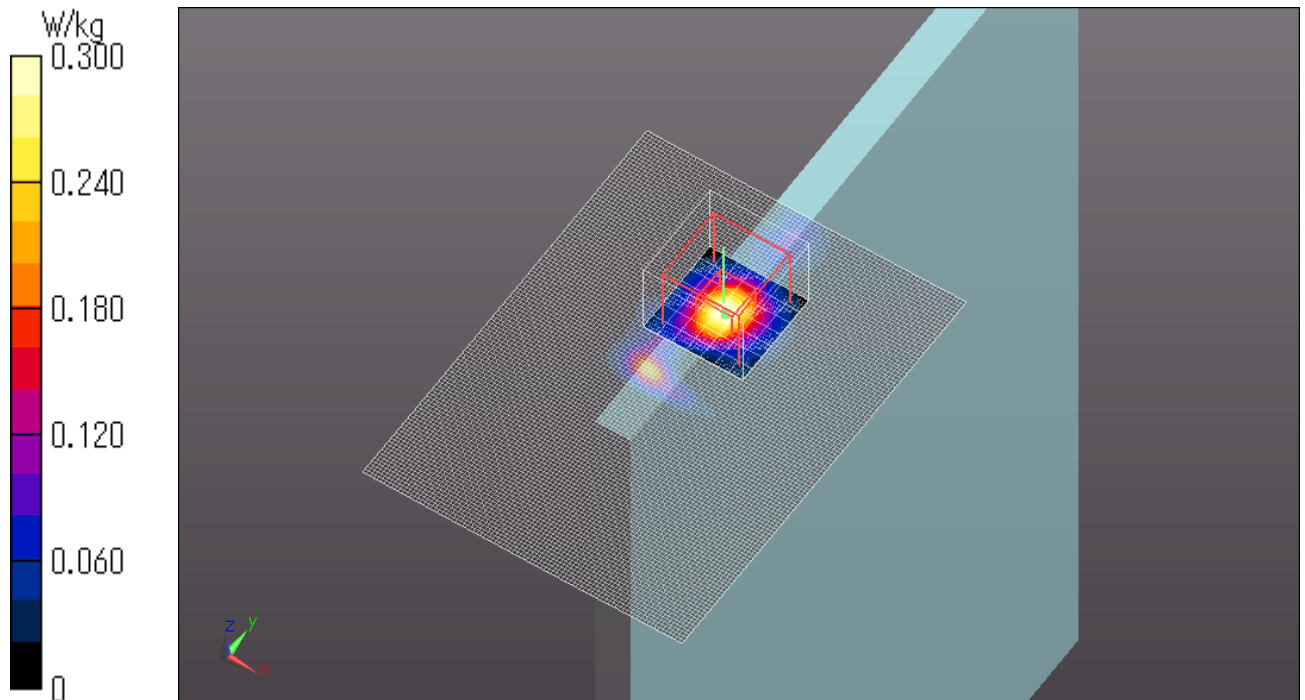

WLAN 11ac80 VHT6 5290MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11ac80 (W52 53); Frequency: 5290 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.587$ S/m; $\epsilon_r = 48.492$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.305 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.609 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.278 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

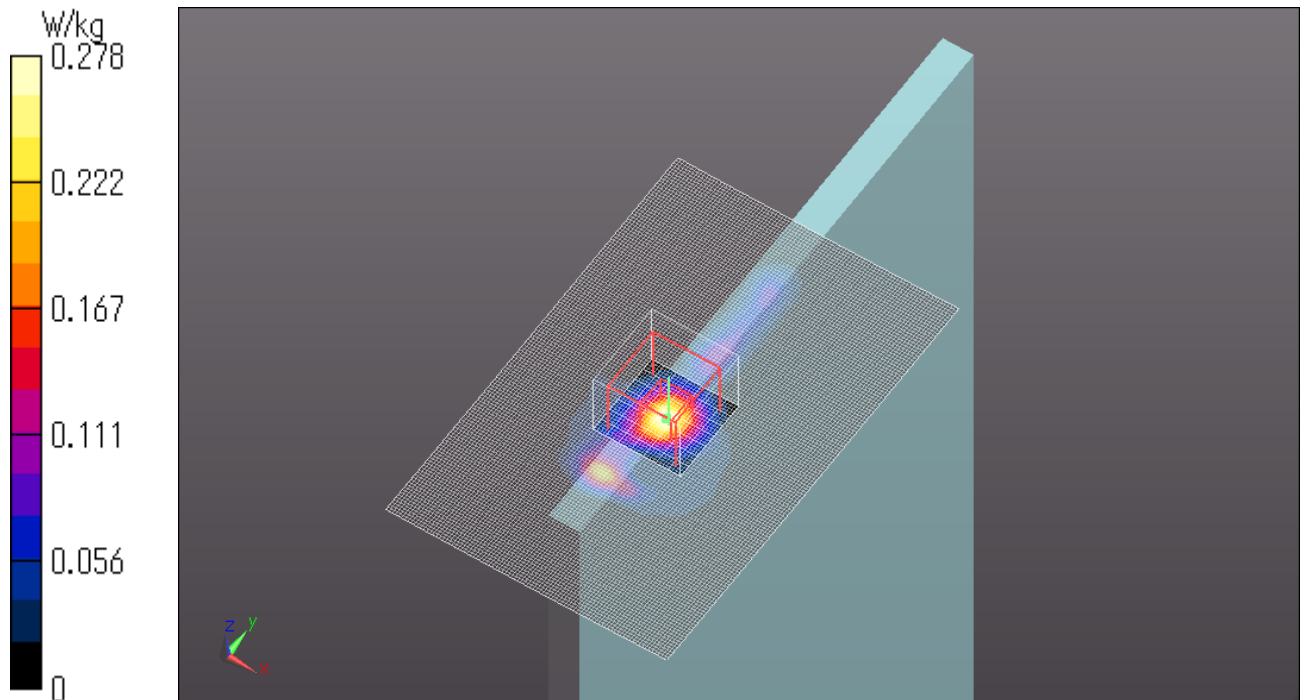

WLAN 11n20 HT4 5280MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.575$ S/m; $\epsilon_r = 48.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.960 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.562 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.973 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

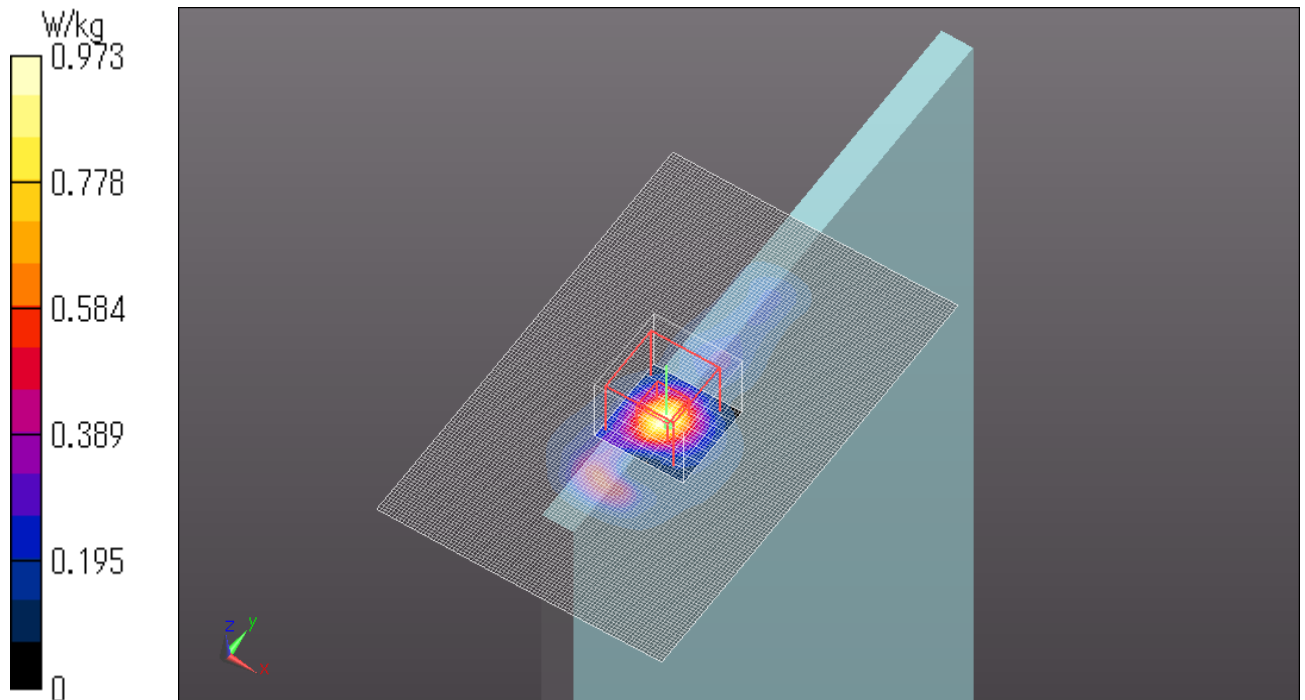

WLAN 11n20 HT4 5320MHz Right side 0mm Ant. Main

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.629 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.251 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

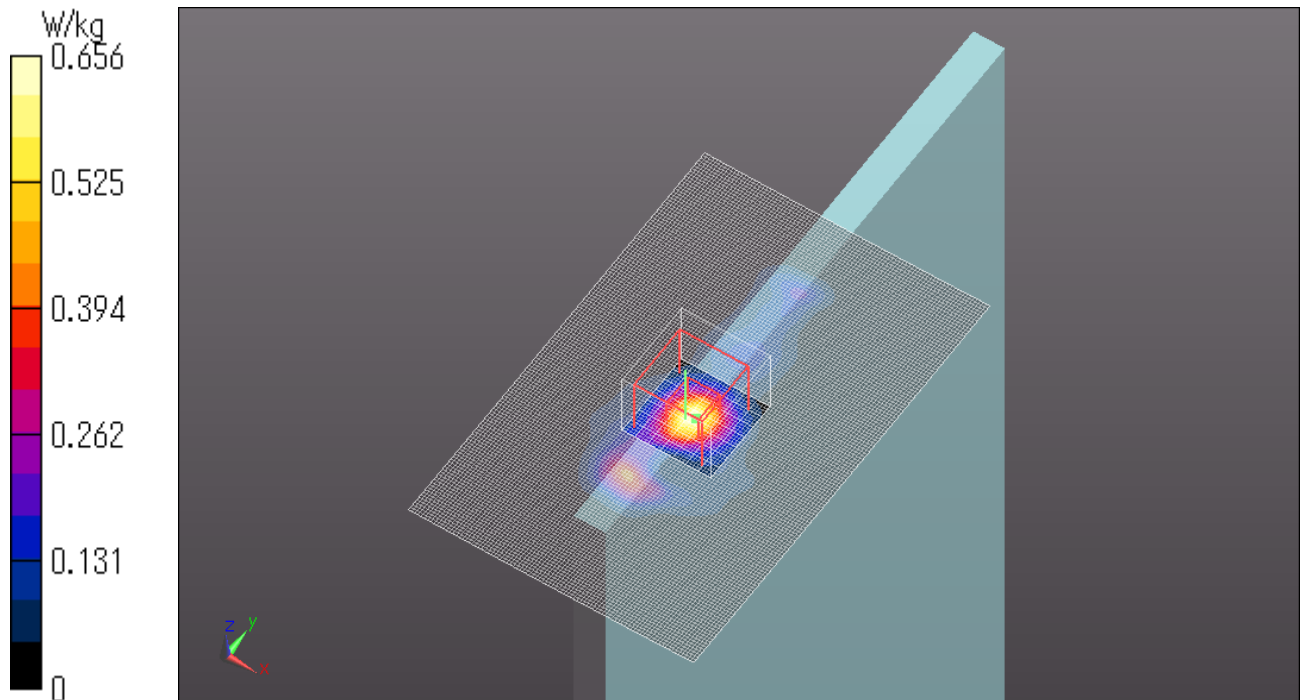

WLAN 11a 6Mbps 5300MHz Right side 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.909 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 12.593 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.801 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

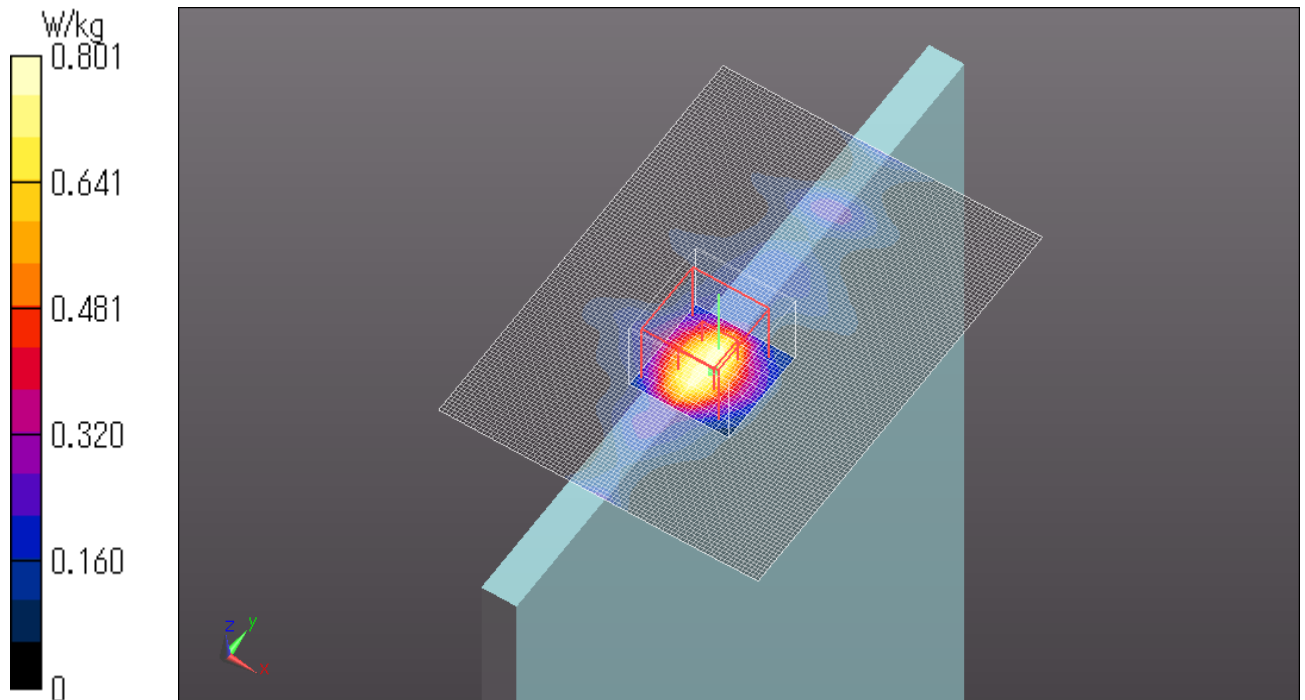

WLAN 11a 6Mbps 5300MHz Rear 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.188 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.883 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

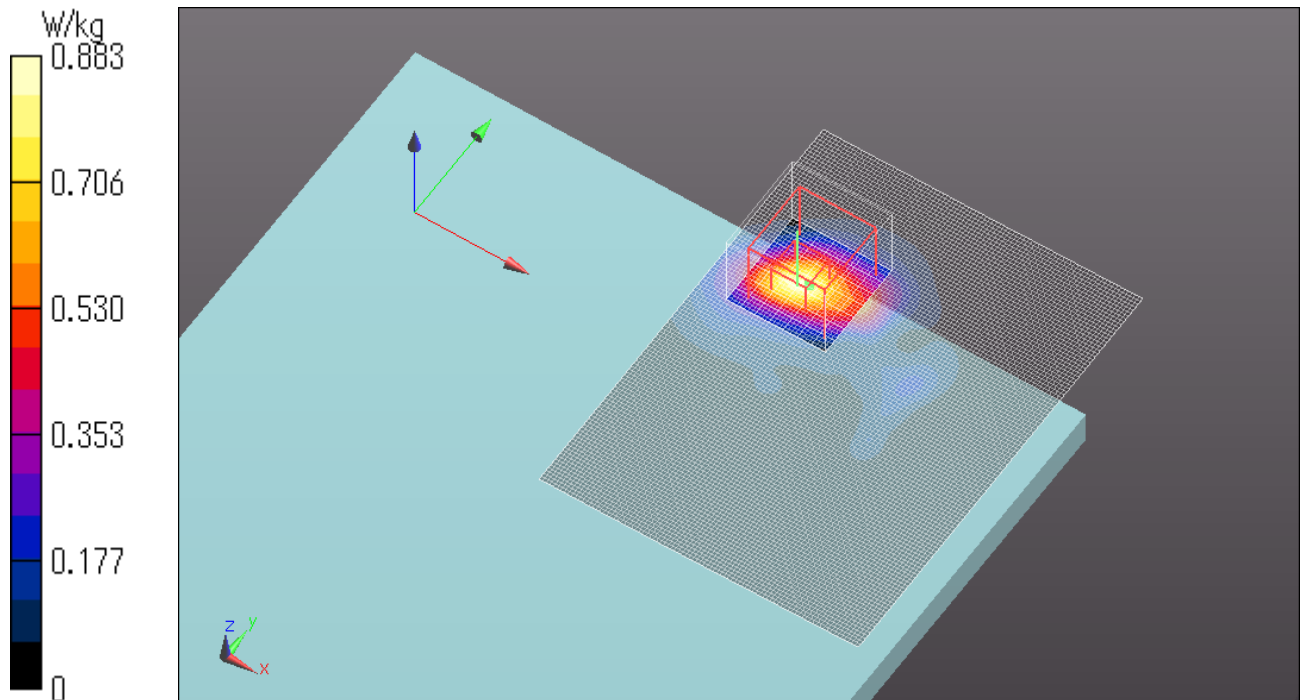

WLAN 11n20 HT4 5280MHz Rear 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.575$ S/m; $\epsilon_r = 48.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.966 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.862 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

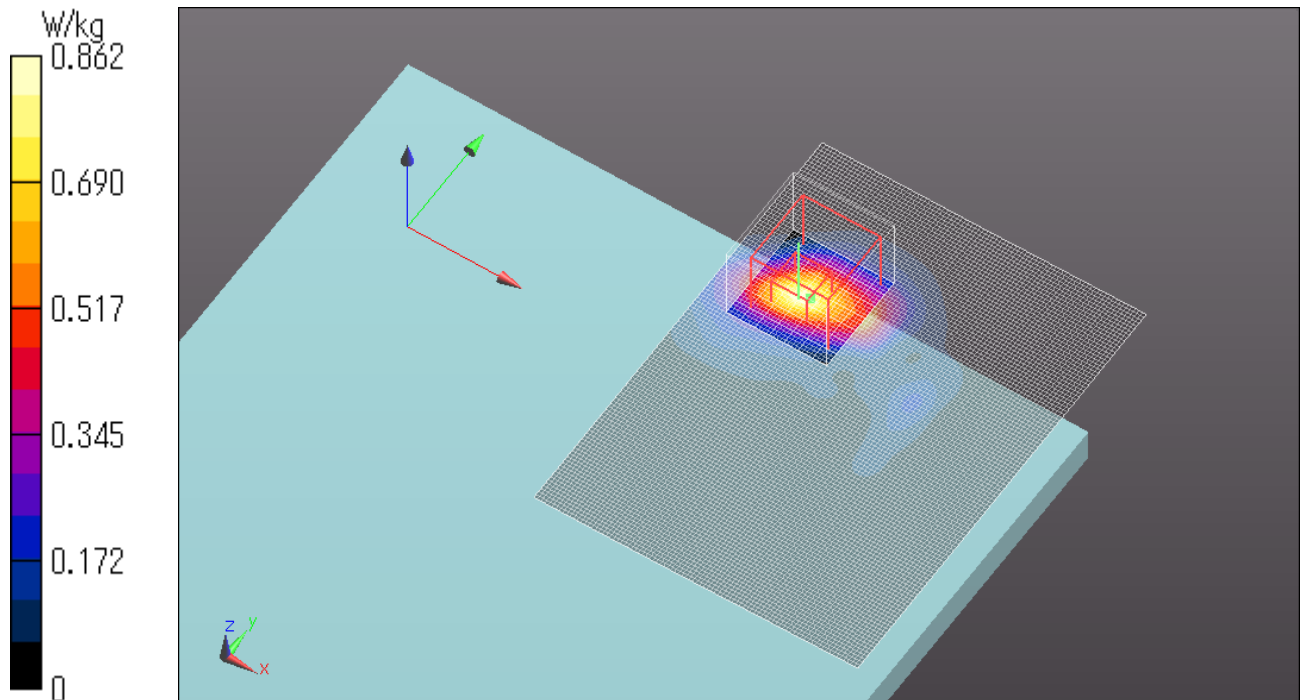

WLAN 11n40 HT4 5310MHz Rear 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5310 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5310$ MHz; $\sigma = 5.616$ S/m; $\epsilon_r = 48.447$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.383 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.958 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

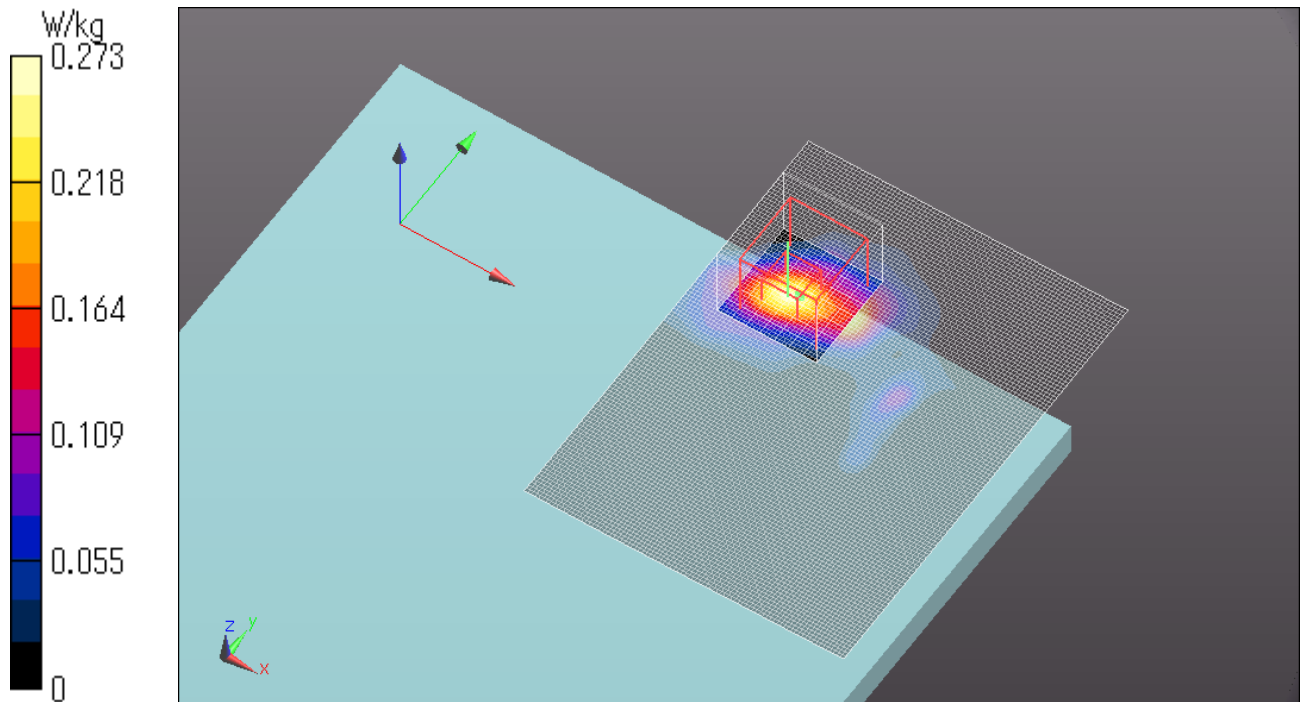

WLAN 11ac80 VHT6 5290MHz Rear 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5290 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.587$ S/m; $\epsilon_r = 48.492$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (121x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.325 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.109 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

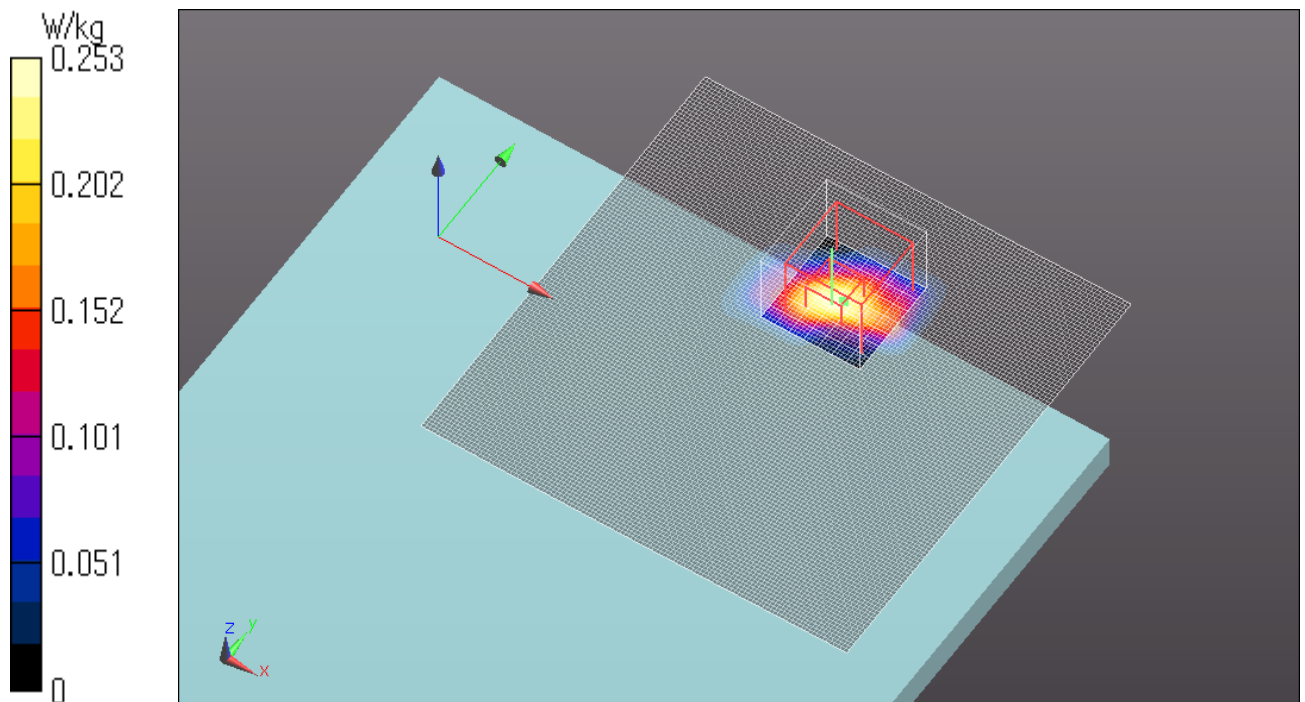

WLAN 11a 6Mbps 5280MHz Rear 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.575$ S/m; $\epsilon_r = 48.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.858 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.486 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.156 W/kg


Maximum value of SAR (measured) = 0.919 W/kg

Area Scan 2 2 (11x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.619 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

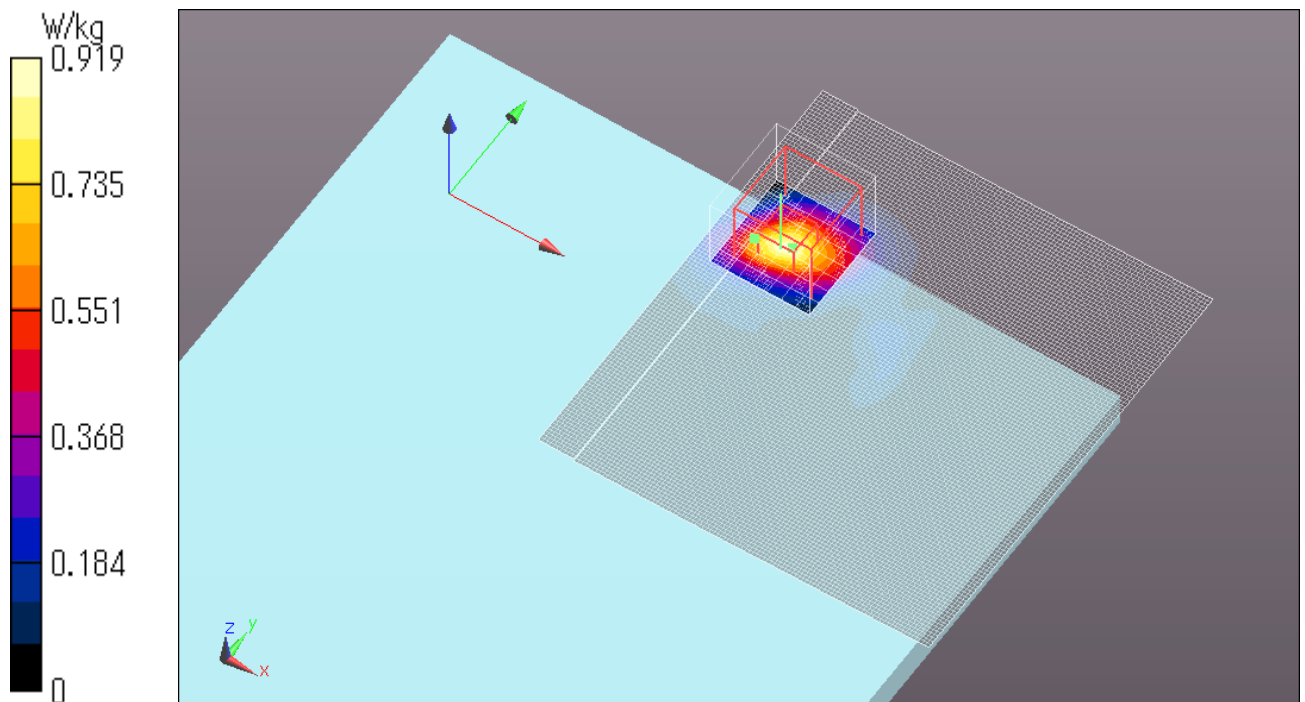

WLAN 11a 6Mbps 5320MHz Rear 0mm Ant. Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n ; Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (111x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.378 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.968 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.372 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

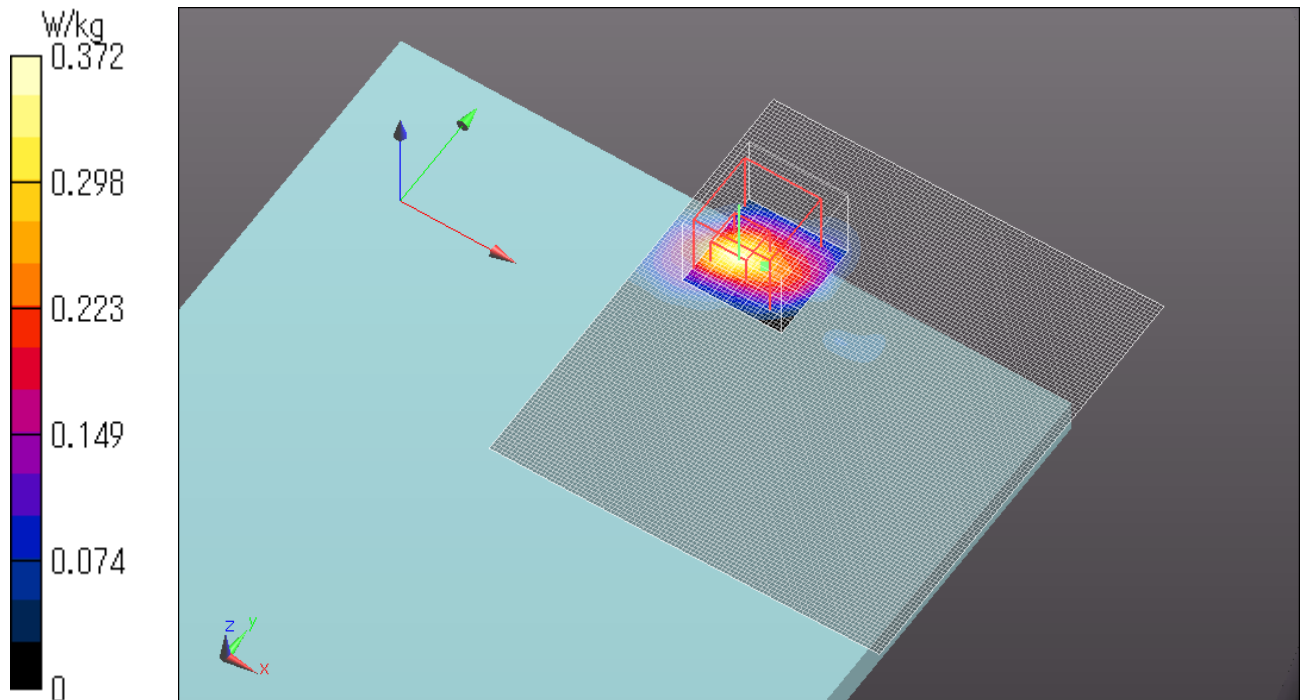

WLAN 11n20 HT8 5280MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.575$ S/m; $\epsilon_r = 48.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 15.857 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 15.857 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

Zoom Scan 2 2 (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 15.857 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.812 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

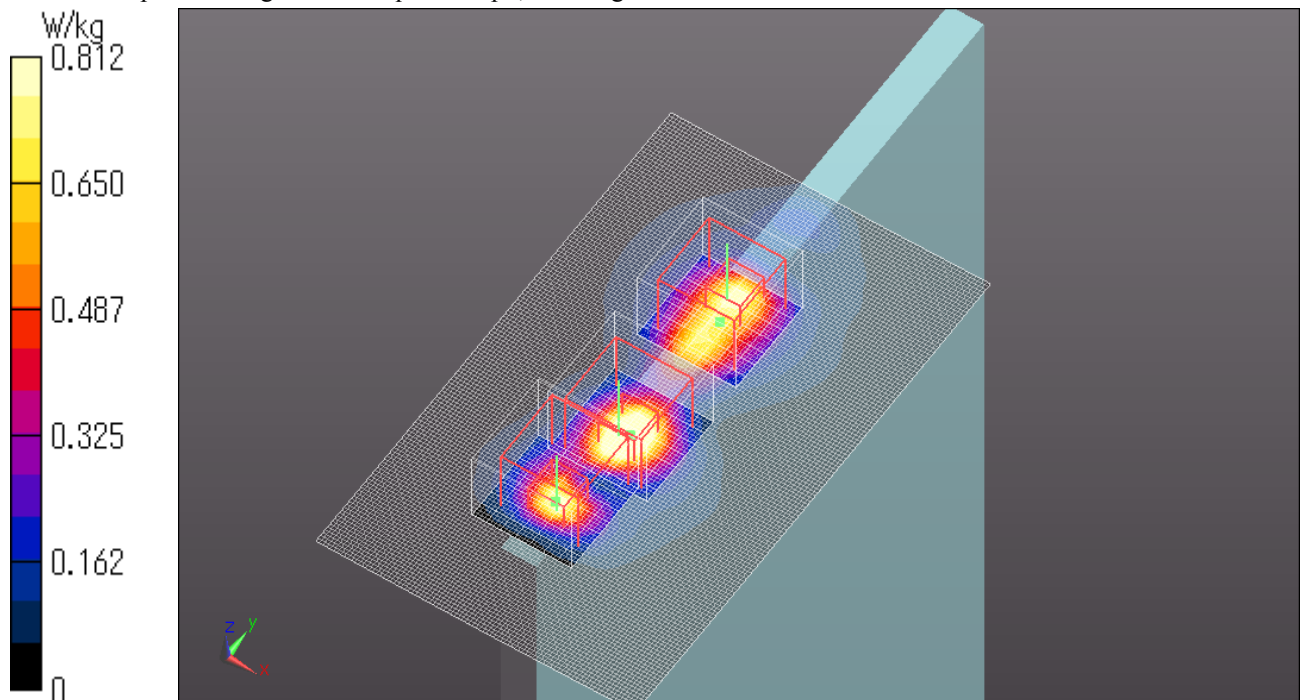

Z Scan at Maximum Body SAR position in WLAN 5260MHz – 5320MHz

WLAN 11n20 HT8 5280MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.575$ S/m; $\epsilon_r = 48.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 151.0$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;


DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Maximum value of SAR (measured) = 1.19 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

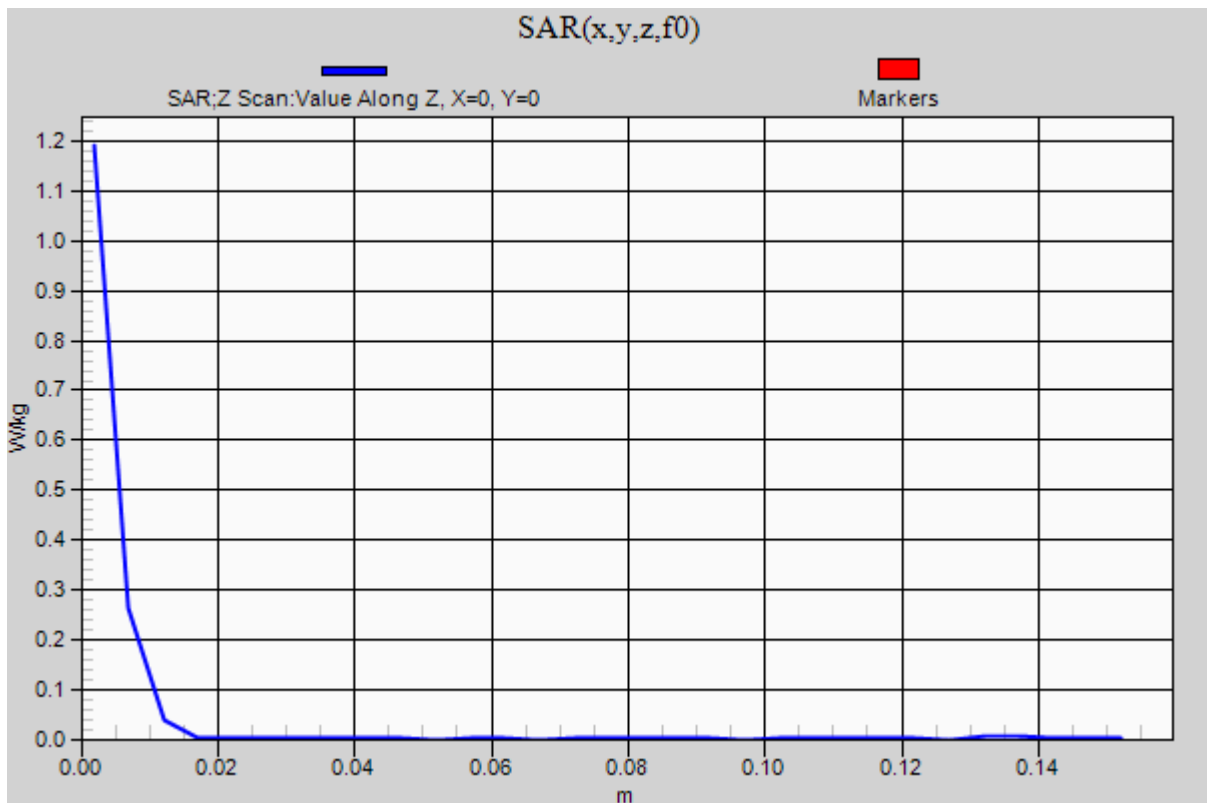

WLAN 11n20 HT8 5280MHz Rear 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5280 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.575$ S/m; $\epsilon_r = 48.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan 2 (121x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.494 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.740 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.800 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.464 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

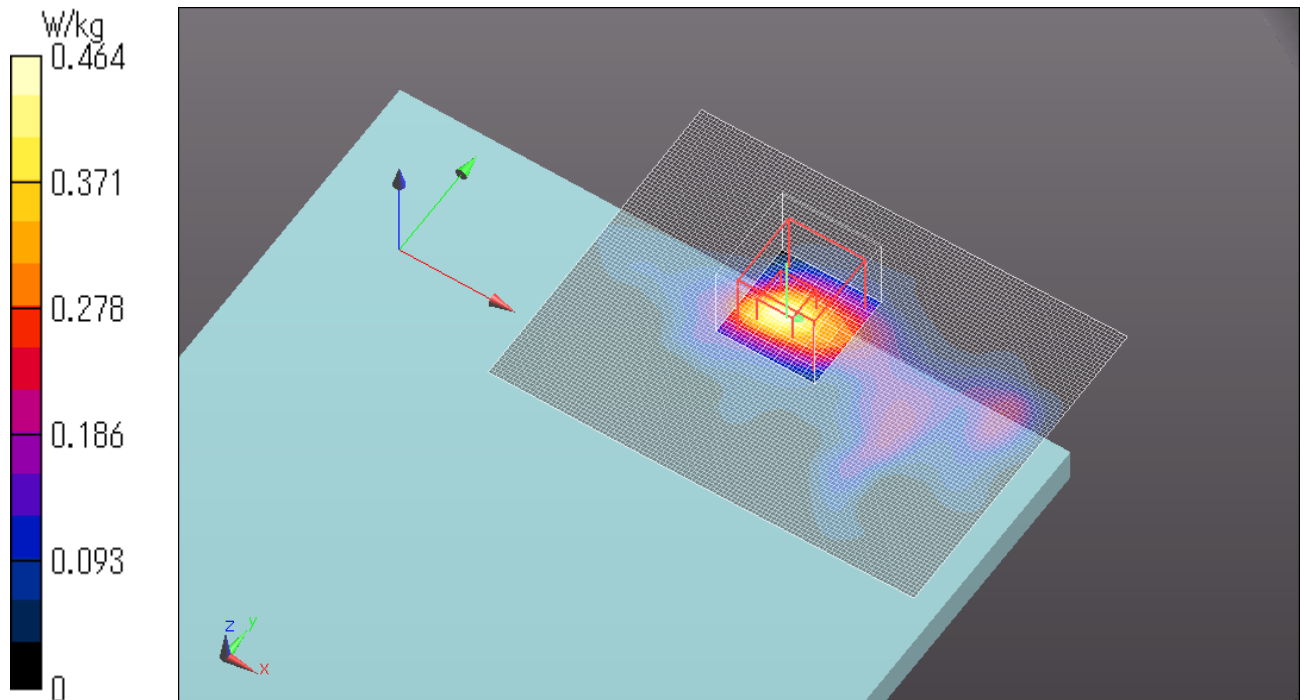

WLAN 11n40 HT8 5310MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5310 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5310$ MHz; $\sigma = 5.616$ S/m; $\epsilon_r = 48.447$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.310 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.492 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

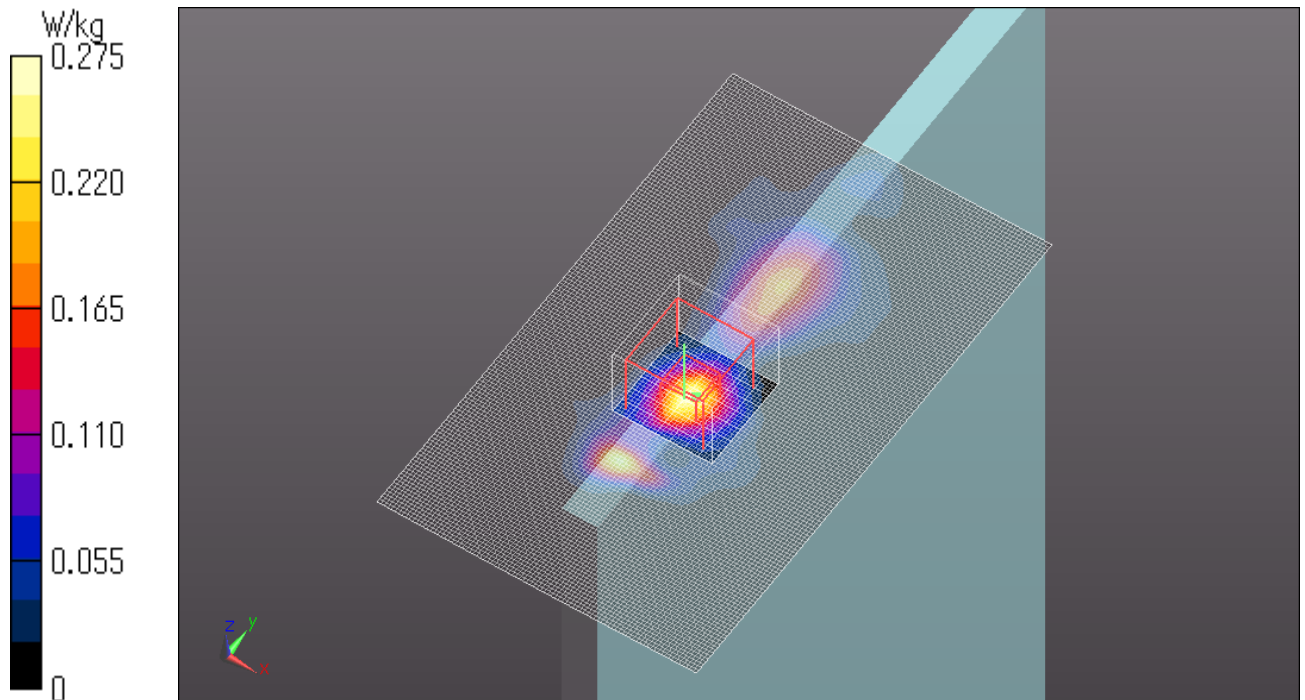

WLAN 11ac80 VHT6 5290MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11ac80 (W52 53); Frequency: 5290 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5290$ MHz; $\sigma = 5.587$ S/m; $\epsilon_r = 48.492$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.352 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.727 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.608 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

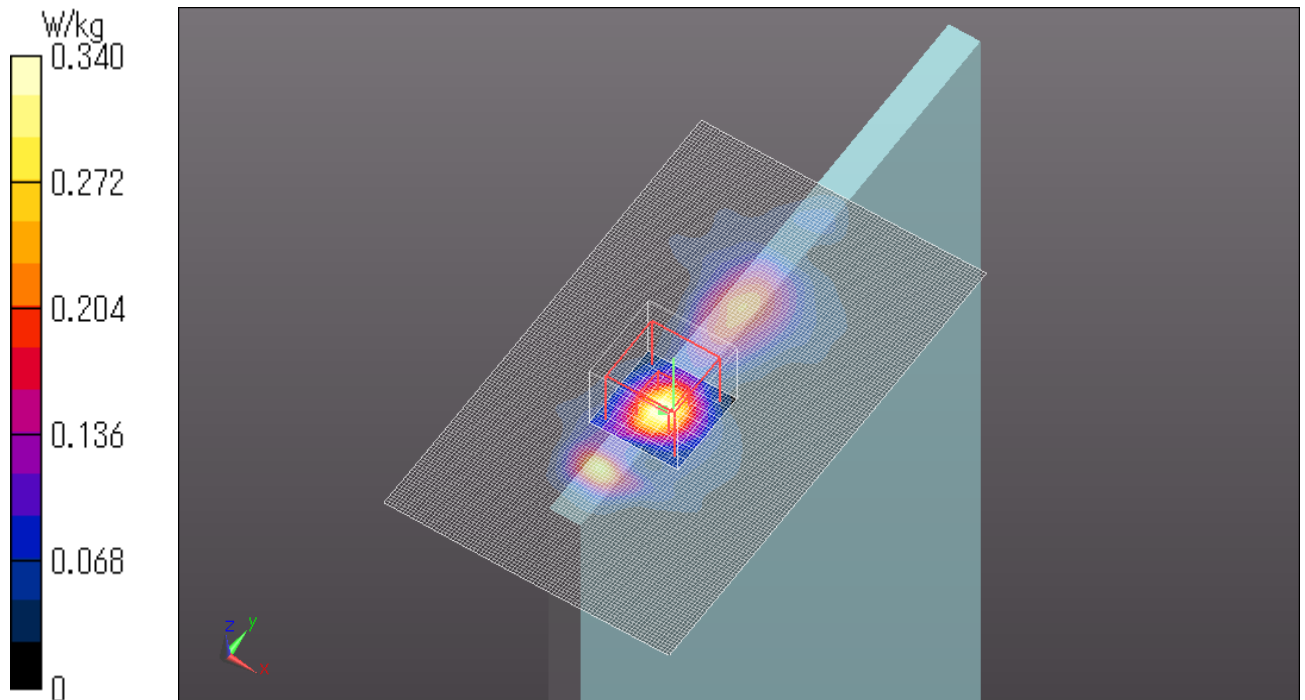

WLAN 11n20 HT8 5300MHz Right side 0mm Ant. Main+Aux

Communication System: UID 0, WLAN 11a/b/g/n ; Communication System Band: 11a/n (W52 53); Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 5300$ MHz; $\sigma = 5.601$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN3825; ConvF(4.34, 4.34, 4.34); Calibrated: 2012/12/10;

Modulation Compensation:

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.5$

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Area Scan (91x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.600 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 11.536 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.585 W/kg

Date: 2013/06/05

Ambient Temp. : 24.5 degree.C. Liquid Temp. ; 24.0 degree.C.

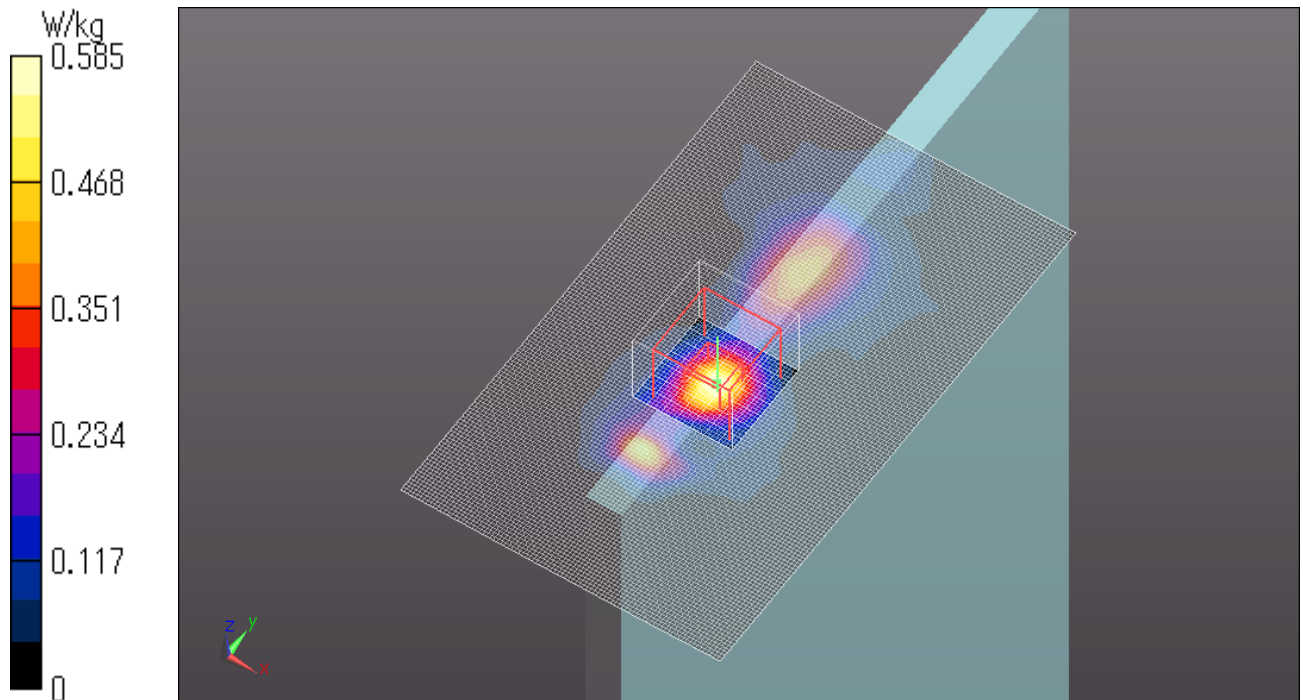

iii) **WLAN 5500MHz-5700MHz**

[5.6GHz band]

WLAN 11a 6Mbps 5560MHz Right side 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n; Frequency: 5560 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.649$ mho/m; $\epsilon_r = 46.432$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; \${Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (3);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.519 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.015 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

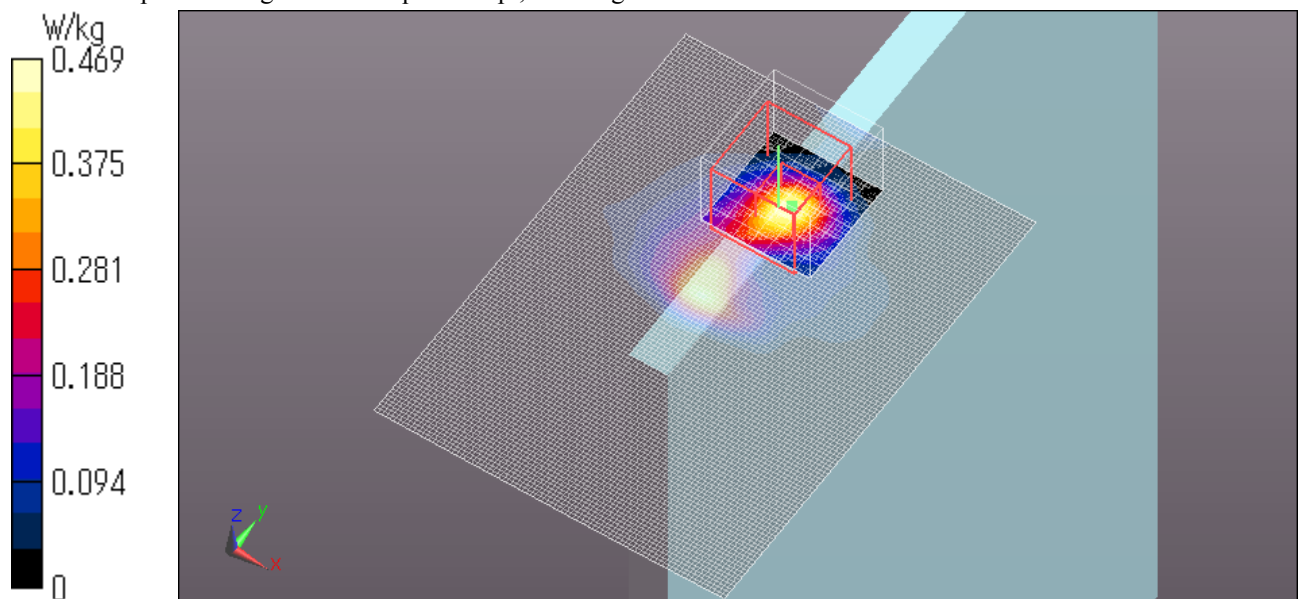

WLAN 11a 6Mbps 5560MHz Bottom side 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n; Frequency: 5560 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5560$ MHz; $\sigma = 5.649$ mho/m; $\epsilon_r = 46.432$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.107 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.987 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

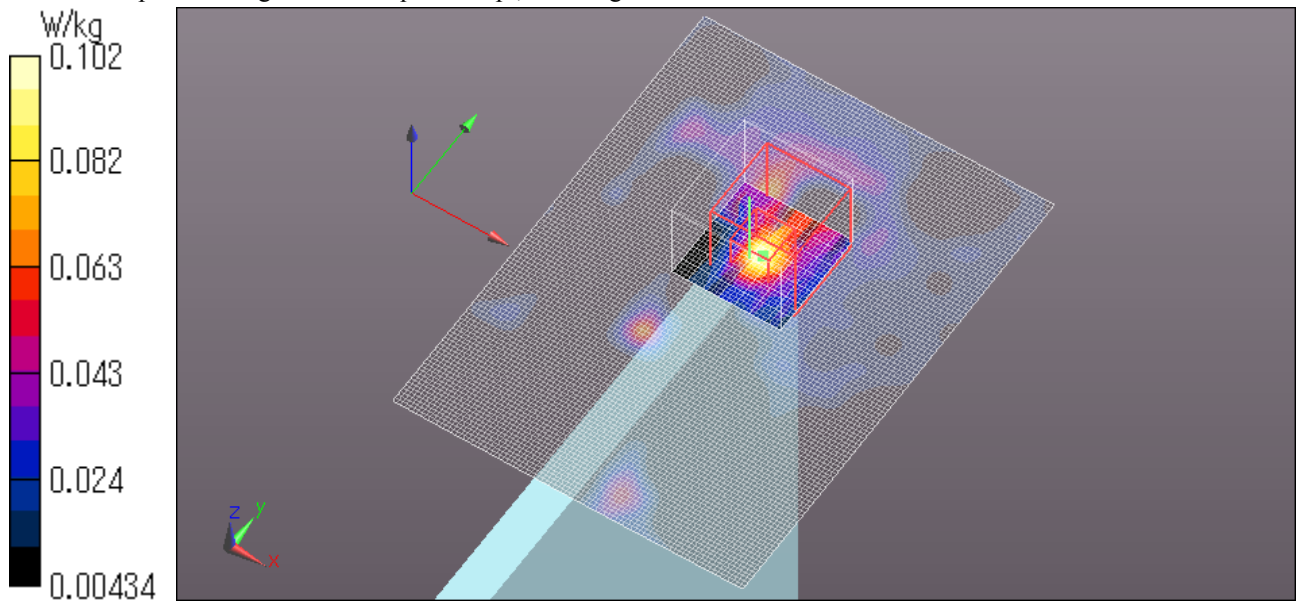

WLAN 11a 6Mbps 5560MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n; Frequency: 5560 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5560$ MHz; $\sigma = 5.649$ mho/m; $\epsilon_r = 46.432$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.685 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.784 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.655 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

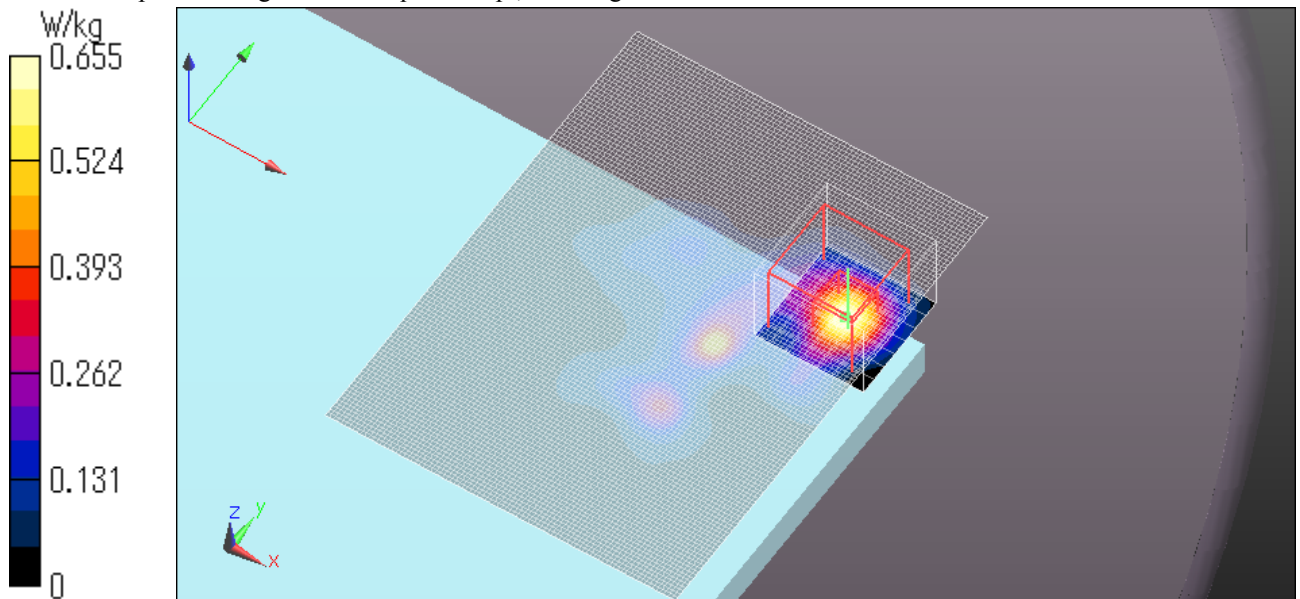

WLAN 11n20 HT4 5620MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n; Frequency: 5620 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5620$ MHz; $\sigma = 5.886$ mho/m; $\epsilon_r = 46.977$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.954 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.879 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.856 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

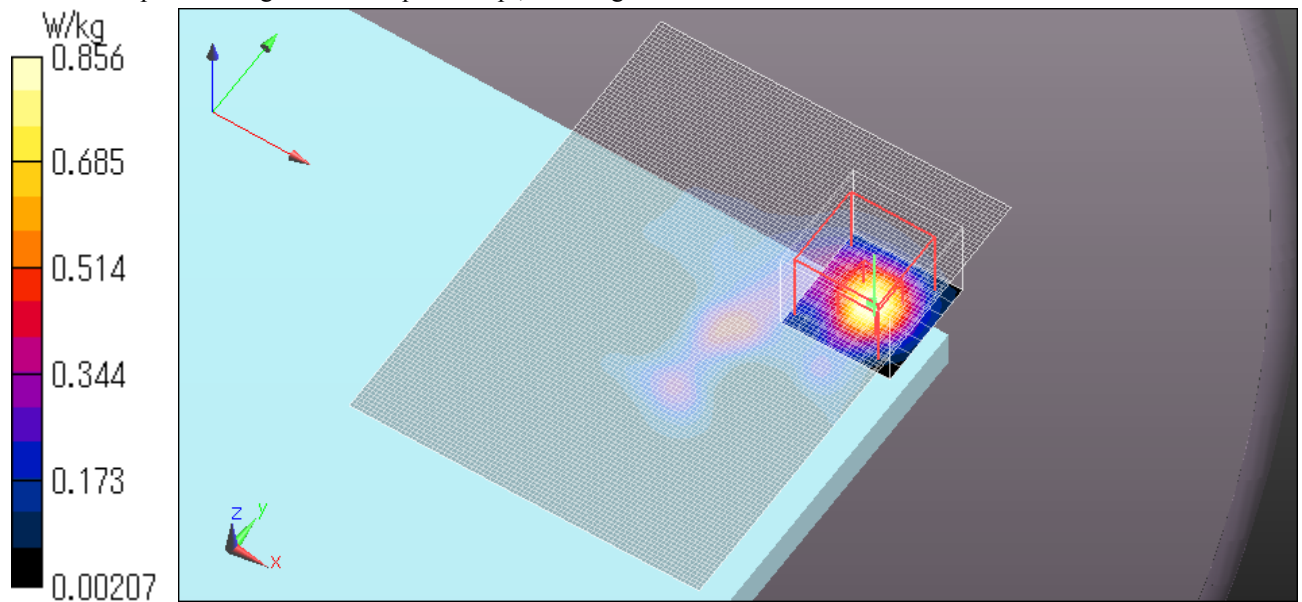

WLAN 11n40 HT4 5550MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n; Frequency: 5550 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5550$ MHz; $\sigma = 5.64$ mho/m; $\epsilon_r = 46.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.89, 3.89, 3.89); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (3);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.710 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.885 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.670 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.885 V/m; Power Drift = 0.08dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

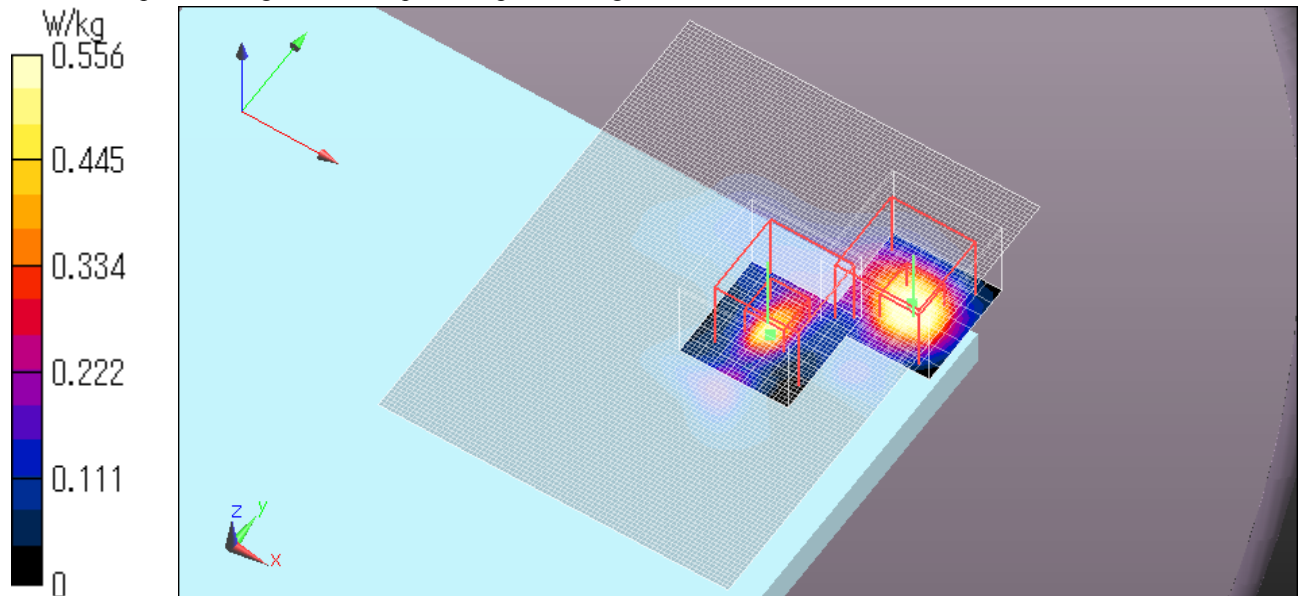

WLAN 11ac20 VHT0 5720MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11ac; Frequency: 5720 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5720$ MHz; $\sigma = 6.134$ mho/m; $\epsilon_r = 48.046$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.2, 4.2, 4.2); Calibrated: 2012/12/10; \${Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);


Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.644 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 2.67 W/kg
SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.644 V/m; Power Drift = 0.12dB
Peak SAR (extrapolated) = 1.56 W/kg
SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.120 W/kg
Maximum value of SAR (measured) = 0.828 W/kg
Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

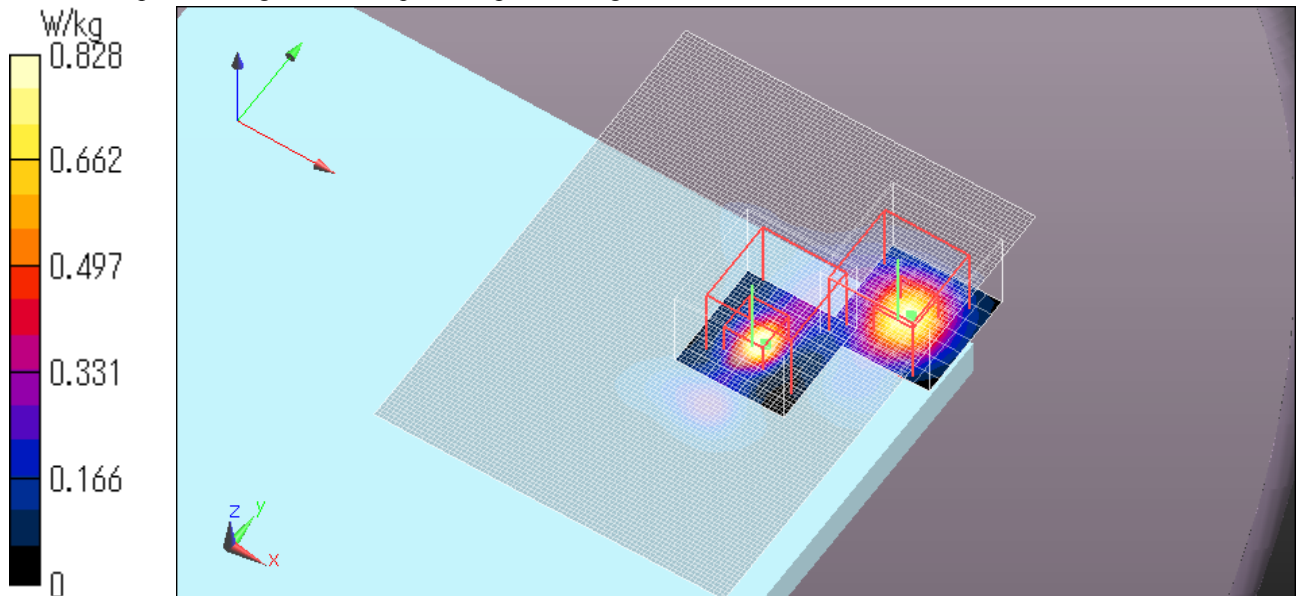

WLAN 11ac40 VHT0 5710MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11ac; Frequency: 5710 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5710$ MHz; $\sigma = 6.123$ mho/m; $\epsilon_r = 48.065$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(4.2, 4.2, 4.2); Calibrated: 2012/12/10; \${Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.771 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.853 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

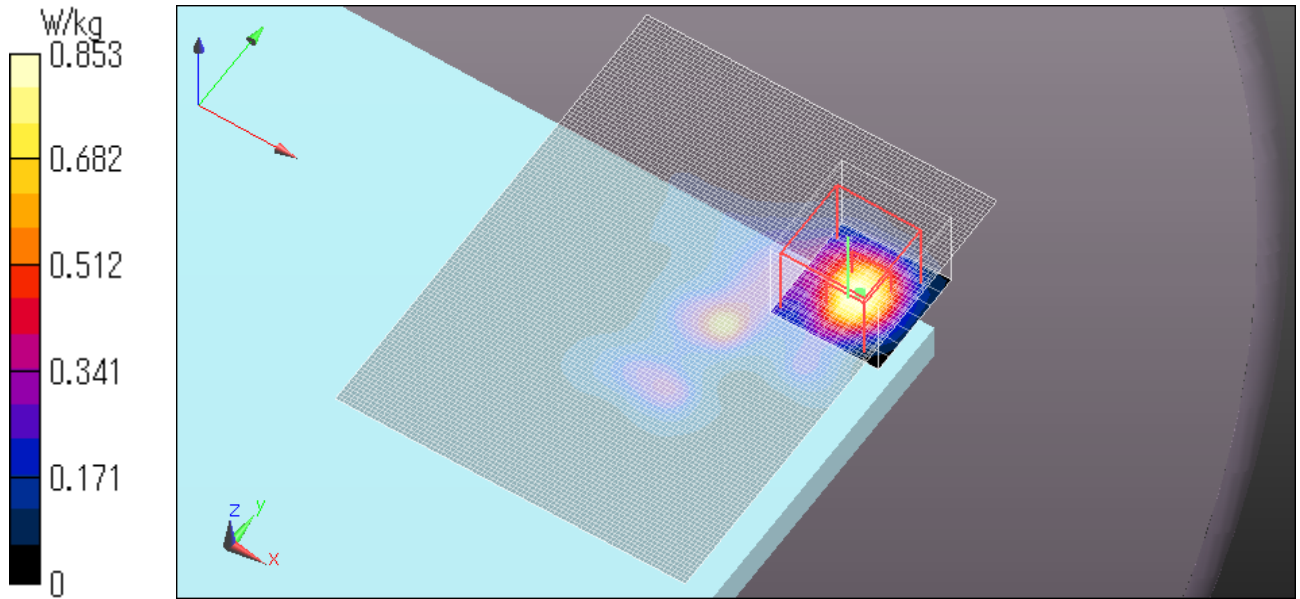

WLAN 11ac80 VHT6 5610MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11ac; Frequency: 5610 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5610$ MHz; $\sigma = 5.671$ mho/m; $\epsilon_r = 46.336$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.475 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.445 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

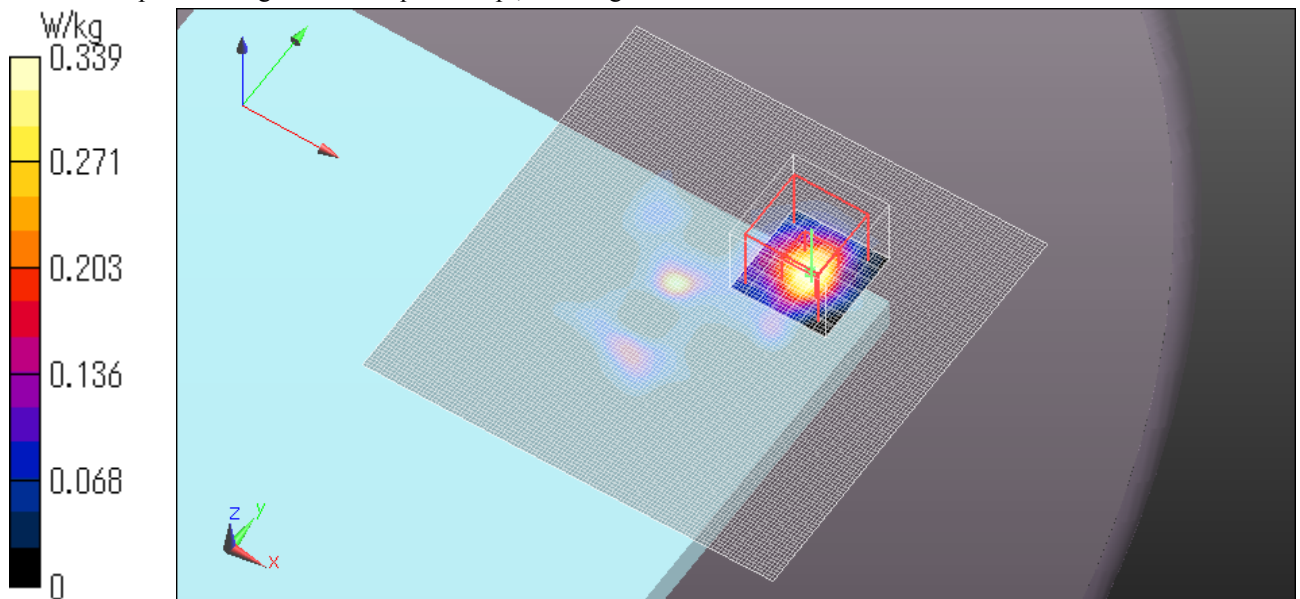

WLAN 11ac80 VHT6 5690MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11ac80 (W56); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.789$ mho/m; $\epsilon_r = 46.297$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.620 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.564 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.461 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.564 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.634 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

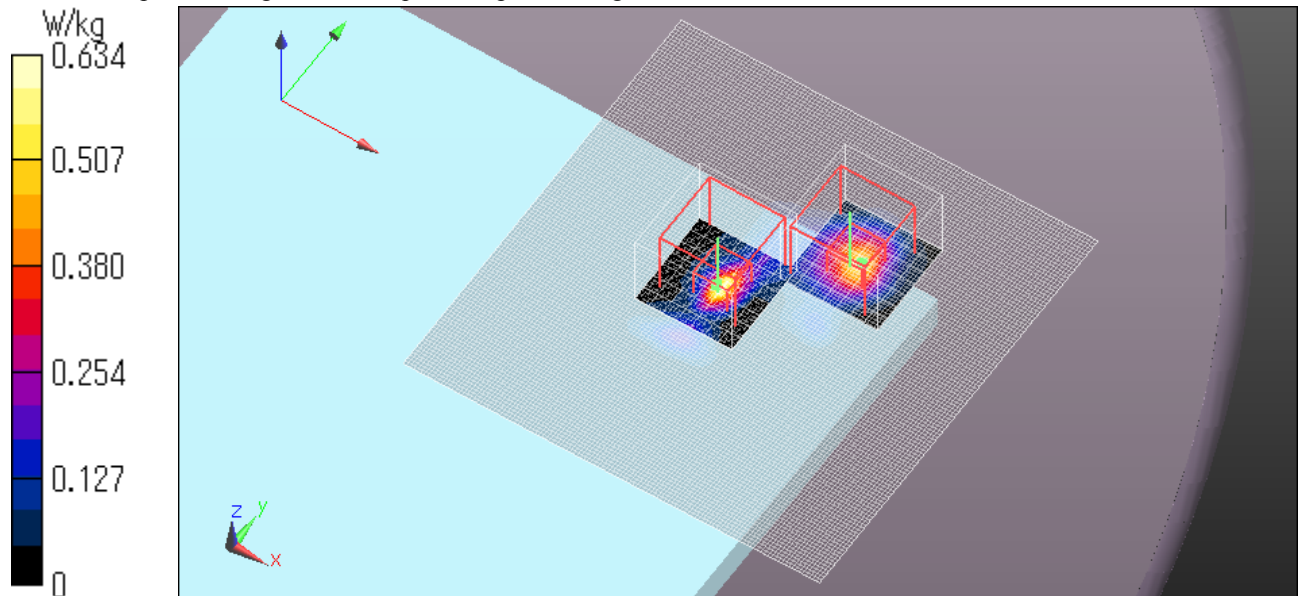

WLAN 11n20 HT4 5540MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n (W56); Frequency: 5540 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5540$ MHz; $\sigma = 5.663$ mho/m; $\epsilon_r = 46.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.89, 3.89, 3.89); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (3);

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.517 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.385 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.420 W/kg

Date: 2013/06/11

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

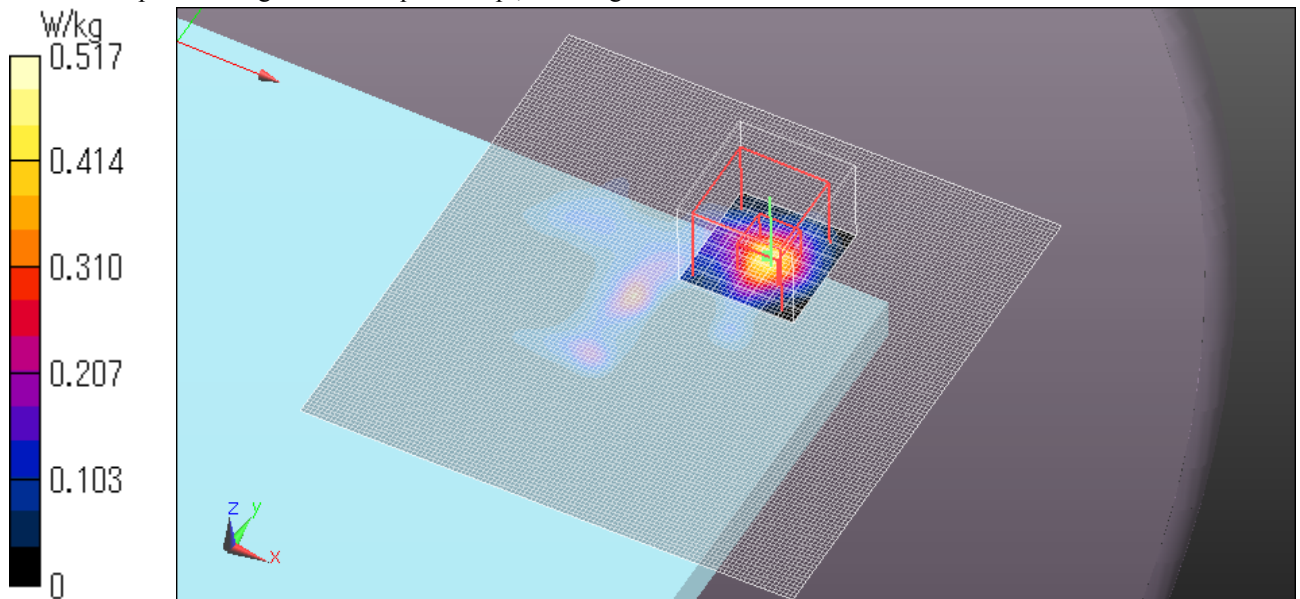

WLAN 11n20 HT4 5600MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n (W56); Frequency: 5600 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.703$ mho/m; $\epsilon_r = 46.462$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (3);

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.833 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 12.114 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.30 W/kg
SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.096 W/kg


Maximum value of SAR (measured) = 0.719 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 12.114 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 2.21 W/kg
SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.901 W/kg

Date: 2013/06/11

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

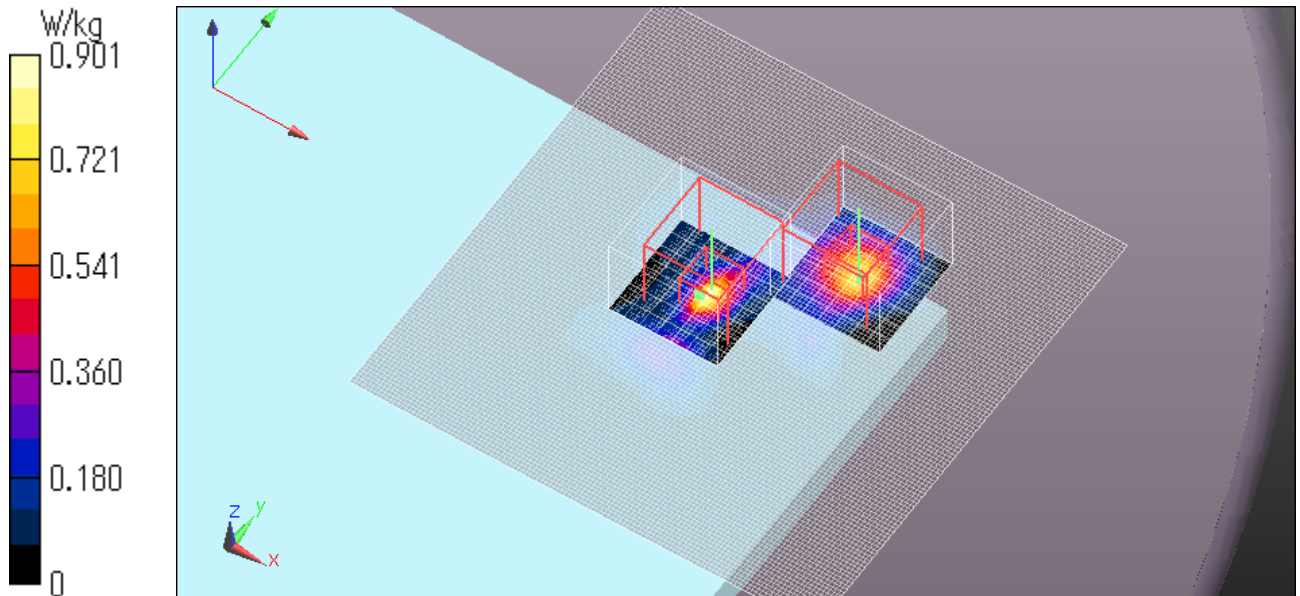

WLAN 11n20 HT4 5660MHz Rear 0mm Ant. Main

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n (W56); Frequency: 5660 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5660$ MHz; $\sigma = 5.814$ mho/m; $\epsilon_r = 46.334$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; {Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Raer/Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 16.068 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

Zoom Scan 2 (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 16.068 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.843 W/kg

Date: 2013/06/11

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

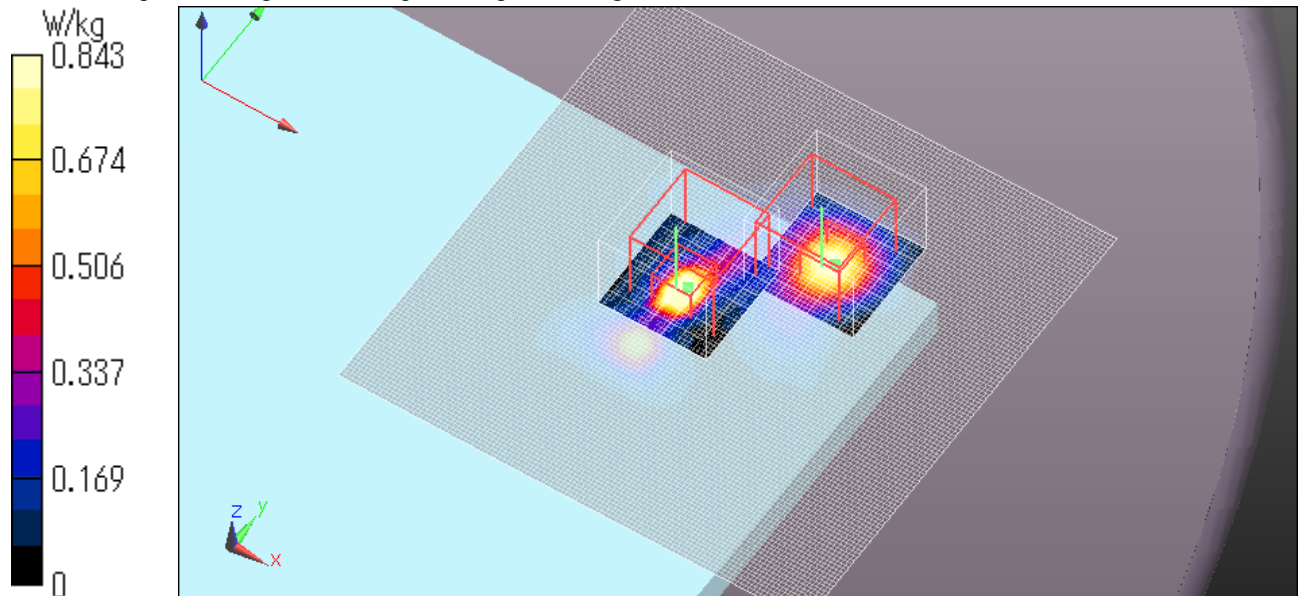

WLAN 11a 6Mbps 5660MHz Right side 0mm Ant. Aux

Communication System: WLAN 11a/b/g/n ; Communication System Band: 11a/n; Frequency: 5660 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5660$ MHz; $\sigma = 5.771$ mho/m; $\epsilon_r = 46.26$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration

Probe: EX3DV4 - SN3825; ConvF(3.85, 3.85, 3.85); Calibrated: 2012/12/10; \${Probe: Calibration Date}

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn509; Calibrated: 2012/07/13

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASYS2, Version 52.8 (3);

Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.764 W/kg

Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.035 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.744 W/kg

Date: 2013/06/10

Ambient Temp. : 24.0 degree.C. Liquid Temp.; 23.5 degree.C.

