

5 GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 5.187$ S/m; $\epsilon_r = 48.44$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Main Ant/Ch44/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.221 W/kg

Tablet Mode/Rear/802.11a/Main Ant/Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 0.970 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.044 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.952 W/kg

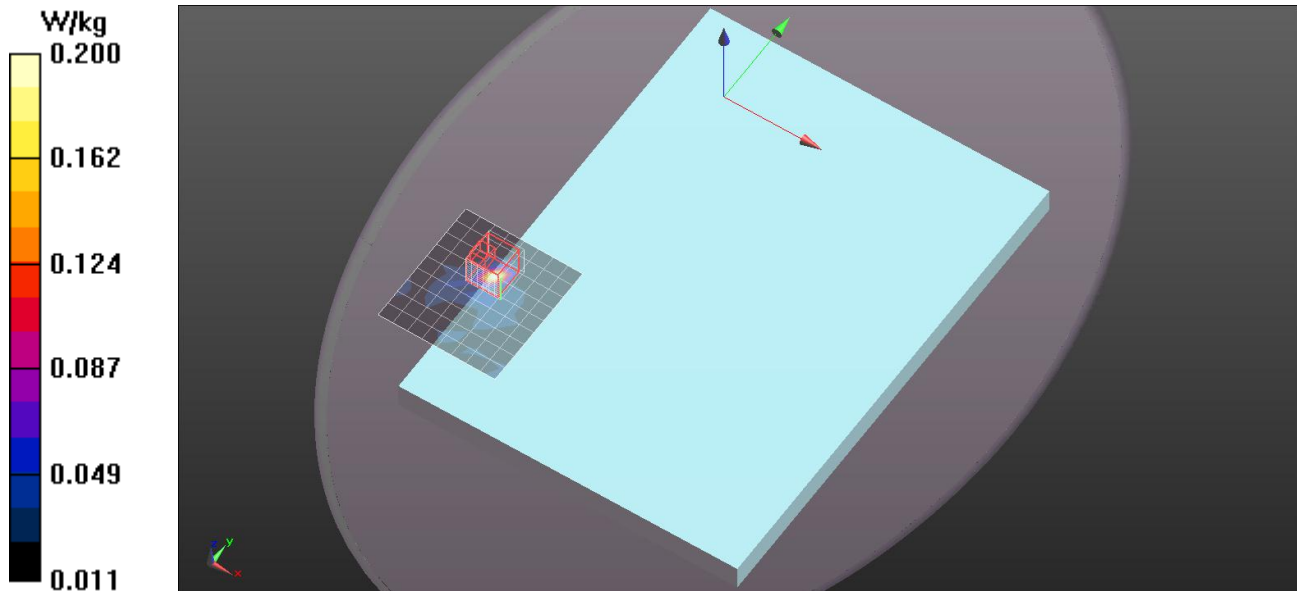

5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.6$ S/m; $\epsilon_r = 47.964$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Main Ant/Ch112/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0645 W/kg


Tablet Mode/Rear/802.11a/Main Ant/Ch112/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.239 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0817 W/kg

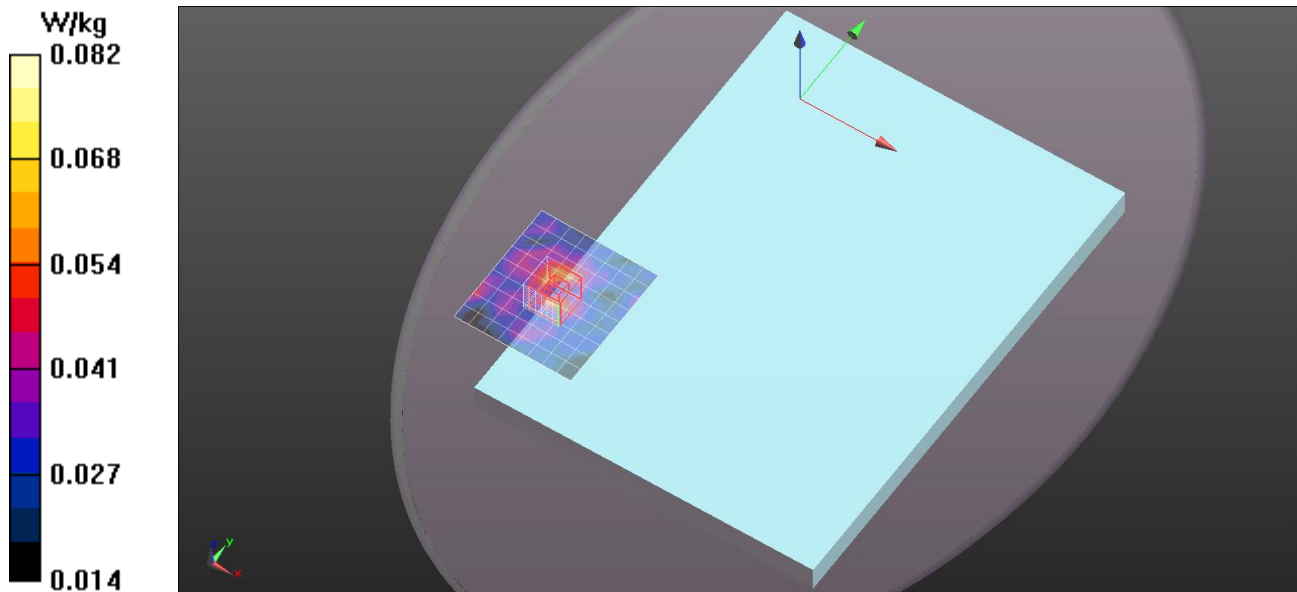

5 GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5660$ MHz; $\sigma = 5.71$ S/m; $\epsilon_r = 47.83$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Main Ant/Ch132/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0918 W/kg

Tablet Mode/Rear/802.11a/Main Ant/Ch132/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 1.539 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.058 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.26 W/kg

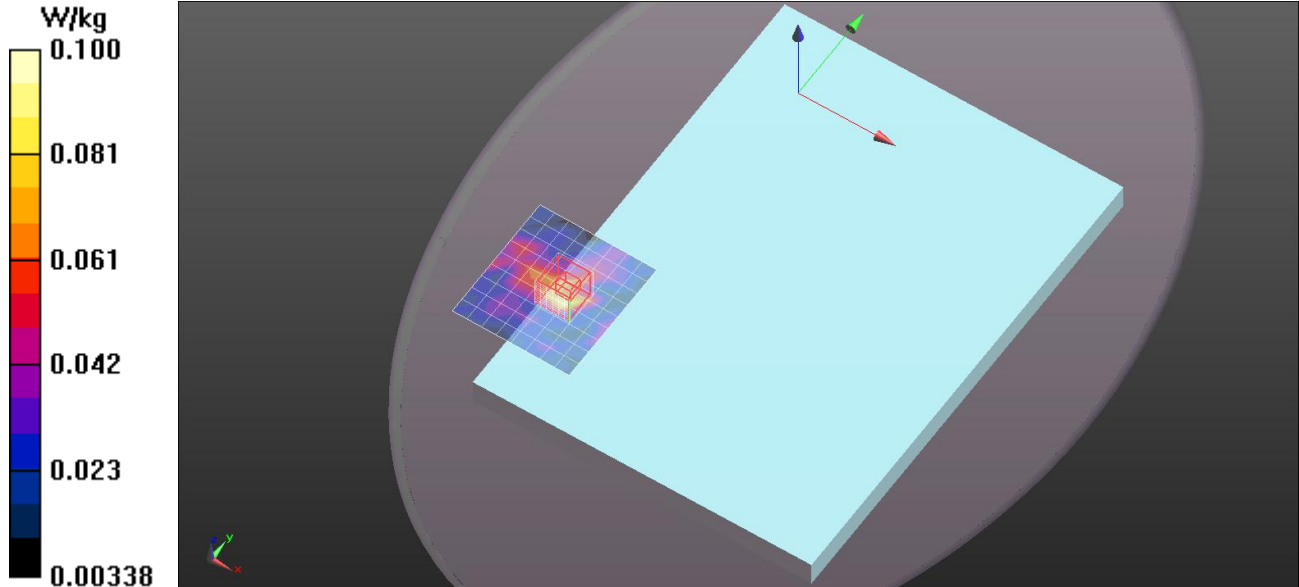

5 GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5785.3$ MHz; $\sigma = 5.876$ S/m; $\epsilon_r = 47.678$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Main Ant/Ch157/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0934 W/kg


Tablet Mode/Rear/802.11a/Main Ant/Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

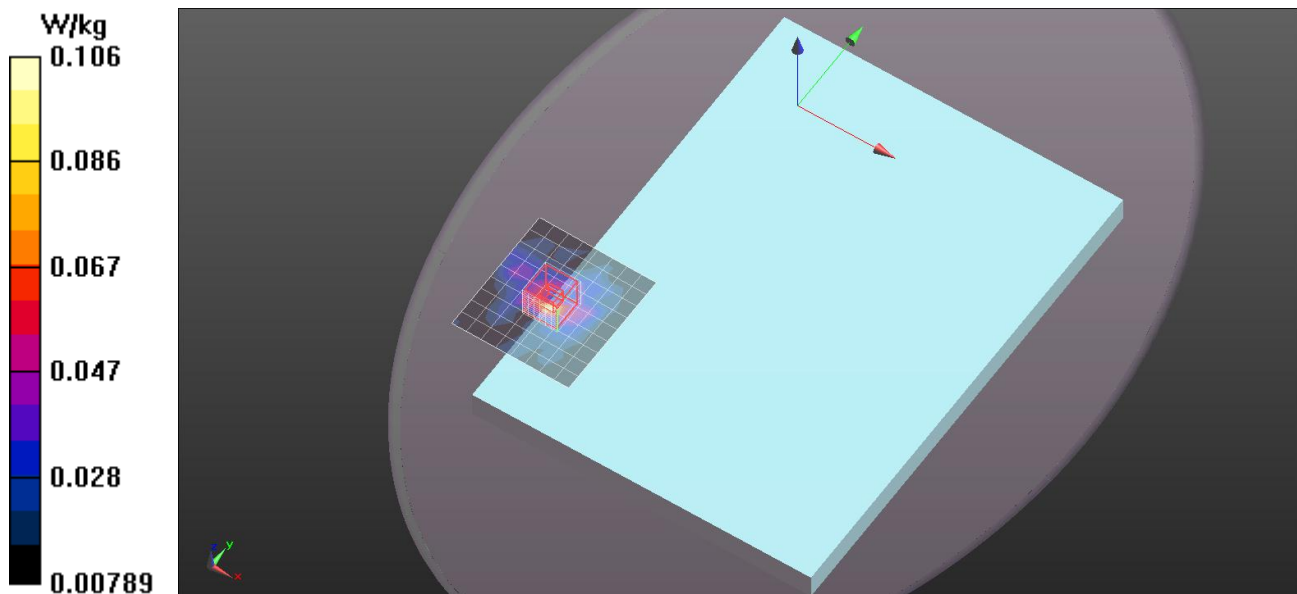

5 GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 5.456$ S/m; $\epsilon_r = 46.839$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch44/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 10.768 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.454 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.48 W/kg

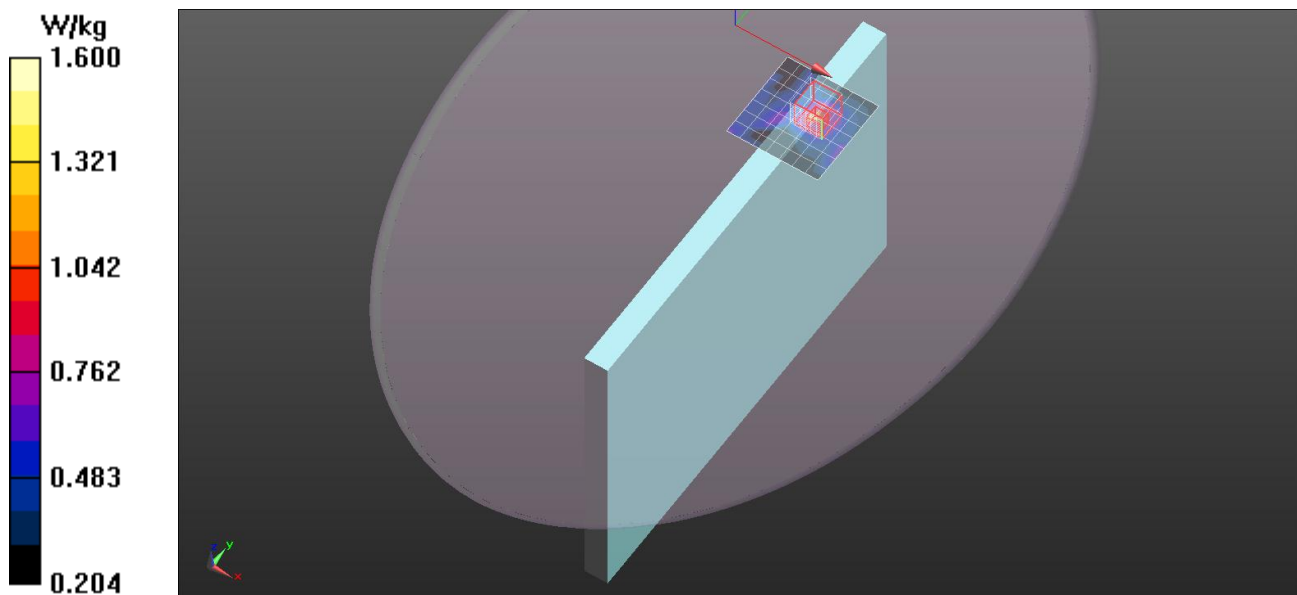

5 GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5300.2$ MHz; $\sigma = 5.55$ S/m; $\epsilon_r = 46.712$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch60/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.29 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.982 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.422 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

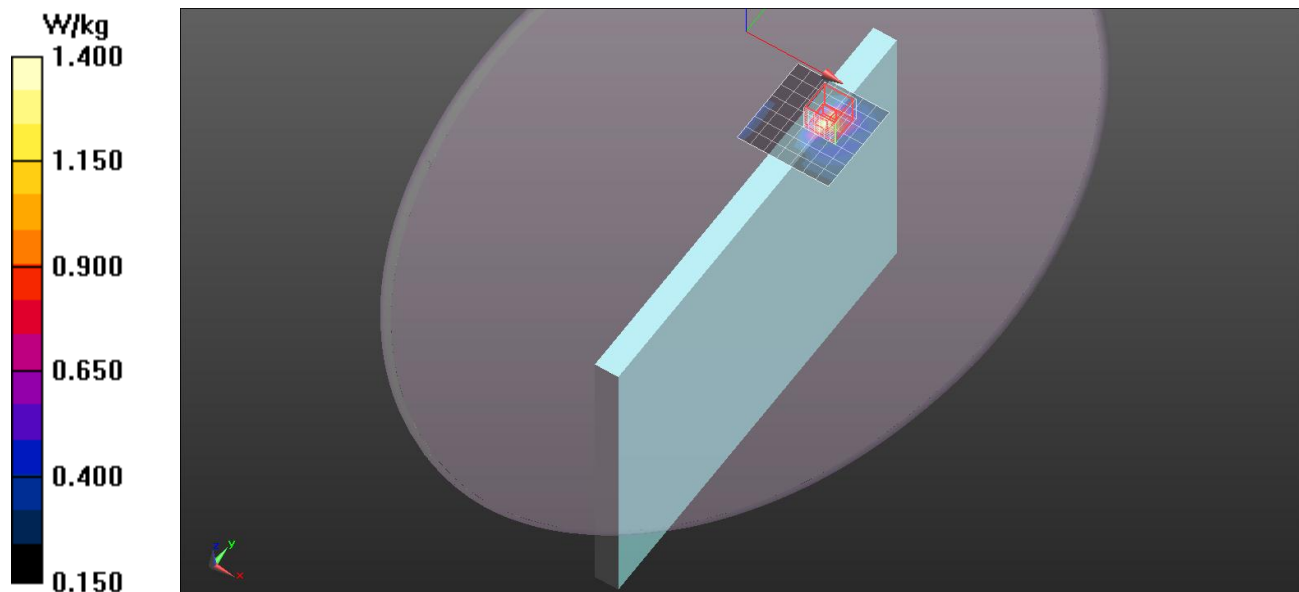

5 GHz Band

Frequency: 5500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5500$ MHz; $\sigma = 5.808$ S/m; $\epsilon_r = 46.378$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch100/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch100/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 4.331 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.349 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.22 W/kg

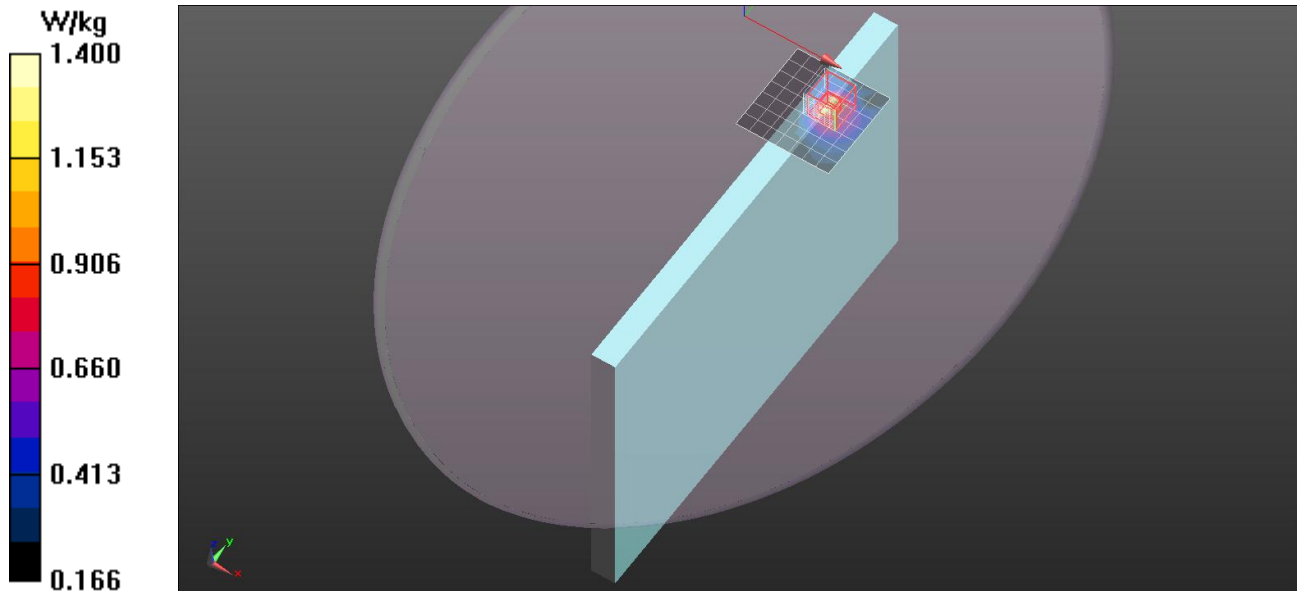

5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 46.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch112/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.47 W/kg


Tablet Mode/Edge3/802.11a/Main Ant/Ch112/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.215 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 5.37 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.512 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

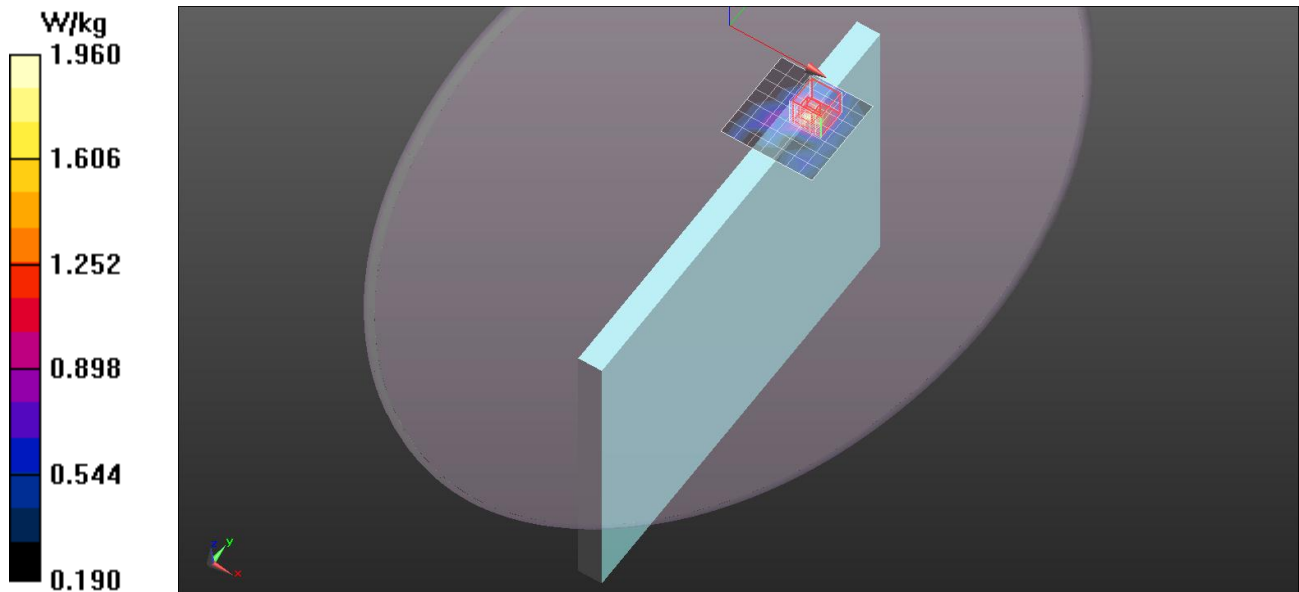


5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1

Tablet Mode/Edge3/802.11a/Main Ant/Ch112/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.38 W/kg

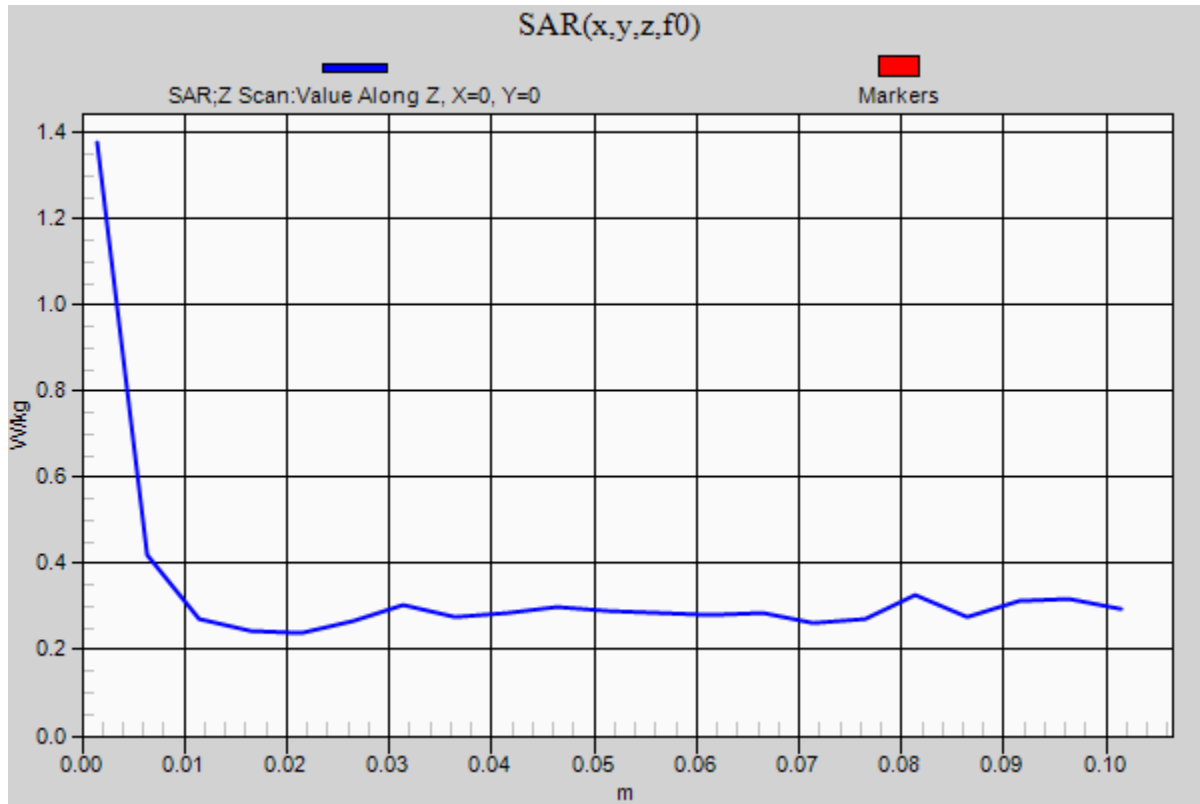

5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 46.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch112_Repeat/Area Scan (8x8x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.45 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch112_Repeat/Zoom Scan (7x7x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.190 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.477 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

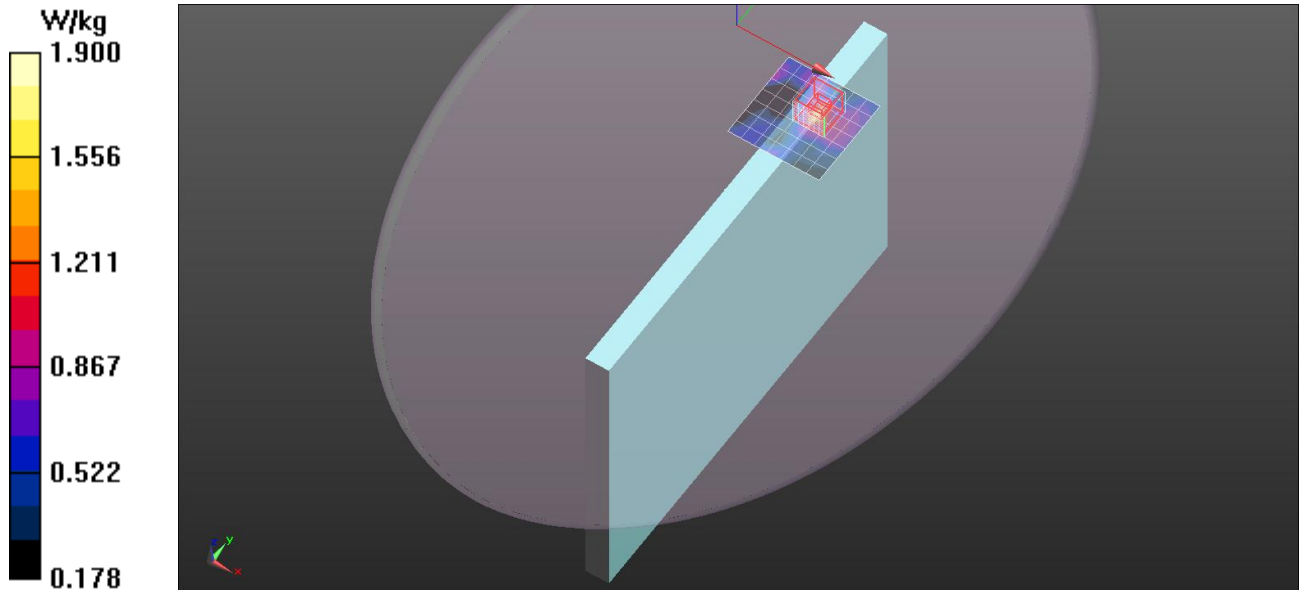

5 GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
 Medium parameters used (interpolated): $f = 5660$ MHz; $\sigma = 6.008$ S/m; $\epsilon_r = 46.113$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch132/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.994 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch132/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 5.277 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.387 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 W/kg

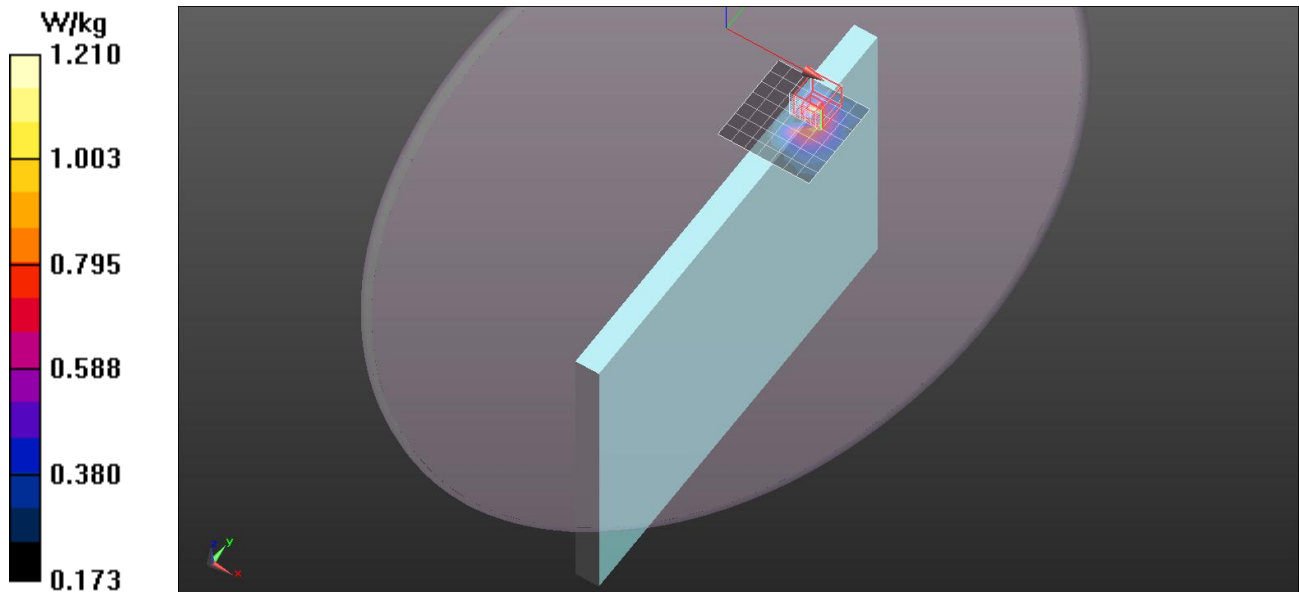

5 GHz Band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 6.033$ S/m; $\epsilon_r = 46.075$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch136/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.936 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch136/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 5.255 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.311 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

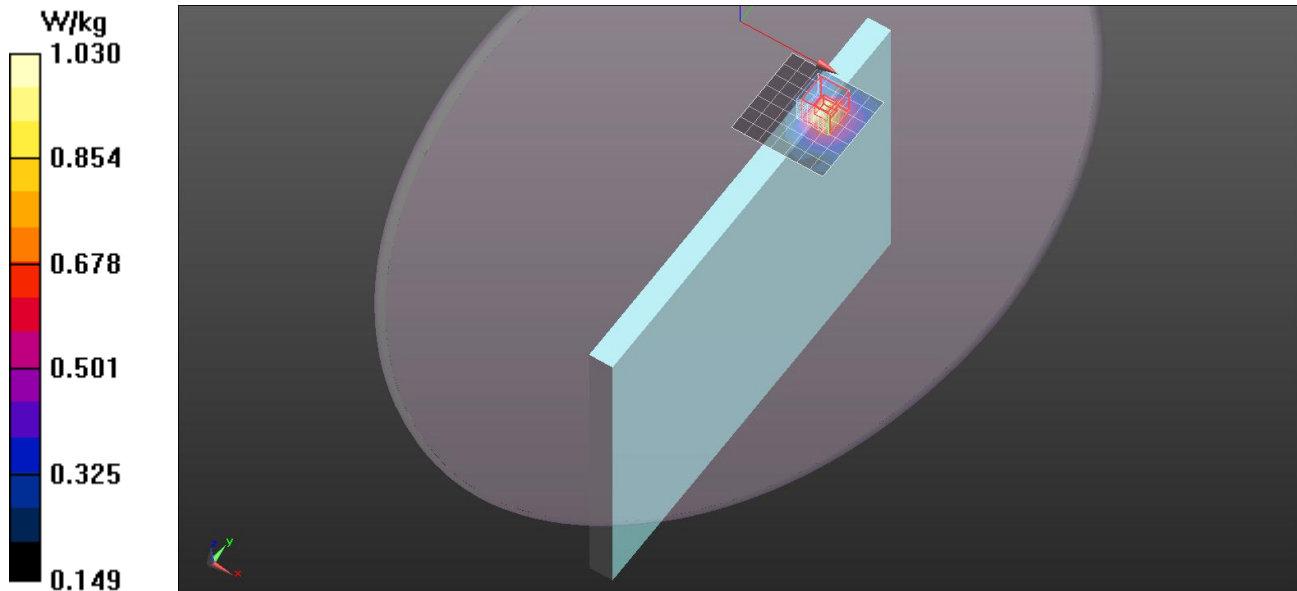

5 GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5785.3$ MHz; $\sigma = 6.166$ S/m; $\epsilon_r = 45.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch157/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.34 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.304 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

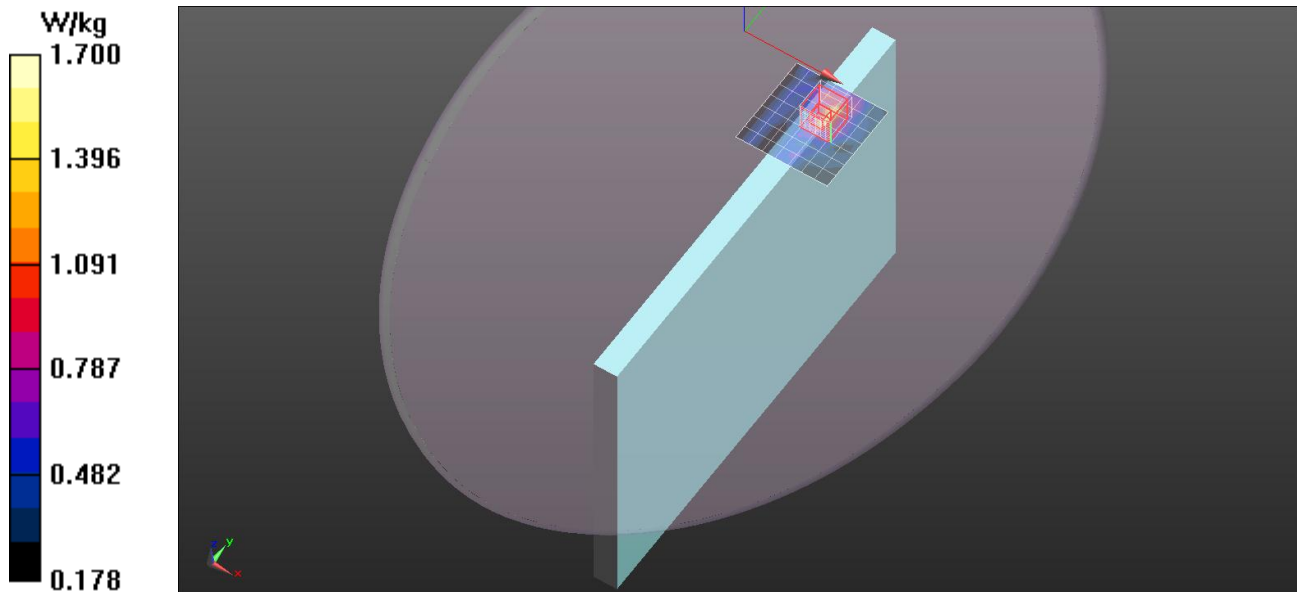

5 GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 5.187$ S/m; $\epsilon_r = 48.44$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Aux Ant/Ch44/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.301 W/kg

Tablet Mode/Rear/802.11a/Aux Ant/Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.026 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.541 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.316 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.372 W/kg

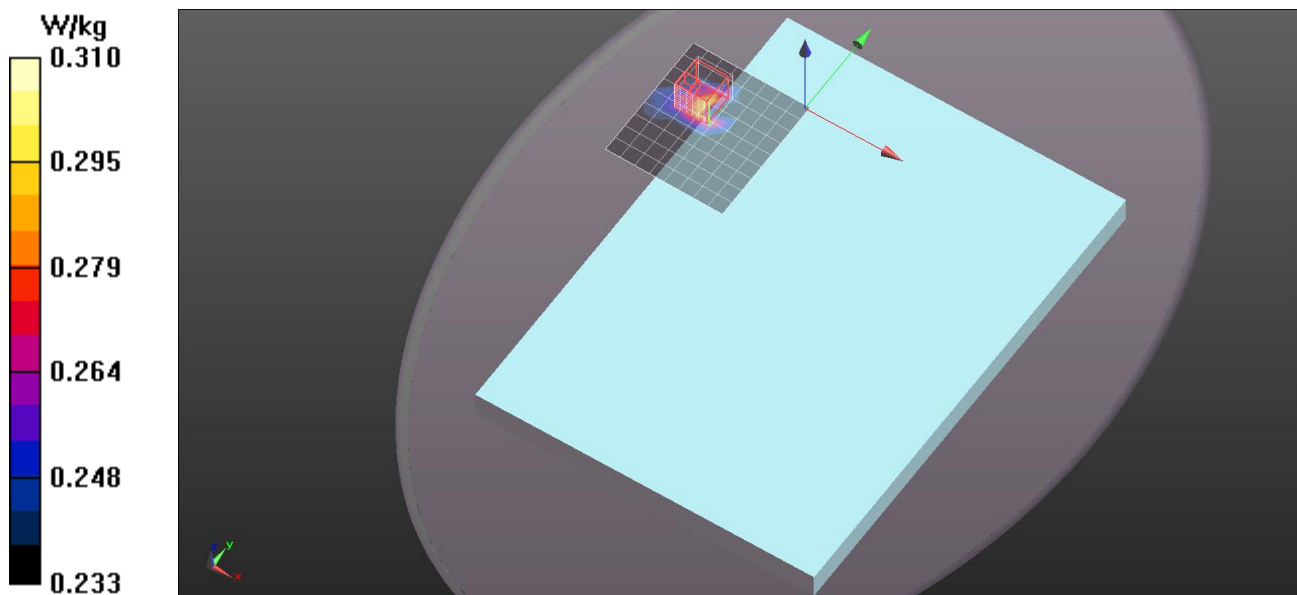

5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.6$ S/m; $\epsilon_r = 47.964$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Aux Ant/Ch112/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.111 W/kg



Tablet Mode/Rear/802.11a/Aux Ant/Ch112/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.723 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

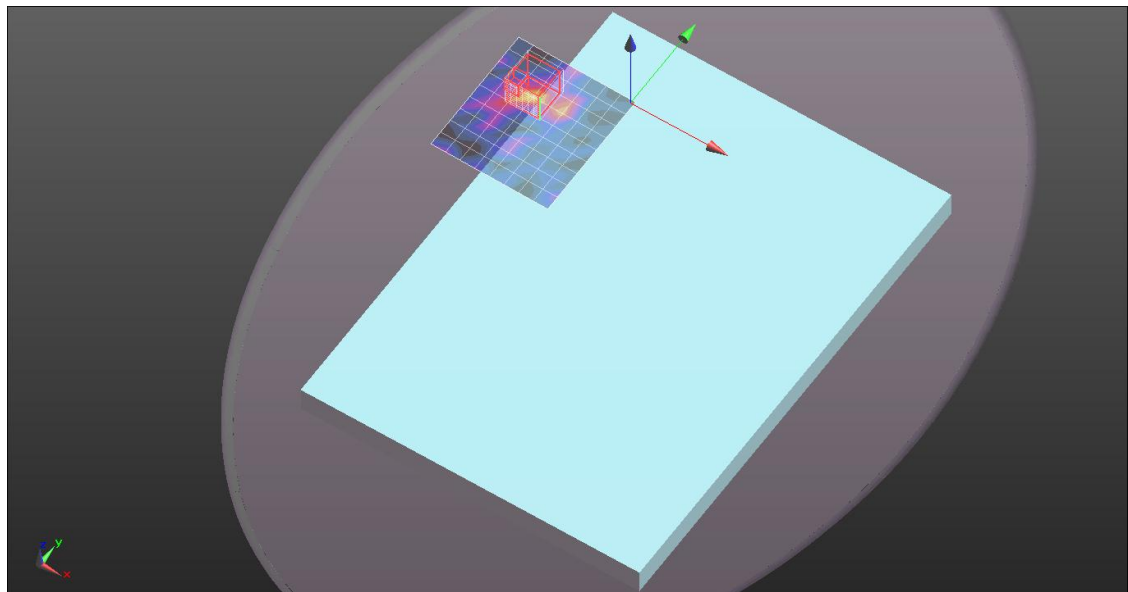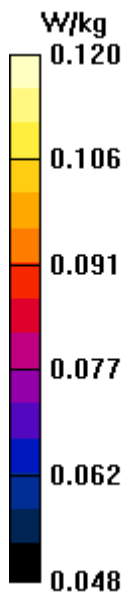

5 GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5660$ MHz; $\sigma = 5.71$ S/m; $\epsilon_r = 47.83$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Aux Ant/Ch132/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0943 W/kg

Tablet Mode/Rear/802.11a/Aux Ant/Ch132/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0.826 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.276 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.61 W/kg

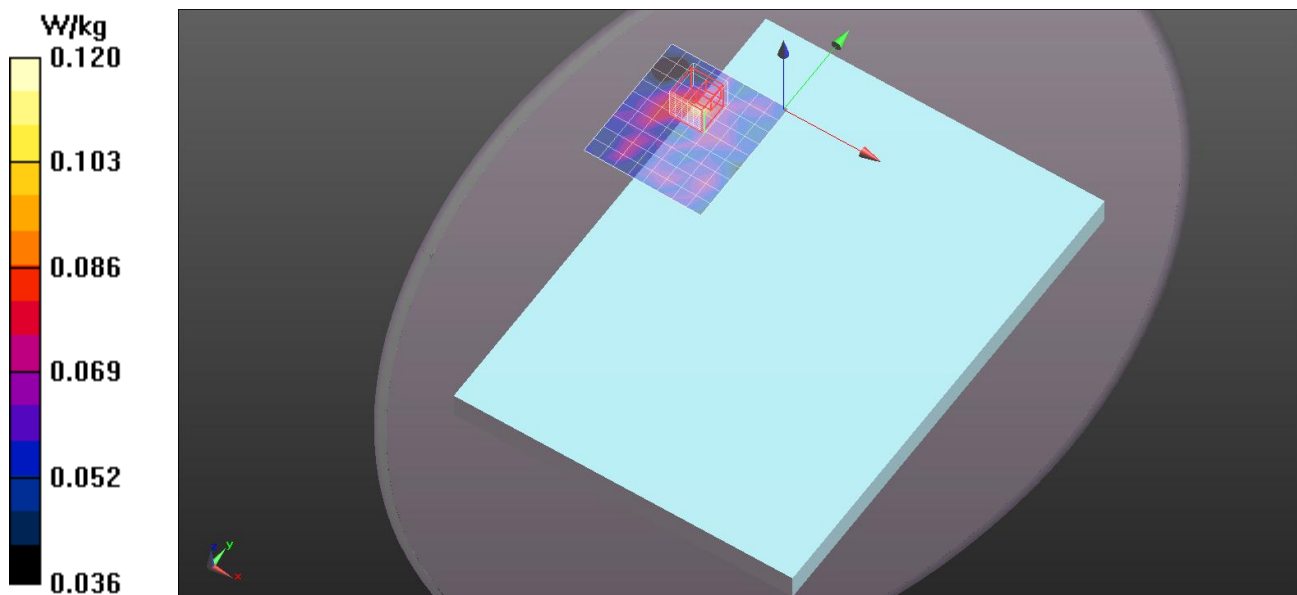

5 GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5785.3$ MHz; $\sigma = 5.876$ S/m; $\epsilon_r = 47.678$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11a/Aux Ant/Ch157/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.888 W/kg


Tablet Mode/Rear/802.11a/Aux Ant/Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.908 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

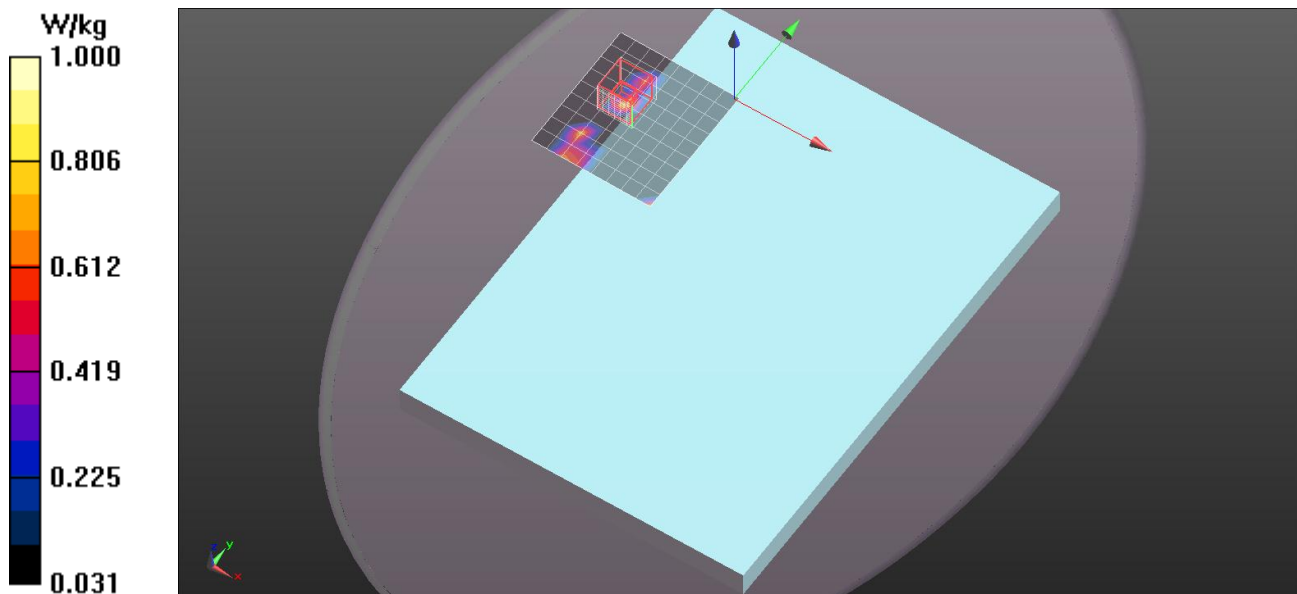

5 GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 5.456$ S/m; $\epsilon_r = 46.839$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Aux Ant/Ch44/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.14 W/kg

Tablet Mode/Edge3/802.11a/Aux Ant/Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.343 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.447 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.43 W/kg

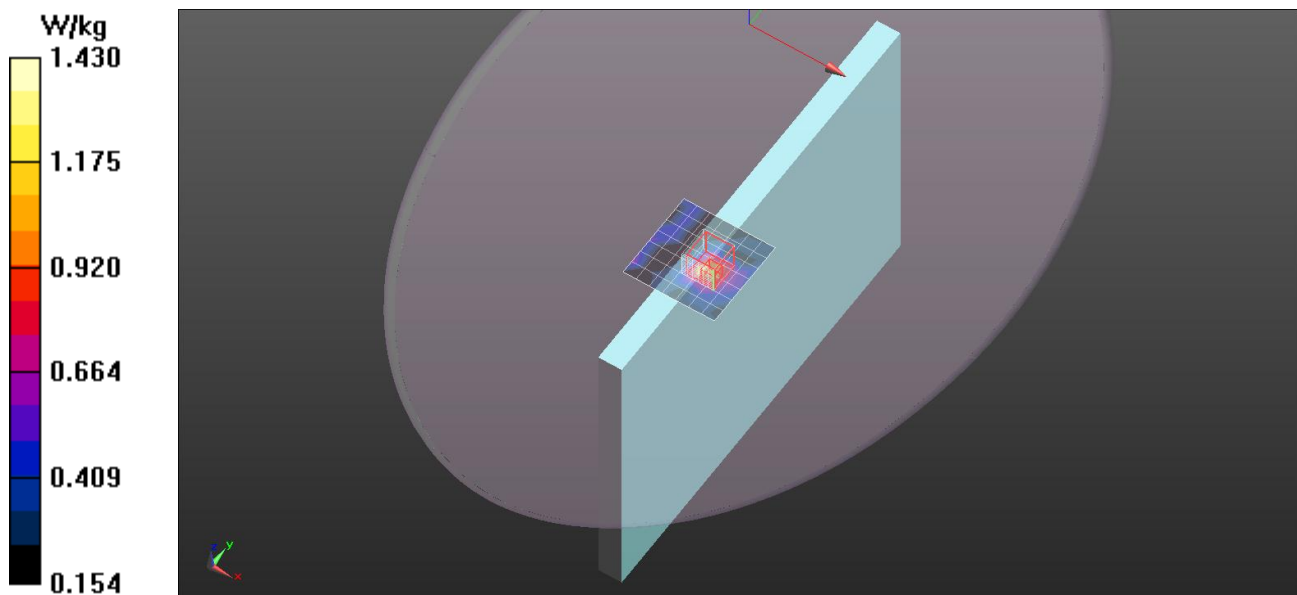

5 GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5300.2$ MHz; $\sigma = 5.55$ S/m; $\epsilon_r = 46.712$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Aux Ant/Ch60/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.33 W/kg


Tablet Mode/Edge3/802.11a/Aux Ant/Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.020 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 1.76 W/kg

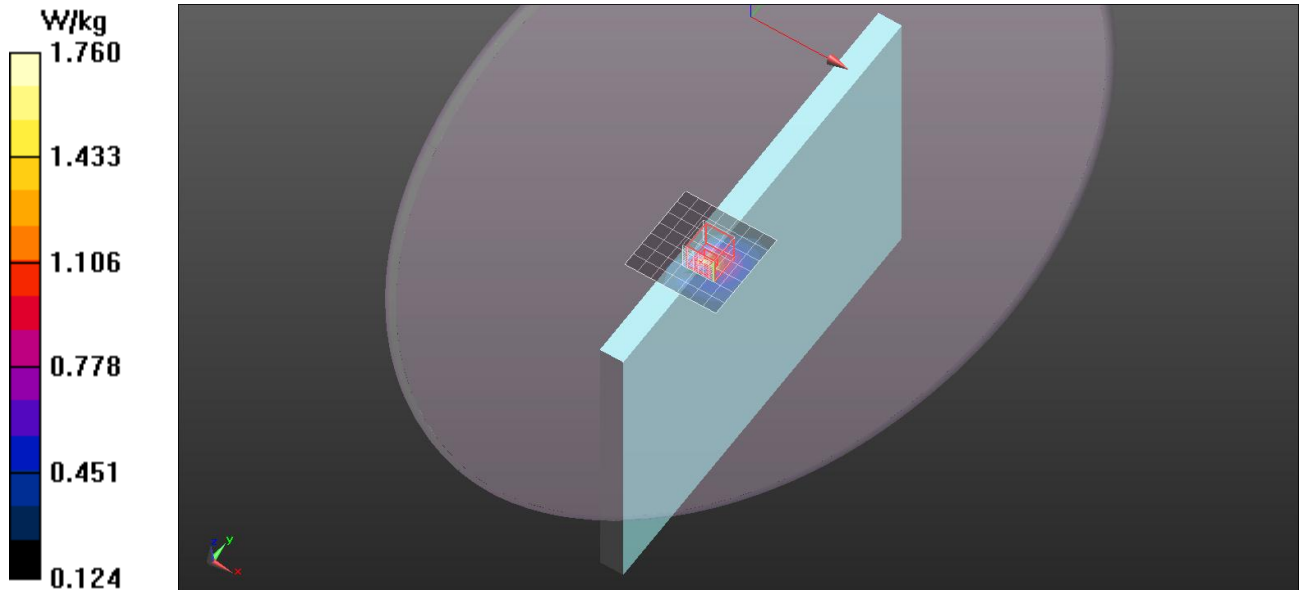

5 GHz Band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 6.033$ S/m; $\epsilon_r = 46.075$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Main Ant/Ch136/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.936 W/kg

Tablet Mode/Edge3/802.11a/Main Ant/Ch136/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 5.255 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.311 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

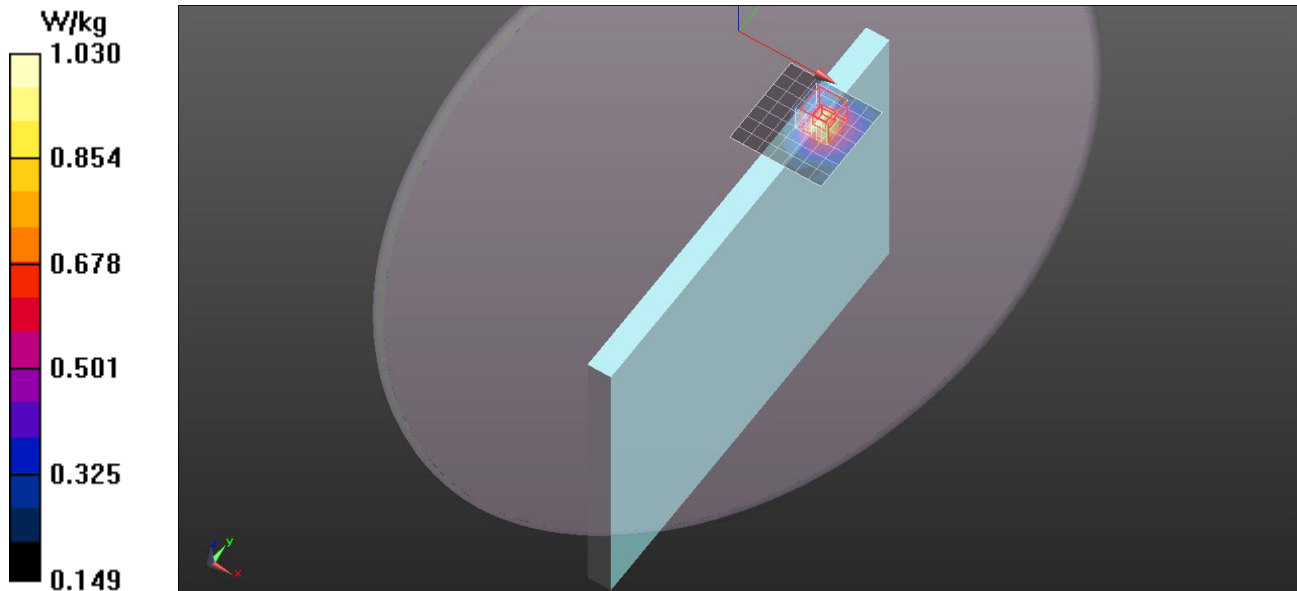

5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 46.265$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Aux Ant/Ch112/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.49 W/kg


Tablet Mode/Edge3/802.11a/Aux Ant/Ch112/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.848 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

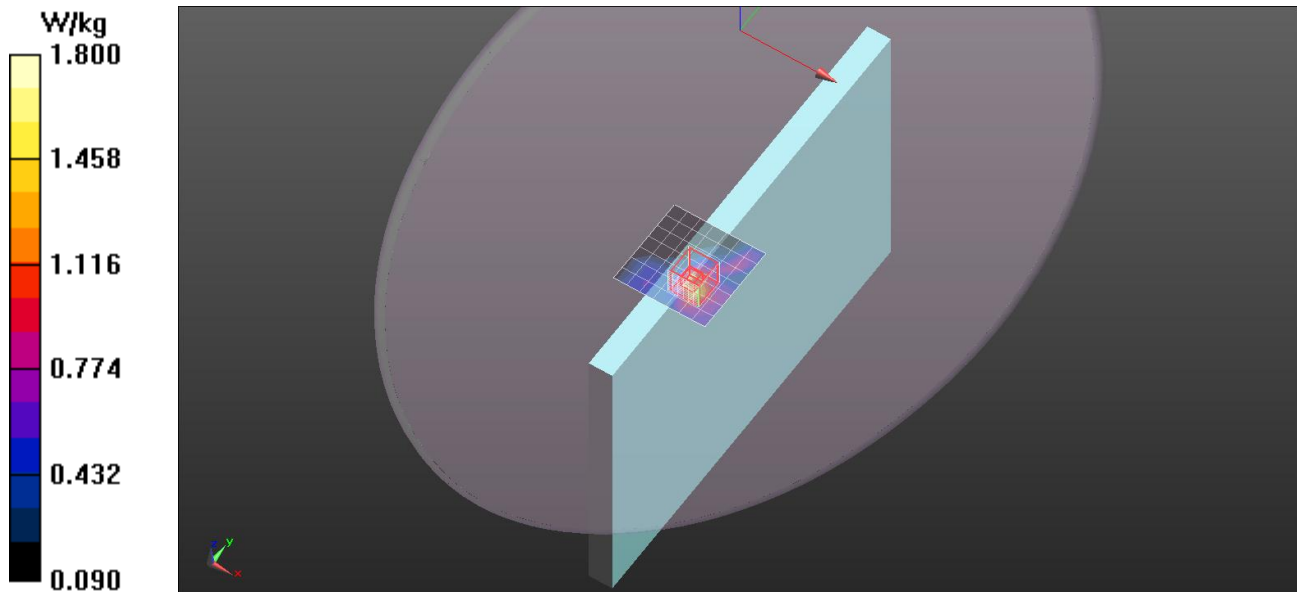

5 GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5660$ MHz; $\sigma = 6.008$ S/m; $\epsilon_r = 46.113$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Aux Ant/Ch132/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.63 W/kg

Tablet Mode/Edge3/802.11a/Aux Ant/Ch132/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 9.936 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.403 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 W/kg

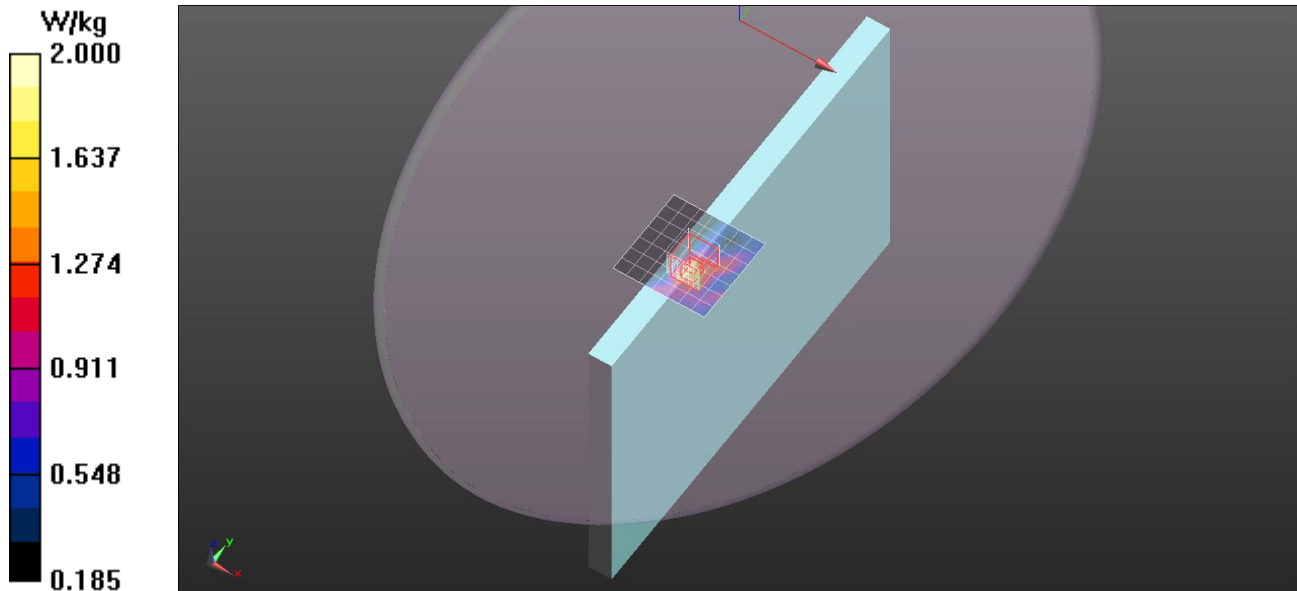

5 GHz Band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 6.033$ S/m; $\epsilon_r = 46.075$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Aux Ant/Ch136/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.10 W/kg

Tablet Mode/Edge3/802.11a/Aux Ant/Ch136/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 5.694 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.382 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 W/kg

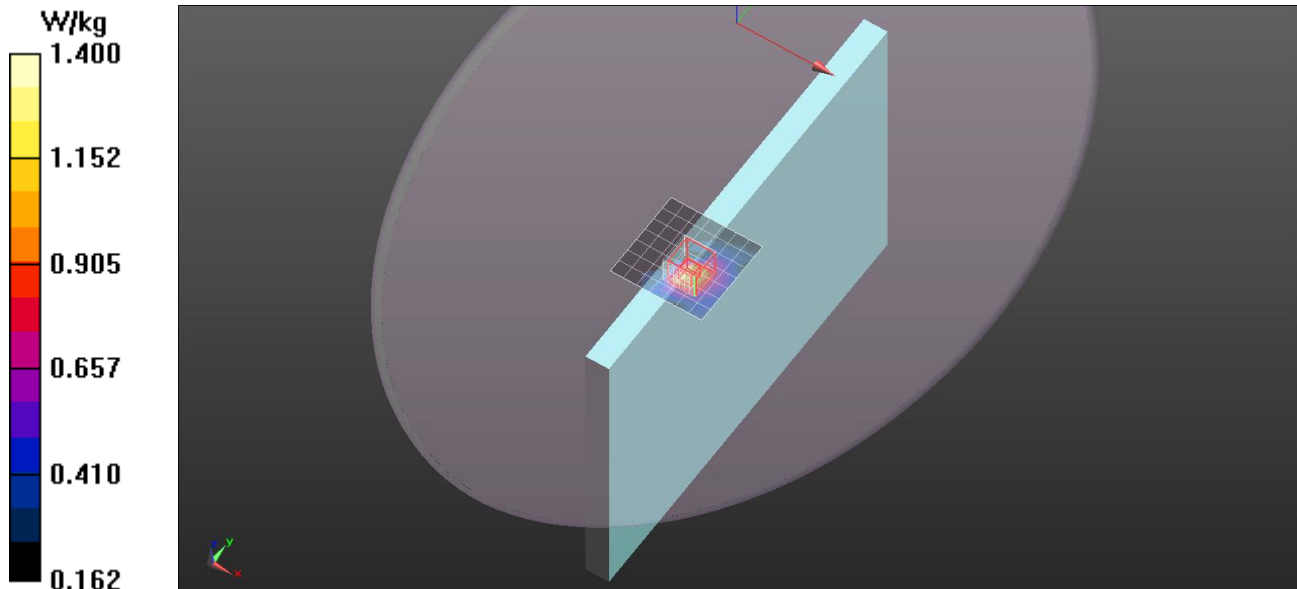

5 GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5785.3$ MHz; $\sigma = 6.166$ S/m; $\epsilon_r = 45.894$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11a/Aux Ant/Ch157/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.56 W/kg


Tablet Mode/Edge3/802.11a/Aux Ant/Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.738 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.467 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

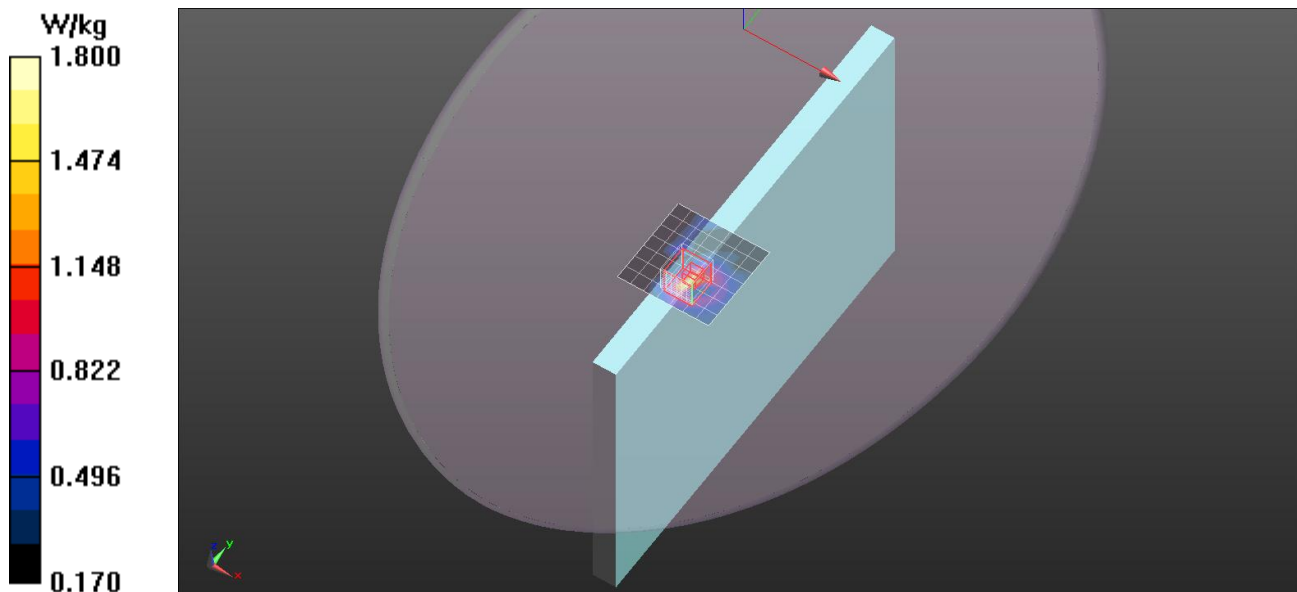

5 GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 5.411$ S/m; $\epsilon_r = 47.098$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Main Ant/Ch44/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.435 W/kg

Stand Mode/Rear/802.11a/Main Ant/Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.027 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.462 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.83 W/kg

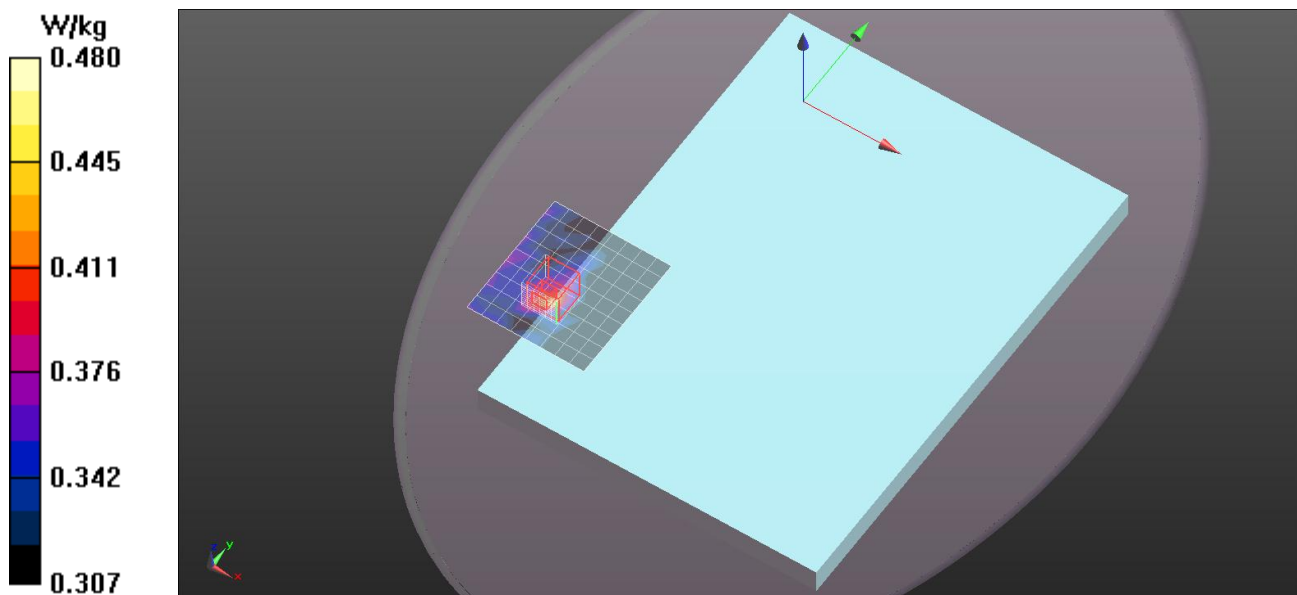

5 GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5300.2$ MHz; $\sigma = 5.506$ S/m; $\epsilon_r = 46.948$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Main Ant/Ch60/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.440 W/kg


Stand Mode/Rear/802.11a/Main Ant/Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.238 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.477 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

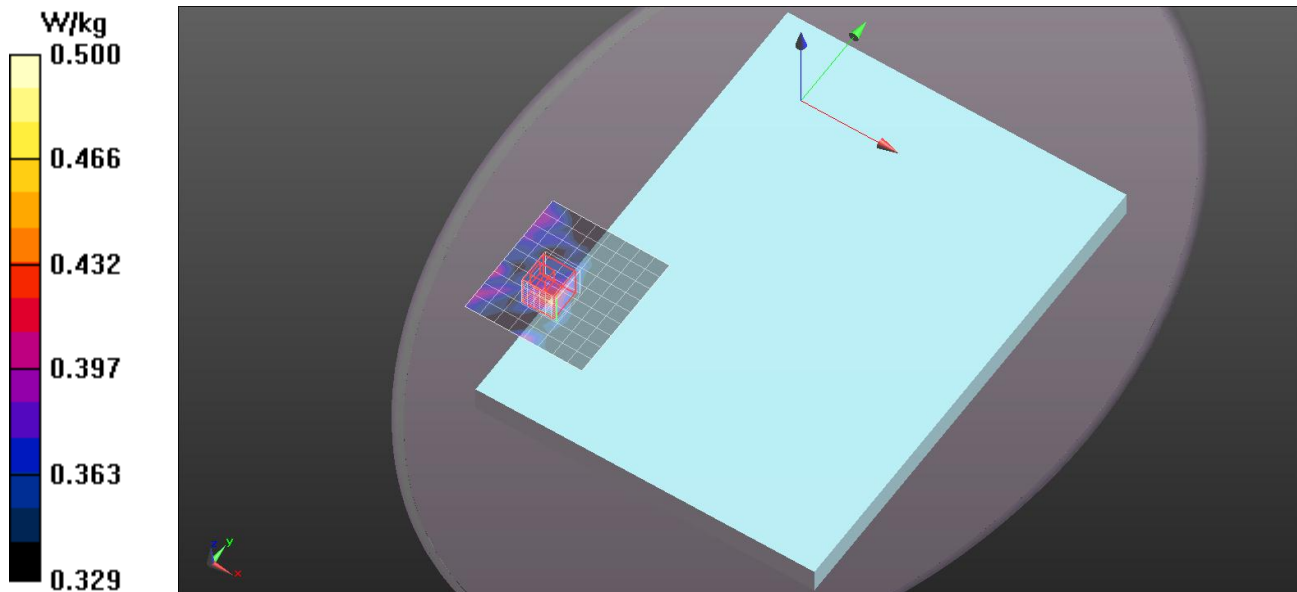

5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 46.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Main Ant/Ch112/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.546 W/kg


Stand Mode/Rear/802.11a/Main Ant/Ch112/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.889 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.523 W/kg

Maximum value of SAR (measured) = 0.638 W/kg

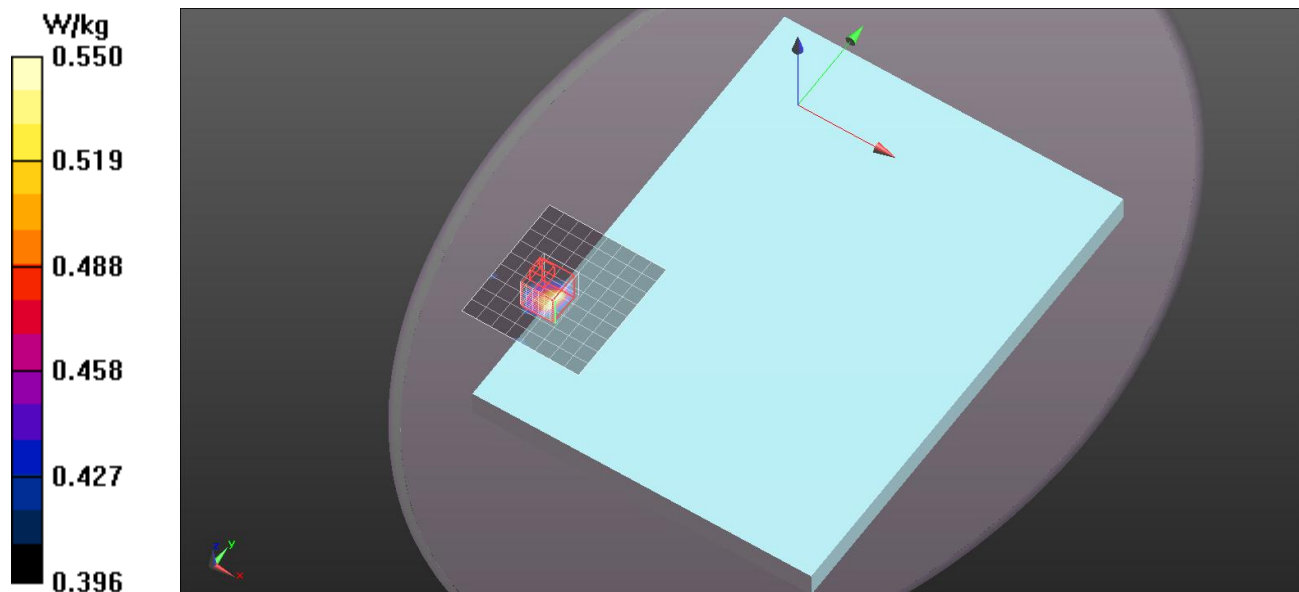

5 GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5660$ MHz; $\sigma = 5.954$ S/m; $\epsilon_r = 46.312$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Main Ant/Ch132/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.663 W/kg

Stand Mode/Rear/802.11a/Main Ant/Ch132/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.088 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.566 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.25 W/kg

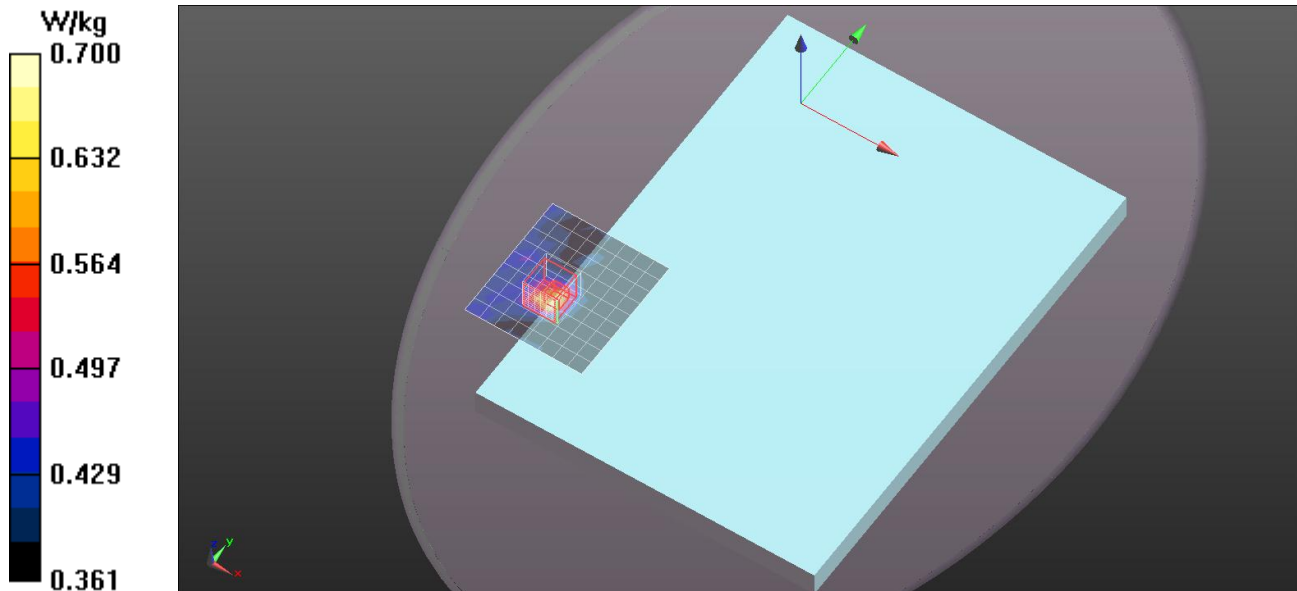

5 GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5785.3$ MHz; $\sigma = 6.108$ S/m; $\epsilon_r = 46.105$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Main Ant/Ch157/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.557 W/kg


Stand Mode/Rear/802.11a/Main Ant/Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.570 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

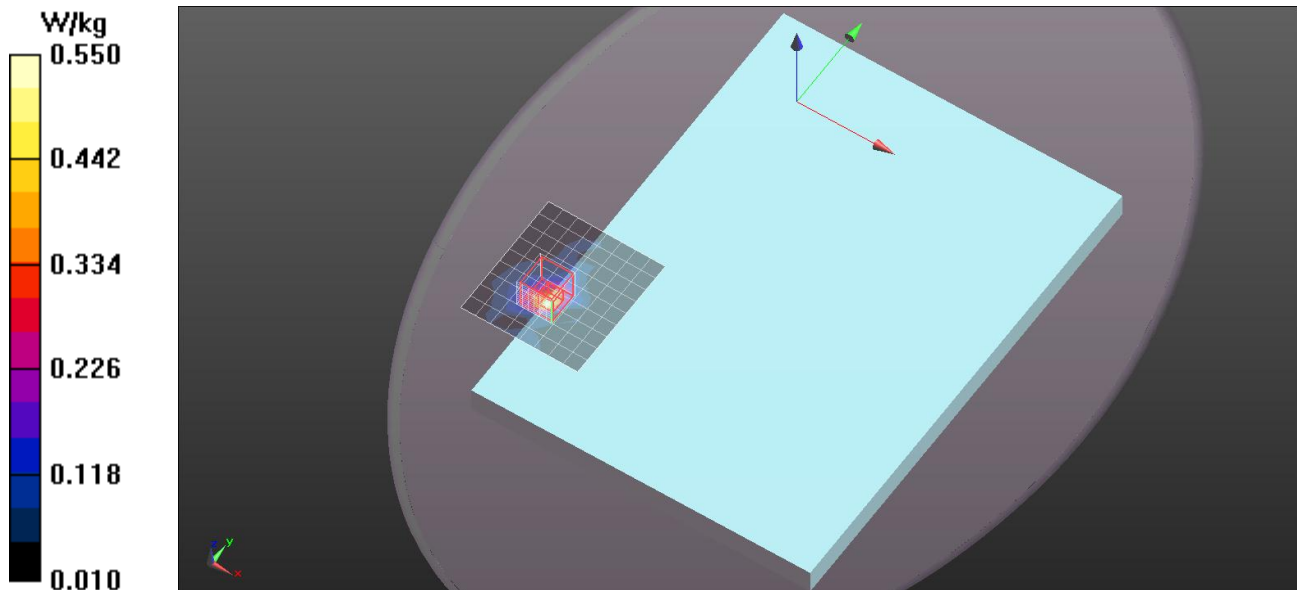

5 GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 5.411$ S/m; $\epsilon_r = 47.098$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Aux Ant/Ch44/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.856 W/kg

Stand Mode/Rear/802.11a/Aux Ant/Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 10.346 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.166 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.10 W/kg

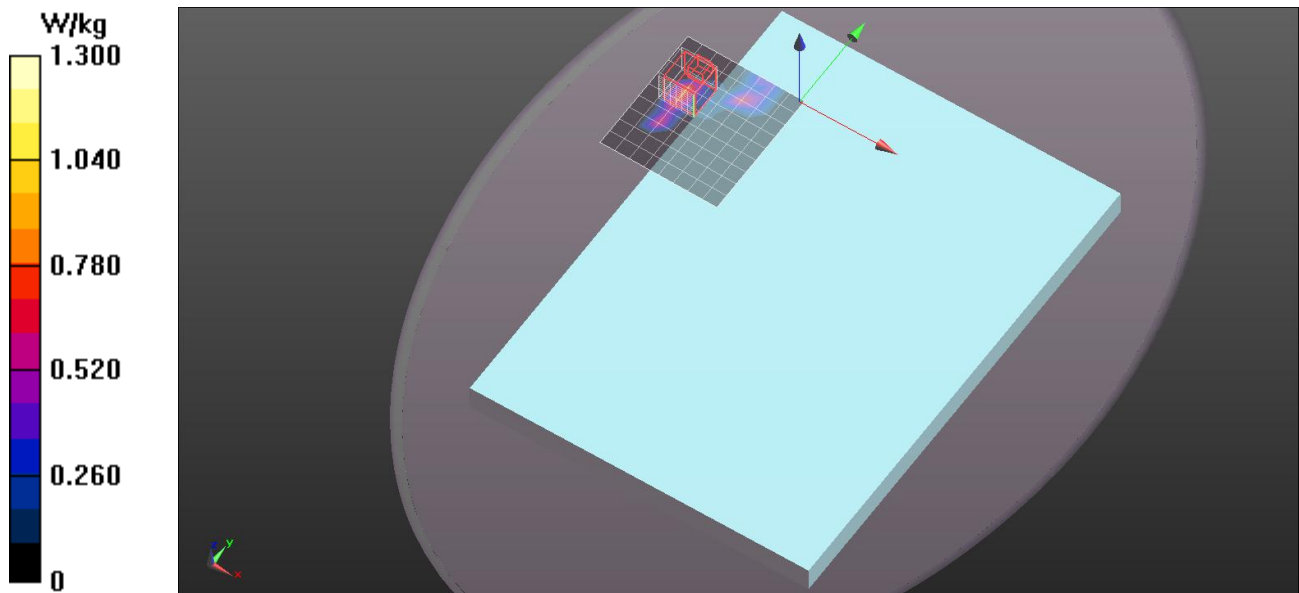

5 GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5300.2$ MHz; $\sigma = 5.506$ S/m; $\epsilon_r = 46.948$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Aux Ant/Ch60/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.38 W/kg


Stand Mode/Rear/802.11a/Aux Ant/Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.841 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.451 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

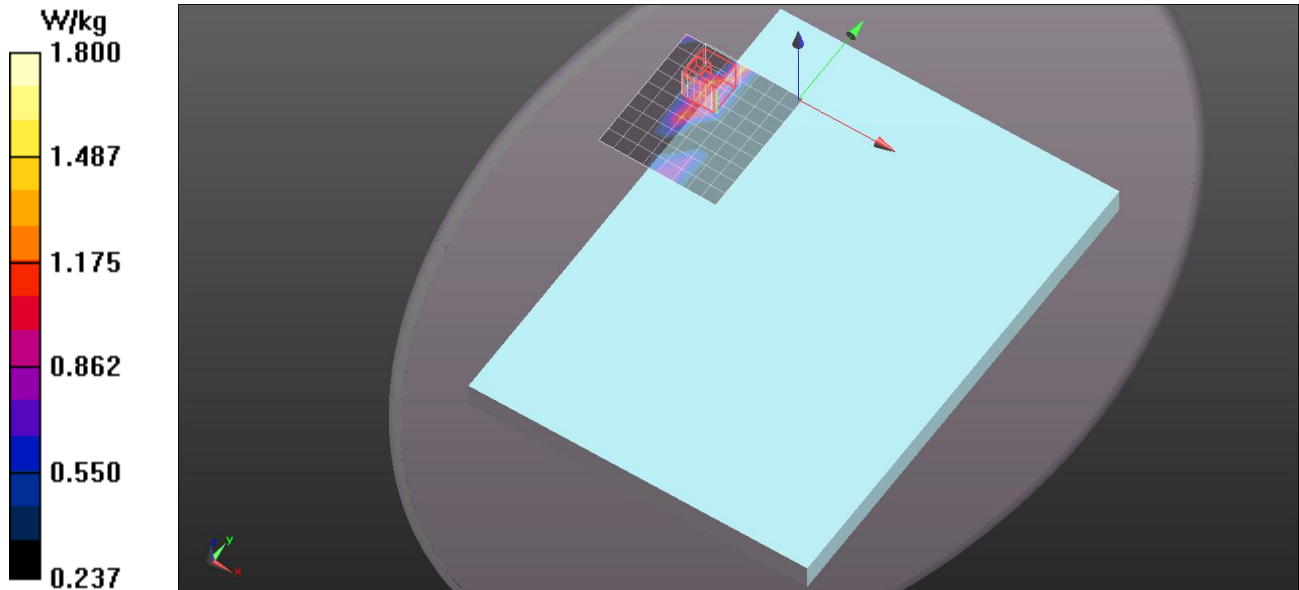

5 GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5560.9$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 46.496$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Aux Ant/Ch112/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.68 W/kg


Stand Mode/Rear/802.11a/Aux Ant/Ch112/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.915 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.490 W/kg

Maximum value of SAR (measured) = 1.89 W/kg

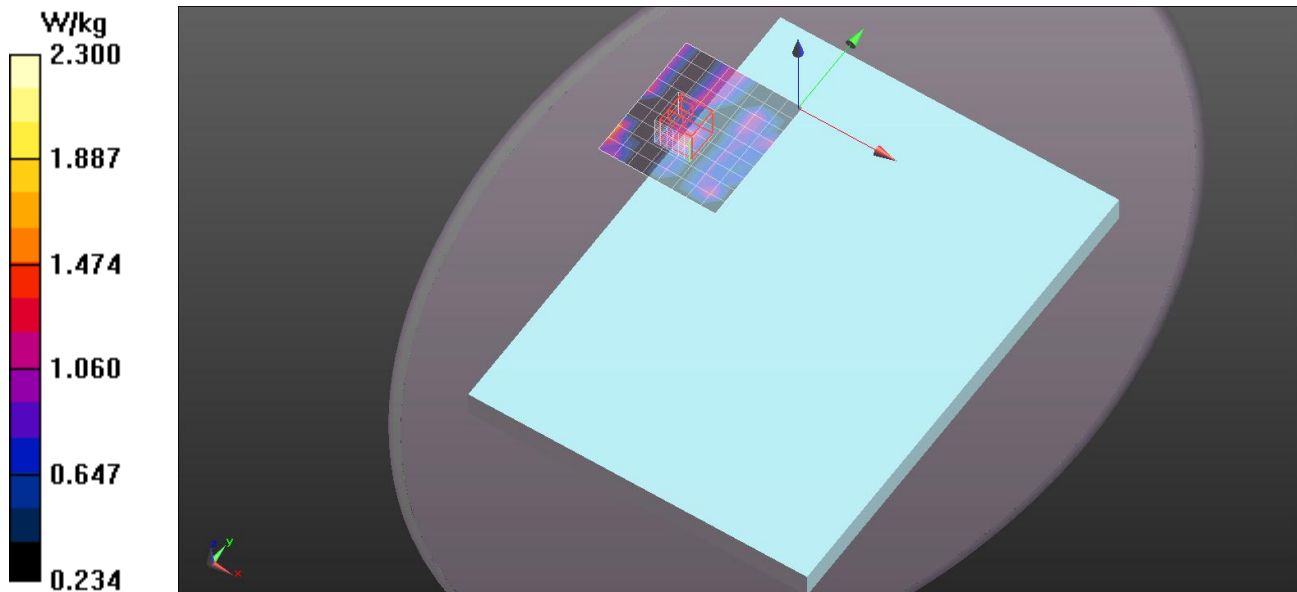

5 GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5660$ MHz; $\sigma = 5.954$ S/m; $\epsilon_r = 46.312$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Aux Ant/Ch132/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.947 W/kg

Stand Mode/Rear/802.11a/Aux Ant/Ch132/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.204 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.486 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.78 W/kg

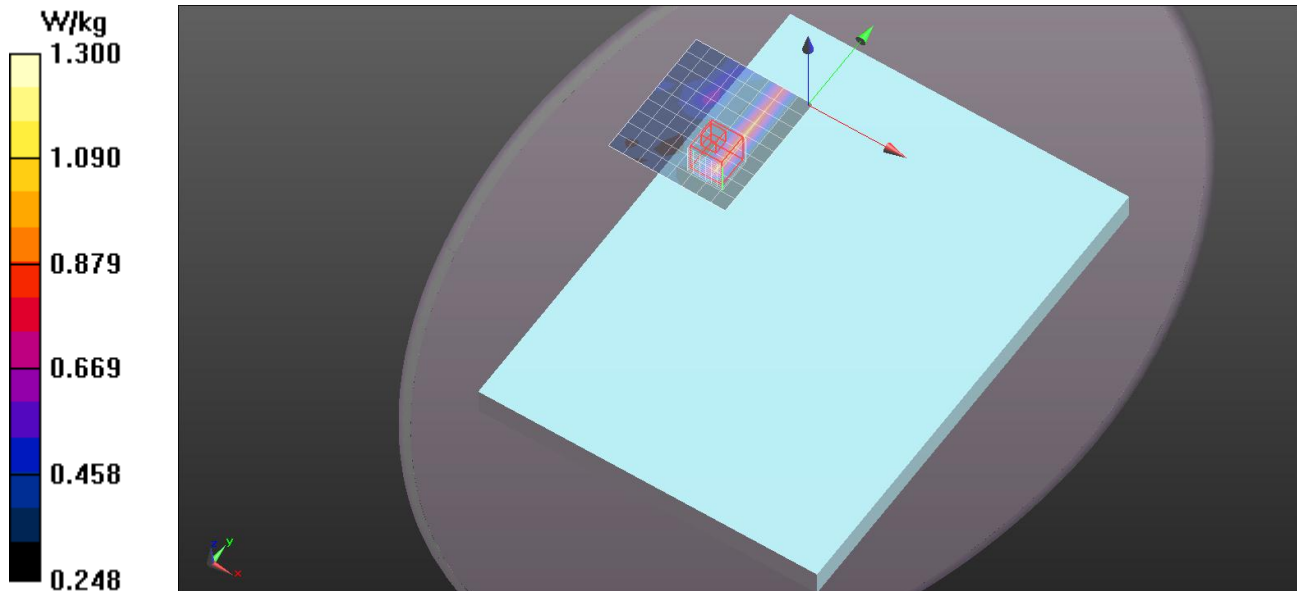

5 GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5785.3$ MHz; $\sigma = 6.108$ S/m; $\epsilon_r = 46.105$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11a/Aux Ant/Ch157/Area Scan (9x10x1): Measurement grid: dx=10mm,

dy=10mm

Maximum value of SAR (measured) = 1.14 W/kg

Stand Mode/Rear/802.11a/Aux Ant/Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid:



dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.234 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.474 W/kg

Maximum value of SAR (measured) = 1.73 W/kg

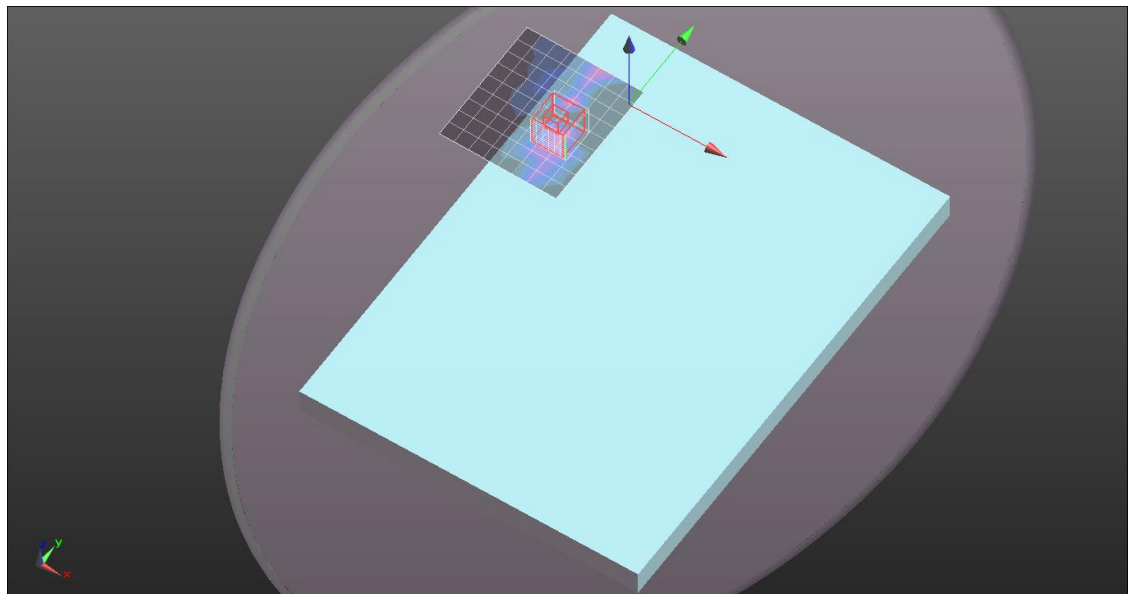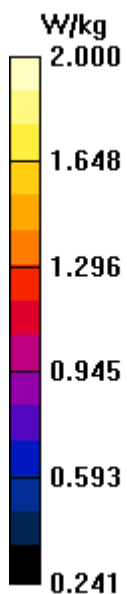

5 GHz Band

Frequency: 5610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5610.4$ MHz; $\sigma = 5.661$ S/m; $\epsilon_r = 48.041$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11ac/Main Ant/Ch122/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.289 W/kg



Tablet Mode/Rear/802.11ac/Main Ant/Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.487 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

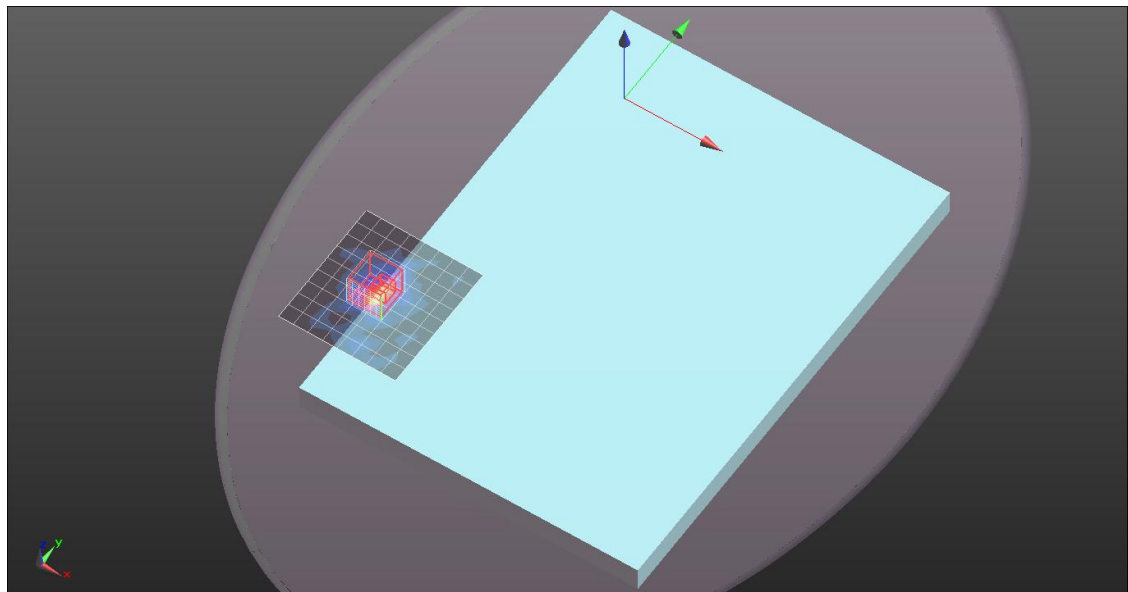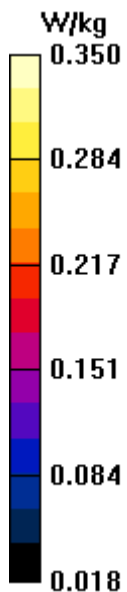

5 GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 5.858$ S/m; $\epsilon_r = 47.683$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11ac/Main Ant/Ch155/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.446 W/kg



Tablet Mode/Rear/802.11ac/Main Ant/Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.982 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

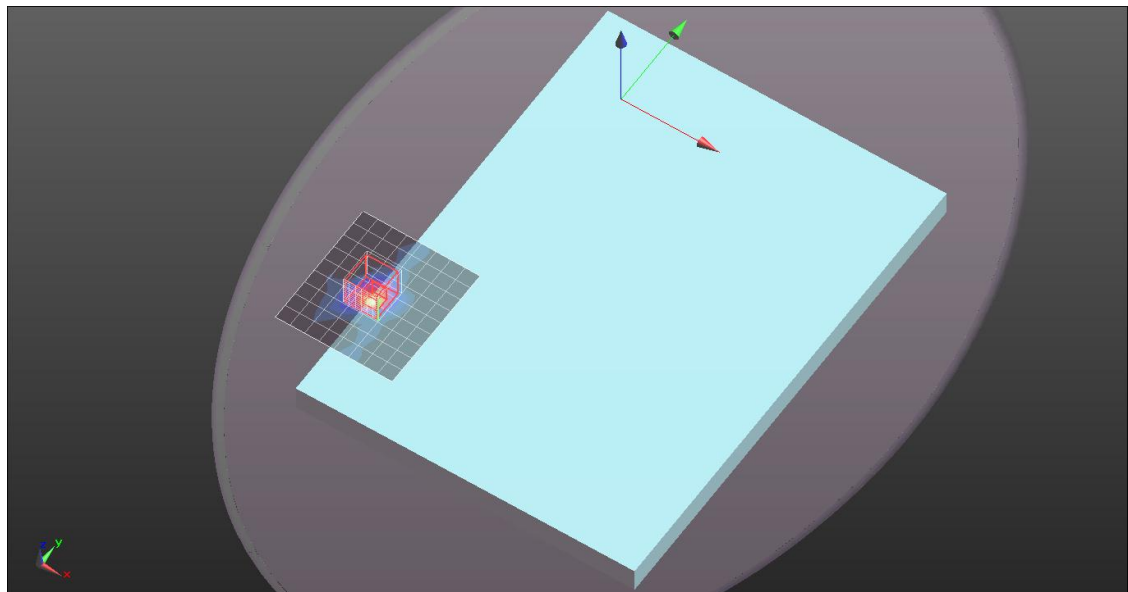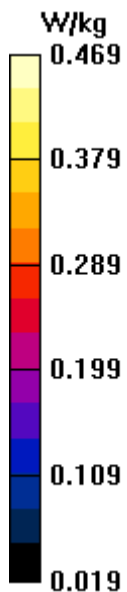

5 GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.442$ S/m; $\epsilon_r = 46.852$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Main Ant/Ch42/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.804 W/kg

Tablet Mode/Edge3/802.11ac/Main Ant/Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 4.246 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.229 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.868 W/kg

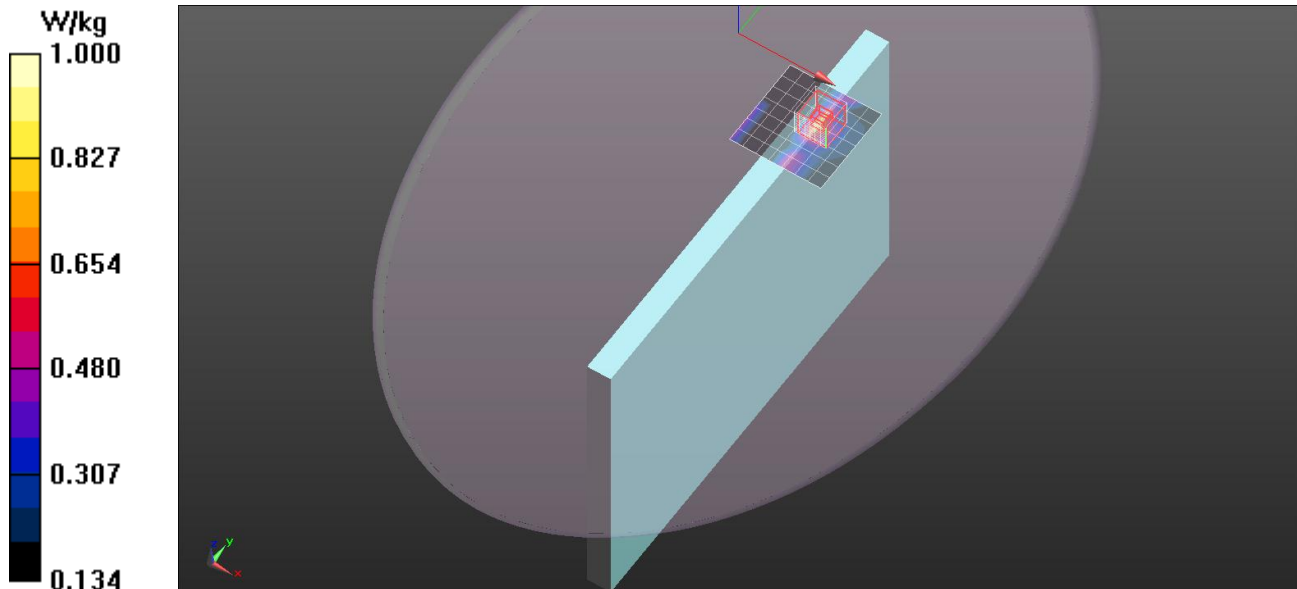

5 GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5290.3$ MHz; $\sigma = 5.541$ S/m; $\epsilon_r = 46.734$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Main Ant/Ch58/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.864 W/kg


Tablet Mode/Edge3/802.11ac/Main Ant/Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.797 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.876 W/kg

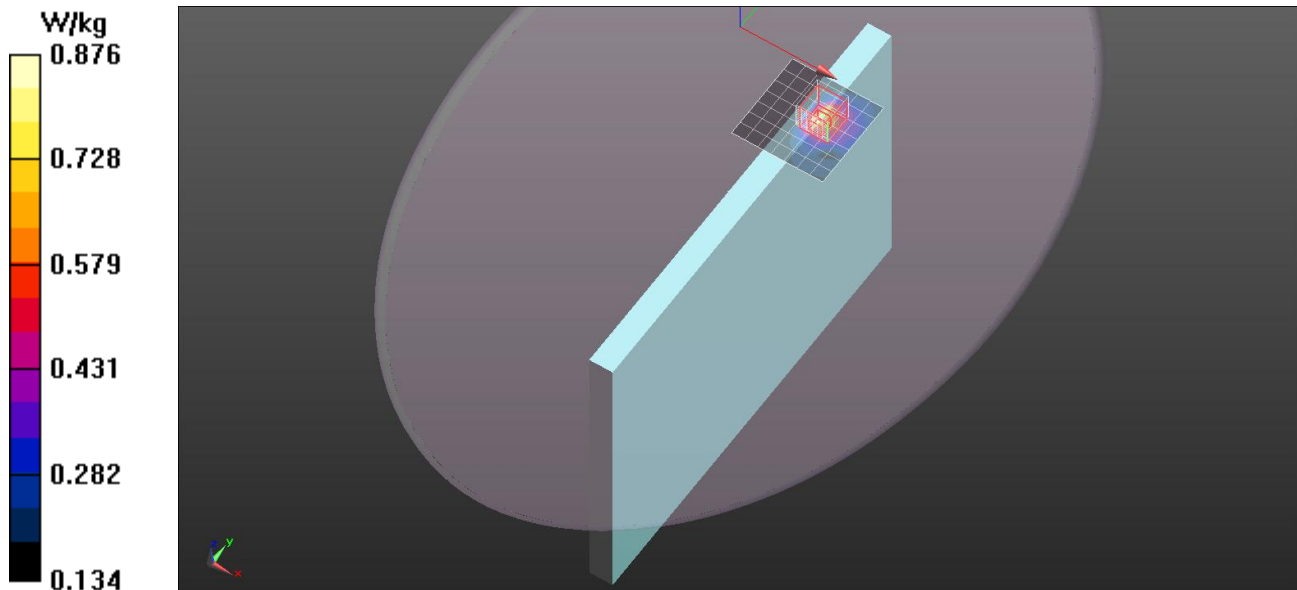

5 GHz Band

Frequency: 5610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5610.4$ MHz; $\sigma = 5.947$ S/m; $\epsilon_r = 46.203$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Main Ant/Ch122/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.34 W/kg


Tablet Mode/Edge3/802.11ac/Main Ant/Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.098 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

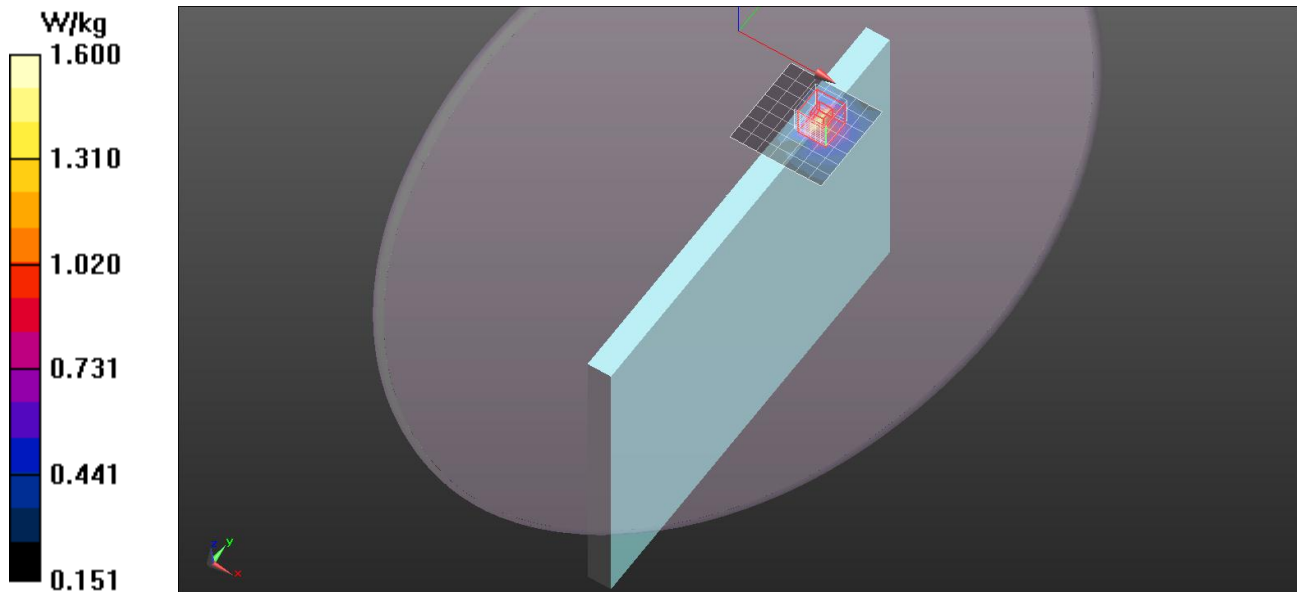

5 GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 6.153$ S/m; $\epsilon_r = 45.912$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Main Ant/Ch155/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.26 W/kg


Tablet Mode/Edge3/802.11ac/Main Ant/Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.914 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

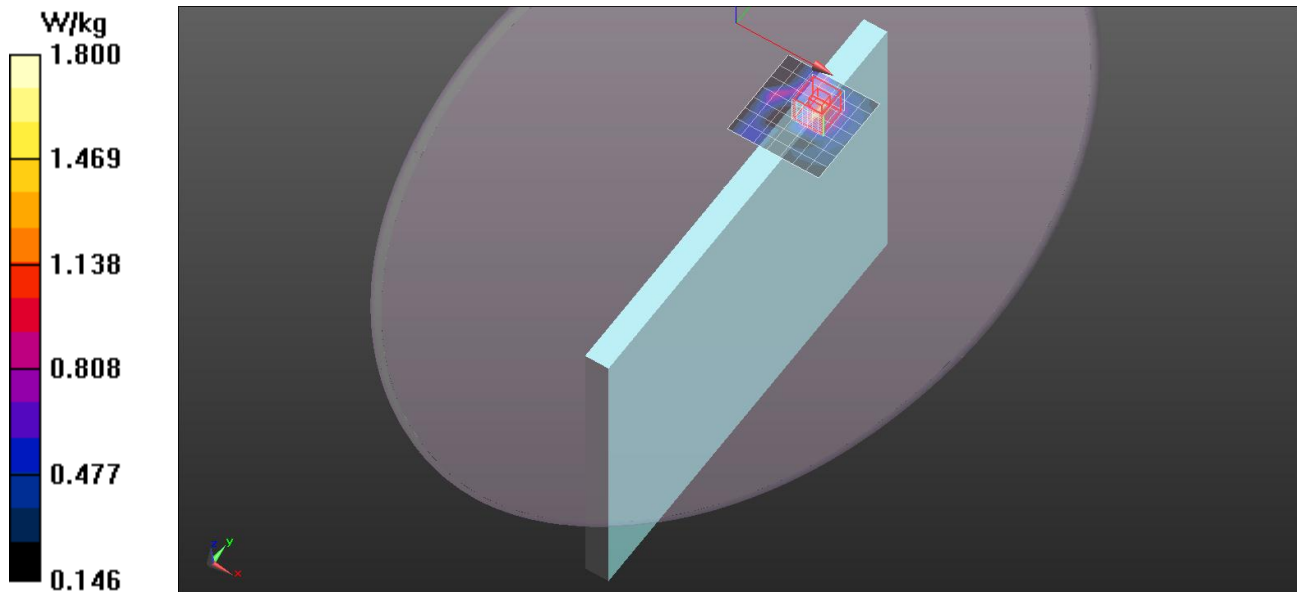

5 GHz Band

Frequency: 5610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5610.4$ MHz; $\sigma = 5.661$ S/m; $\epsilon_r = 48.041$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11ac/Aux Ant/Ch122/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.237 W/kg



Tablet Mode/Rear/802.11ac/Aux Ant/Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.316 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

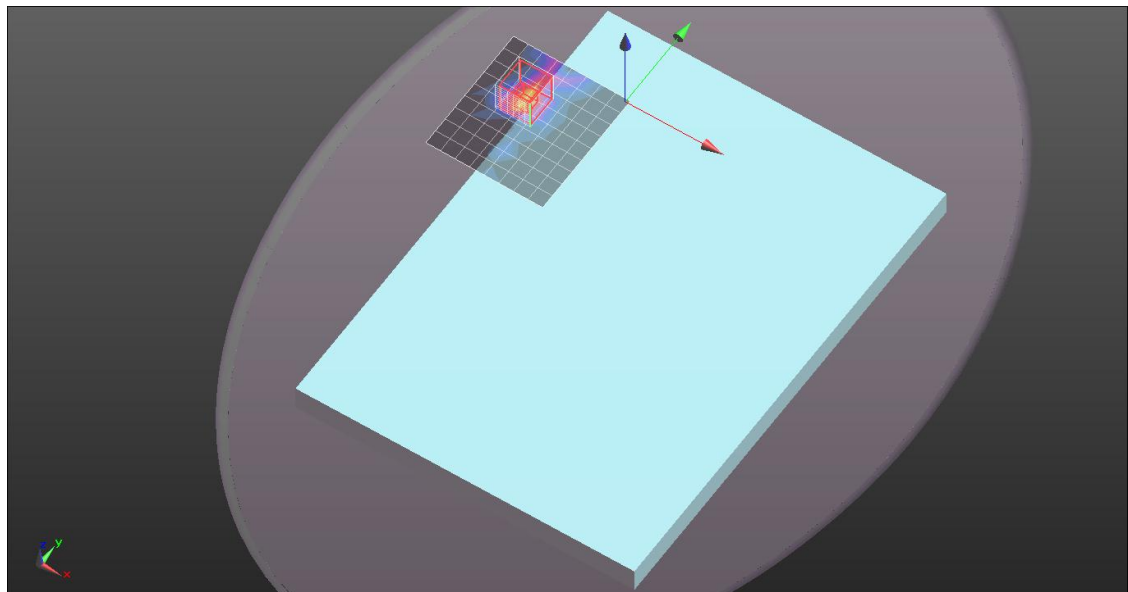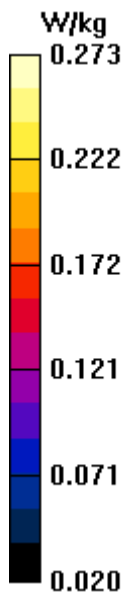

5 GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 5.858$ S/m; $\epsilon_r = 47.683$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Rear/802.11ac/Aux Ant/Ch155/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.265 W/kg


Tablet Mode/Rear/802.11ac/Aux Ant/Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.283 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

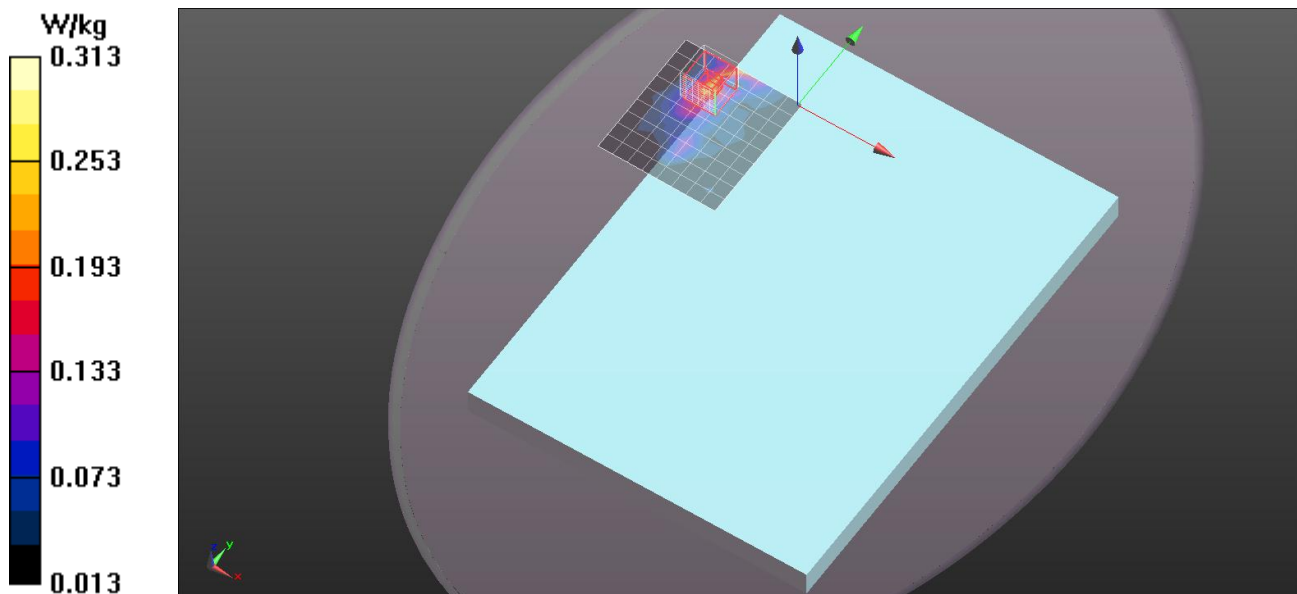

5 GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.442$ S/m; $\epsilon_r = 46.852$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Aux Ant/Ch42/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.555 W/kg

Tablet Mode/Edge3/802.11ac/Aux Ant/Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 3.560 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.216 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.823 W/kg

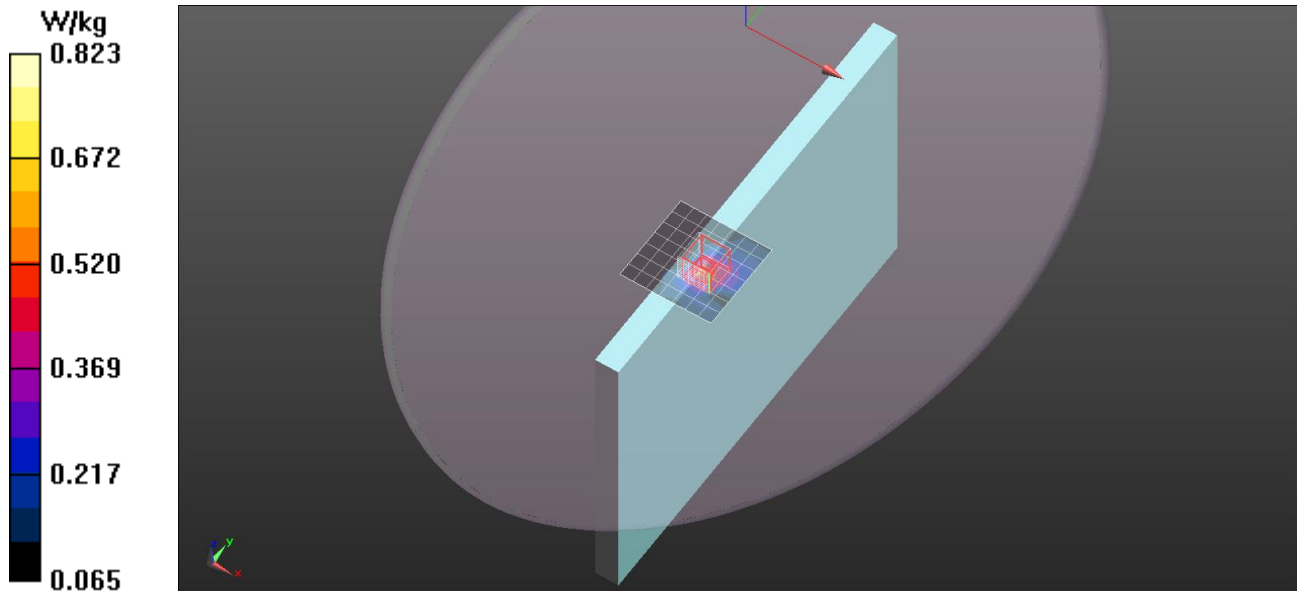

5 GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5290.3$ MHz; $\sigma = 5.541$ S/m; $\epsilon_r = 46.734$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Aux Ant/Ch58/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.07 W/kg


Tablet Mode/Edge3/802.11ac/Aux Ant/Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.868 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

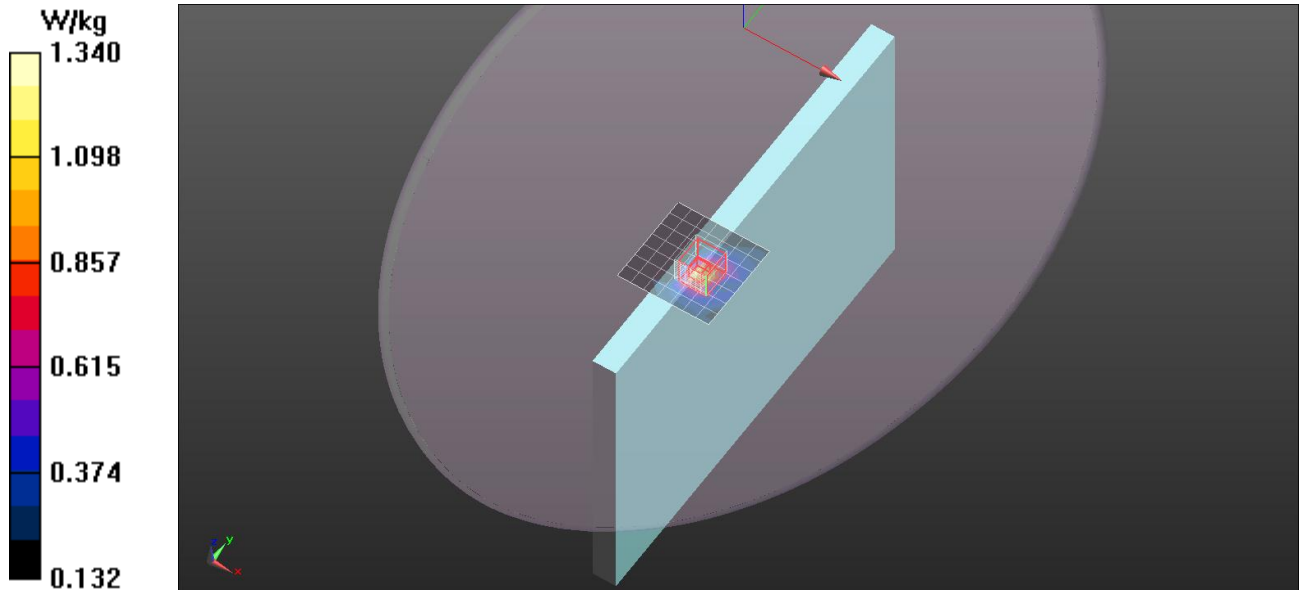

5 GHz Band

Frequency: 5610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5610.4$ MHz; $\sigma = 5.947$ S/m; $\epsilon_r = 46.203$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Aux Ant/Ch122/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.46 W/kg


Tablet Mode/Edge3/802.11ac/Aux Ant/Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.996 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.63 W/kg

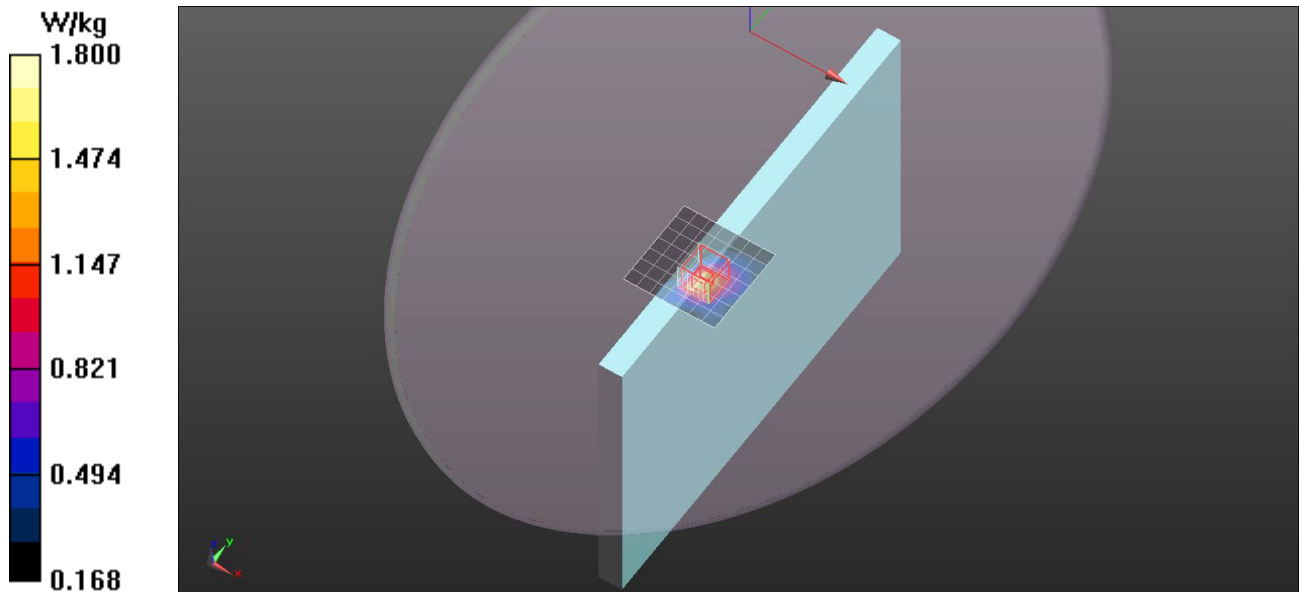

5 GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 6.153$ S/m; $\epsilon_r = 45.912$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Tablet Mode/Edge3/802.11ac/Aux Ant/Ch155/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.82 W/kg


Tablet Mode/Edge3/802.11ac/Aux Ant/Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.731 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 6.41 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

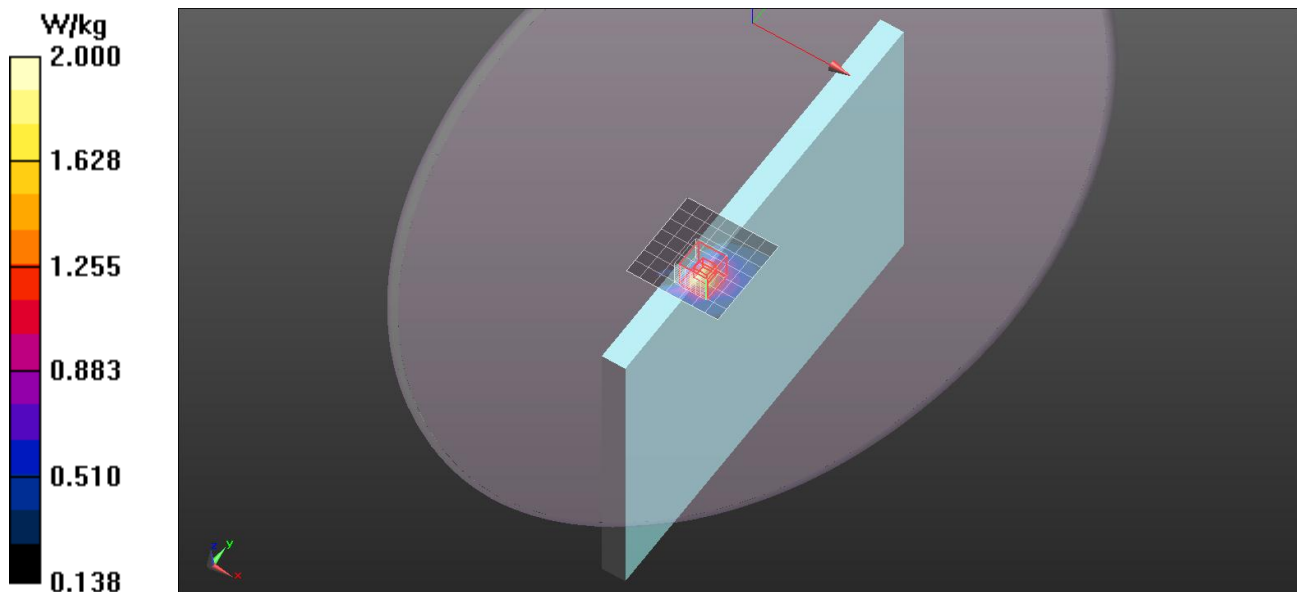

5 GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 47.114$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Main Ant/Ch42/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.337 W/kg

Stand Mode/Rear/802.11ac/Main Ant/Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.140 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.390 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.455 W/kg

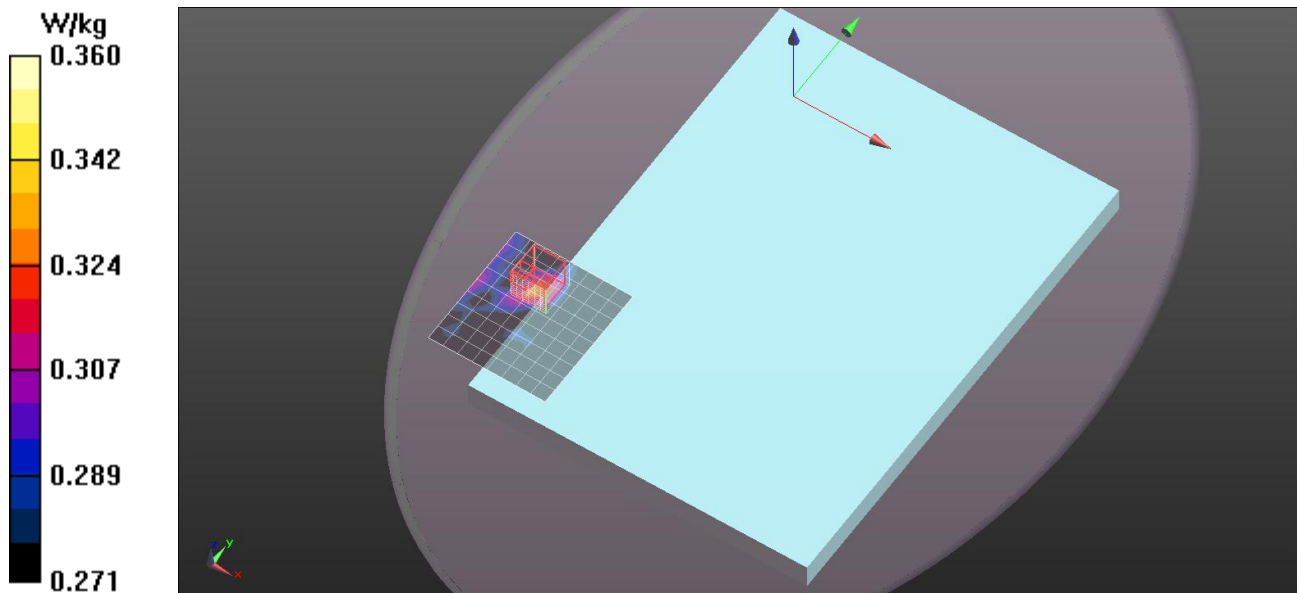

5 GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5290.3$ MHz; $\sigma = 5.495$ S/m; $\epsilon_r = 46.966$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Main Ant/Ch58/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.399 W/kg


Stand Mode/Rear/802.11ac/Main Ant/Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.881 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.431 W/kg

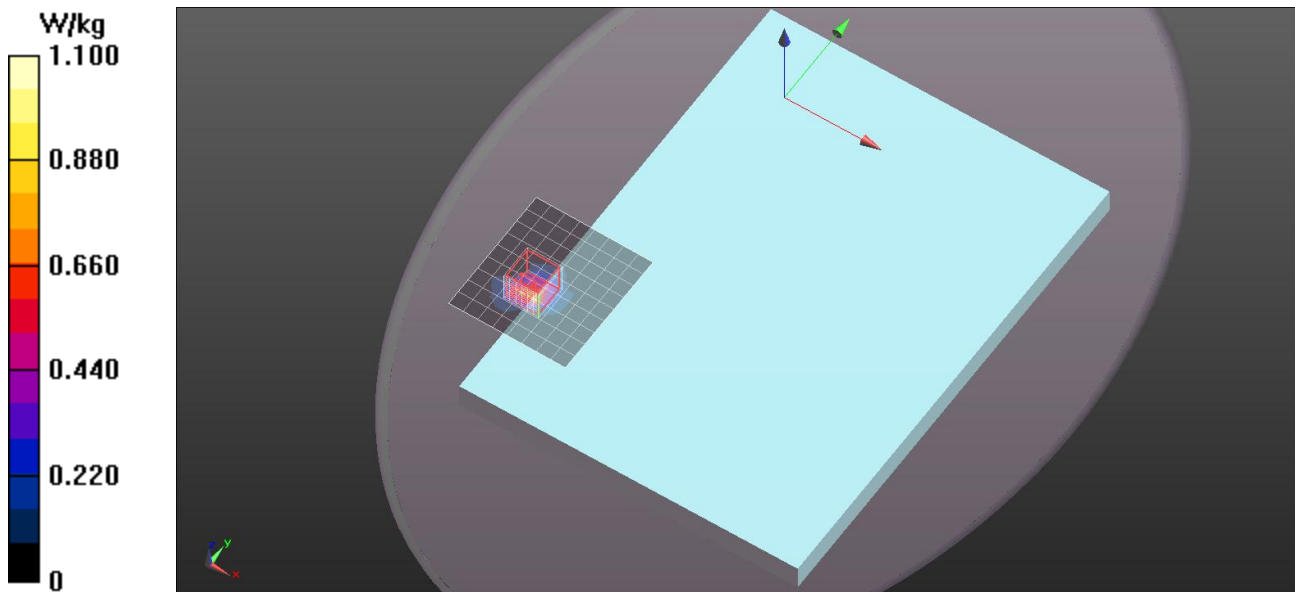

5 GHz Band

Frequency: 5610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5610.4$ MHz; $\sigma = 5.889$ S/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Main Ant/Ch122/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.17 W/kg



Stand Mode/Rear/802.11ac/Main Ant/Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

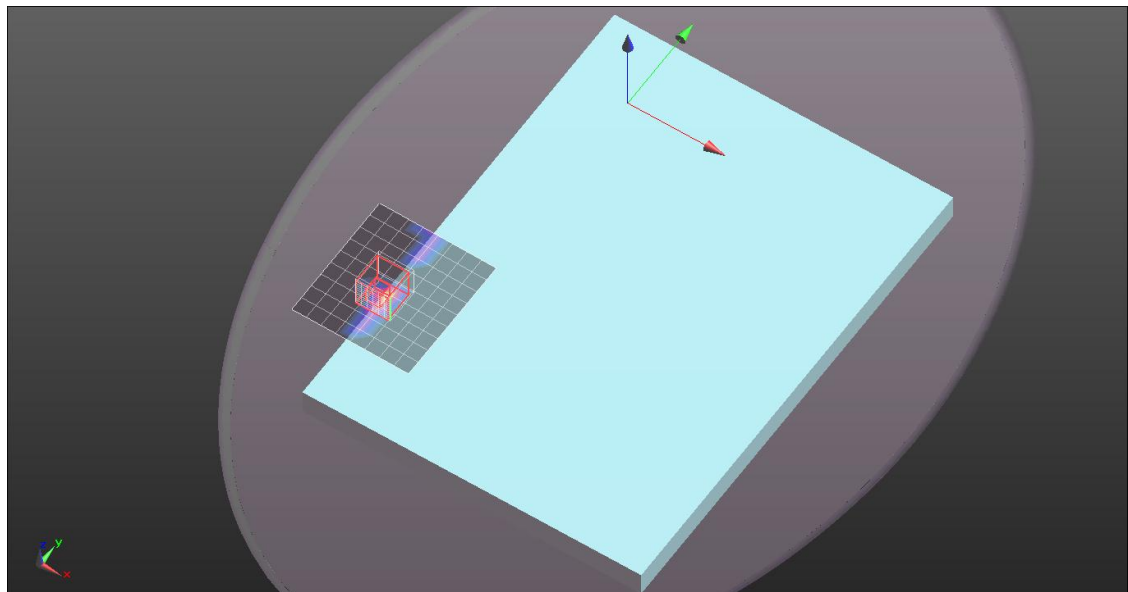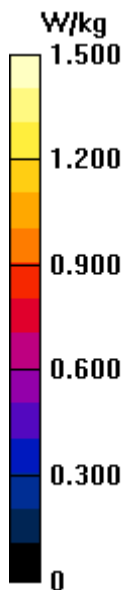

5 GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 6.097$ S/m; $\epsilon_r = 46.132$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Main Ant/Ch155/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.551 W/kg


Stand Mode/Rear/802.11ac/Main Ant/Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

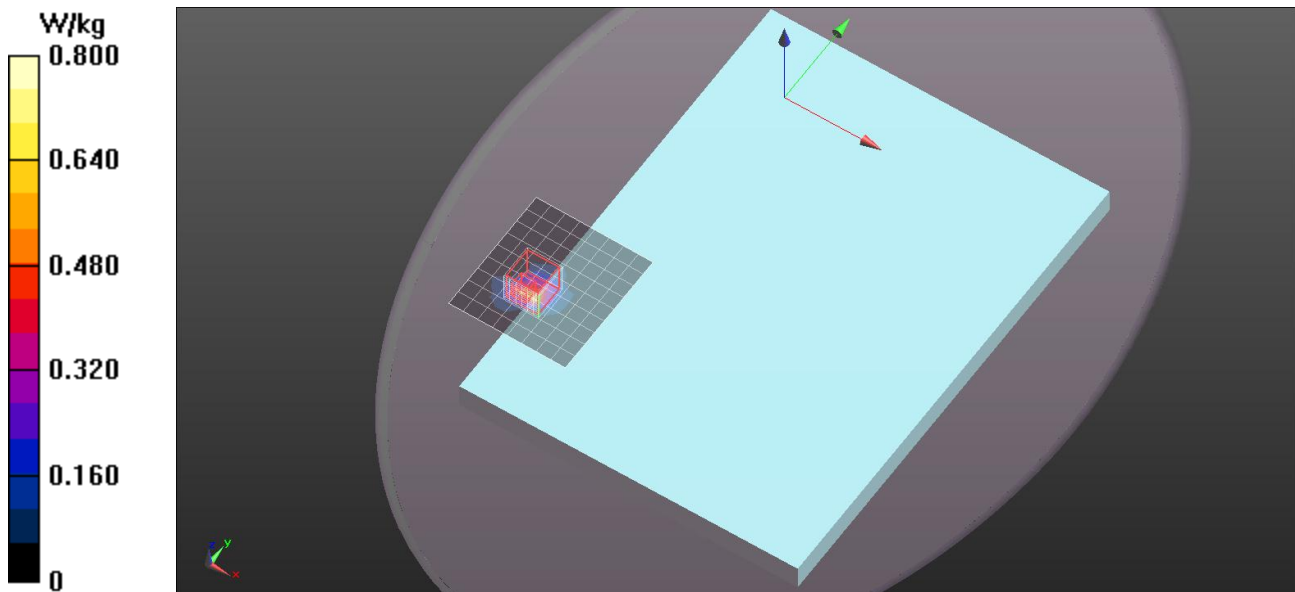

5 GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 47.114$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.44, 4.44, 4.44); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Aux Ant/Ch42/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.438 W/kg

Stand Mode/Rear/802.11ac/Aux Ant/Ch42/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.765 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.537 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.448 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.537 W/kg

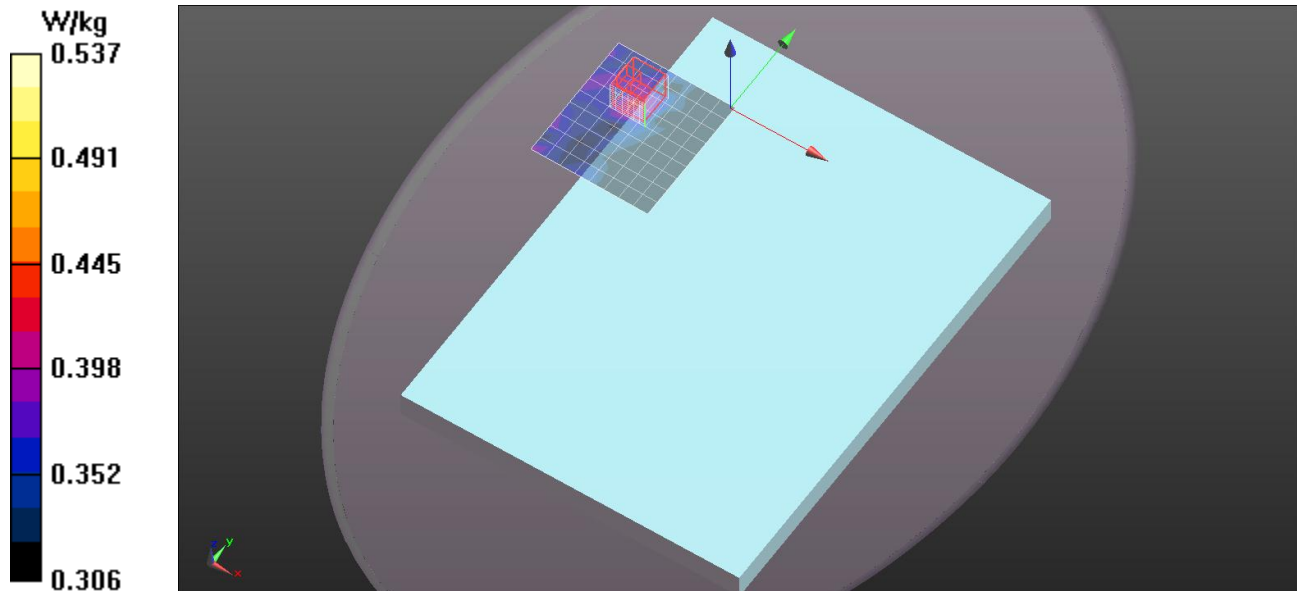

5 GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C
 Medium parameters used: $f = 5290.3$ MHz; $\sigma = 5.495$ S/m; $\epsilon_r = 46.966$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.27, 4.27, 4.27); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Aux Ant/Ch58/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.538 W/kg

Stand Mode/Rear/802.11ac/Aux Ant/Ch58/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.628 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.475 W/kg

Maximum value of SAR (measured) = 0.564 W/kg

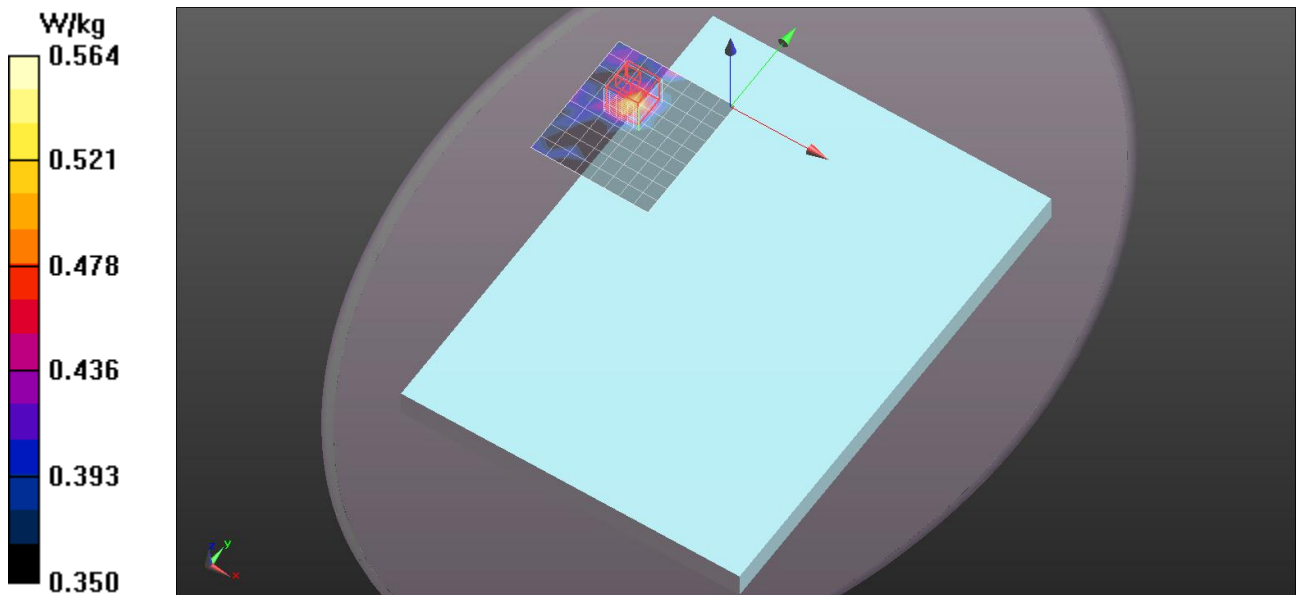

5 GHz Band

Frequency: 5610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5610.4$ MHz; $\sigma = 5.889$ S/m; $\epsilon_r = 46.4$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.07, 4.07, 4.07); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Aux Ant/Ch122/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.734 W/kg


Stand Mode/Rear/802.11ac/Aux Ant/Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.819 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.562 W/kg

Maximum value of SAR (measured) = 0.835 W/kg

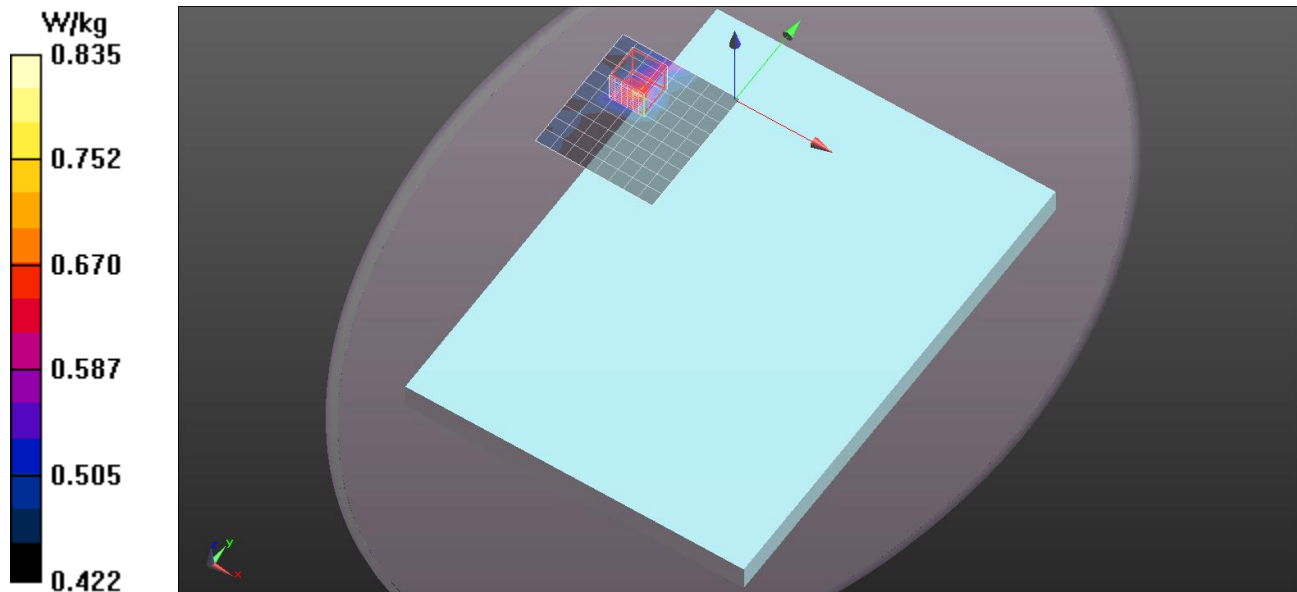

5 GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5775.4$ MHz; $\sigma = 6.097$ S/m; $\epsilon_r = 46.132$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Probe: EX3DV4 - SN3665; ConvF(4.38, 4.38, 4.38); Calibrated: 2013/05/07;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Stand Mode/Rear/802.11ac/Aux Ant/Ch155/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.650 W/kg

Stand Mode/Rear/802.11ac/Aux Ant/Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.905 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.523 W/kg

Maximum value of SAR (measured) = 0.663 W/kg

