



**FCC 47 CFR PART 15 SUBPART E AND ANSI C63.4:2009  
TEST REPORT (Class II Permissive Change Report)**

**For**

**Wireless Network Adapter Module**

**Model : 7260NGW**

**Trade Name : TOSHIBA**

**Issued for**

**Toshiba Corporation**

**Digital Products & Service Company 2-9, Suehiro-cho, Ome-shi ,  
Tokyo ,Japan**

**Issued by**

**Compliance Certification Services Inc.  
Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,  
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**

**TEL: +886-3-5921698**

**FAX: +886-3-5921108**

**<http://www.ccsrf.com>**

**E-Mail : [service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: April 21, 2014**



**Note:** *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.*



### Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	04/21/2014	Initial Issue	All Page 43	Gloria Chang



---

**TABLE OF CONTENTS**

<b>TITLE</b>	<b>PAGE NO.</b>
<b>1. TEST REPORT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
2.1 DESCRIPTION OF EUT & POWER .....	5
2.2 DESCRIPTION OF CLASS II CHANGE .....	7
<b>3. DESCRIPTION OF TEST MODES .....</b>	<b>8</b>
<b>4. TEST METHODOLOGY .....</b>	<b>11</b>
<b>5. FACILITIES AND ACCREDITATION .....</b>	<b>11</b>
5.1 FACILITIES .....	11
5.2 ACCREDITATIONS.....	11
5.3 MEASUREMENT UNCERTAINTY .....	12
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>13</b>
<b>7. FCC PART 15.407 REQUIREMENTS .....</b>	<b>14</b>
7.1 RADIATED EMISSION.....	14
<b>APPENDIX SETUP PHOTOS .....</b>	<b>43</b>



# 1. TEST REPORT CERTIFICATION

**Applicant** : Toshiba Corporation  
**Address** : Digital Products & Service Company 2-9, Suehiro-cho,  
Ome-shi , Tokyo ,Japan  
**Equipment Under Test** : Wireless Network Adapter Module  
**Model** : 7260NGW  
**Trade Name** : TOSHIBA  
**Identify Number** : T140328L05  
**Tested Date** : March 28 ~ April 21, 2014

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart E AND ANSI C63.4:2009	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Approved by:**

Rex Liao  
Deputy Manager

**Reviewed by:**

Jacky Chen  
Section Manager



## 2. EUT DESCRIPTION

### 2.1 DESCRIPTION OF EUT & POWER

<b>Product Name</b>	Wireless Network Adapter Module
<b>Model Number</b>	7260NGW
<b>Received Date</b>	March 28, 2014
<b>Frequency Range</b>	<p>IEEE 802.11a, 802.11an HT20 : 5180MHz ~ 5240MHz , 5260MHz ~ 5320MHz, 5500MHz ~ 5700MHz</p> <p>IEEE 802.11an HT40 : 5190MHz ~ 5230MHz, 5270MHz ~ 5310MHz, 5510MHz ~ 5670MHz</p> <p>IEEE 802.11ac VHT80 : 5210MHz, 5290MHz, 5530MHz, 5610MHz</p>
<b>Transmit Power</b>	<p>IEEE 802.11a 5180MHz ~ 5240MHz : 15.54dBm (0.0358W) 5260MHz ~ 5320MHz : 15.32dBm (0.0340W) 5500MHz ~ 5700MHz : 16.12dBm (0.0409W)</p> <p>IEEE 802.11an HT20 5180MHz ~ 5240MHz : 12.68dBm (0.0185W) 5260MHz ~ 5320MHz : 13.33dBm (0.0215W) 5500MHz ~ 5700MHz : 15.91dBm (0.0390W)</p> <p>IEEE 802.11an HT40 5190MHz ~ 5230MHz : 12.04dBm (0.0160W) 5270MHz ~ 5310MHz : 8.97dBm (0.0079W) 5510MHz ~ 5670MHz : 16.25dBm (0.0422W)</p> <p>IEEE 802.11ac VHT80 : 5210MHz : 6.34dBm (0.0043W) 5290MHz : 8.83dBm (0.0076W) 5530MHz ~ 5610MHz : 16.28dBm (0.0424W)</p>



<b>Channel Spacing</b>	IEEE 802.11a, 802.11an HT20 : 20MHz IEEE 802.11an HT40 : 40MHz IEEE 802.11ac VHT80 : 80MHz
<b>Channel Number</b>	IEEE 802.11a, 802.11an HT20 5150MHz ~ 5250MHz : 4 Channels 5250MHz ~ 5350MHz : 4 Channels 5500MHz ~ 5700MHz : 11 Channels IEEE 802.11an HT40 5150MHz ~ 5250MHz : 2 Channels 5250MHz ~ 5350MHz : 2 Channels 5500MHz ~ 5700MHz : 5 Channels IEEE 802.11ac VHT80 5150MHz ~ 5250MHz : 1 Channels 5250MHz ~ 5350MHz : 1 Channels 5500MHz ~ 5700MHz : 2 Channels
<b>Transmit Data Rate</b>	IEEE 802.11a : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11an HT20 : 144.4, 130, 117, 115.6, 104, 86.7, 78, 72.2, 65, 58.5, 57.8, 52, 43.3, 39, 28.9, 26, 21.7, 19.5, 14.4, 13, 7.2, 6.5 Mbps IEEE 802.11an HT40 : 300, 270, 243, 240, 216, 180, 162, 150, 135, 121.5, 120, 108, 90, 81, 60, 54, 45, 40.5, 30, 27, 15, 13.5 Mbps IEEE 802.11ac VHT80 : 433.3, 390, 351, 325, 292.5, 263.4, 263.3, 260, 234, 195, 175.6, 175.5, 130, 117, 97.5, 87.9, 87.8, 65, 58.5, 32.5, 29.3Mbps
<b>Type of Modulation</b>	IEEE 802.11a : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11an 20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac 80 : OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
<b>Antenna Type</b>	PIFA Antenna x 2, Antenna Gain 5 dBi
<b>Power Rating</b>	19Vdc
<b>Test Voltage</b>	120Vac, 60Hz
<b>AC Power Cord Type</b>	Non-shielded cable, 1.8m (detachable)
<b>DC Power Cable Type</b>	Non-shielded cable, 1.8m (Non-detachable)
<b>I/O Port</b>	USB Port x 2, Micro SD Port x 1, Micro HDMI Port x 1, Power Port x 1, Audio Port x 1



**Power Adapter :**

No.	Manufacturer	Model No.	Power Input	Power Output
1	TOSHIBA	PA5201U-1ACA	100-240Vac, 1.2A, 50/60Hz	19Vdc, 2.37A

**Remark :**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: CJ6UPA5125WB filing to comply with Section 15.207, 15.209 and 15.407 of the FCC Part 15, Subpart E Rules.

**2.2 DESCRIPTION OF CLASS II CHANGE**

The major change filed under this application is :

The subject approved module is being used in a specific host (Portable category Configuration).

Product name: Personal Computer(notebook)

Brand name: TOSHIBA

Model: KIRA ; KIRAbook ; KIRAbook Pro ; KIRAbook Elite ; KIRAbook V ; KIRAbook Fit ; KIRAbook Lift ; KIRA Flip ; KIRAbook Go ; KIRAbook Switch ; KIRAbook Ka ; KIRAbook CrossFit ; KIRAbook X-Fit ; KIRAbook Klay ; KIRAbook Kinetix ; dynabook KIRA V93 ; dynabook KIRA V83 ; dynabook KIRA L93 ; dynabook KIRA L83 ; dynabook KIRA L73 ;dynabook KIRA L63 ; dynabook KIRA L53

Model Number: PSUM2; PSUM3; PSUM4

After pre-scan, the testing data please refer to section 7.1.

Other testing items data was showed as original application document reports (FCC ID: CJ6UPA5125WB).



### 3. DESCRIPTION OF TEST MODES

The EUT (Wireless Network Adapter Module) had been tested under operating condition.

#### Above 1 GHz Radiated Emission Test :

##### 5500MHZ ~ 5700MHZ

##### IEEE 802.11a

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
Middle	5600

IEEE 802.11a mode : 6Mbps data rate (worst case) were chosen for full testing.

##### IEEE 802.11an HT20 mode

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
Middle	5580

IEEE 802.11an HT20 mode : 13Mbps data rate (worst case) were chosen for full testing.

##### IEEE 802.11an HT40 mode

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
Middle	5590

IEEE 802.11an HT40 mode : 27Mbps data rate (worst case) were chosen for full testing.

##### IEEE 802.11ac VHT80 mode

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
High	5610

IEEE 802.11ac VHT80 mode : 29.3Mbps data rate (worst case) were chosen for full testing.





**Above 1 GHz Restricted Band Edges Test :**

**5150MHz ~ 5250MHz**

**IEEE 802.11a**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
Low	5180

IEEE 802.11a mode : 6Mbps data rate (worst case) were chosen for full testing.

**IEEE 802.11an HT20 mode**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
Low	5180

IEEE 802.11a HT20 mode : 13Mbps data rate (worst case) were chosen for full testing.

**IEEE 802.11an HT40 mode**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
Low	5190

IEEE 802.11a HT40 mode : 27Mbps data rate (worst case) were chosen for full testing.

**IEEE 802.11ac VHT80 mode**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
Low	5210

IEEE 802.11ac VHT80 mode : 29.3Mbps data rate (worst case) were chosen for full testing.



**5250MHz ~ 5350MHz**

**IEEE 802.11a**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
High	5320

IEEE 802.11a mode : 6Mbps data rate (worst case) were chosen for full testing.

**IEEE 802.11an HT20 mode**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
High	5320

IEEE 802.11a HT20 mode : 13Mbps data rate (worst case) were chosen for full testing.

**IEEE 802.11an HT40 mode**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
High	5310

IEEE 802.11a HT40 mode : 27Mbps data rate (worst case) were chosen for full testing.

**IEEE 802.11ac VHT80 mode**

The EUT had been tested under operating condition.

There are one channels have been tested as following :

Channel	Frequency (MHz)
High	5290

IEEE 802.11ac VHT80 mode : 29.3Mbps data rate (worst case) were chosen for full testing.



## 4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2009 and FCC CFR 47, 15.207, 15.209 and 15. 407.

## 5. FACILITIES AND ACCREDITATION

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village,  
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2009 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

### 5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>Taiwan</b>	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>Canada</b>	INDUSTRY CANADA
<b>Japan</b>	VCCI
<b>Taiwan</b>	BSMI
<b>USA</b>	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



### 5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than  $U_{CISPR}$  which is 3.6dB and 5.2dB respectively. CCS values (called  $U_{Lab}$  in CISPR 16-4-2) is less than  $U_{CISPR}$  as shown in the table above. Therefore, MU need not be considered for compliance.



## **6. SETUP OF EQUIPMENT UNDER TEST**

### **SUPPORT EQUIPMENT**

N/A

### **SETUP DIAGRAM FOR TESTS**

EUT & peripherals setup diagram is shown in appendix setup photos.

### **EUT OPERATING CONDITION**

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. Test software : DRTU 1.6.0-0510  
Driver : 16.0.0.17
3. All of the functions are under run.
4. Start test.



## 7. FCC PART 15.407 REQUIREMENTS

### 7.1 RADIATED EMISSION

#### LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 – 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

**Remark:**

1. <sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. <sup>2</sup> Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.



(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

**Remark:** \*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

**TEST EQUIPMENT**

**Radiated Emission / 966Chamber\_B**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/15/2015
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101131	03/25/2015
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/12/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-250	09/12/2014
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	12/05/2014
Horn Antenna	COM-POWER	AH-840	03077	12/18/2014
Pre-Amplifier	Agilent	8447D	2944A10052	07/16/2014
Pre-Amplifier	Agilent	8449B	3008A01916	07/16/2014
LOOP Antenna	EMCO	6502	8905-2356	08/20/2014
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R
Band Reject Filter	Micro-Tronics	BRC50703-01	004	N.C.R
Band Reject Filter	Micro-Tronics	BRC50704-01	004	N.C.R
Band Reject Filter	Micro-Tronics	BRC50705-01	007	N.C.R


**Remark:** 1. Each piece of equipment is scheduled for calibration once a year.  
2. N.C.R = No Calibration Request.




**TEST SETUP**

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.

**9kHz ~ 30MHz**

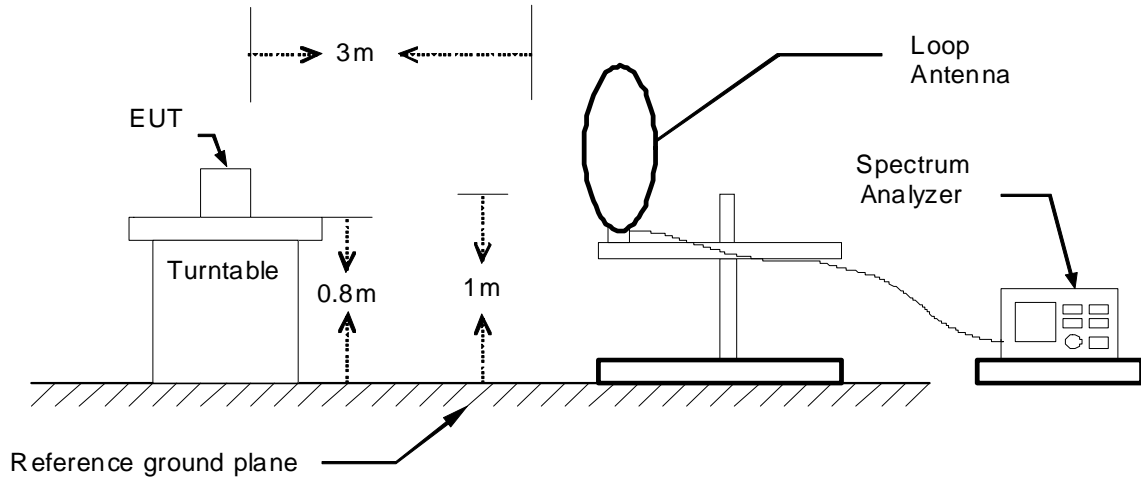


**30MHz ~ 1GHz**

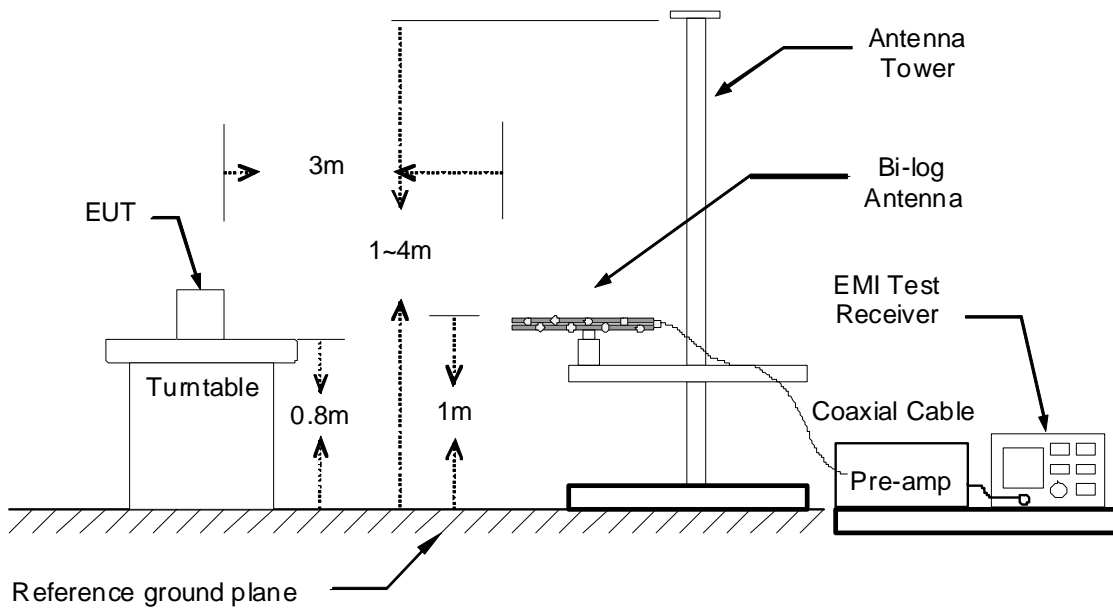





The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

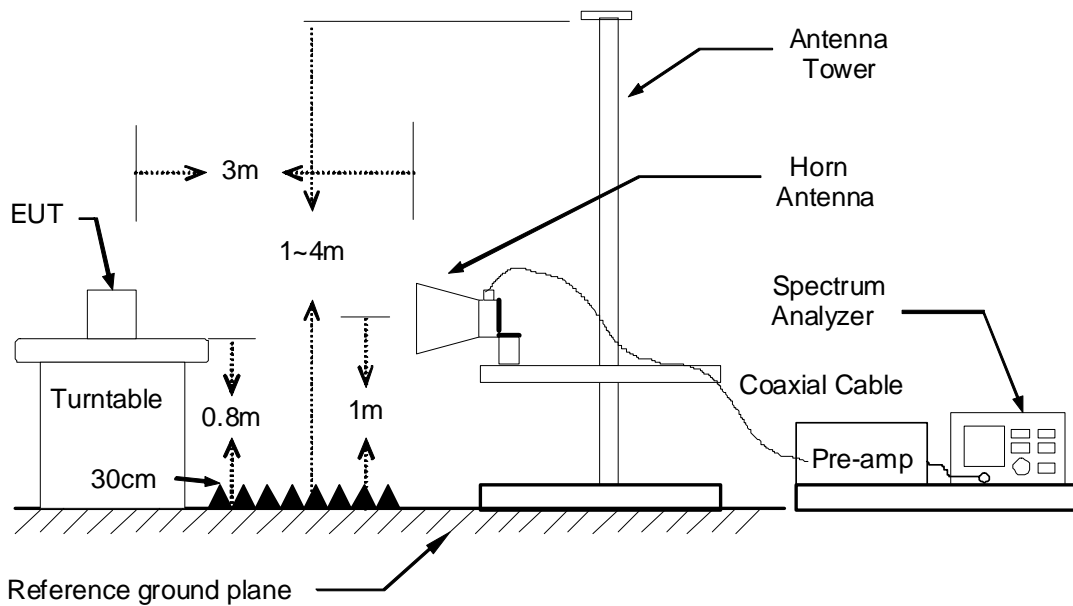

### **TEST PROCEDURE**

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### **Remark :**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.



**TEST RESULTS**

**Above 1 GHz**

<b>Product Name</b>	Wireless Network Adapter Module	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	7260NGW	<b>Test Date</b>	2014/04/19
<b>Test Mode</b>	IEEE 802.11a TX / CH Middle / ANT A	<b>Temp. &amp; Humidity</b>	26°C, 51%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6156.00	38.32	---	11.26	49.58	---	74.00	54.00	-4.42	Peak
6636.00	39.25	---	12.23	51.48	---	74.00	54.00	-2.52	Peak
6924.00	40.07	---	12.15	52.22	---	74.00	54.00	-1.78	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6072.00	38.91	---	11.01	49.92	---	74.00	54.00	-4.08	Peak
6696.00	39.38	---	12.22	51.60	---	74.00	54.00	-2.40	Peak
6900.00	39.32	---	12.16	51.48	---	74.00	54.00	-2.52	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(AV)  
Remark AVG = Result(AV) - Limit(AV)



<b>Product Name</b>	Wireless Network Adapter Module	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	7260NGW	<b>Test Date</b>	2014/04/19
<b>Test Mode</b>	IEEE 802.11a TX / CH Middle / ANT B	<b>Temp. &amp; Humidity</b>	26°C, 51%

<b>966 Chamber_B at 3Meter / Horizontal</b>									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6384.00	38.72	---	11.93	50.65	---	74.00	54.00	-3.35	Peak
6624.00	39.41	---	12.24	51.65	---	74.00	54.00	-2.35	Peak
6924.00	39.84	---	12.15	51.99	---	74.00	54.00	-2.01	Peak
<b>966 Chamber_B at 3Meter / Vertical</b>									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6120.00	39.32	---	11.15	50.47	---	74.00	54.00	-3.53	Peak
6588.00	39.58	---	12.25	51.83	---	74.00	54.00	-2.17	Peak
6888.00	39.21	---	12.16	51.37	---	74.00	54.00	-2.63	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(AV)  
Remark AVG = Result(AV) - Limit(AV)



<b>Product Name</b>	Wireless Network Adapter Module	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	7260NGW	<b>Test Date</b>	2014/04/19
<b>Test Mode</b>	IEEE 802.11an HT20 TX / CH Middle	<b>Temp. &amp; Humidity</b>	26°C, 51%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6384.00	38.66	---	11.93	50.59	---	74.00	54.00	-3.41	Peak
6780.00	39.24	---	12.19	51.43	---	74.00	54.00	-2.57	Peak
7200.00	39.12	---	12.75	51.87	---	74.00	54.00	-2.13	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6324.00	38.93	---	11.75	50.68	---	74.00	54.00	-3.32	Peak
6756.00	39.99	---	12.20	52.19	---	74.00	54.00	-1.81	Peak
6900.00	39.44	---	12.16	51.60	---	74.00	54.00	-2.40	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(AV)  
Remark AVG = Result(AV) - Limit(AV)



<b>Product Name</b>	Wireless Network Adapter Module	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	7260NGW	<b>Test Date</b>	2014/04/19
<b>Test Mode</b>	IEEE 802.11an HT40 TX / CH Middle	<b>Temp. &amp; Humidity</b>	26°C, 51%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6624.00	39.12	---	12.24	51.36	---	74.00	54.00	-2.64	Peak
6708.00	39.54	---	12.21	51.75	---	74.00	54.00	-2.25	Peak
6960.00	39.32	---	12.14	51.46	---	74.00	54.00	-2.54	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6372.00	38.89	---	11.89	50.78	---	74.00	54.00	-3.22	Peak
6600.00	38.75	---	12.24	50.99	---	74.00	54.00	-3.01	Peak
6924.00	39.25	---	12.15	51.40	---	74.00	54.00	-2.60	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor  
Margin = Result - Limit  
Remark Peak = Result(PK) - Limit(AV)  
Remark AVG = Result(AV) - Limit(AV)



<b>Product Name</b>	Wireless Network Adapter Module	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	7260NGW	<b>Test Date</b>	2014/04/19
<b>Test Mode</b>	IEEE 802.11ac VHT80 / CH High	<b>Temp. &amp; Humidity</b>	24°C, 43%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6384.00	38.65	---	11.93	50.58	---	74.00	54.00	-3.42	Peak
6708.00	39.54	---	12.21	51.75	---	74.00	54.00	-2.25	Peak
6876.00	39.70	---	12.16	51.86	---	74.00	54.00	-2.14	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
6204.00	38.04	---	11.40	49.44	---	74.00	54.00	-4.56	Peak
6492.00	39.12	---	12.25	51.37	---	74.00	54.00	-2.63	Peak
6876.00	38.88	---	12.16	51.04	---	74.00	54.00	-2.96	Peak


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor  
Margin = Result – Limit  
Remark Peak = Result(PK) – Limit(AV)  
Remark AVG = Result(AV) – Limit(AV)




Restricted Band Edges

Detector Mode : Peak Polarity : Horizontal

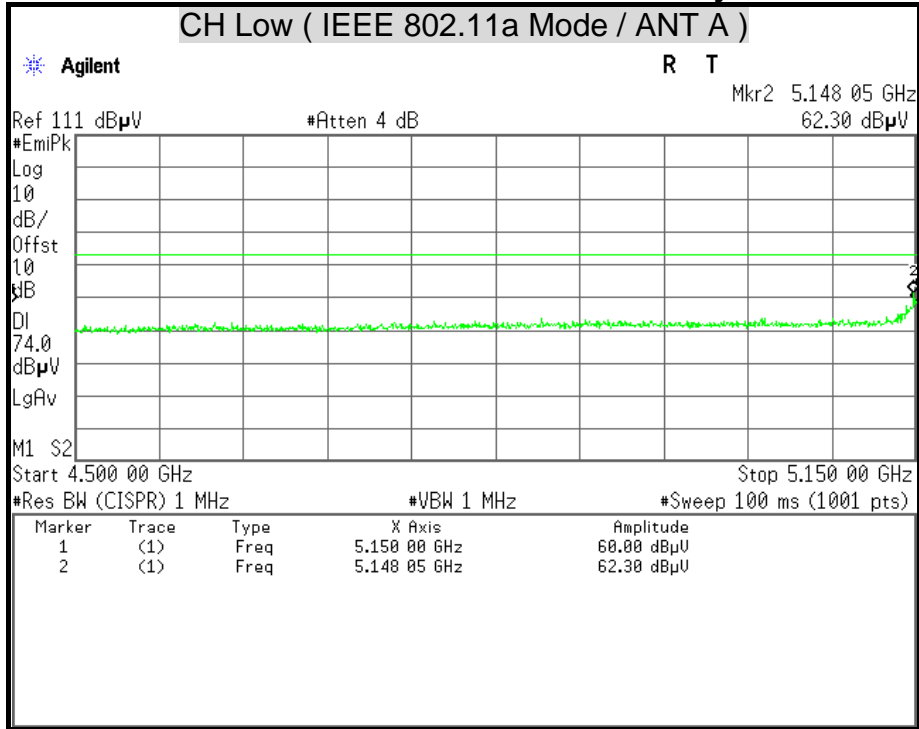


Detector Mode : Average Polarity : Horizontal

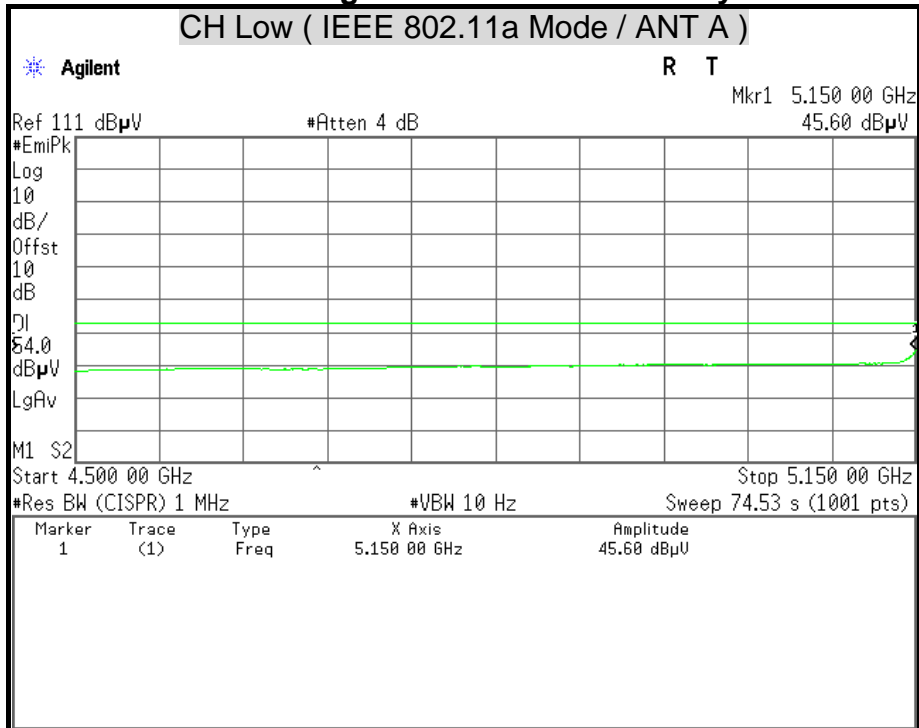




Detector Mode : Peak

Polarity : Vertical

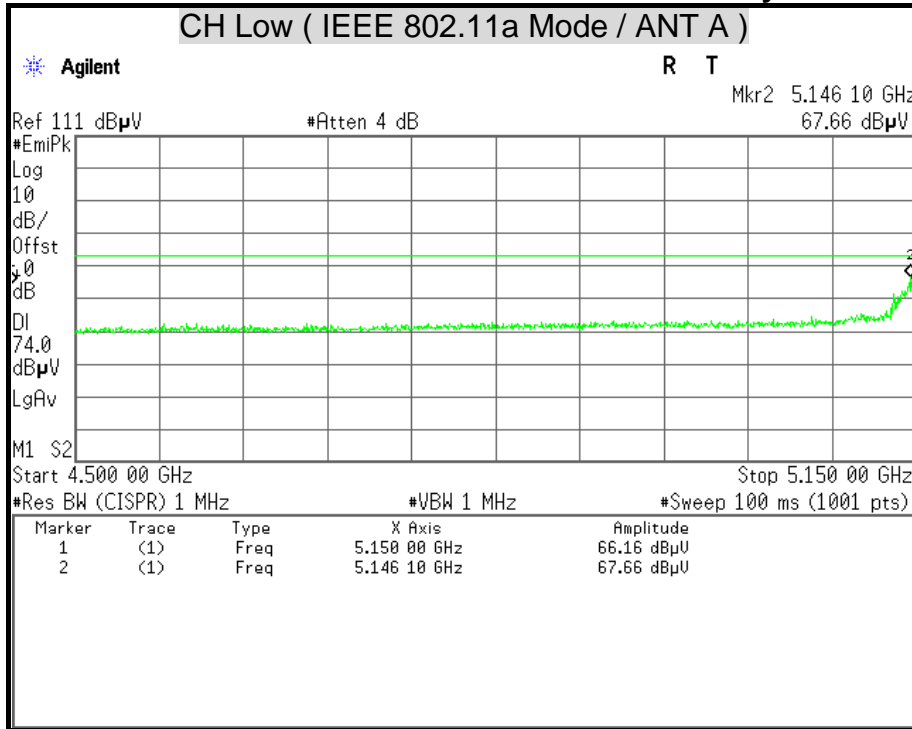

Detector Mode : Average

Polarity : Vertical

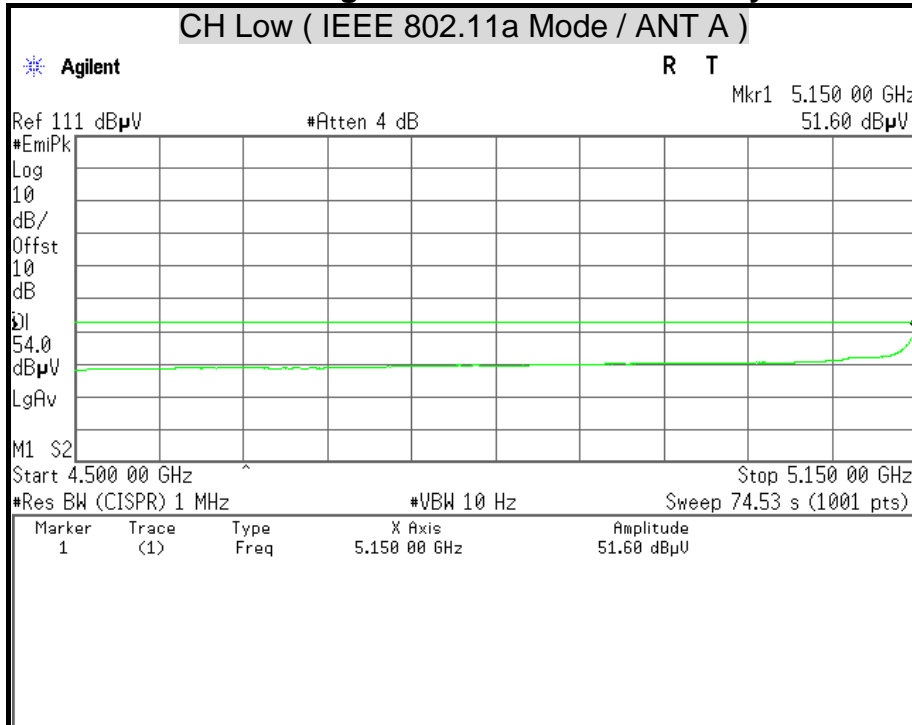







Detector Mode : Peak

Polarity : Horizontal

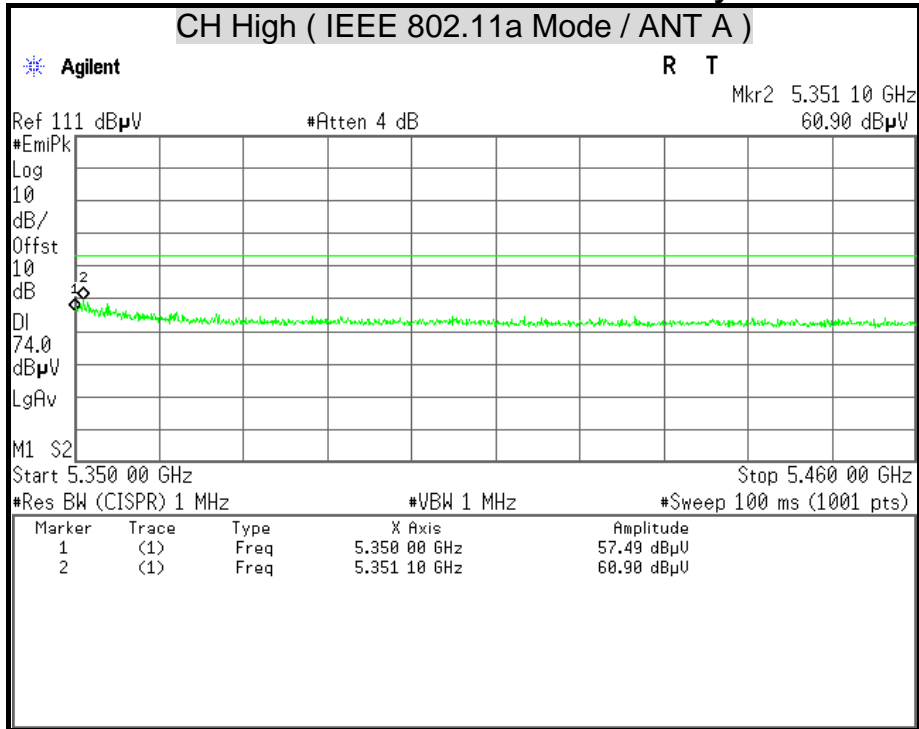

Detector Mode : Average


Polarity : Horizontal

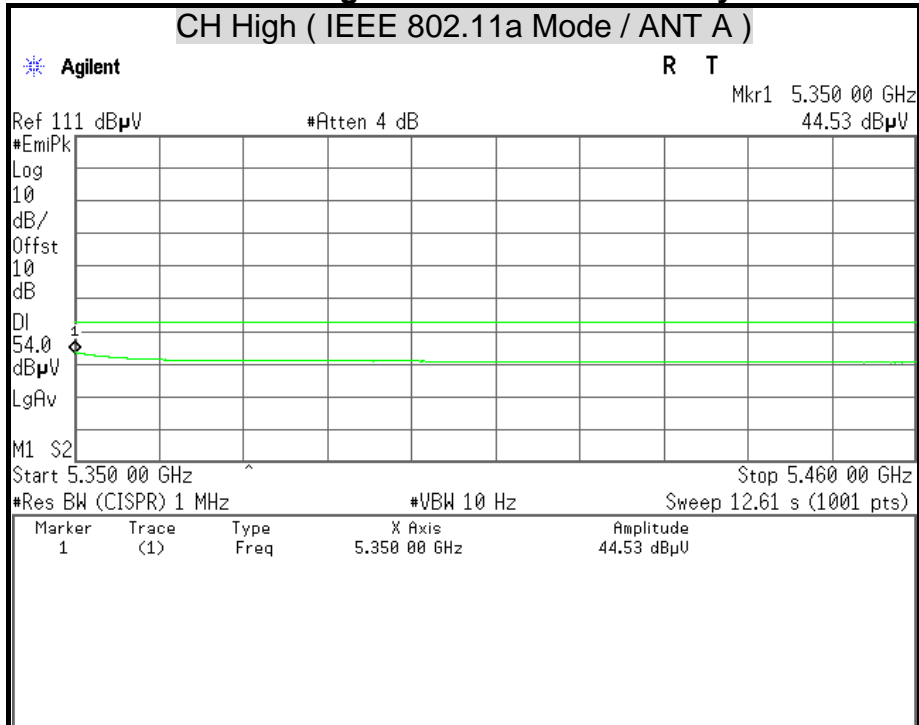




Detector Mode : Peak

Polarity : Vertical

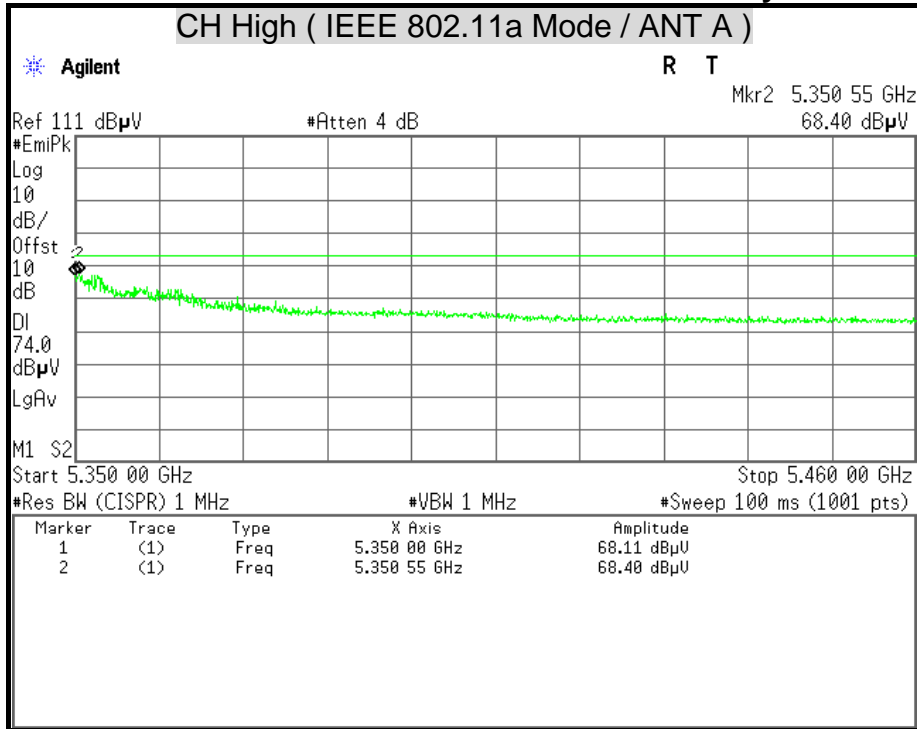

Detector Mode : Average


Polarity : Vertical

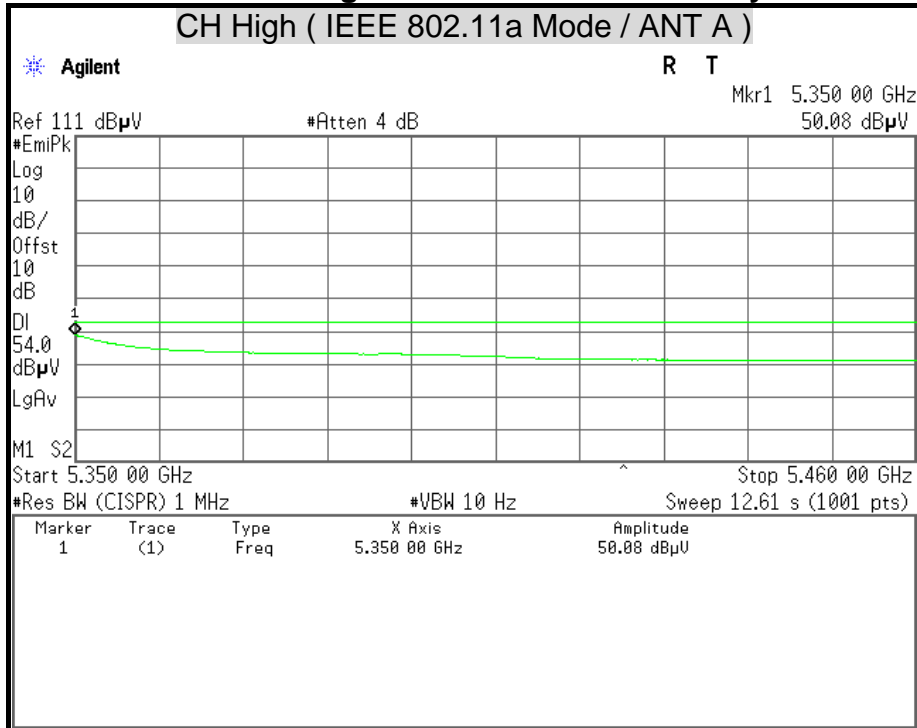




Detector Mode : Peak

Polarity : Horizontal

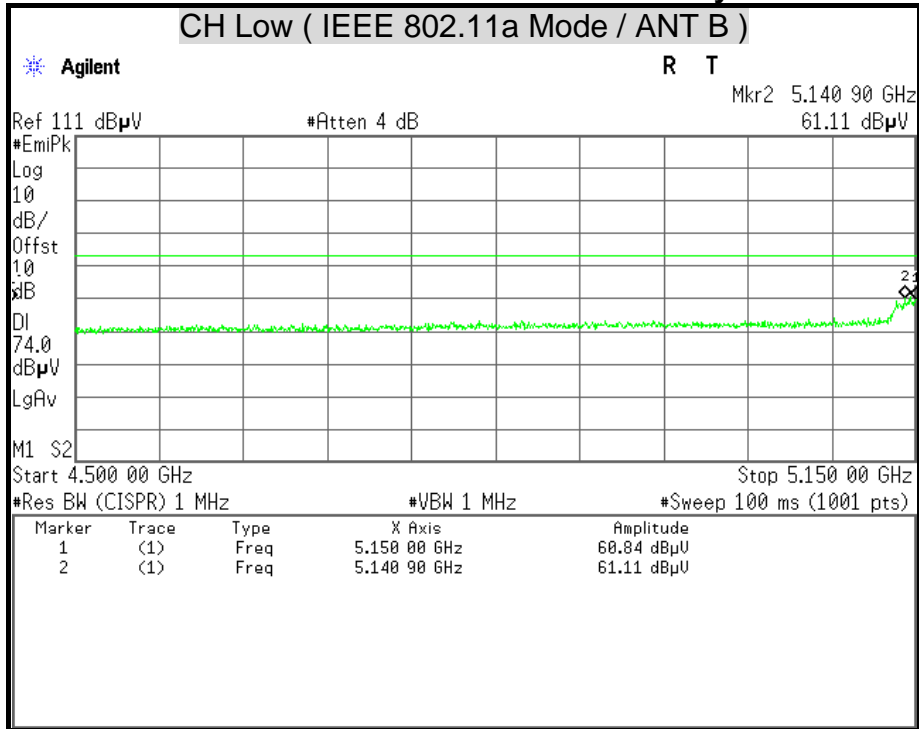

Detector Mode : Average


Polarity : Horizontal

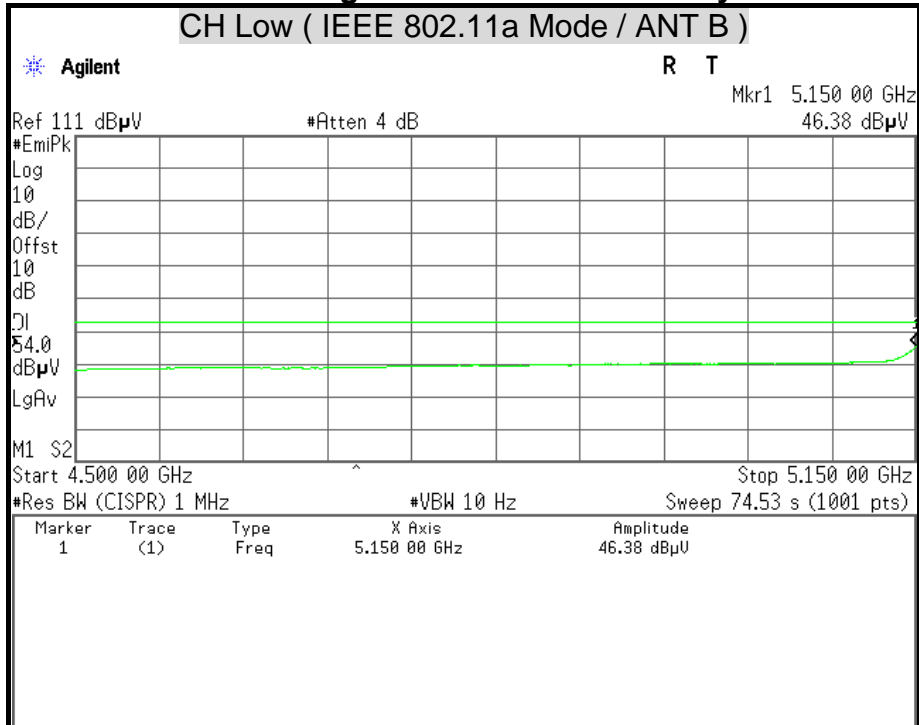




Detector Mode : Peak

Polarity : Vertical

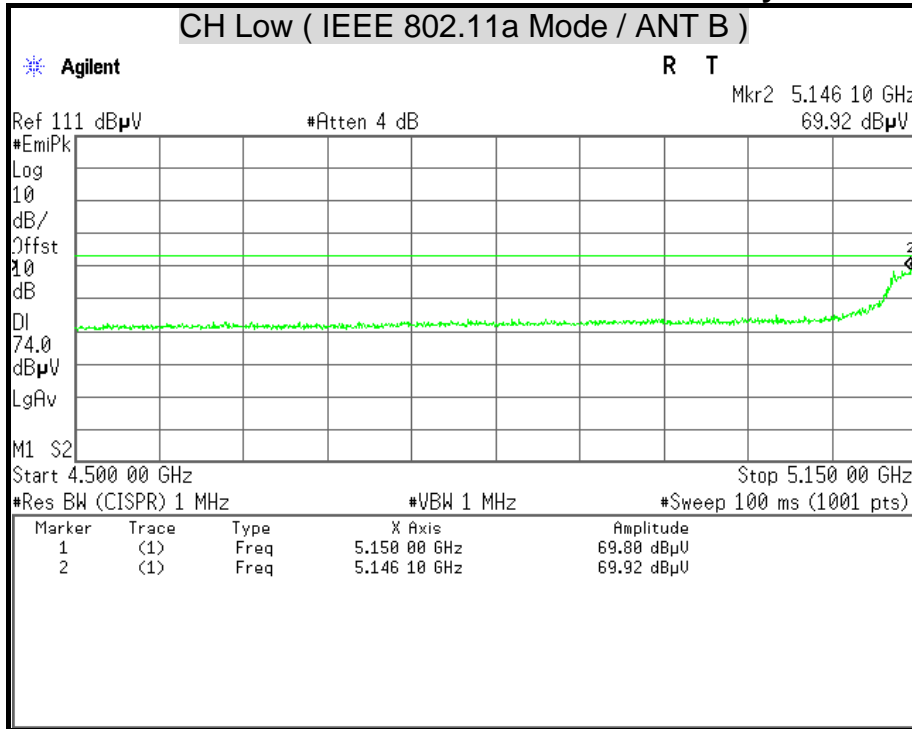

Detector Mode : Average


Polarity : Vertical

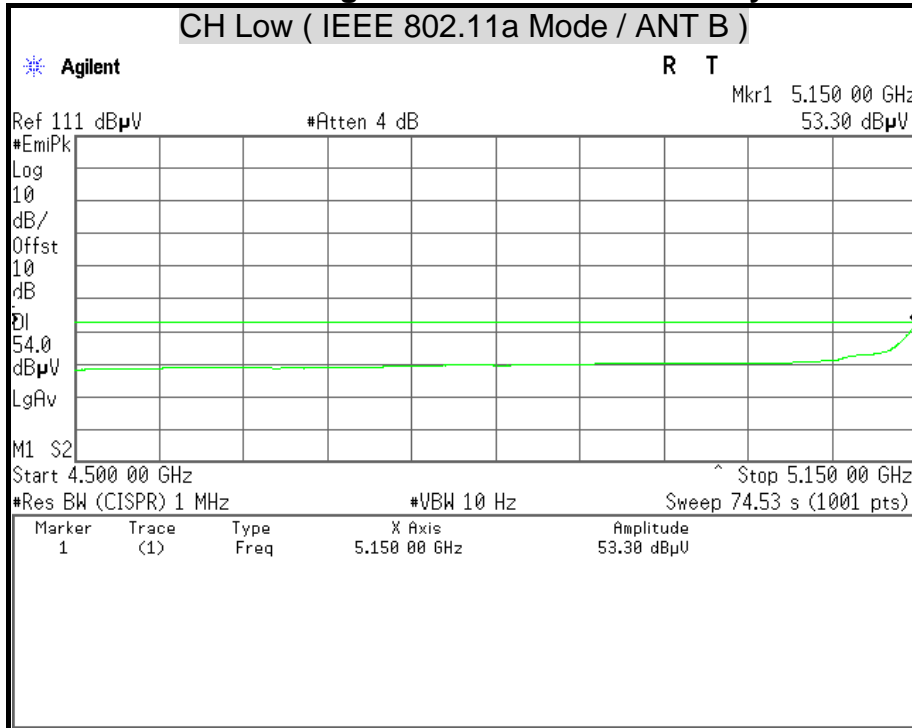




Detector Mode : Peak

Polarity : Horizontal

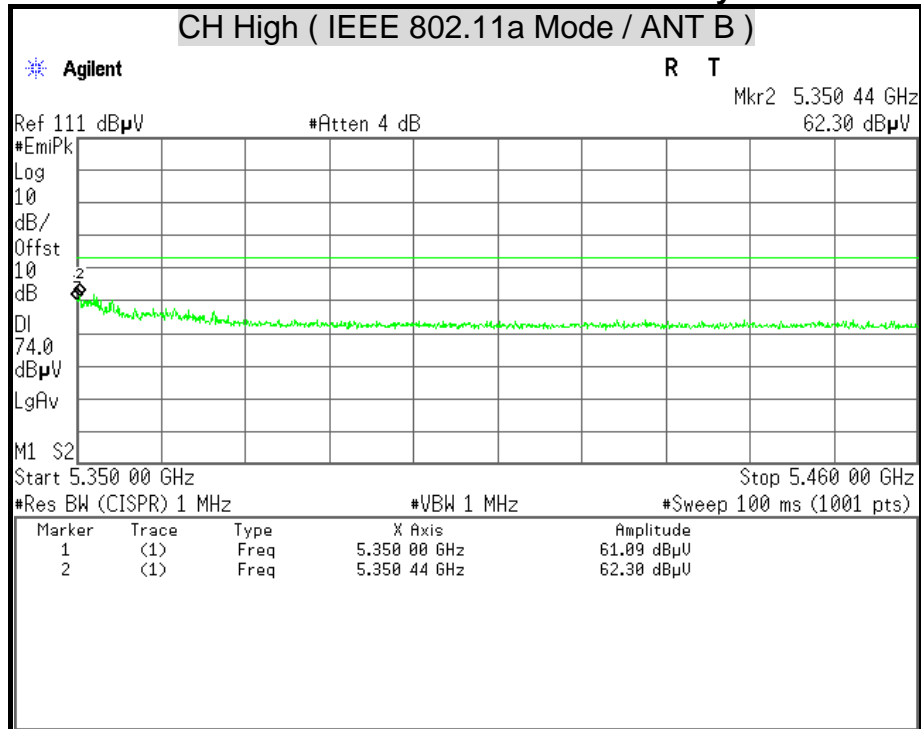

Detector Mode : Average


Polarity : Horizontal

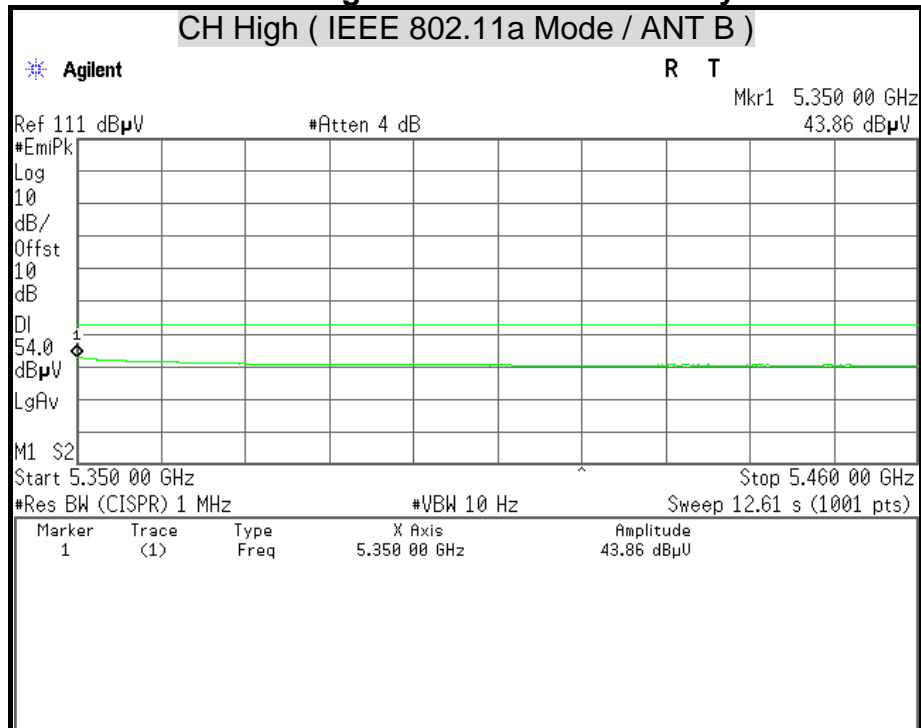




Detector Mode : Peak

Polarity : Vertical

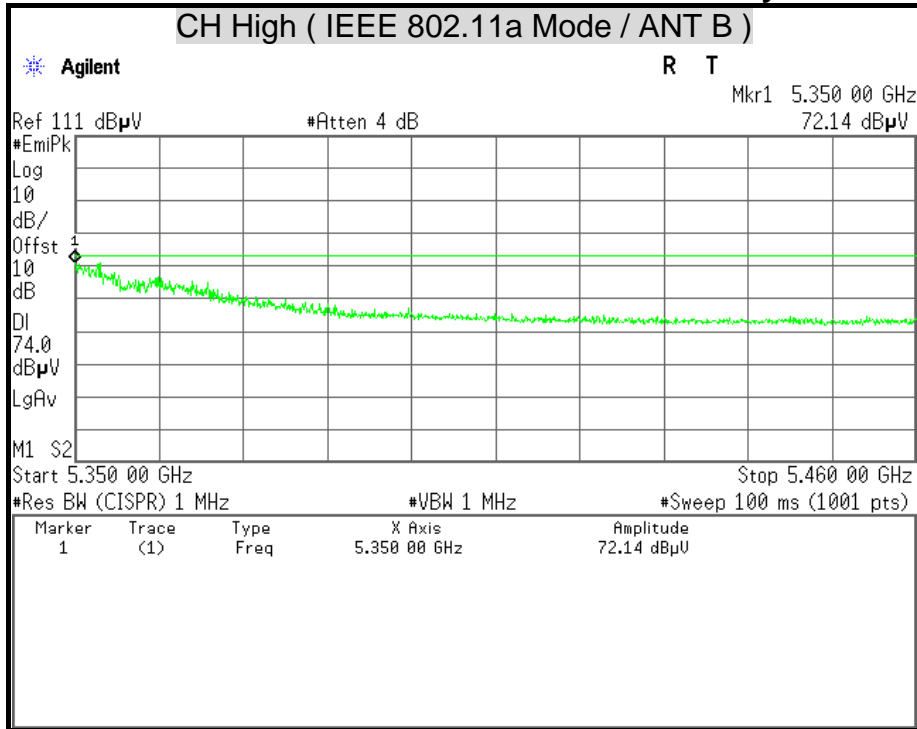

Detector Mode : Average


Polarity : Vertical

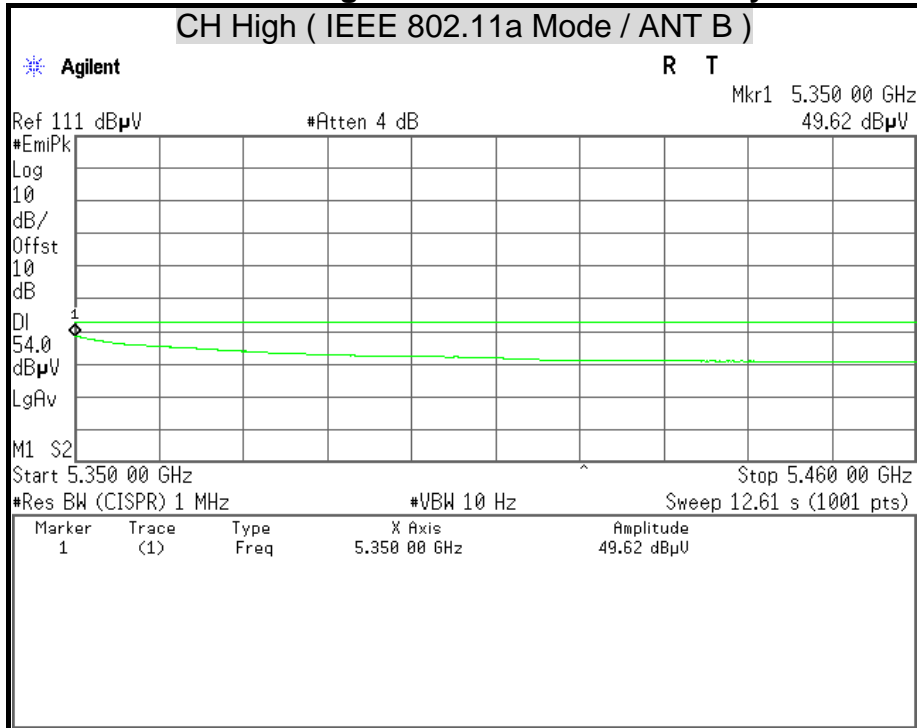




Detector Mode : Peak

Polarity : Horizontal

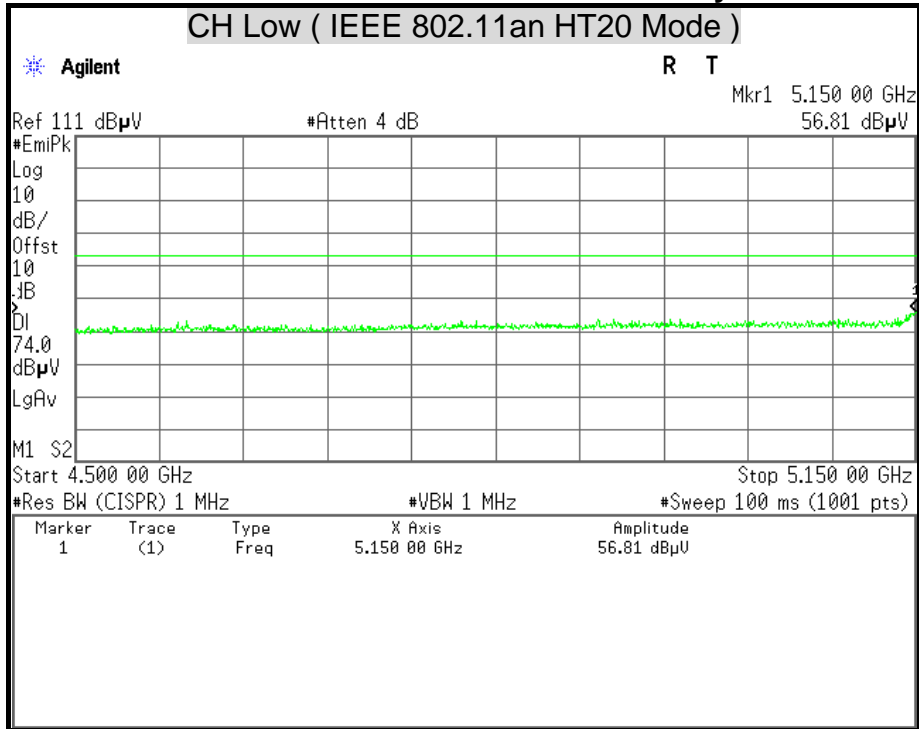

Detector Mode : Average


Polarity : Horizontal

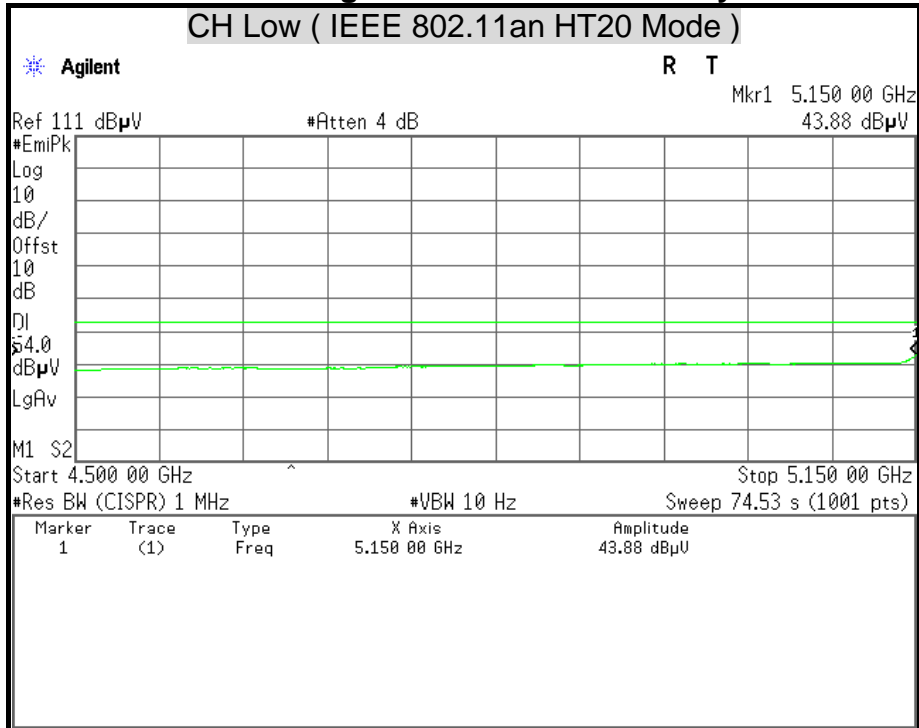




Detector Mode : Peak

Polarity : Vertical

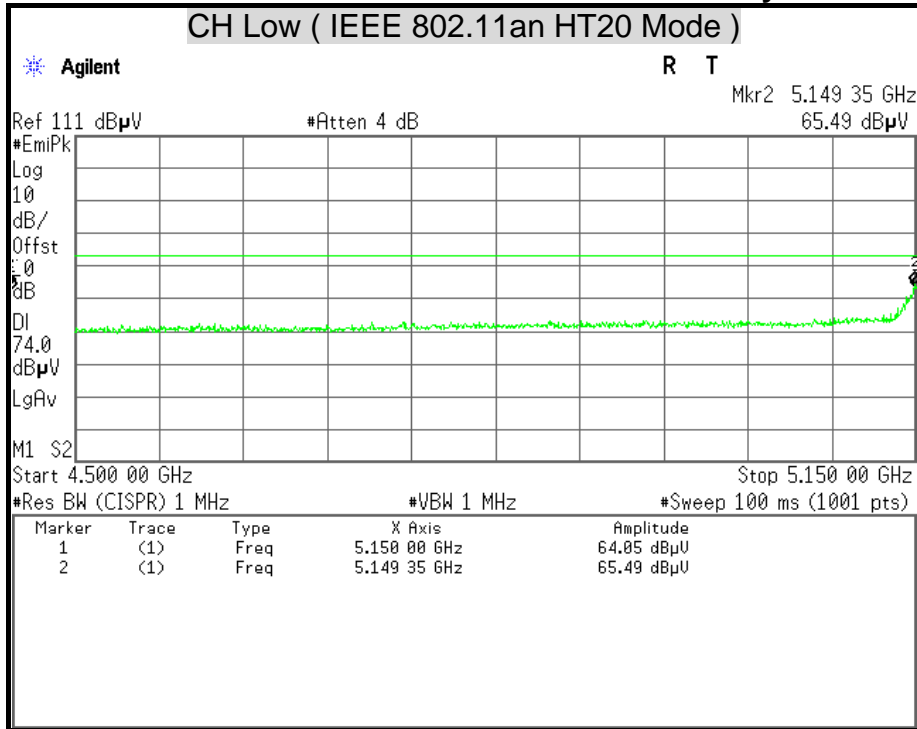

Detector Mode : Average

Polarity : Vertical

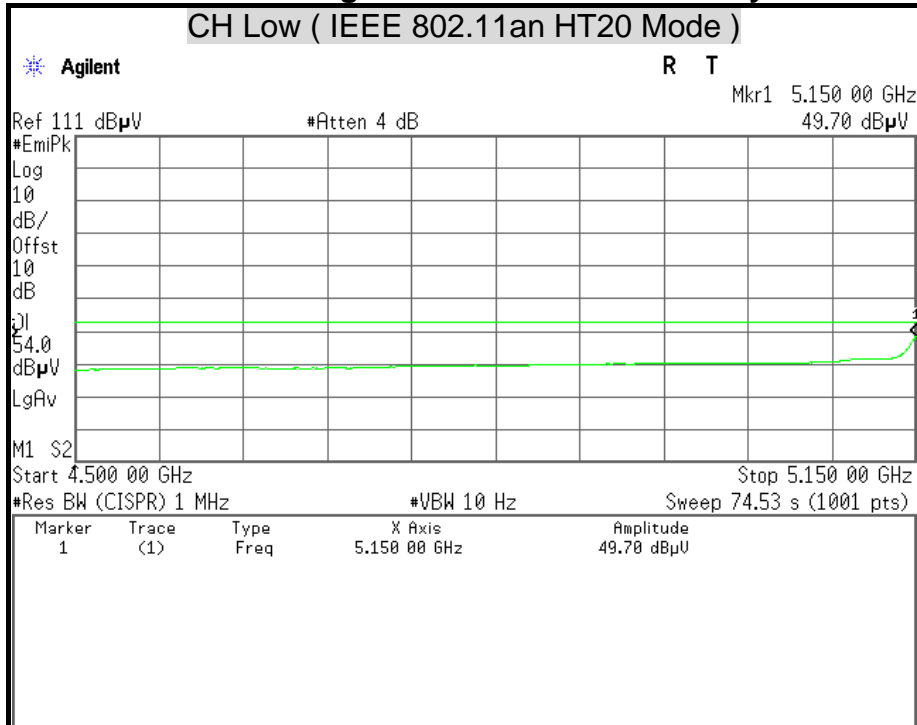







Detector Mode : Peak

Polarity : Horizontal

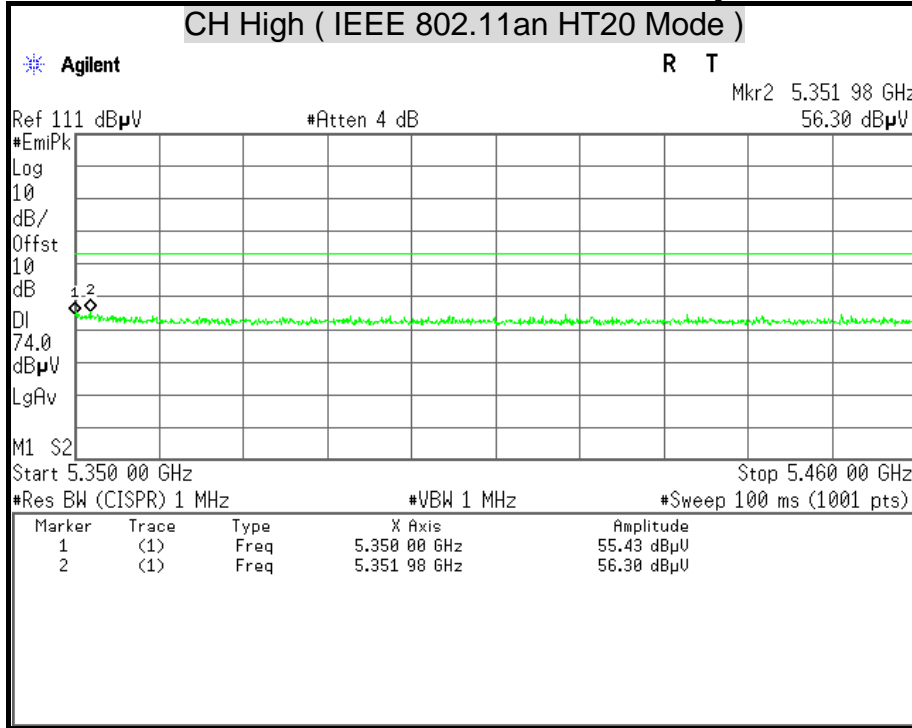

Detector Mode : Average


Polarity : Horizontal

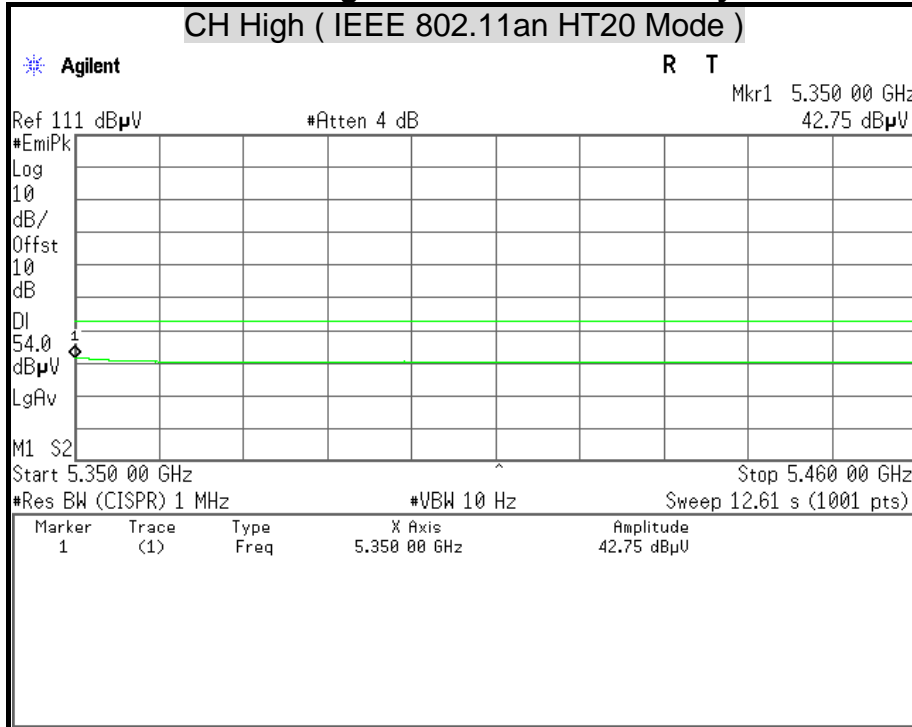




Detector Mode : Peak

Polarity : Vertical

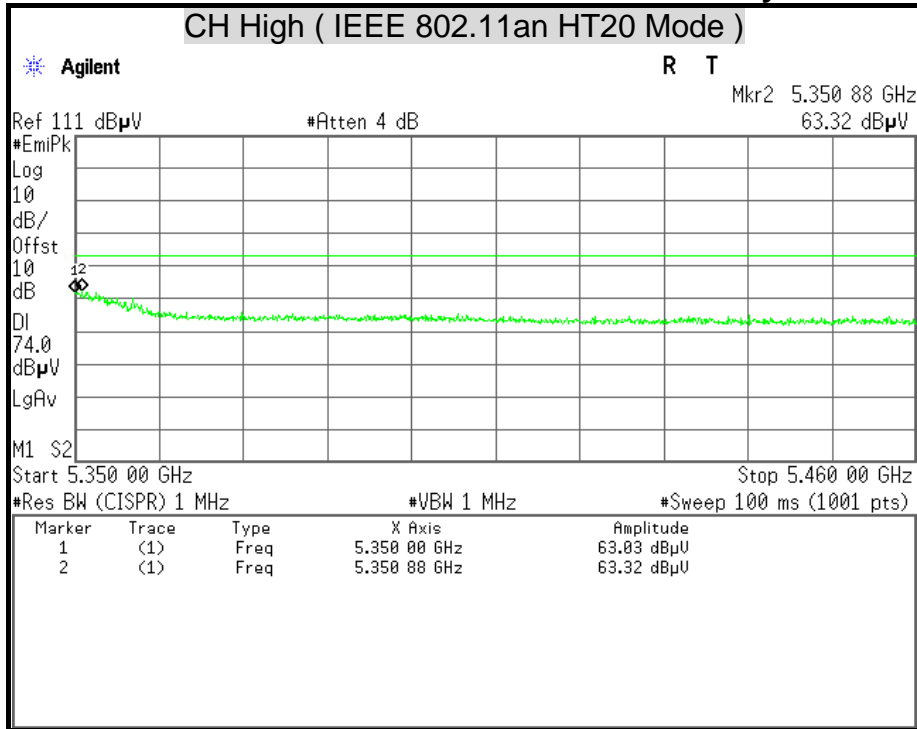

Detector Mode : Average


Polarity : Vertical

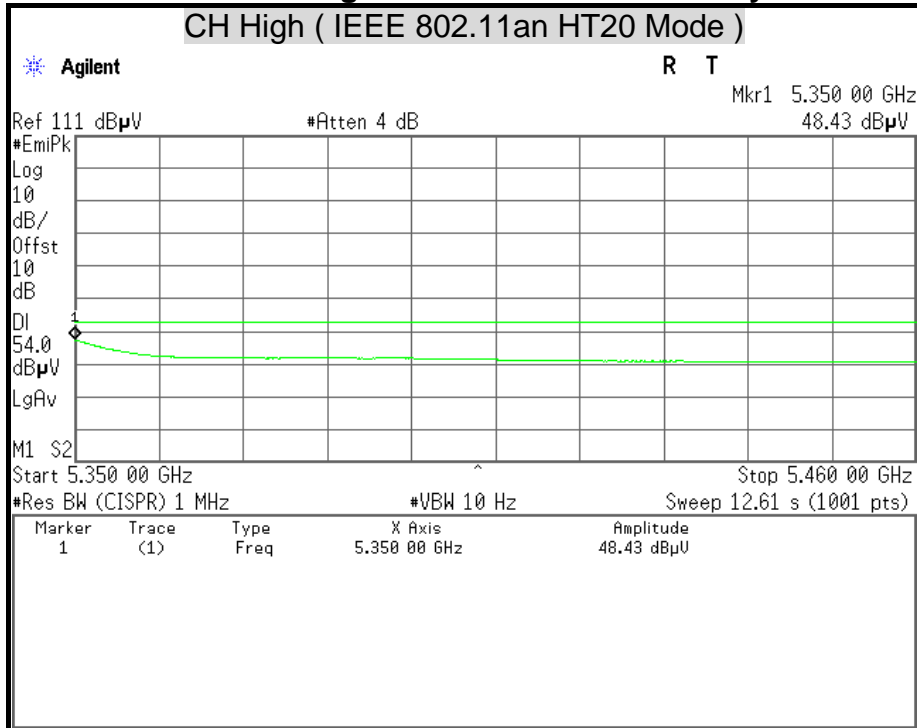




Detector Mode : Peak

Polarity : Horizontal

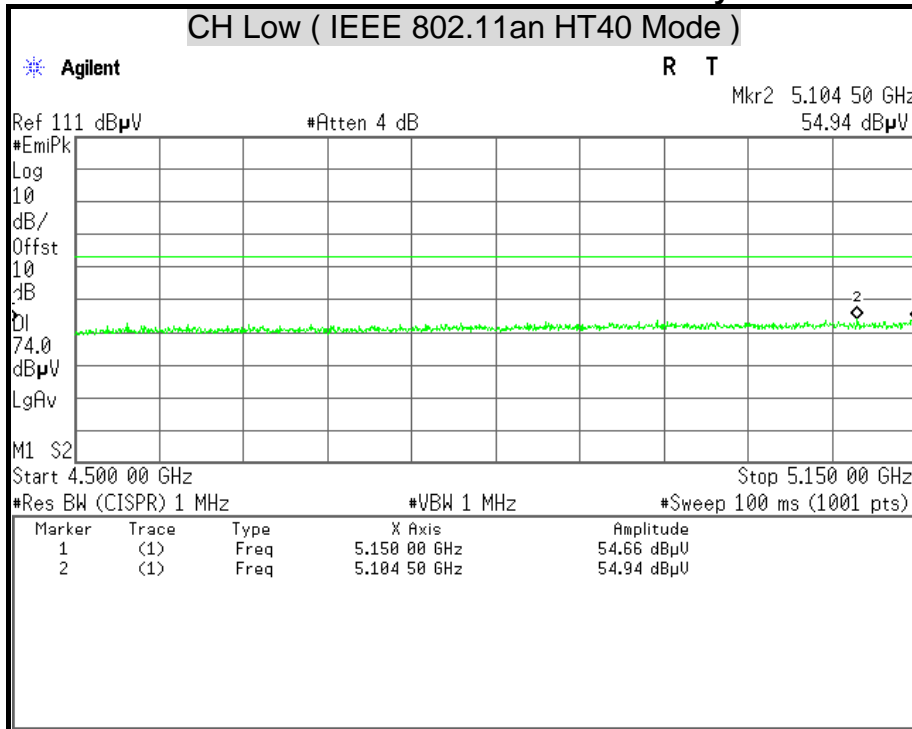

Detector Mode : Average


Polarity : Horizontal

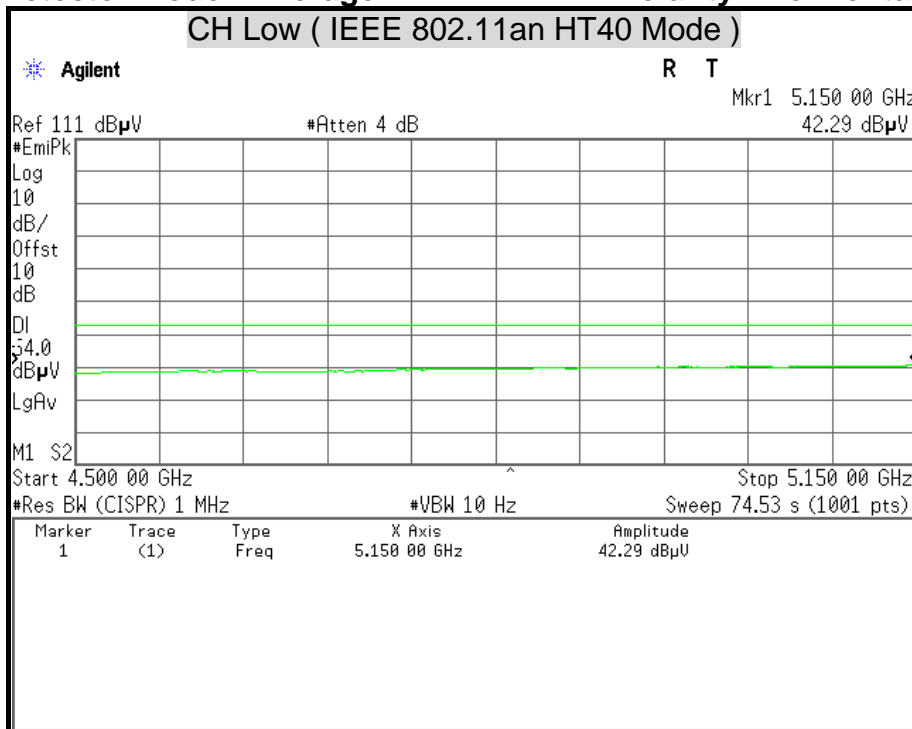




Detector Mode : Peak

Polarity : Vertical

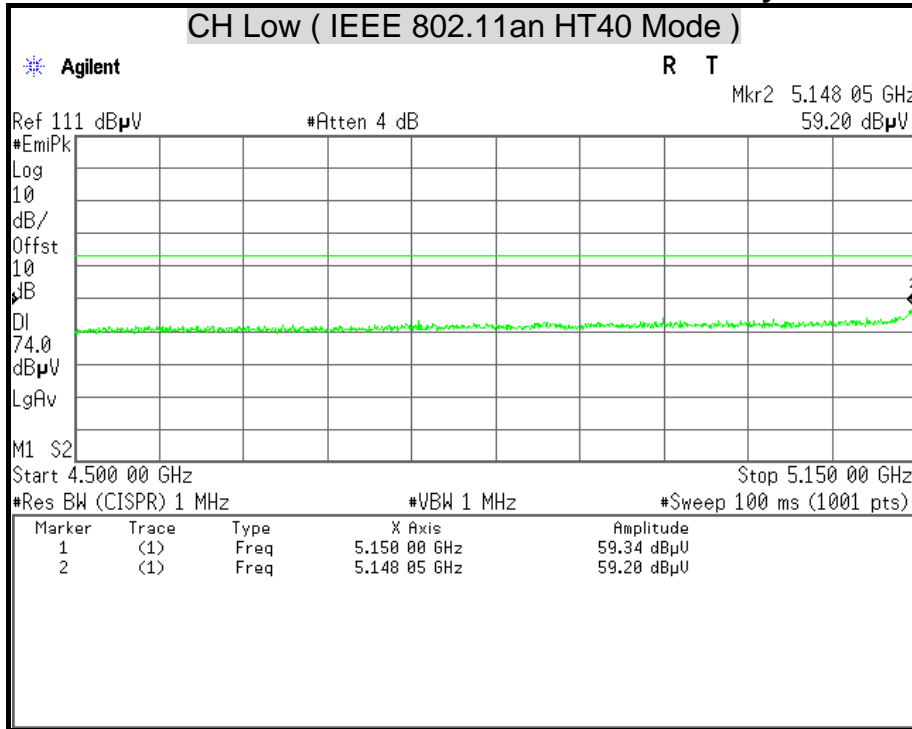

Detector Mode : Average


Polarity : Vertical

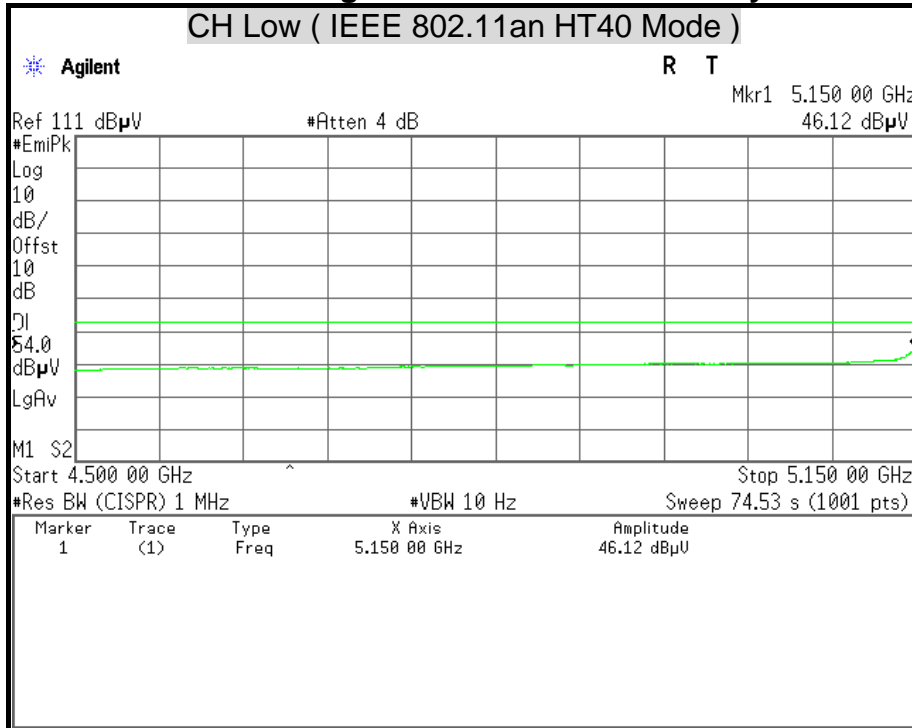




Detector Mode : Peak

Polarity : Horizontal

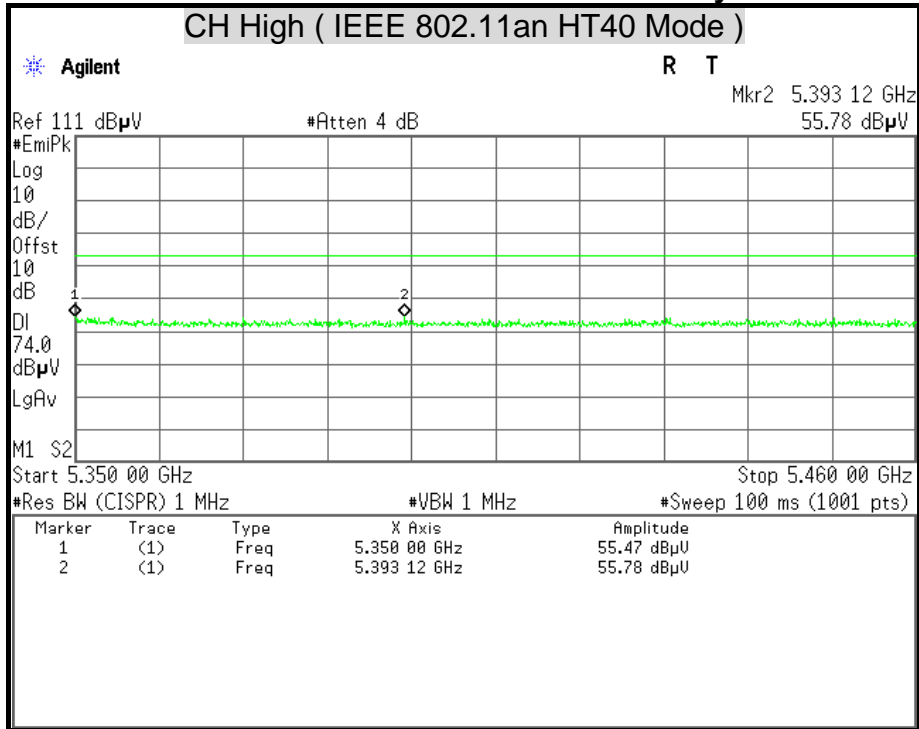

Detector Mode : Average


Polarity : Horizontal

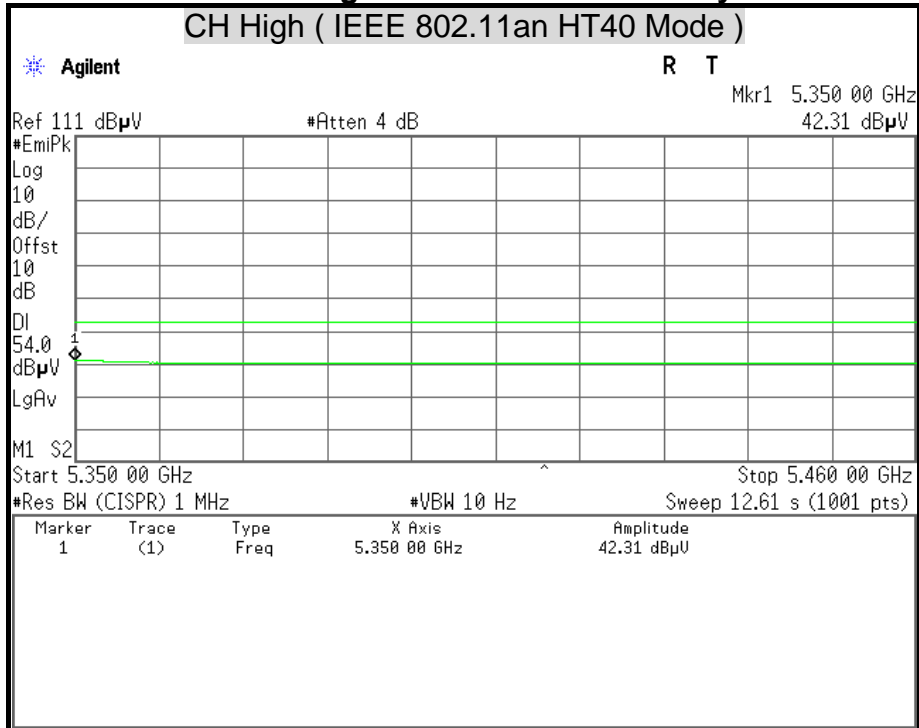




Detector Mode : Peak

Polarity : Vertical

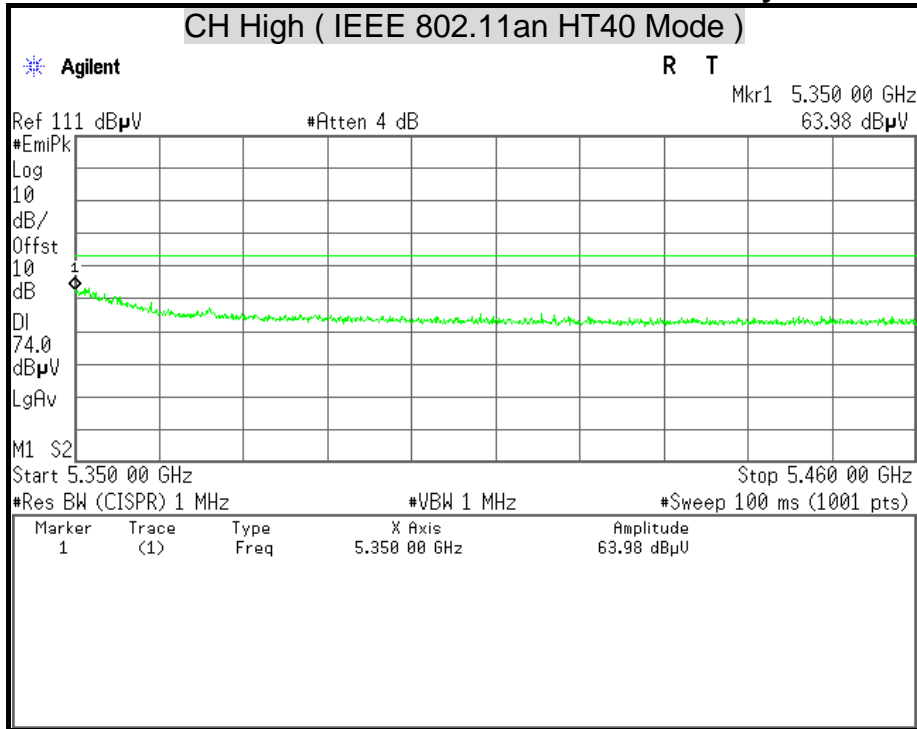

Detector Mode : Average


Polarity : Vertical

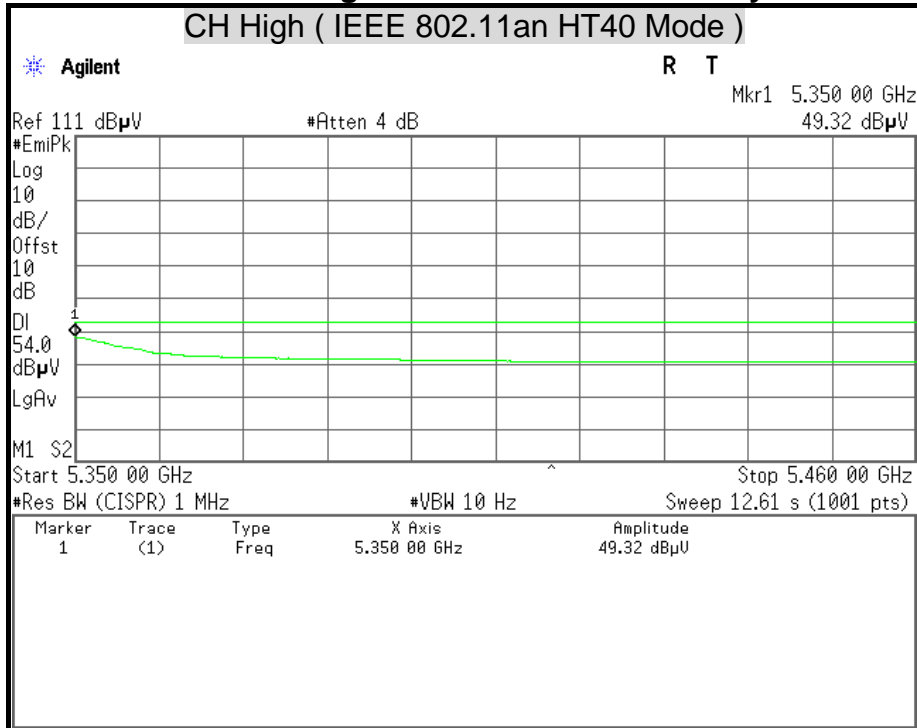




Detector Mode : Peak

Polarity : Horizontal

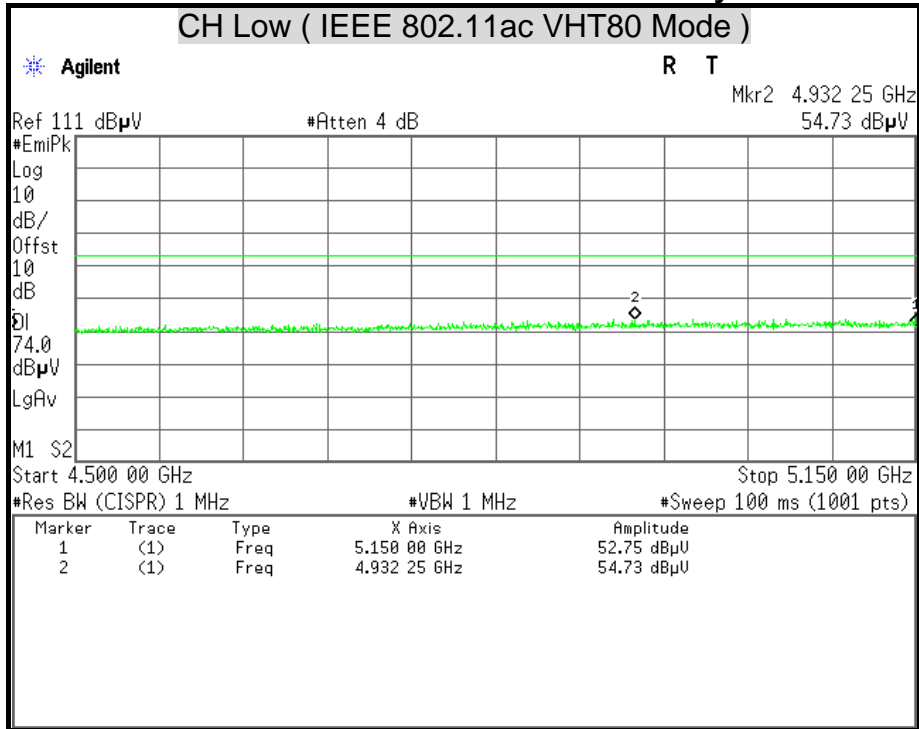

Detector Mode : Average


Polarity : Horizontal

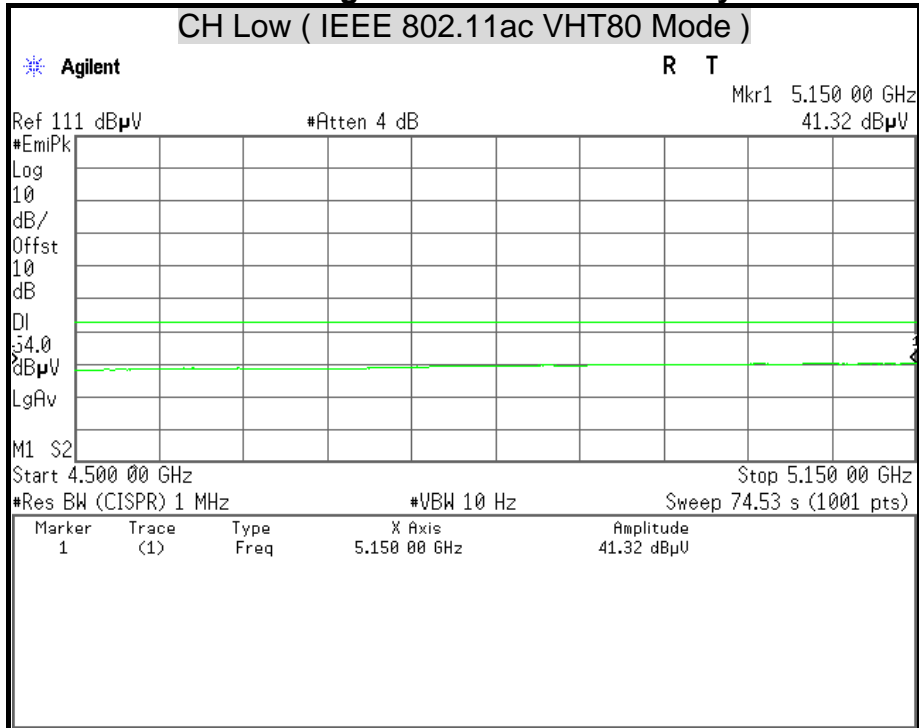




Detector Mode : Peak

Polarity : Vertical

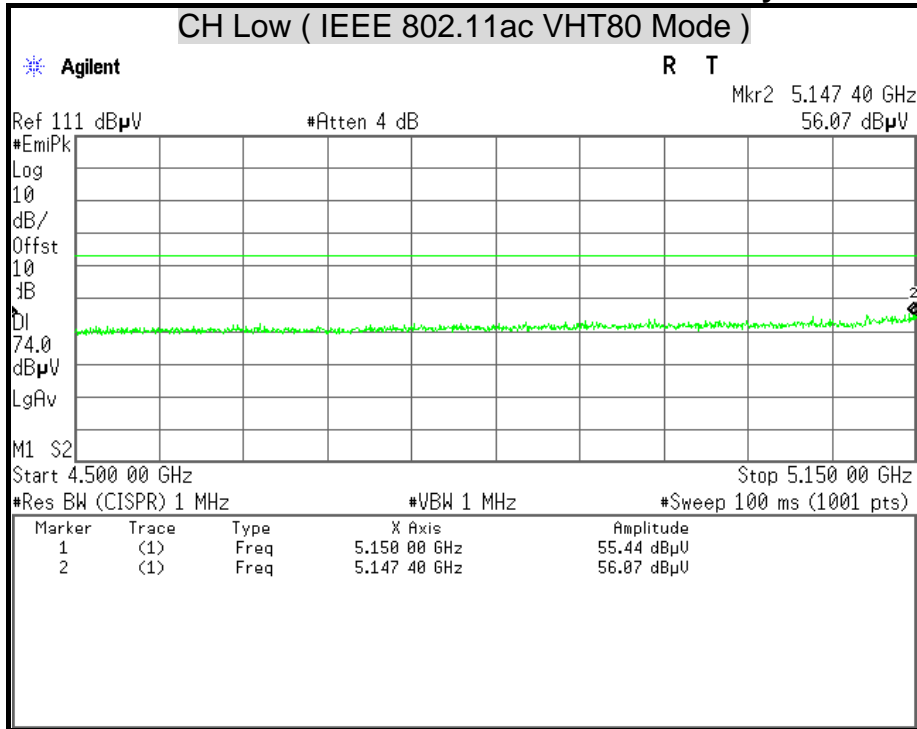

Detector Mode : Average

Polarity : Vertical

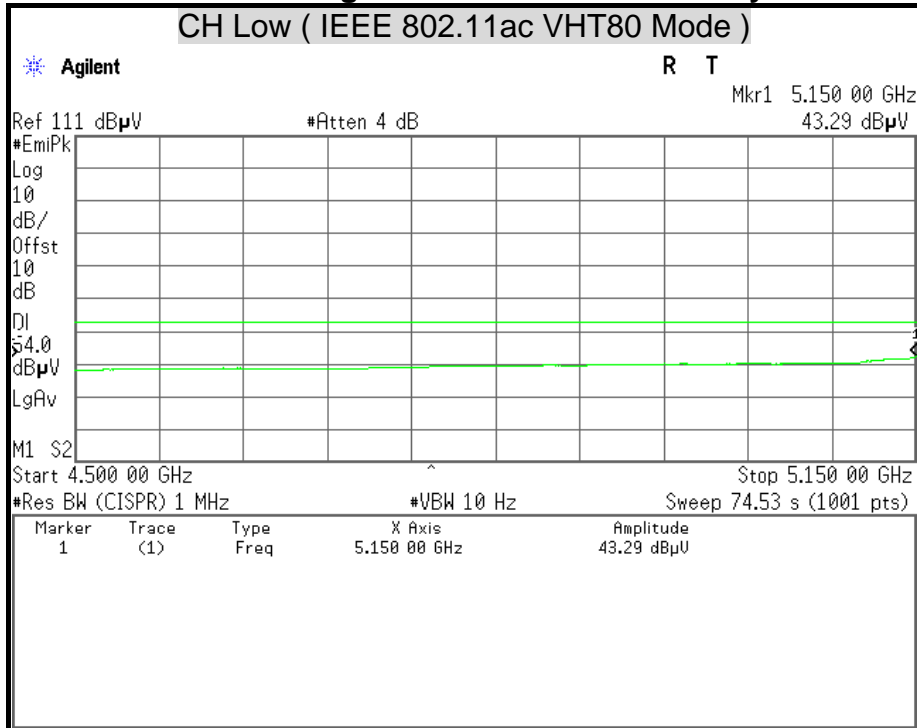







Detector Mode : Peak

Polarity : Horizontal

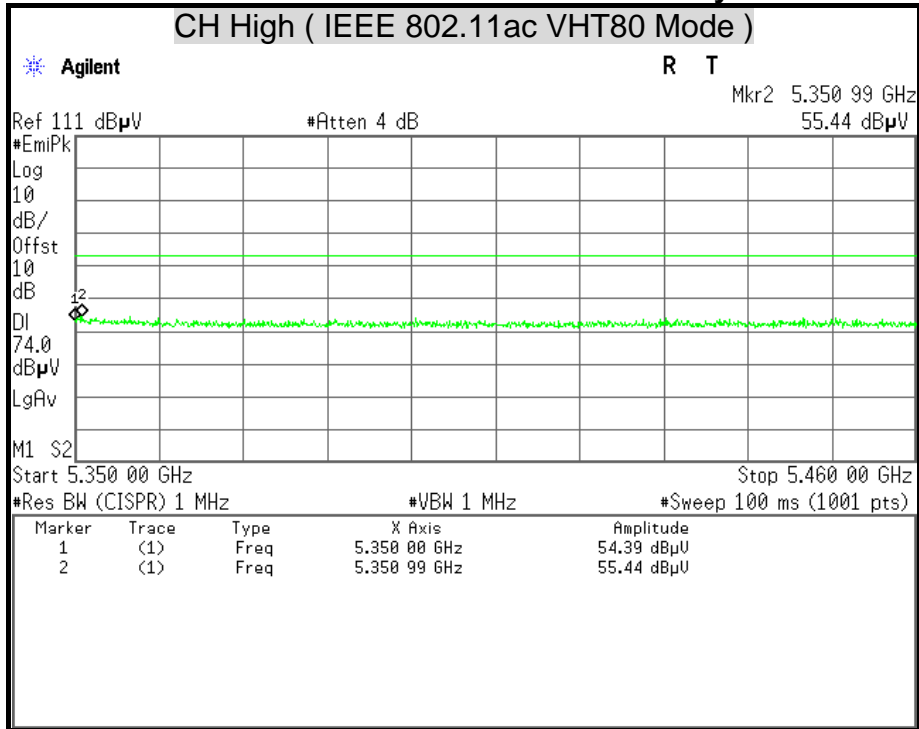

Detector Mode : Average


Polarity : Horizontal

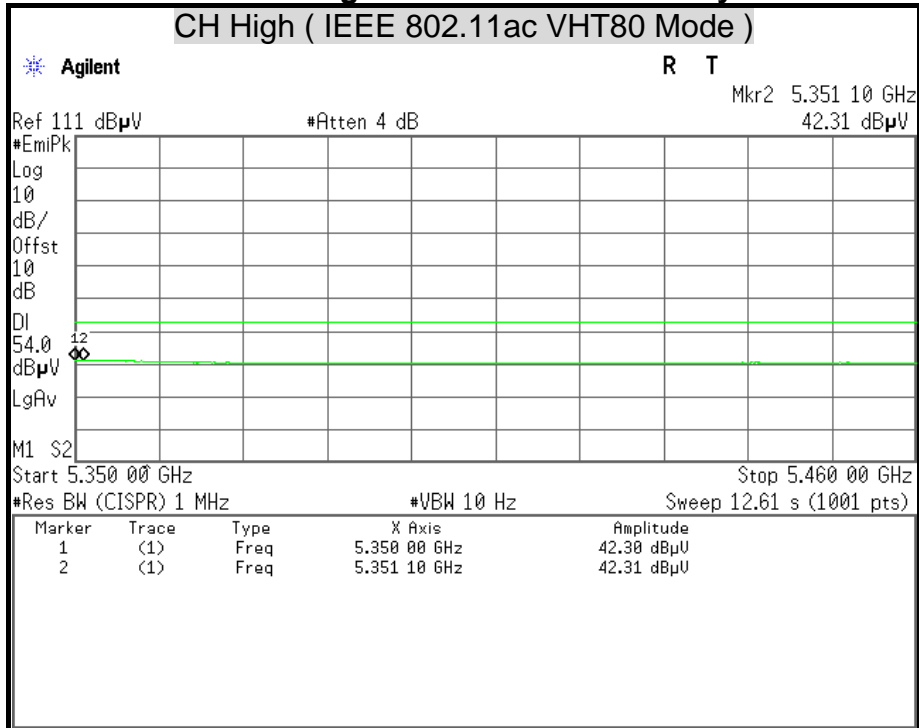



Detector Mode : Peak

Polarity : Vertical

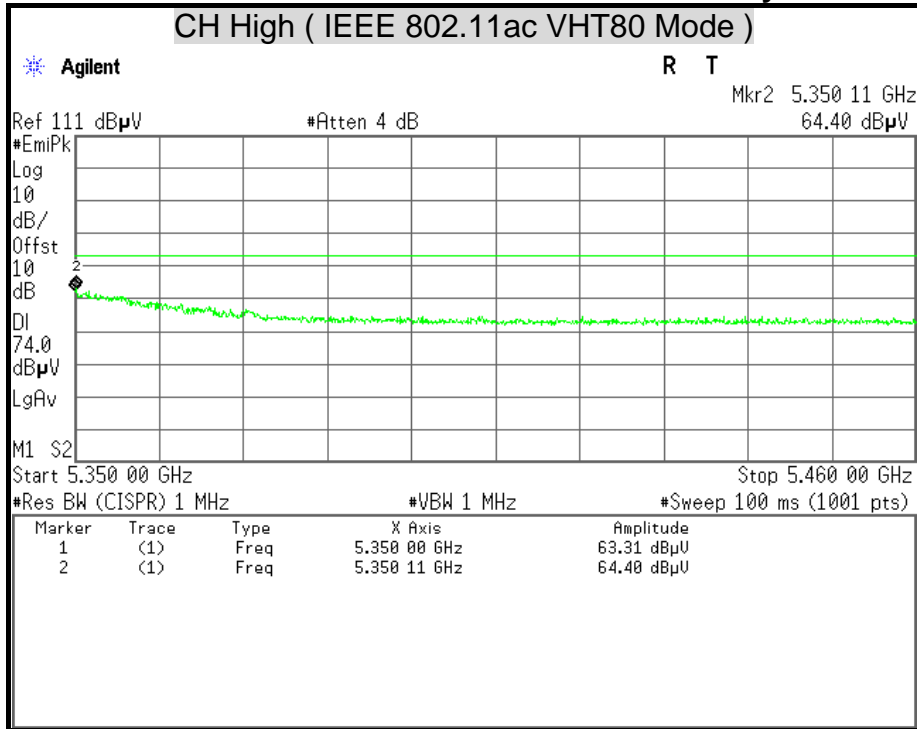

Detector Mode : Average

Polarity : Vertical

