



FCC TEST REPORT

CERTIFICATION

according to

**47 CFR FCC Rules and Regulations Part 15 Subpart B,
Class B Digital Device**

Equipment : TransferJet MicroUSB Adapter

Model No. : TJM35420MU

FCC ID : CJ6UPA5145TJ

Filing Type : Certification

Applicant : **TOSHIBA CORPORATION**
1-1, Shibaura 1-chome, Minato-ku,
Tokyo, 105-8001, Japan

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by TAF or any agency of U.S. government.**

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-3-327-3456

FAX : 886-3-327-0973

Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	2
1.5. Modification of EUT	2
2. Test Configuration of Equipment under Test.....	3
2.1. Test Manner	3
2.2. Description of Test System	4
2.3. Connection Diagram of Test System	5
3. Test Software	7
4. General Information of Test.....	8
4.1. Test Facility	8
4.2. Uncertainty of Test Site	8
4.3. Test Voltage	8
4.4. Measurement Procedure.....	8
4.5. Test in Compliance with	8
4.6. Frequency Range Investigated	8
4.7. Test Distance	9
5. Test of Conducted Powerline	10
5.1. Test Procedures.....	10
5.2. Typical Test Setup Layout of Conducted Powerline	11
5.3. Test Result of AC Powerline Conducted Emission	12
6. Test of Radiated Emission.....	14
6.1. Test Procedures.....	14
6.2. Typical Test Setup Layout of Radiated Emission.....	15
6.3. Test Result of Radiated Emission for Below 1GHz.....	16
6.4. Test Result of Radiated Emission for Above 1GHz	20
7. List of Measuring Equipment Used	22
Appendix A. Test Photos	A1 ~ A5
Appendix B. Photographs of EUT.....	B1 ~ B5

History of this test report

Original Report Issue Date: Apr. 01, 2014

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Report No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

CERTIFICATION

according to



**47 CFR FCC Rules and Regulations Part 15 Subpart B,
Class B Digital Device**

Equipment : TransferJet MicroUSB Adapter

Model No. : TJM35420MU

FCC ID : CJ6UPA5145TJ

Applicant : **TOSHIBA CORPORATION**
1-1, Shibaura 1-chome, Minato-ku,
Tokyo, 105-8001, Japan

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2009** and the energy emitted by this equipment was **passed CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission **Class B** limits.

The product sample received on **Oct. 03, 2013** and completely tested on **Oct. 25, 2013** at **SPORTON International Inc. LAB.**


Kero Kuo
Engineering Supervisor

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

TOSHIBA CORPORATION

1-1, Shibaura 1-chome, Minato-ku, Tokyo, 105-8001, Japan

1.2. Manufacturer

GOOD WAY TECHNOLOGY CO., LTD.

3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist., New Taipei City 231, Taiwan, R.O.C.

1.3. Basic Description of Equipment under Test

Equipment	:	TransferJet MicroUSB Adapter
Model No.	:	TJM35420MU
Trade Name	:	TOSHIBA
Power Supply Type	:	From host system

1.4. Feature of Equipment under Test

Please refer to user manual.

1.5. Modification of EUT

None.

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. During testing, the personal computer and equipment positions were varied according to ANSI C63.4-2009 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The equipment under test were performed the following test modes:

Test Items	Function Type
AC Conducted Emission	Mode 1. SEND DATA
Radiated Emissions	Mode 1. SEND DATA

- c. Frequency range investigated: Conduction 150 kHz to 30 MHz, Radiation 30 MHz to 23 GHz

2.2. Description of Test System

<For conducted and radiated emission below 1GHz >


No.	Description	Manufacturer	Model	FCC ID	Signal Cable Description
1	PC	DELL	DCTA	DOC	-
2	LCD Monitor"19"	DELL	E198WFPF	DOC	D-SUB Cable, D-Shielded, 1.8m
3	Keyboard	DELL	SK-8175	DOC	USB Cable, AL-F-Shielded, 1.8m
4	Mouse	DELL	MOC5UO	DOC	USB Cable, AL-F-Shielded, 1.8m
5	Printer	HP	C2642A	B94C2642X	LPT Cable, D-Shielded, 1.2m
6	Modem	ACEEX	DM1414	IFAXDM1414	RS-232 Cable, D-Shielded, 1.15m
7	Notebook	DELL	E5520	DOC	-
8	TransferJet USB Adapter	TOSHIBA	TJM35420UX	-	USB Cable, D-Shielded, 1.0m

<For radiated emission above 1GHz>

No.	Description	Manufacturer	Model	FCC ID	Signal Cable Description
1	PC	DELL	DCTA	DoC	-
2	LCD Monitor"19"	DELL	U2410	DoC	D-SUB Cable, D-Shielded, 1.8m
3	Keyboard	DELL	SK-8175	DoC	USB Cable, AL-F-Shielded, 1.8m
4	Mouse	DELL	MOC5UO	DoC	USB Cable, AL-F-Shielded, 1.8m
5	Printer	HP	C2642A	B94C2642X	LPT Cable, D-Shielded, 1.2m
6	Modem	ACEEX	DM1414	IFAXDM1414	RS-232 Cable, D-Shielded, 1.15m
7	Notebook	DELL	PP05L	DoC	-
8	TransferJet USB Adapter	TOSHIBA	TJM35420UX	-	USB Cable, D-Shielded, 1.0m

2.3. Connection Diagram of Test System


< Conducted Emission >

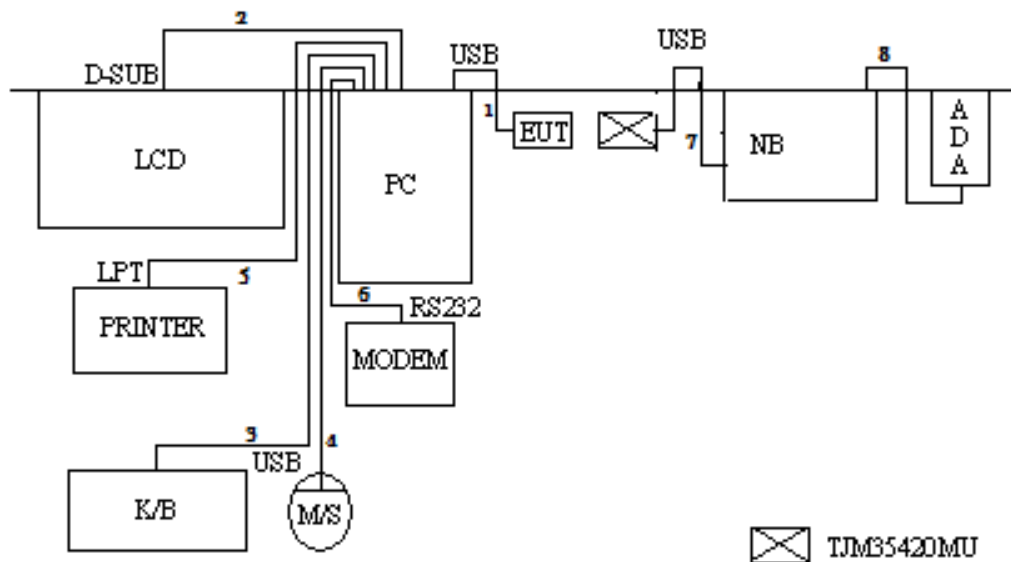

1. The USB cable is connected from the PC to the EUT.
2. The D-SUB cable is connected from the PC to the support unit 2.
3. The USB cable is connected from the PC to the support unit 3.
4. The USB cable is connected from the PC to the support unit 4.
5. The I/O cable is connected from the PC to the support unit 5.
6. The RS232 cable is connected from the EUT to the support unit 6.
7. The USB cable is connected from the Notebook to the support unit 8.
8. The I/O cable is connected from the Notebook to the Adapter.

Note: Above support unit on behalf of the meaning, please refer to section 2.2.

< Radiated Emission >

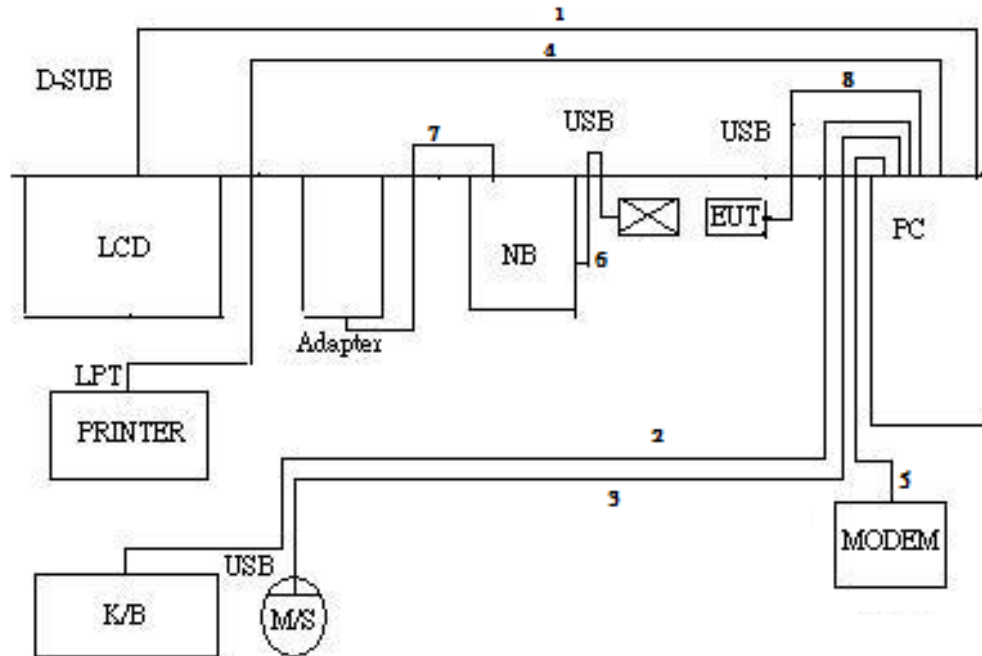

1. The D-DUB cable is connected from the PC to the support unit 2.
2. The USB cable is connected from the PC to the support unit 3.
3. The USB cable is connected from the PC to the support unit 4.
4. The I/O cable is connected from the PC to the support unit 5.
5. The I/O cable is connected from the PC to the support unit 6.
6. The I/O cable is connected from the Notebook to the support unit 8.
7. The I/O cable is connected from the Notebook to the Adapter.
8. The USB cable is connected from the PC to the EUT.

Note: Above support unit on behalf of the meaning, please refer to section 2.2.

3. Test Software

Two executive programs, "EMITEST.exe & EMCTEST.exe" under WIN XP, which generate a complete line of continuously repeating "H" pattern were used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends "H" pattern to the monitor, and the monitor displays "H" patterns on the screen.
- d. The PC sends "H" messages to the printer, and then the printer prints them on the paper.
- e. The PC sends signal messages to the modem.
- f. The PC sends signal messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from c to f.
- h. Executed "TJetUSBTransfer" to link with the NB to keep transmitting and receiving data via EUT.

4. General Information of Test

4.1. Test Facility

Test Site : SPORTON INTERNATIONAL INC.

Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District, Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-4739

FAX : 886-2-2631-9740

Test Site No. : CO01-NH, OS01-NH

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

TEL : 886-3-327-3456

FAX : 886-3-318-0055

Test Site No. : 03CH04-HY

4.2. Uncertainty of Test Site

Test Items	Test Site No.	Uncertainty	Remark
Conducted Emissions	CO01-NH	$\pm 2.62\text{dB}$	Confidence levels of 95%
Radiated Emissions below 1GHz	OS01-NH	$\pm 2.80\text{dB}$	Confidence levels of 95%
Radiated Emissions above 1GHz	03CH04-HY	$\pm 4.78\text{dB}$	Confidence levels of 95%

4.3. Test Voltage

AC 120V / 60Hz

4.4. Measurement Procedure

ANSI C63.4-2009

4.5. Test in Compliance with

CISPR PUB. 22 and Part 15 Subpart B

15.107 Conducted Emission

15.109 Radiated Emission

4.6. Frequency Range Investigated

a. Conducted emission test: from 150 kHz to 30 MHz

b. Radiated emission test: from 30 MHz to 23 GHz

4.7. Test Distance

- c. The test distance of radiated emission test from antenna to EUT is 10 M (from 30MHz~1000MHz).
- d. The test distance of radiated emission test from antenna to EUT is 3 M (from 1GHz~ 9GHz).
- e. The test distance of radiated emission test from antenna to EUT is 1 M (from 9GHz~ 23GHz).

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in ANSI C63.4, Clause 7. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.


5.1. Test Procedures

- a. The EUT was warmed up for 15 minutes before testing started.
- b. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
- c. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- d. All the support units are connect to the other LISN.
- e. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- f. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- g. Both sides of AC line were checked for maximum conducted interference.
- h. The frequency range from 150 kHz to 30 MHz was searched.
- i. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.3. Test Result of AC Powerline Conducted Emission


Test Mode	Mode 1	Test Site No.	CO01-NH
Test Frequency	0.15 MHz ~ 30 MHz	Test Engineer	Eddie
Temperature	24 °C	Relative Humidity	54 %
Note: 1. Corrected Reading (dB μ V) = LISN Factor + Cable Loss + Read Level = Level			
2. All emissions not reported here are more than 10 dB below the prescribed limit.			
■ The test was passed at the minimum margin that marked by the frame in the following data			

Line

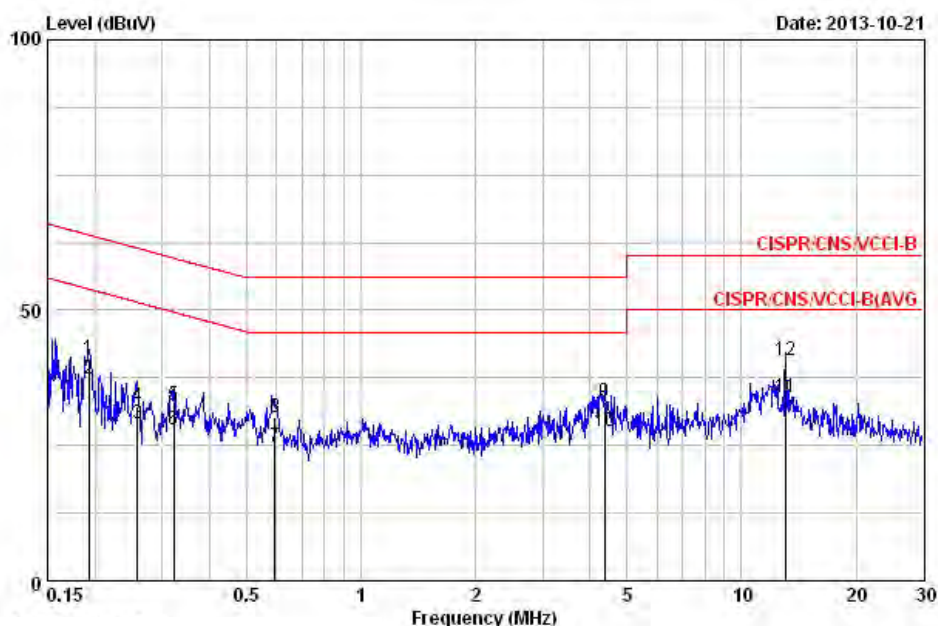

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dB μ V	dB	dB μ V	dB μ V	dB	dB	
1	0.192	41.09	-22.86	63.94	30.82	10.17	0.10	QP
2	0.192	37.19	-16.76	53.94	26.92	10.17	0.10	AVERAGE
3	0.259	29.07	-22.40	51.47	18.80	10.17	0.10	AVERAGE
4	0.259	32.22	-29.25	61.47	21.95	10.17	0.10	QP
5	0.322	32.57	-27.09	59.66	22.30	10.17	0.10	QP
6	0.322	27.89	-21.77	49.66	17.62	10.17	0.10	AVERAGE
7	0.592	24.67	-21.33	46.00	14.39	10.18	0.10	AVERAGE
8	0.592	30.25	-25.75	56.00	19.97	10.18	0.10	QP
9	4.361	33.07	-22.93	56.00	22.63	10.24	0.20	QP
10	4.361	27.65	-18.35	46.00	17.21	10.24	0.20	AVERAGE
11	13.014	33.90	-16.10	50.00	23.33	10.37	0.20	AVERAGE
12	13.014	40.74	-19.26	60.00	30.17	10.37	0.20	QP

Neutral

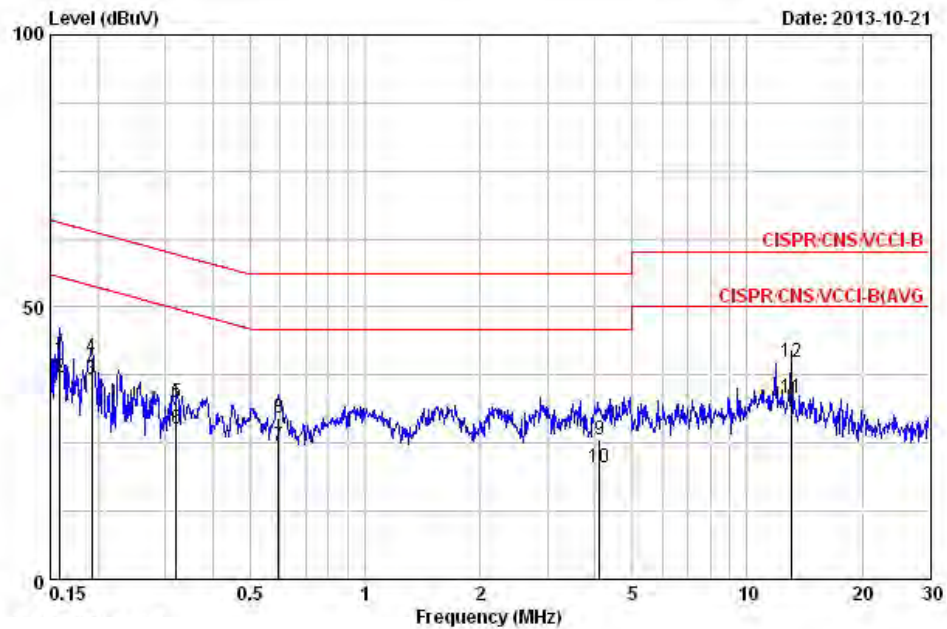

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.159	40.46	-25.06	65.52	30.22	10.14	0.10	QP
2	0.159	37.04	-18.48	55.52	26.80	10.14	0.10	AVERAGE
3	0.192	36.78	-17.15	53.93	26.54	10.14	0.10	AVERAGE
4	0.192	40.79	-23.14	63.93	30.55	10.14	0.10	QP
5	0.320	32.50	-27.20	59.71	22.26	10.14	0.10	QP
6	0.320	27.56	-22.14	49.71	17.32	10.14	0.10	AVERAGE
7	0.595	24.45	-21.55	46.00	14.20	10.14	0.10	AVERAGE
8	0.595	29.75	-26.25	56.00	19.50	10.14	0.10	QP
9	4.114	25.66	-30.34	56.00	15.26	10.19	0.20	QP
10	4.114	20.54	-25.46	46.00	10.14	10.19	0.20	AVERAGE
11	13.015	33.31	-16.69	50.00	22.76	10.35	0.20	AVERAGE
12	13.015	39.97	-20.03	60.00	29.42	10.35	0.20	QP

6. Test of Radiated Emission


Radiated emissions below 1 GHz were measured with a bandwidth of 120 kHz for 30 MHz to 1,000 MHz and bandwidth of 1 MHz for above 1 GHz to 5th harmonic of highest frequency according to the methods defines in ANSI C63.4, Clause 8. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 1/3m(above 1GHz)/10m(below 1GHz) from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. The FCC Part 15.109 (g) permit parties seeking to authorize a digital device to choose to demonstrate that the device complies with either the Part 15 standards or the international standards found in Publication 22 of the International Special Committee on Radio Interference (CISPR).
- i. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- j. The main board was tested in accordance with section 15.32 of the FCC rules. Testing for radiated emissions was first performed with the main board installed in a typical enclosure but with the enclosure's cover removed so that the internal circuitry is exposed at the top and on at least two sides. And then the EUT was tested with enclosure's cover unless it pass the required limits at first condition.

6.2. Typical Test Setup Layout of Radiated Emission

< Below 1GHz >

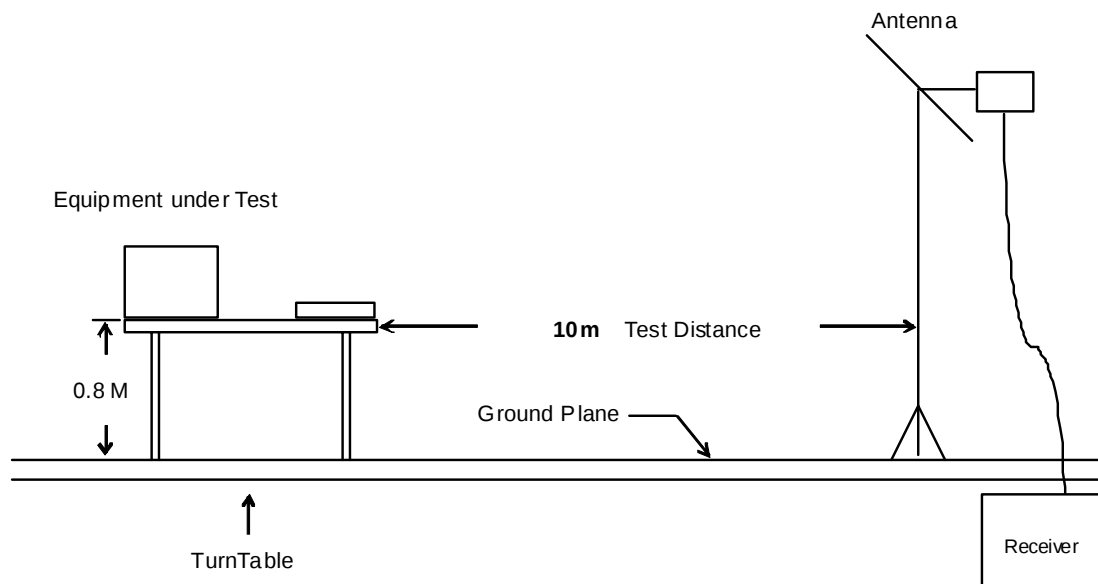


< Above 1GHz >

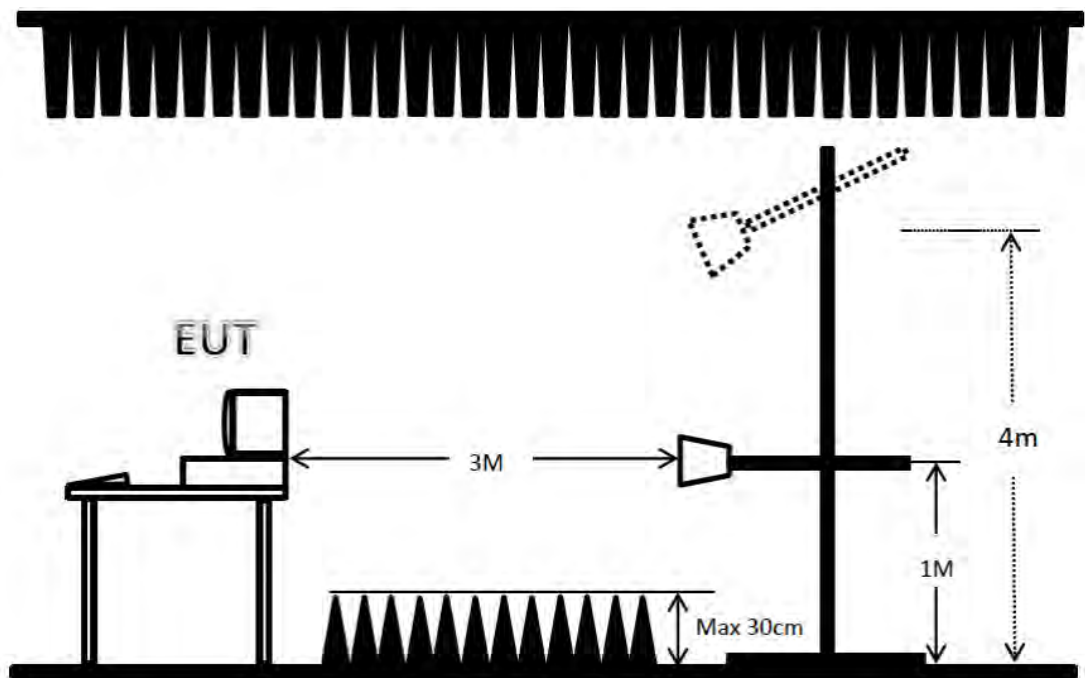

6.3. Test Result of Radiated Emission for Below 1GHz


Test mode	Mode 1	Test Site No.	OS01-NH
Test frequency	30 MHz ~ 1000 MHz	Test Engineer	Louis
Temperature	25 °C	Relative Humidity	55 %
Note: 1. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)			
2. Corrected Reading : Antenna Factor + Cable Loss + Read Level – Preamp Factor = Level			
■ The test was passed at the minimum margin that marked by the frame in the following data			

Vertical

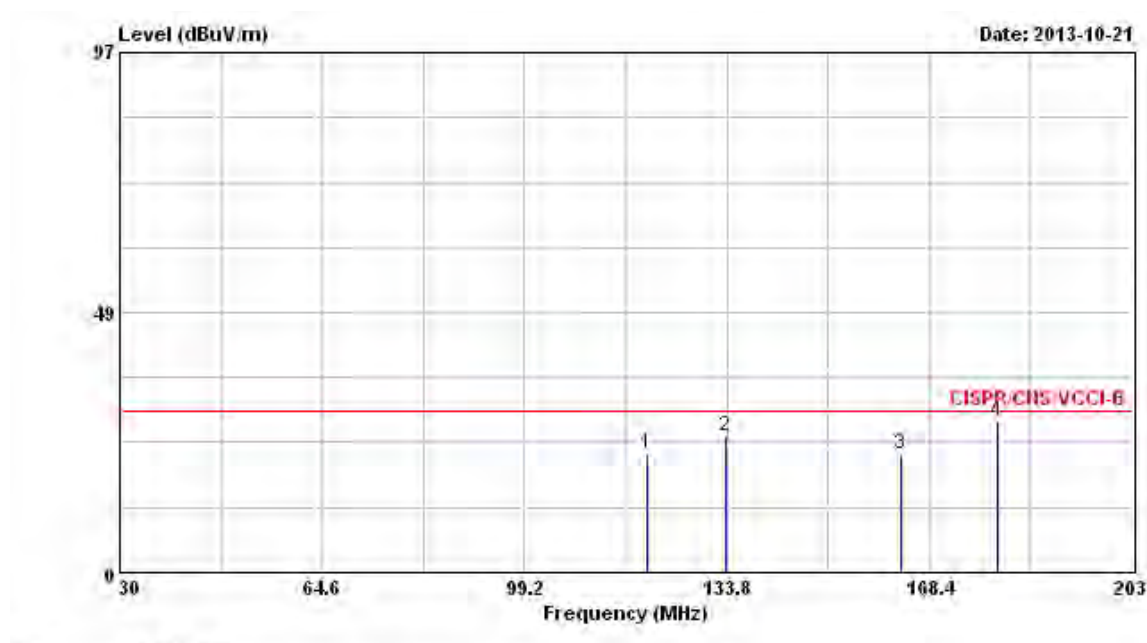


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dB μ V/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dB μ V/m	dB μ V	dB/m	dB	dB		cm	deg
1	120.130	22.05	-7.95	30.00	33.79	11.90	1.52	25.16	QP	100	122
2	133.630	25.56	-4.44	30.00	37.58	11.48	1.60	25.10	QP	100	174
3	163.570	22.19	-7.81	30.00	35.52	9.84	1.78	24.95	QP	100	225
4	180.000	28.06	-1.94	30.00	41.86	9.20	1.87	24.87	QP	100	180

Vertical

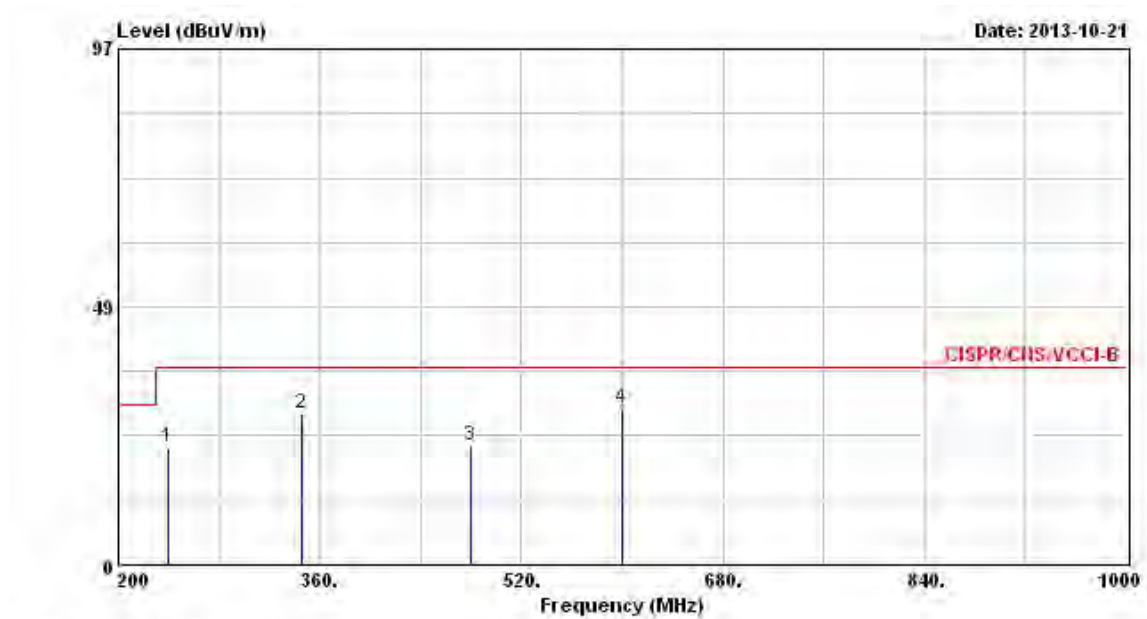


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	240.000	22.21	-14.79	37.00	33.54	11.20	2.12	24.65	QP	100	316
2	345.600	28.52	-8.48	37.00	36.02	14.28	2.53	24.31	QP	100	206
3	480.000	22.49	-14.51	37.00	25.72	17.22	3.20	23.65	QP	100	133
4	600.000	29.27	-7.73	37.00	29.82	18.70	3.96	23.21	QP	100	197

Horizontal

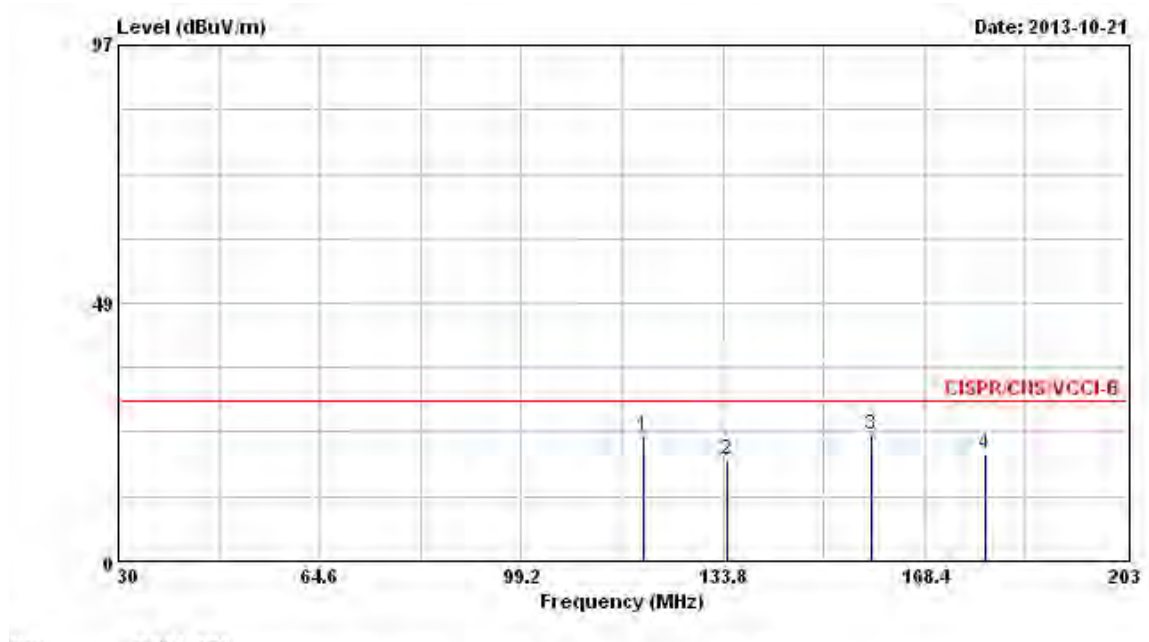

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	120.130	23.53	-6.47	30.00	35.27	11.90	1.52	25.16	QP	400	79
2	134.620	19.13	-10.87	30.00	31.20	11.42	1.60	25.09	QP	400	328
3	159.230	23.64	-6.36	30.00	36.93	9.94	1.75	24.98	QP	400	197
4	178.840	20.01	-9.99	30.00	33.72	9.31	1.86	24.88	QP	400	272

Horizontal

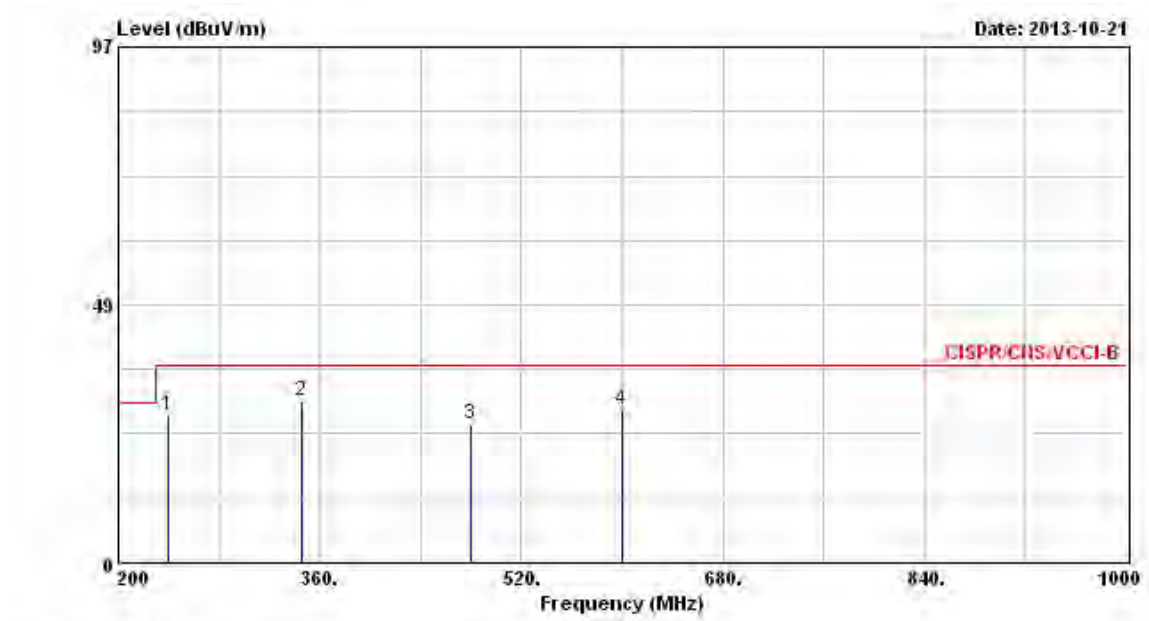


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	240.000	27.74	-9.26	37.00	39.07	11.20	2.12	24.65	QP	400	322
2	345.600	30.44	-6.56	37.00	37.94	14.28	2.53	24.31	QP	400	268
3	480.000	26.23	-10.77	37.00	29.46	17.22	3.20	23.65	QP	300	213
4	600.000	28.90	-8.10	37.00	29.45	18.70	3.96	23.21	QP	300	207

6.4. Test Result of Radiated Emission for Above 1GHz


Test mode	Mode 1	Test Site No.	03CH04-HY
Test frequency	1 GHz ~ 23 GHz	Test Engineer	Alan
Temperature	21 °C	Relative Humidity	50 %
Note: 1. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)			
2. Corrected Reading : Antenna Factor + Cable Loss + Read Level – Preamp Factor = Level			
■ The test was passed at the minimum margin that marked by the frame in the following data			

Vertical

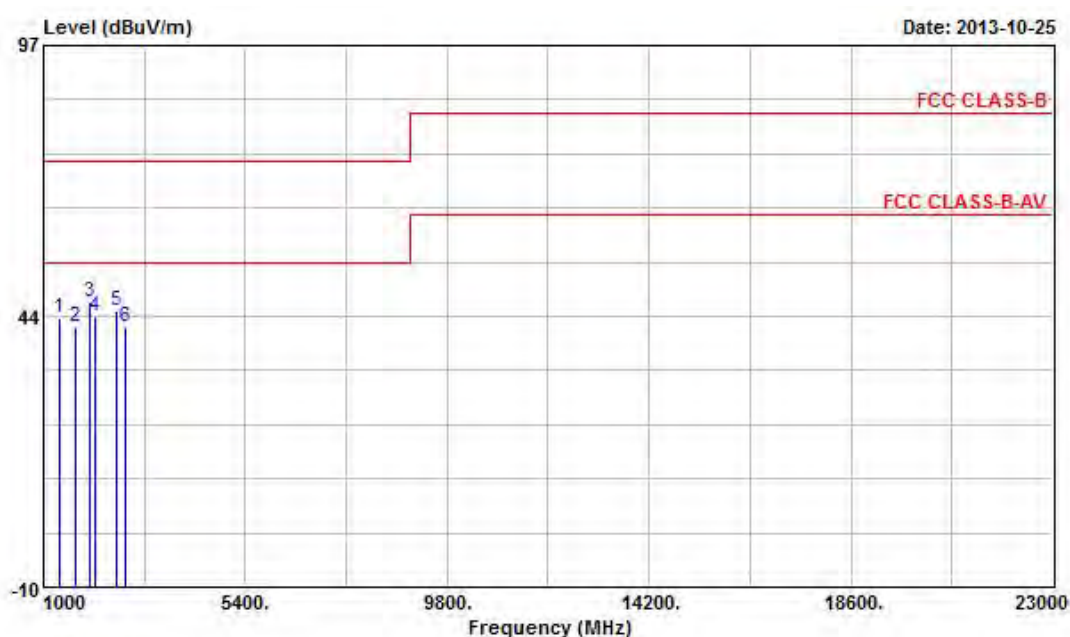

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Ant	Table	
	MHz	dB μ V/m	Limit	Line	Level	Factor	Factor	Loss	Pos	Pos	Remark
			dB	dB μ V/m	dB μ V	dB/m	dB	dB	cm	deg	
1	1332.000	43.06	-30.94	74.00	49.00	25.48	34.02	2.60	---	---	Peak
2	1686.000	41.27	-32.73	74.00	46.96	24.98	33.67	3.00	---	---	Peak
3	1990.000	46.17	-27.83	74.00	50.31	26.07	33.52	3.31	100	168	Peak
4	2142.000	43.44	-30.56	74.00	46.32	27.30	33.66	3.49	---	---	Peak
5	2590.000	44.42	-29.58	74.00	46.72	27.80	34.04	3.94	---	---	Peak
6	2766.000	41.25	-32.75	74.00	42.94	28.33	34.16	4.14	---	---	Peak

Horizontal

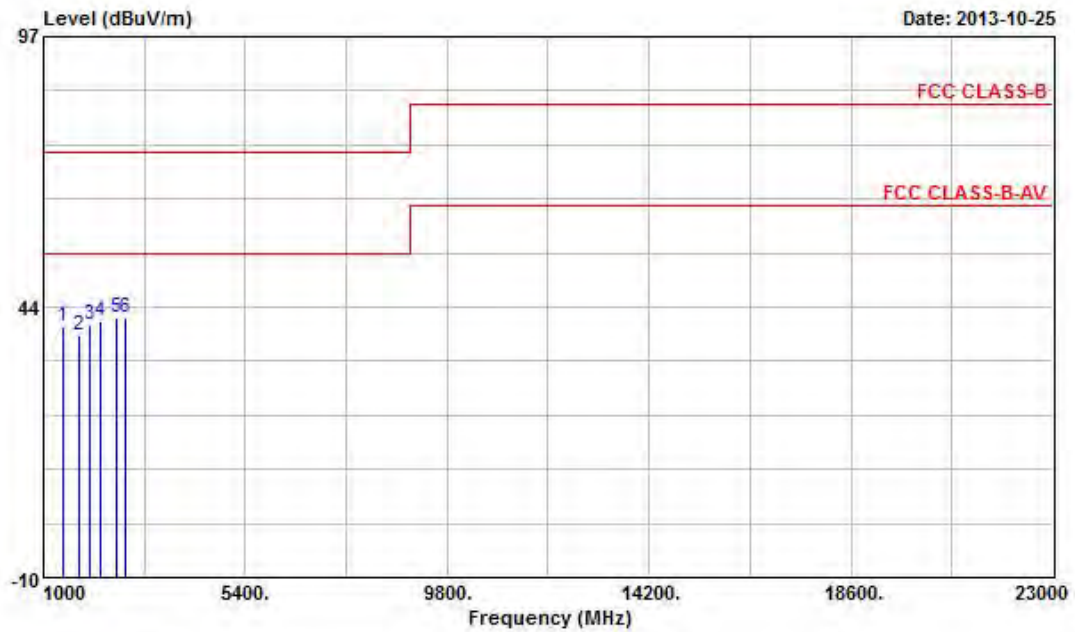

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	1438.000	39.53	-34.47	74.00	45.36	25.33	33.87	2.71	---	---	Peak
2	1766.000	37.76	-36.24	74.00	43.14	25.17	33.63	3.08	---	---	Peak
3	1996.000	40.04	-33.96	74.00	44.09	26.13	33.52	3.34	---	---	Peak
4	2228.000	40.59	-33.41	74.00	42.80	27.96	33.73	3.56	---	---	Peak
5	2580.000	41.51	-32.49	74.00	43.86	27.76	34.04	3.94	---	---	Peak
6	2774.000	41.50	-32.50	74.00	43.21	28.33	34.18	4.14	---	---	Peak

7. List of Measuring Equipment Used

< Conducted Emission >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Receiver	R&S	ESCS 30	100357	9 kHz ~ 2.75 GHz	Nov. 22, 2012	Conduction (CO01-NH)
LISN	SCHAFFNER	NNB41	04/10053	9 kHz ~ 30 MHz	Nov. 20, 2012	Conduction (CO01-NH)
Power Filter	CORCOM	MR12030	N/A	30A*2	NCR	Conduction (CO01-NH)
RF Cable-CON	Suhner Switzerland	RG223/U	CB004	9 kHz ~ 30 MHz	Dec. 12, 2012	Conduction (CO01-NH)

※ Calibration Interval of instruments listed above is one year. NCR: No calibration request.

< Radiated Emission below 1GHz >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Open Area Test Site	SPORTON	OATS-10	OS01-NH	30 MHz - 1 GHz 10m	Jul. 28, 2013	Radiation (OS01-NH)
Amplifier	HP	8447D	2944A06292	0.1 MHz - 1.3 GHz	Apr. 25, 2013	Radiation (OS01-NH)
Spectrum Analyzer	R&S	FSP	838858/038	9 kHz ~ 7 GHz	Mar. 12, 2013	Radiation (OS01-NH)
Test Receiver	R&S	ESCS 30	100168	9 kHz - 2.75 GHz	Feb. 23, 2013	Radiation (OS01-NH)
Bilog Antenna	SCHAFFNER	CBL6111C	2738	30 MHz ~ 1 GHz	Mar. 25, 2013	Radiation (OS01-NH)
Turn Table	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	NCR	Radiation (OS01-NH)
Antenna Mast	EMCO	1051-1.2	9503-1876	1 m ~ 4 m	NCR	Radiation (OS01-NH)
RF Cable-R10m	BELDEN	RG8/U	CB001	30 MHz ~ 1 GHz	Nov. 13, 2012	Radiation (OS01-NH)

※ Calibration Interval of instruments listed above is one year. NCR: No calibration request.

< Radiated Emission above 1GHz >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100004	9 kHz ~ 40 GHz	Mar. 11, 2013	Radiation (03CH04-HY)
Amplifier	Agilent	8449B	3008A02326	1 GHz ~ 26.5 GHz	May. 17, 2013	Radiation (03CH04-HY)
Horn Antenna	SCHWARZBECK	BBHA9120	BBHA9120D1130	1 GHz ~ 18 GHz	Sep.10, 2013	Radiation (03CH04-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz ~ 40 GHz	Jan. 08, 2013	Radiation (03CH04-HY)
Turn Table	Chaintek	3000	MF7802056	0 ~ 360 degree	NCR	Radiation (03CH04-HY)
Antenna Mast	MF	MF-7802	MF780208163	1 m ~ 4 m	NCR	Radiation (03CH04-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	CB063-HF	1 GHz ~ 40 GHz	Nov. 21, 2012	Radiation (03CH04-HY)

※ Calibration Interval of instruments listed above is one year. NCR: No calibration request.