

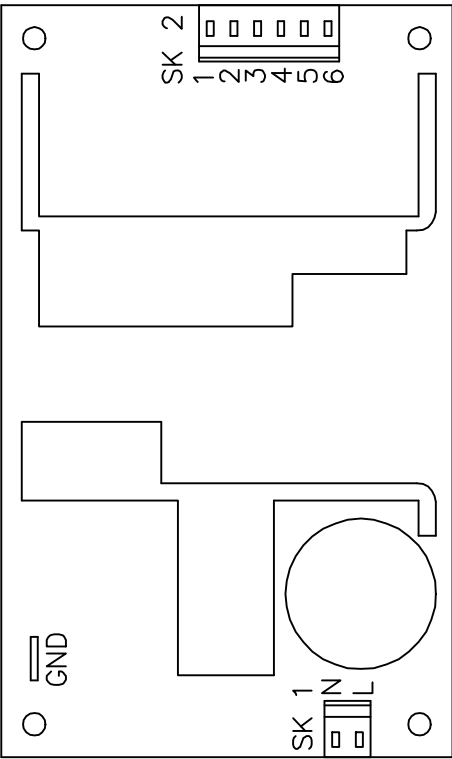


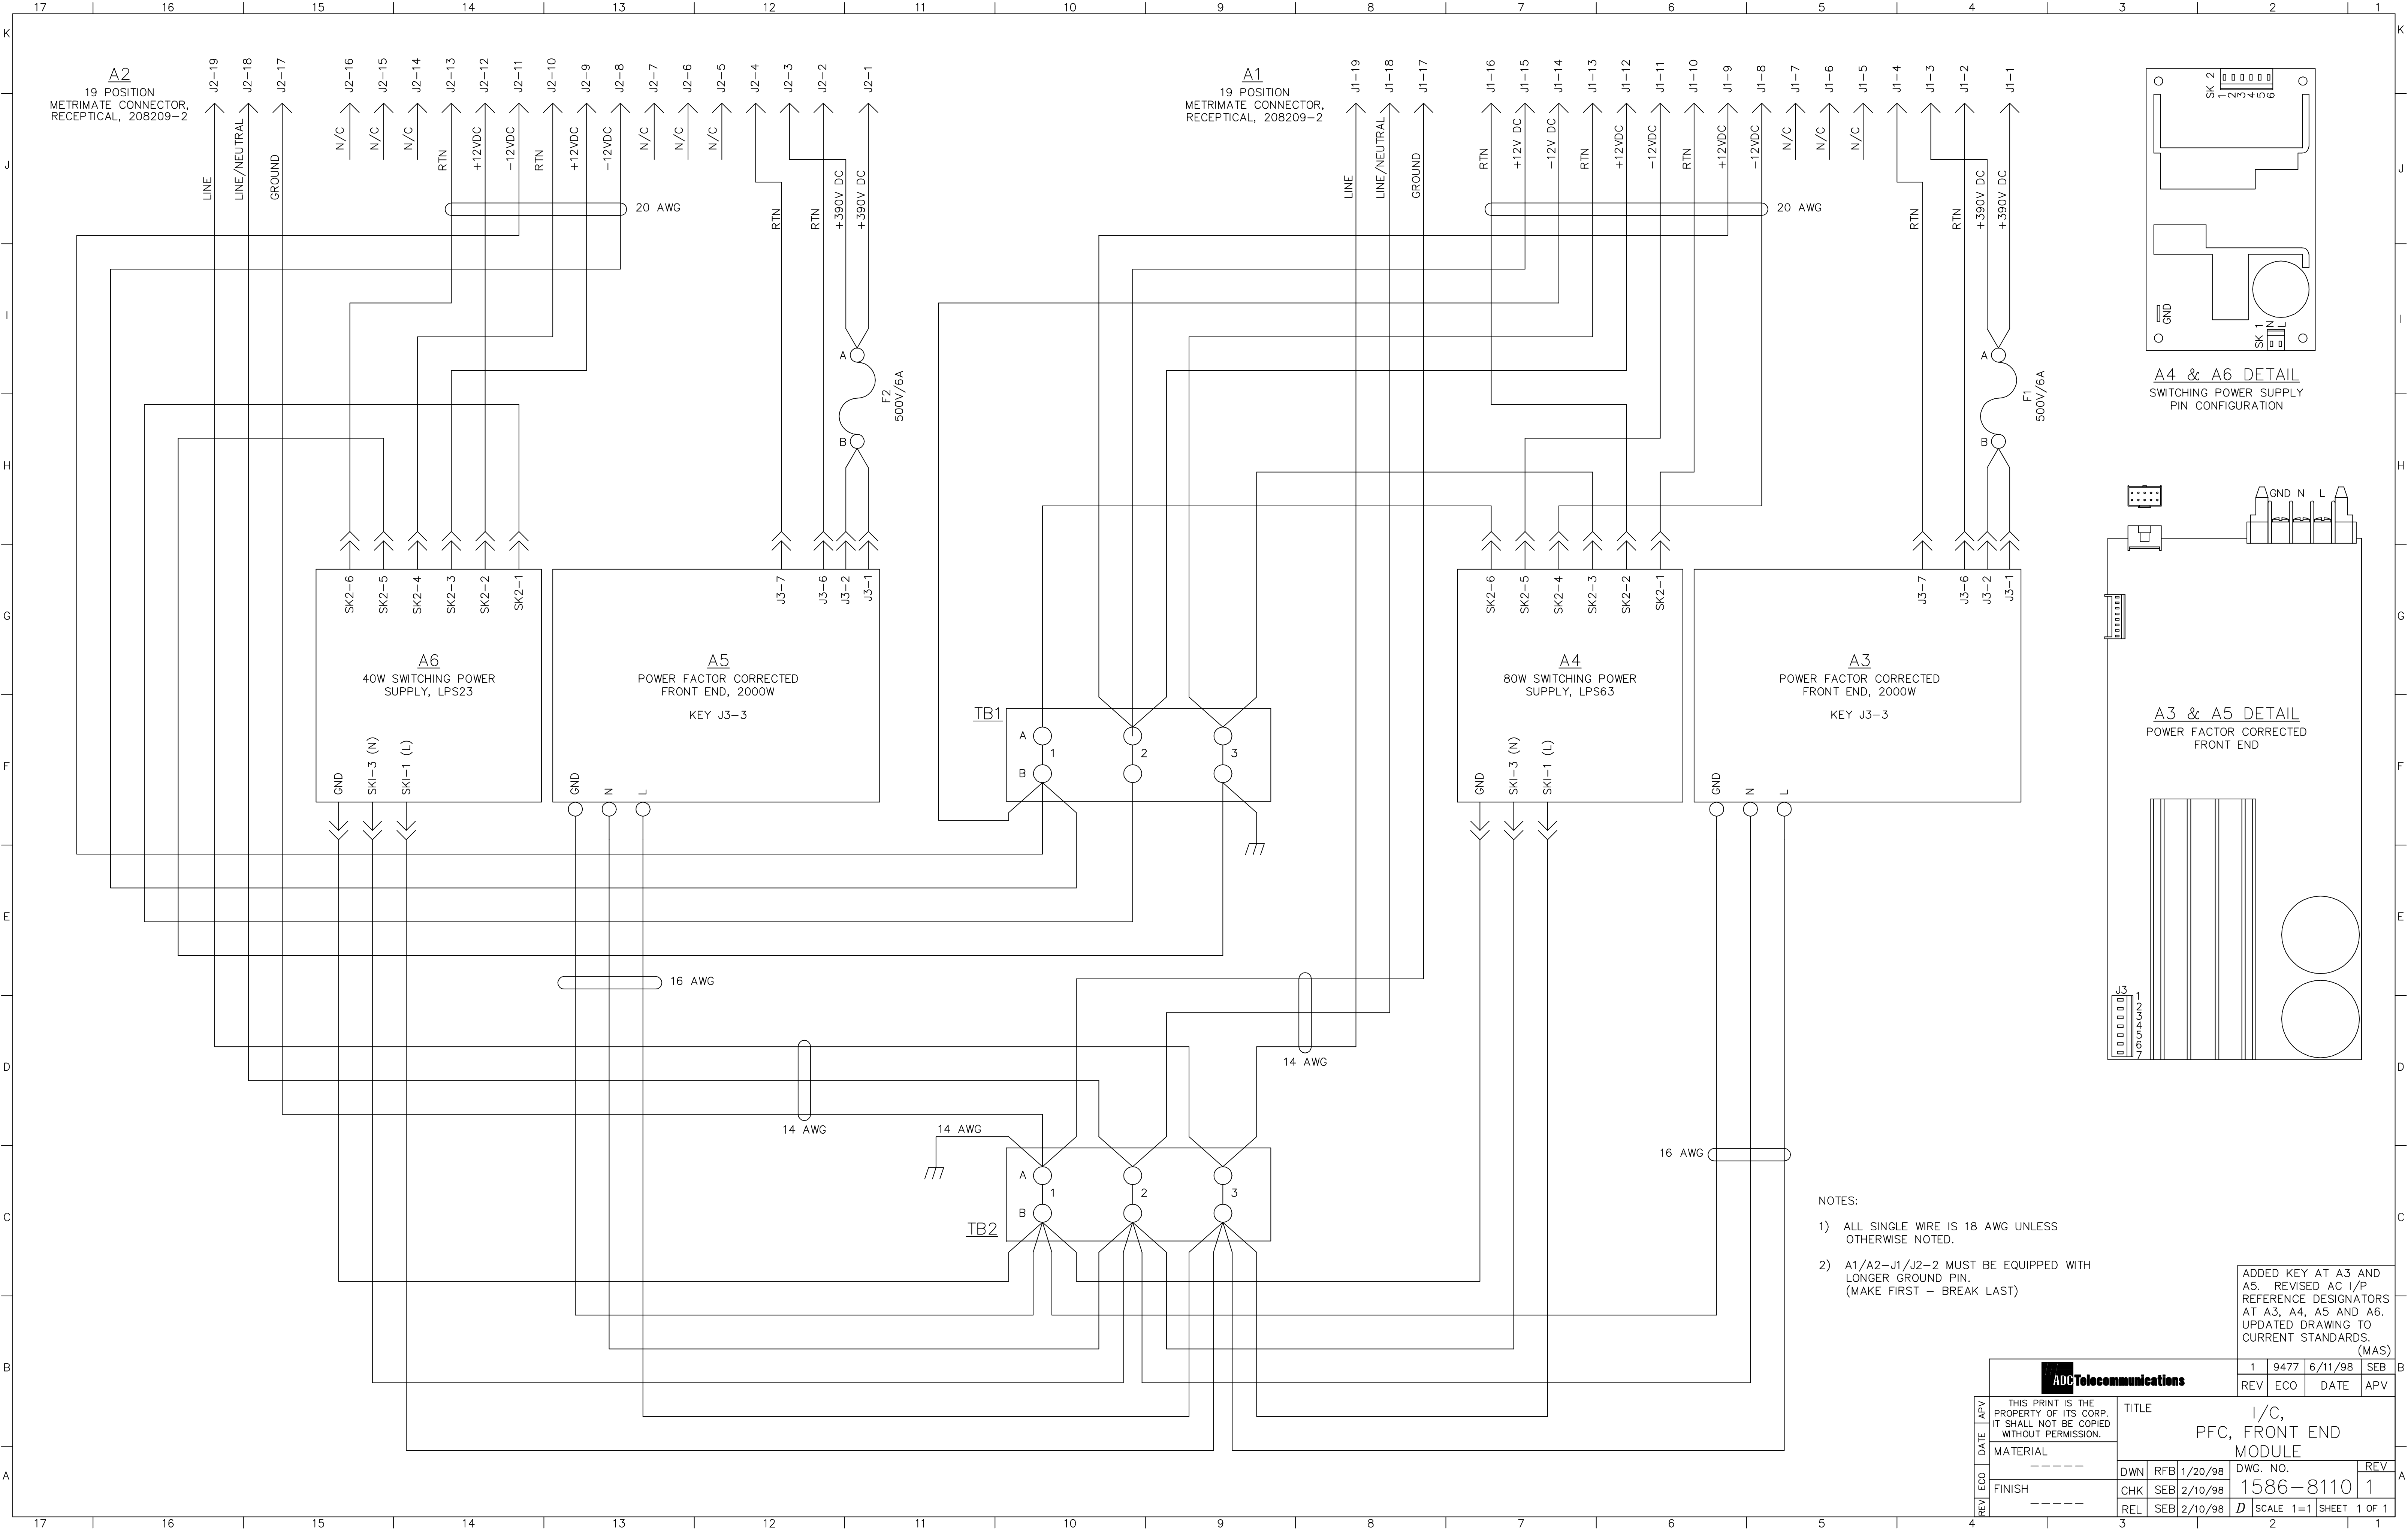

A4 & A6 DETAIL
SWITCHING POWER SUPPLY
PIN CONFIGURATION

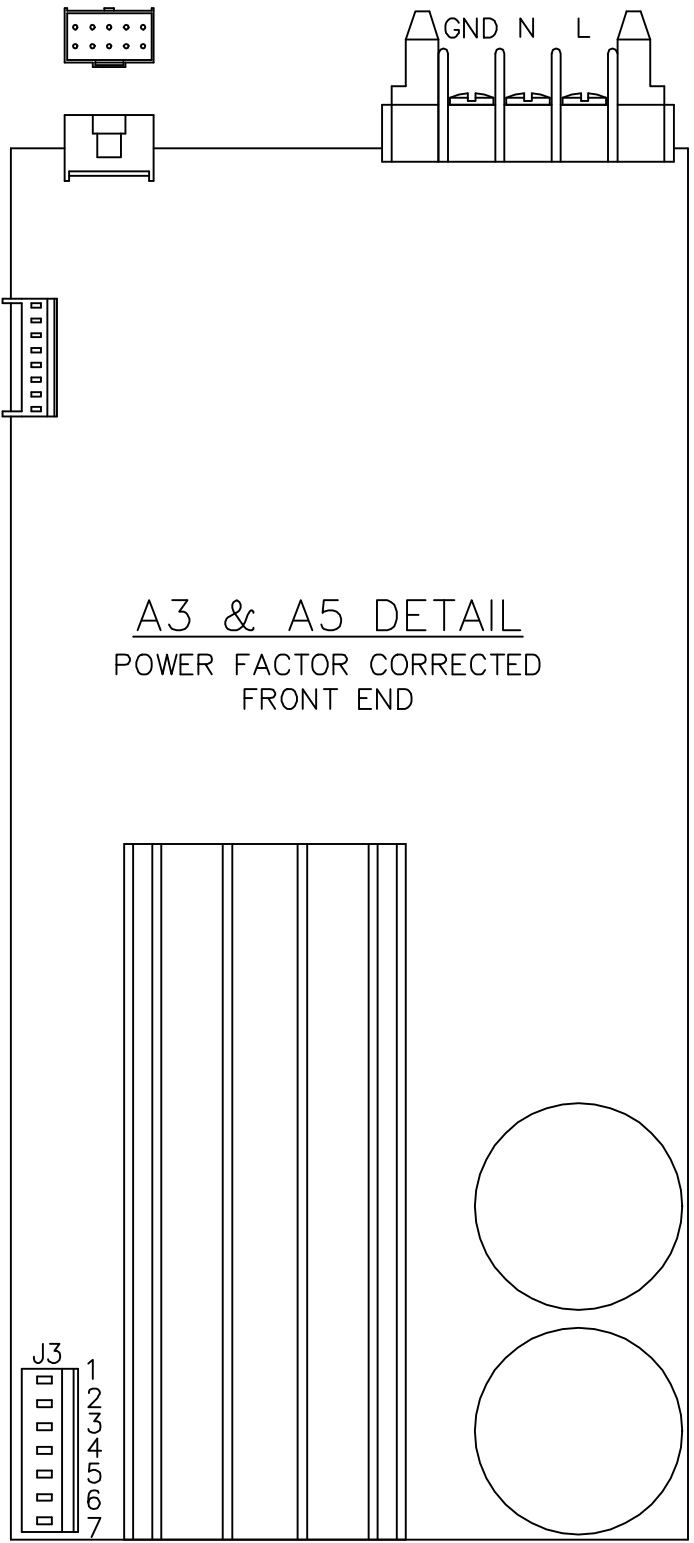

A3 & A5 DETAIL
POWER FACTOR CORRECTED
FRONT END

NOTES:

- 1) ALL SINGLE WIRE IS 18 AWG UNLESS OTHERWISE NOTED.
- 2) A1/A2-J1/J2-2 MUST BE EQUIPPED WITH LONGER GROUND PIN.
(MAKE FIRST - BREAK LAST)

ADCTelecommunications			1	9477	6/11/98	SEB
			REV	ECO	DATE	APV
APV	THIS PRINT IS THE PROPERTY OF ITS CORP. IT SHALL NOT BE COPIED WITHOUT PERMISSION.					
DATE						
MATERIAL	-----					
FINISH	-----					
REL	DWN	RFB	1/20/98	DWG. NO.		REV
ECO	CHK	SEB	2/10/98	1586-8110		1
	REL	SEB	2/10/98	SCALE 1=1	SHEET 1 OF 1	

ADDED KEY AT A3 AND A5.
REVISED AC I/P REFERENCE DESIGNATORS AT A3, A4, A5 AND A6.
UPDATED DRAWING TO CURRENT STANDARDS.
(MAS)

I/C,
PFC, FRONT END
MODULE