


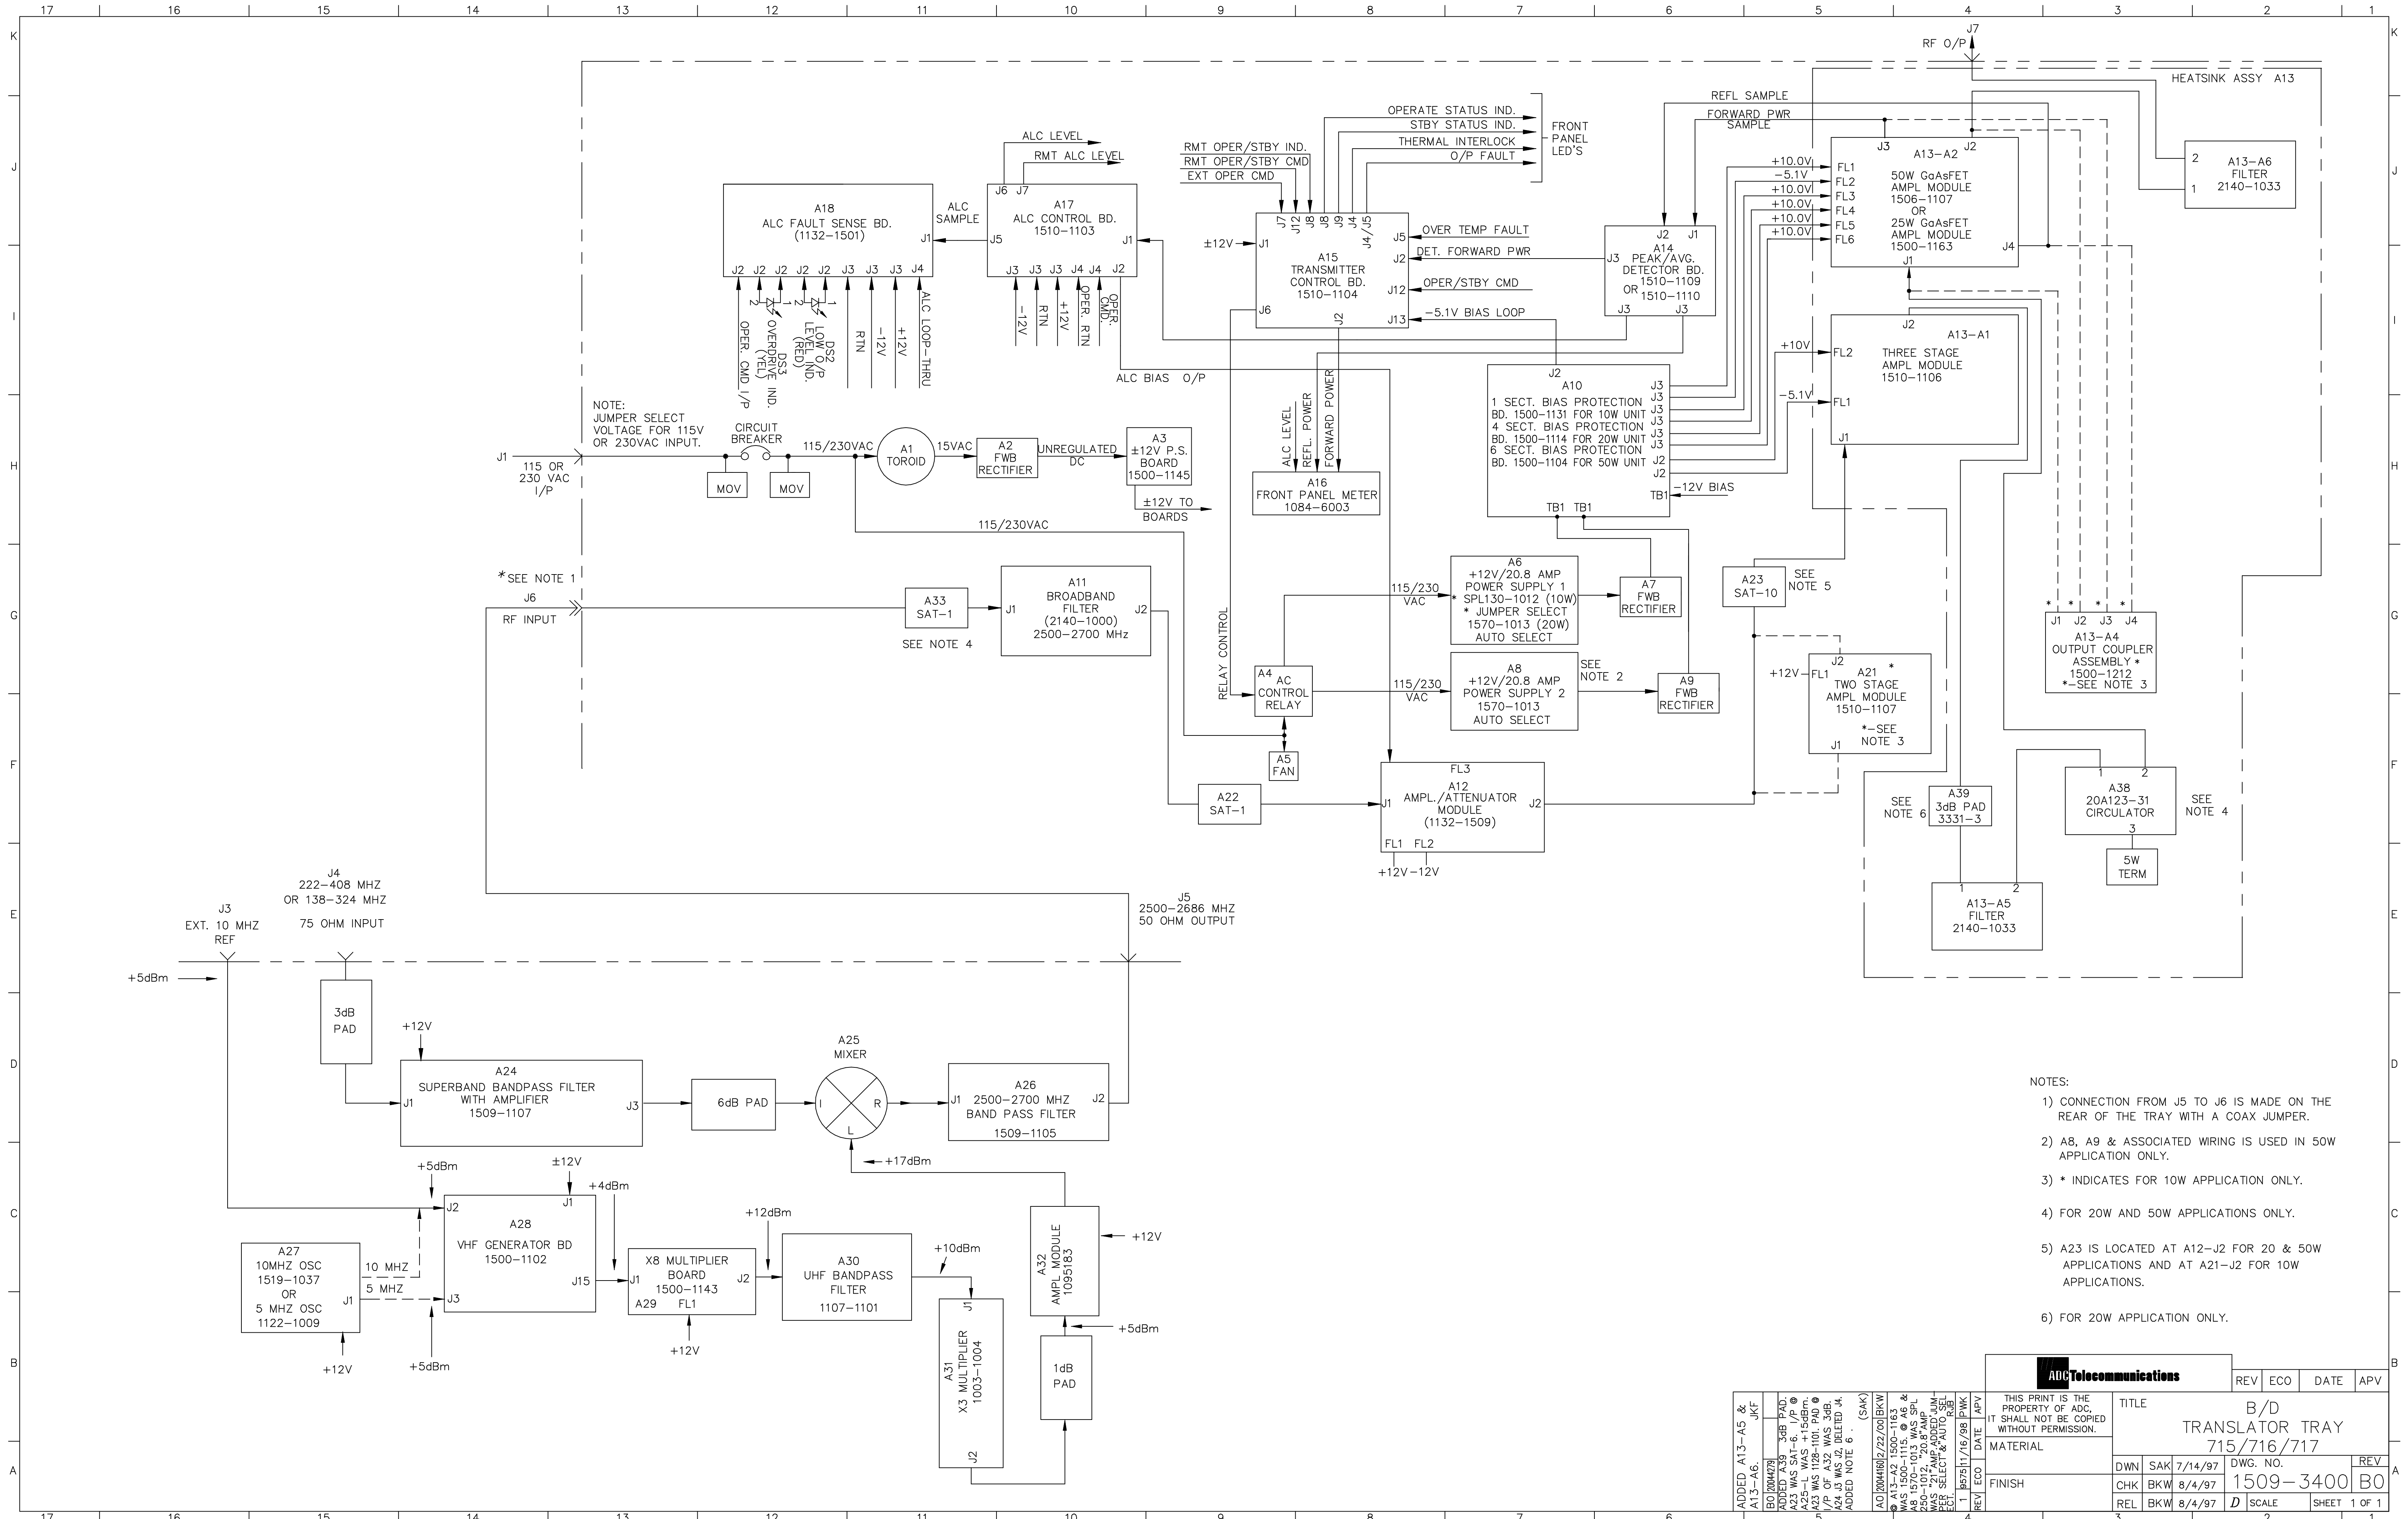

- NOTES:
- 1) CONNECTION FROM J5 TO J6 IS MADE ON THE REAR OF THE TRAY WITH A COAX JUMPER.
 - 2) A8, A9 & ASSOCIATED WIRING IS USED IN 50W APPLICATION ONLY.
 - 3) * INDICATES FOR 10W APPLICATION ONLY.
 - 4) FOR 20W AND 50W APPLICATIONS ONLY.
 - 5) A23 IS LOCATED AT A12-J2 FOR 20 & 50W APPLICATIONS AND AT A21-J2 FOR 10W APPLICATIONS.
 - 6) FOR 20W APPLICATION ONLY.

ADCTelecommunications				REV	ECO	DATE	APV
THIS PRINT IS THE PROPERTY OF ADCT. IT SHALL NOT BE COPIED WITHOUT PERMISSION.				TITLE			
MATERIAL				B/D TRANSLATOR TRAY 715/716/717			
FINISH				DWN	SAK	7/14/97	DWG. NO.
				CHK	BKW	8/4/97	1509-3400
				REL	BKW	8/4/97	SCALE
				SHEET		1 OF 1	