

HYUNDAI ELECTRONICS INDUSTRIES CO., LTD.

CORP QA OFFICE / INT'L STANDARD CERTIFICATION TEAM
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA
TEL : +82 31 639 8518 FAX : +82 31 639 8525

CERTIFICATION

Manufacture;
HYUNDAI ELECTRONICS INDUSTRIES CO., LTD.
San 136-1, Ami-Ri, Bubal-Eup, Icheon-Si
Kyongki-Do 467-701, KOREA

Dates of Tests: NOV. 21 2000
Test Report No.: HCT-F00-1101
Test Site: HYUNDAI ELECTRONICS
INDUSTRIES CO., LTD.

FCC ID :

CKLC19R06090

MODEL / TYPE :

P990+ / C19R06090

FCC Rule Part(s):	Part 15 & 2; ET Docket 95-19
Classification:	FCC Class B Peripheral Device (JBP)
Standard(s):	FCC Class B: 1998 (CISPR 22)
Equipment(EUT) Type:	19" Color Monitor
Max Resolution:	1600X1200 Non-interlaced (@93.8KHz/ 75Hz)
Port/ Connector(s)	15-pon D-sub VGA connector, 9-pin serial port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988,21 U.S.C.853(a).

Ki Soo Kim

Report prepared by : Ki-Soo Kim
Manager of QA Office---



TABLE OF CONTENTS

PAGE

1. GENERAL INFORMATION.....	3
1.1 Product Description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested System Details.....	4
1.4 Test Methodology.....	4
1.5 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 Justification.....	5
2.2 EUT Exercise Software.....	5
2.3 Cable Description.....	6
2.4 Noise Suppression Parts on Cable.....	6
2.5 Equipment Modifications.....	7
2.6 Configuration of Tested System.....	8
3. PRELIMINARY TESTS.....	9
3.1 Power line Conducted Emissions Tests.....	9
3.2 Radiated Emissions Tests.....	9
4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	10
4.1 Conducted Emission Tests.....	10
4.2 Radiated Emission Tests.....	11
5. FIELD STRENGTH CALCULATION.....	12
6. LIST OF TEST EQUIPMENT	13

ATTACHMENT A	ID Label / Location Info.
ATTACHMENT B	External Photos.
ATTACHMENT C	Block Diagram..
ATTACHMENT D	Test Setup Photos.
ATTACHMENT E	User's Manual.
ATTACHMENT F	Internal Photos.

1. GENERAL INFORMATION

1.1 Product Description

The Hyundai Electronics Industries Co., Ltd. ModelP990+ (referred to as the EUT in this report) is a 19"COLOR CRT Monitor HOR. Freq. 93.8KHz w/max. Resolution of 1600X1200 Non-Interlaced.

Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	PLASTIC
LIST OF EACH OSC. OR XTAL. FREQ.(FREQ. 1MHz)	12 MHz
CHIPSET BRAND AND PART NO.	WELTREND : 3205001327 NATIONAL SEMICO: 3200001490 TOSHIBA: 3331100041 SAMSUNG ELEC.: 3200001434 MYSON TECH: 3204000577 SAMSUNG ELEC.: UKA3843 SAMSUNG ELEC.: ULM358N SAMSUNG ELEC.: 3203000819 SAMSUNG ELEC.: ULM7805CT
POWER REQUIREMENT	100 - 240 VAC 50/60Hz 2.5A
NUMBER OF LAYERS	MAIN BOARD 1 LAYER CRT BOARD 1 LAYER BNC BOARD 1 LAYER PFC BOARD 1 LAYER
MAX. RESOLUTION	1600 X 1200 NON-INTERLACED(@93.8KHz/ 75 Hz)
H-SYNC FREQUENCY RANGE	30KHz 95KHz
V-SYNC FREQUENCY RANGE	50 Hz 150Hz
CRT SIZE	19" (CRT Type :SAMSUNG M46QCY261X112)

1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

1.3 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
MONITOR (EUT)	HYUNDAI	P990+	CKLC19R06090	HOST
PC(HOST)	H/P	DTPC-17	DoC	N/A
KEY BOARD	H/P	SK-2501-2D-K	GYUR385K	HOST
PRINTER	H/P	HP895C	DoC	HOST
MODEM	3COM CORPORATION	56K FAX MODEM	DoC	HOST
VIDEO CARD	DIAMOND	3D3000	DoC	HOST
MOUSE	H/P	M-S34	DZL211029	HOST

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 10 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO, 467-701,KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 24,2000(Confirmation Number: EA90661)

2.SYSTEM TEST CONFIGURATION

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following components and I/O cards inside the E.U.T were used.

DEVICE TYPE	MANUFACTURE	MODEL/PART NUMBER
MAIN BOARD	HYUNDAI	3040100871
CRT BOARD	HYUNDAI	304010085302
BNC BOARD	HYUNDAI	304010085402
PFC BOARD	HYUNDAI	304010087001

2.2 EUT exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

2.3 Cable Description

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
PC(HOST)	N	N/A	1.8(P)
MONITOR(EUT)	N	Y	1.8(P), 1.5(D)
PRINTER	N	Y	2.0(P),1.5(D)
KEY BOARD	N/A	Y	2.0(D)
MODEM	N	Y	2.0(P),1.5(D)
MOUSE	N/A	Y	1.8(D)

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

2.4 Noise Suppression Parts on Cable. (I/O CABLE)

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
MONITOR(EUT)	Y	BOTH END	Y	BOTH END
PRINTER	N	N/A	Y	BOTH END
KEY BOARD	Y	PC END	N	N/A
MODEM	N	N/A	Y	BOTH END
MOUSE	N	N/A	N	N/A

2.5 Equipment Modifications

N/A


2.6 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were connected to another LISN.

Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating condition. Final Radiated Emission tests were conducted at 10 meter open area test site.

[Configuration of Tested System]

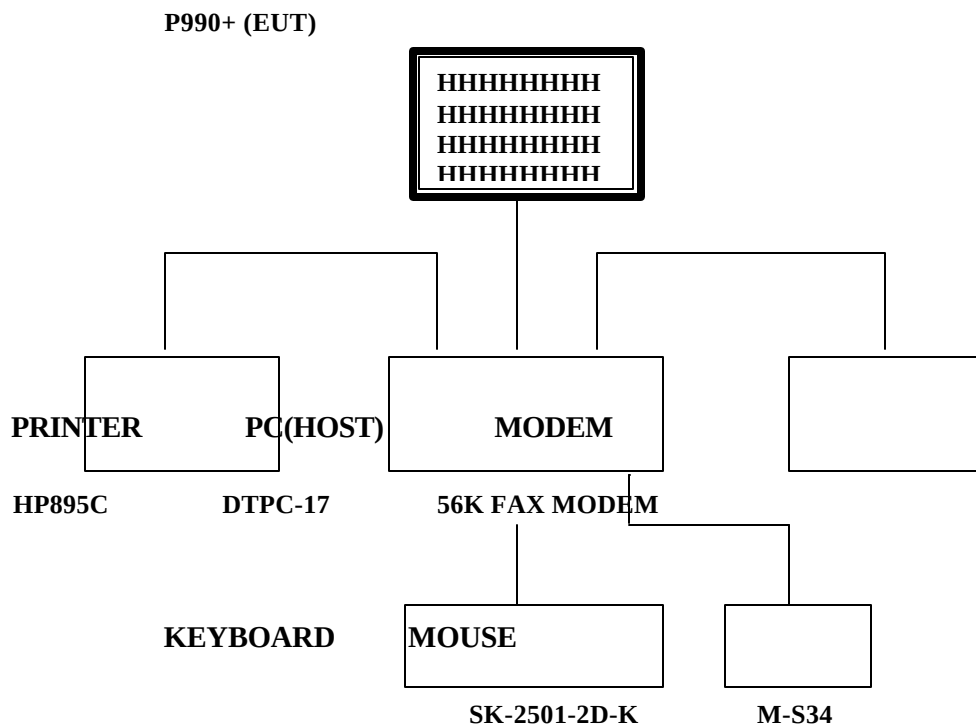

3. PRELIMINARY TESTS

3.1 AC Power line Conducted Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1024 x 768 Non-Interlaced (68.7KHz/85Hz)	
Pentium 350 MHz	800 x 600 Non-Interlaced (53.7 KHz/85Hz)	
Pentium 350 MHz	640 x 480 Non-Interlaced (50.6 KHz/100Hz)	
Pentium 350 MHz	1280x1024 Non-Interlaced (91.9 KHz/85Hz)	
Pentium 350 MHz	1600x1200 Non-Interlaced (93.8 KHz/75Hz)	X

4.2 Radiated Emission Tests

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1024 x 768 Non-Interlaced (68.7KHz/85Hz)	
Pentium 350 MHz	800 x 600 Non-Interlaced (53.7 KHz/85Hz)	
Pentium 350 MHz	640 x 480 Non-Interlaced (50.6 KHz/100Hz)	
Pentium 350 MHz	1280x1024 Non-Interlaced (91.9 KHz/85Hz)	
Pentium 350 MHz	1600x1200 Non-Interlaced (93.8 KHz/75Hz)	X

NOTE:

The monitor(EUT) has two(2) video interface port(VGA 15 pin D-sub, 5BNC) to support various kinds of graphics adapters. So the test were performed with each video interface port. The final measurement was performed with VGA 15 pin D-sub video interface port that produce the worst case emission.

Tested by KEUN- HO PARK / Engineer

Date : NOV. 1, 2000

4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Humidity Level : 33% Temperature : 21
 Limit apply to : CISPR 22
 Type of Tests : CLASS B
 Date : NOV. 2, 2000
 Result : PASSED BY -8.4dB
 EUT : 19" CRT MONITOR

Operating Condition : 1600 X1200 Non-Interlaced (Hf : 106.1 KHz, Vf : 85 Hz)

Detector : CISPR Quasi-Peak (6 dB Bandwidth : 9 KHz)
 CISPR Average(6 dB Bandwidth : 9 KHz)

Line Conducted Emission Tabulated Data

Power Line Conducted Emissions			CISPR 22		
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)	Detector Mode
0.186	45.80	H	54	-8.4	Average
0.936	34.70	H	46	-11.3	Average
0.186	45.40	N	54	-8.8	Average
0.936	34.50	N	46	-11.5	Average

NOET:

1. All video modes and resolutions were investigated and the worst-case emissions are reported
 Other video modes & resolution were tested and found to be in compliance.

Measured by : KEUN- HO PARK / Engineer


Date : NOV. 2, 2000

HYUNDAI C-TECH. CO.,LTD. EMC LAB
San 136-1, Ami-Ri-Bubal-Eub, Ichon-Si, Kyongki-Do

EUT: P990+
Manufacturer: HYUNDAI IMAGE QUEST.CO.,LTD.
Operating Condition: 1600X1200 HF:93.8KHz , Vf:75Hz
Test Site: Shield Room
Operator: Keun-Ho, Park
Test Specification: CISPR 22 CLASSB
Comment: HOT
Start of Test: 11/2/00 / 11:29:38AM

SCAN TABLE: "EN 55022 V (PKH)"

Short Description:			EN 55022 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	2.0 MHz	3.0 kHz	MaxPeak	100.0 ms	9 kHz	C/E FACTOR
			Average			
2.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	C/E FACTOR
			Average			

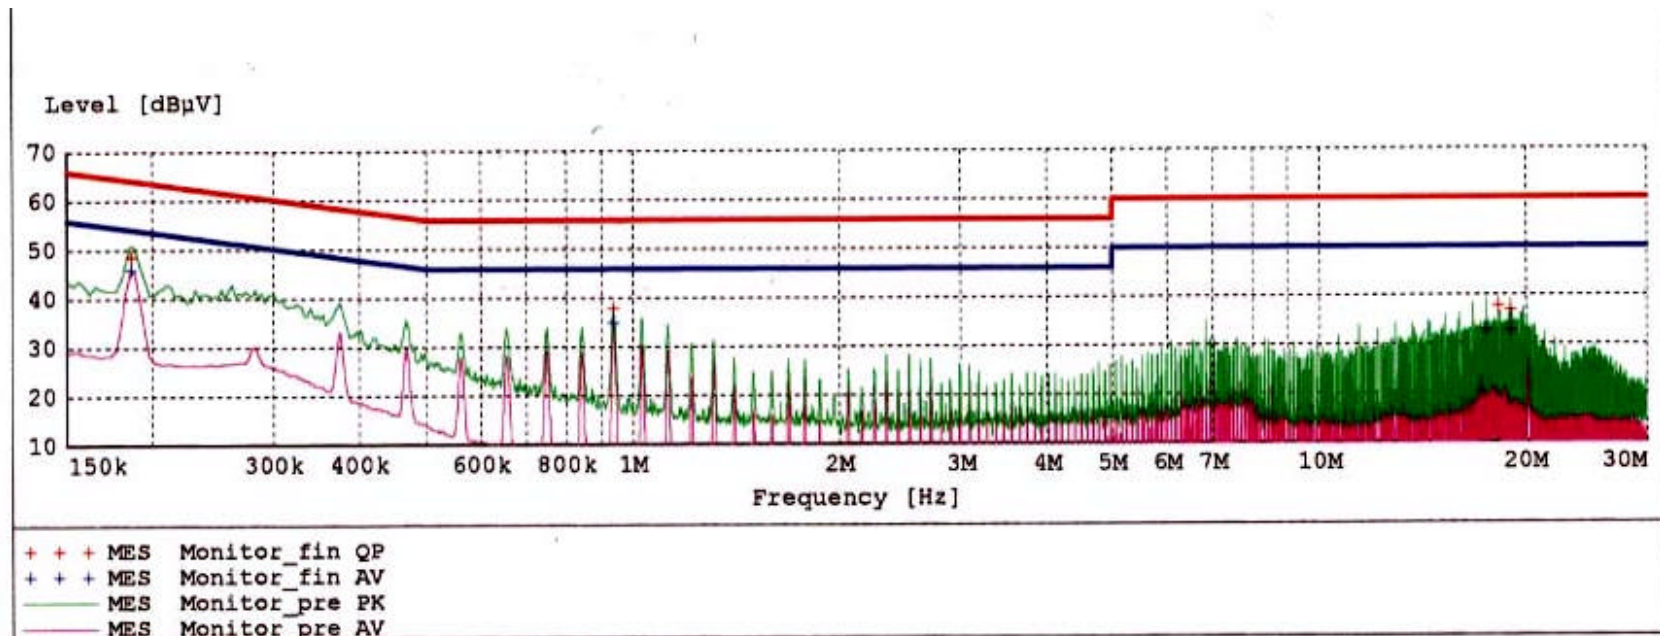

MEASUREMENT RESULT: "Monitor_fin QP"

11/2/00 11:34AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.186000	48.40	0.5	64	15.8	1	---
0.936000	37.70	0.5	56	18.3	1	---
18.260000	37.60	1.7	60	22.4	1	---
19.010000	36.80	1.7	60	23.2	1	---

MEASUREMENT RESULT: "Monitor_fin AV"

11/2/00 11:34AM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.186000	45.80	0.5	54	8.4	1	---
0.936000	34.70	0.5	46	11.3	1	---
17.510000	32.70	1.7	50	17.3	1	---
19.010000	32.60	1.7	50	17.4	1	---

HYUNDAI C-TECH. CO.,LTD. EMC LAB
San 136-1,Ami-Ri-Bubal-Eub,Ichon-Si,Kyongki-Do

EUT: P990+
Manufacturer: HYUNDAI IMAGE QUEST.CO.,LTD.
Operating Condition: 1600X1200 HF:93.8KHz , Vf:75Hz
Test Site: Shield Room
Operator: Keun-Ho, Park
Test Specification: CISPR 22 CLASSB
Comment: NEUTRAL
Start of Test: 11/2/00 / 11:36:53AM

SCAN TABLE: "EN 55022 V (PKH)"

Short Description:			EN 55022 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	2.0 MHz	3.0 kHz	MaxPeak	100.0 ms	9 kHz	C/E FACTOR
			Average			
2.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	C/E FACTOR
			Average			

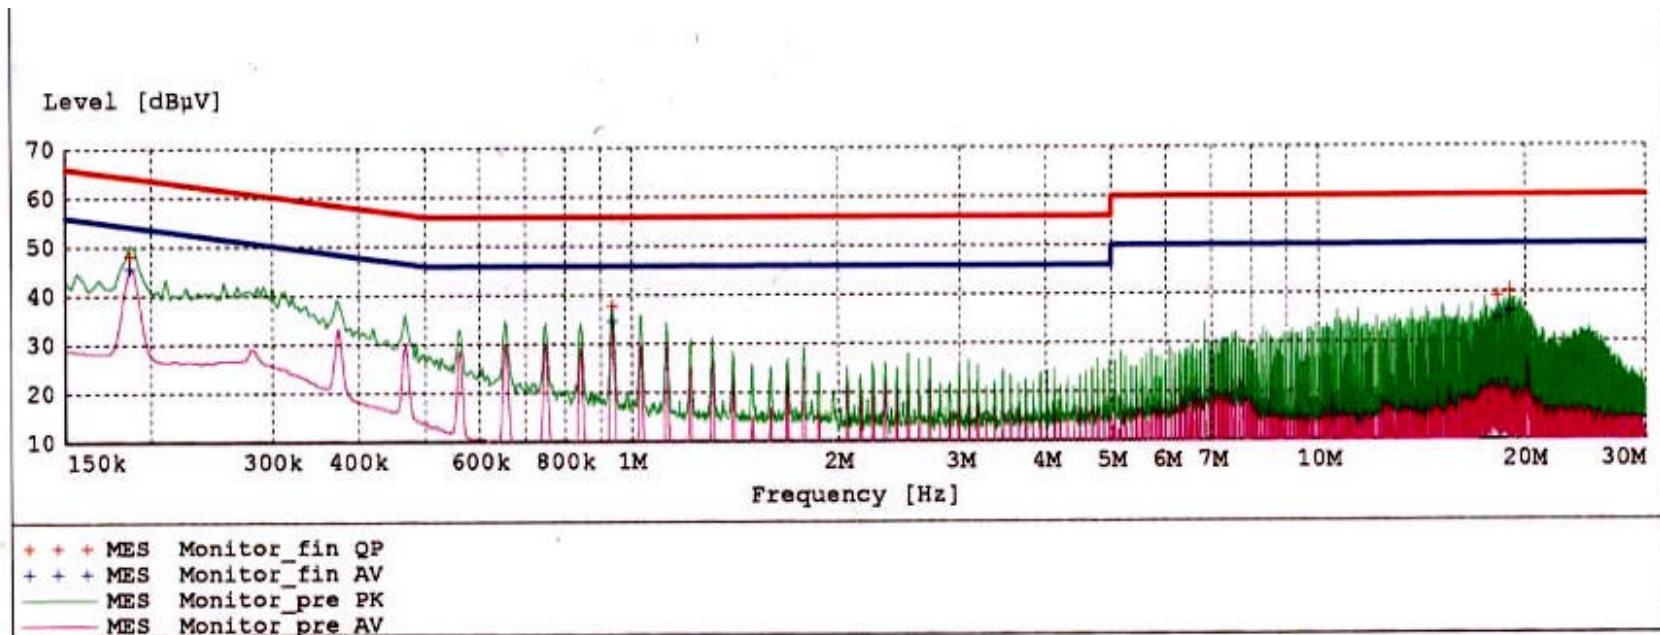

MEASUREMENT RESULT: "Monitor_fin QP"

11/2/00 11:43AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.186000	48.00	0.5	64	16.2	1	---
0.936000	37.60	0.5	56	18.4	1	---
18.260000	39.10	1.7	60	20.9	1	---
19.010000	40.00	1.7	60	20.0	1	---

MEASUREMENT RESULT: "Monitor_fin AV"

11/2/00 11:43AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.186000	45.40	0.5	54	8.8	1	---
0.936000	34.50	0.5	46	11.5	1	---
18.260000	34.60	1.7	50	15.4	1	---
19.010000	35.90	1.7	50	14.1	1	---

4.2 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Humidity Level : 31 % Temperature : 20

Limit apply to : CISPR 22

Type of Tests : CLASS B

Date : NOV. 6, 2000

Result : PASSED BY -4.4 dB

EUT : 19" CRT MONITOR

Operating Condition : 1600 X 1200 Non-Interlaced (Hf :93.8 kHz, Vf : 75 Hz)

Detector : CISPR Quasi-Peak (6 dB Bandwidth : 120 KHz)

Frequency MHz	Reading dBuV	Ant. Factor dB	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dB	Margin dB
60.7	14.92	7.18	1.70	V	23.8	30.0	-6.2
101.1	9.92	10.78	2.10	V	22.8	30.0	-7.2
121.3	7.61	13.49	2.40	H	23.5	30.0	-6.5
165.0	5.54	14.86	2.70	V	23.1	30.0	-6.9
101.1	9.92	10.78	2.10	V	22.8	30.0	-7.2
364.2	9.13	16.57	4.10	V	29.8	37.0	-7.2
384.4	9.46	16.54	4.20	V	30.2	37.0	-6.8
445.2	7.59	17.21	4.60	H	29.4	37.0	-7.6
465.3	6.09	17.91	4.80	V	28.8	37.0	-8.2
485.5	7.47	18.13	4.80	V	30.4	37.0	-6.6
505.8	9.04	18.66	4.90	V	32.6	37.0	-4.4
566.4	3.44	19.86	5.30	V	28.6	37.0	-8.4
606.9	1.26	20.84	5.80	V	27.9	37.0	-9.1

NOTE:

- 1.All video modes and resolutions were investigated and the worst-case emissions are reported.
- 2.Other video modes & resolution were tested and found to be in compliance.
3. The EUT was test up to 2GHz and no significant emission was found.

Measured by : KEUN- HO PARK / Engineer

Date : NOV. 6, 2000

5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm } [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

6. LIST OF TEST EQUIPMENT

TYPE	MANUFACTURE	MODEL	CAL. DATE	
EMI Test Receiver	Rohde & Schwarz	ESH3	2000.6.29	
EMI Test Receiver	Rohde & Schwarz	ESVP	2000.2.14	
EMI Test Receiver	Rohde & Schwarz	ESI40	2000.1.18	
EMI Test Receiver	Rohde & Schwarz	ESVS30	2000.6.29	Spectrum
Monitor	Rohde & Schwarz	EZM	N.A	
Graphic Plotter	Rohde & Schwarz	DOP2	N.A	
Printer	Rohde & Schwarz	PDN	N.A	
Spectrum Analyzer	H.P	8591EM	2000.7.11	
LISN	EMCO	3825/2	2000.10.13	
LISN	Rohde & Schwarz	ESH2-Z5	2000.7.14	
Amplifier	Hewlett-Packard	8447E	2001.3.6	
Dipole Antennas	Rohde & Schwarz	VHAP	2000.6.29	
Dipole Antennas	Rohde & Schwarz	UHAP	2000.6.29	
Biconical Antenna	Rohde & Schwarz	BBA-9106	2000.6.29	
Log-Periodic Antenna	Rohde & Schwarz	UHALP-9107	2000.6.29	
Antenna Position Tower	EMCO	1051-12	N.A	
Turn Table	EMCO	1060-06	N.A	
Line Filter	KEENE	ULW 2X30-60	N.A	
Power Analyzer	Voltech	PM 3300	2000.12.20	
Reference Network Impedance	Voltech	IEC 555	N.A	
AC Power Source	PACIFIC	Magnetic Module	N.A	
AC Power Source	PACIFIC	360AMX	N.A	