

ATTACHMENT N – SAR MEASUREMENT REPORT

PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 21045 • U.S.A.

TEL (410) 290-6652 • FAX (410) 290-6654

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

HYUNDAI Electronics Industries Co., Ltd.
San 136-1, Ami-Ri, Bubal-Eub
Ichon-Si, Kyungki-Do, KOREA 467-701
Attn: Mr. Ki-Soo Kim, Q M Dept
System Quality Assurance Office

Dates of Tests: July 18-20, 2000
Test Report S/N: SAR.200718355.CKL
Test Site: PCTEST Lab, Columbia MD U.S.A.

FCC ID

CKLHGC-610E

APPLICANT

HYUNDAI Electronics Industries Co., Ltd.

EUT Type:	Dual-Mode Cellular Phone (AMPS/CDMA)
Tx Frequency:	824.04 – 848.97 MHz (AMPS) / 824.70 – 848.31 MHz (CDMA)
Rx Frequency:	869.04 – 893.97 MHz (AMPS) / 869.70 – 893.31 MHz (CDMA)
Max. RF Output Power:	0.55W ERP AMPS (27.38 dBm) / 0.34W ERP CDMA (25.27 dBm)
Trade Name/Model(s):	HYUNDAI DX-10
FCC Classification:	Non-Broadcast Transmitter Held to Ear (TNE)
Application Type:	Certification
FCC Rule Part(s):	2.1093; ET Docket 96.326

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in ANSI/IEEE Std. C95.3-1992 (See Test Report).

Part 22 AMPS Mode -	Head Max. SAR:	1.4374 W/kg	FCC Limit: 1.6 W/kg
	Body Max. SAR:	0.6379 W/kg	FCC Limit: 1.6 W/kg
	Hand Max. SAR:	1.3.775 W/kg	FCC Limit: 4.0 W/kg
Part 22 CDMA Mode -	Head Max. SAR:	1.1204 W/kg	FCC Limit: 1.6 W/kg

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

NVLAP accreditation does not constitute any product endorsement by NVLAP or any agency of the United States Government.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President & Chief Engineer

200718355.CKL



NVLAP[®]
LAB CODE 100431-0

Table of Contents

1.1:	SCOPE	1
2.1-2:	INTRODUCTION / SAR DEFINITION	2
3.1:	SAR MEASUREMENT SET-UP	3
4.1-2:	E-FIELD PROBE SYSTEM	4
5.1-4:	E-FIELD PROBE CALIBRATION	5-6
6.1-3:	PHANTOM & EQUIVALENT TISSUE	7
7.1-2:	SYSTEM SPECIFICATIONS	8
8.1-2:	MEASUREMENT PROCESS	9
9.1-2:	TEST POSITION OF THE PHONE	10
10.1-2:	BODY-WORN TEST SETUP	11
11.1:	ANSI/IEEE C95.1 RF EXPOSURE LIMITS	12
12.1:	MEASUREMENT UNCERTAINTIES	13
13.1-3:	TEST DATA SUMMARY	14-16
14.1:	SAR TEST EQUIPMENT LIST	17
15.1:	CONCLUSION / REFERENCES	18

SAR MEASUREMENT REPORT

1.1 SCOPE

Environmental evaluation measurements of specific absorption rate¹ (SAR) distributions in simulated human head and body tissues exposed to radiofrequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).²

Company Name:	HYUNDAI ELECTRONICS CO., LTD.
Address:	San 136-1, Ami-Ri, Bubal-Eab Ichon-Si, Kyungki-Do, KOREA 467-701
Attention:	Mr. Ki-Soo Kim, QA Dept. System Quality Assurance Office

- EUT Type: Dual-Mode Cellular Phone (AMPS/CDMA)
- Trade Name: **HYUNDAI**
- FCC IDENTIFIER: **CKLHGC-610E**
- Model: **DX-10**
- Tx Frequency: 824.04 – 848.97 MHz (AMPS)
824.70 – 848.31 MHz (CDMA)
- Rx Frequency: 869.04 – 893.97 MHz (AMPS)
869.70 – 893.31 MHz (CDMA)
- Application Type: Certification
- FCC Classification: Non-Broadcast Transmitter
Held to Ear (TNE)
- FCC Rule Part(s): §2.1093, Docket 96-326
- Max. RF Output Power: 0.55W ERP AMPS (27.38 dBm)
0.34W ERP CDMA (25.27 dBm)
- Modulation: AMPS / CDMA
- Antenna Type: Helical ($\lambda/2$)
- Antenna Dimensions: 8.55 cm. (Length)
- Dates of Test(s): July 18-20, 2000
- Place of Test(s): PCTEST Engineering Lab.
Columbia, MD, U.S.A.
- Report Serial No.: SAR.200718355.CKL



Fig. 1 SAR Test Setup



¹ Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

² IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET-Docket 93-62.

2.1 INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radiofrequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in *IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz*. (c) 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in *IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in *Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields*, NCRP Report No. 86 (c) NCRP, 1986, Bethesda, MD 20814.[4] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.2 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (r). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2).

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{r dV} \right)$$

Figure 1. SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = s E^2 / r$$

where:

s	=	conductivity of the tissue-simulant material (S/m)
r	=	mass density of the tissue-simulant material (kg/m ³)
E	=	Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[4]

3.1 SAR MEASUREMENT SET-UP

PCTEST Lab SAR measurement system consists of completely automated robotics system, cell controller (Pentium Pro 200 computer), E-field probe, and phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3).

The Robot table consists of the power supply, robot controller, safety computer, teach pendant (Joystick), six-axis robot arm, and the probe. The cell controller consists of PCTEST Pentium-Pro 200 MHz computer with Windows NT system and SAR Measurement software, National Instruments analog card, NEC monitor, keyboard, and mouse. The robot controller is connected to the cell controller to communicate between the two computers. The probe data is connected to the cell controller via high-impedance carbon-fiber cable to avoid field distortions and minimize external noise from interfering with the data.

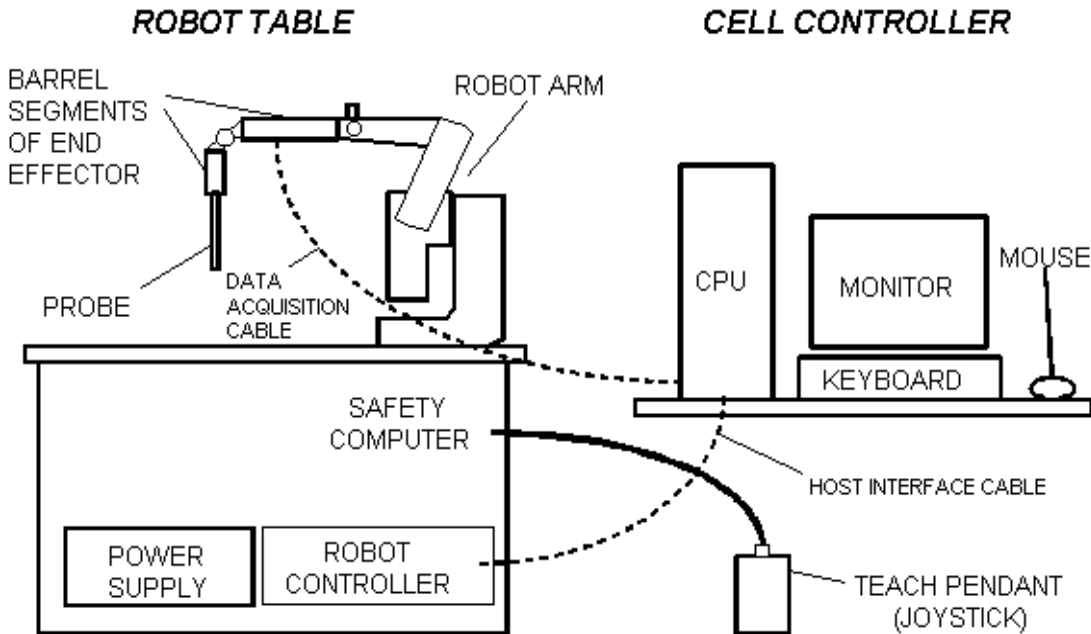


Figure 2. PCTEST Robotics SAR Test Measurement Set-up

When the Robot is in the home position, the Y-axis of the coordinate system parallels the line of intersection between the tabletop and the long axis of the Robot's Large Shoulder. The Teach Pendant may be used to establish the X,Y coordinate directions by depressing the 0-X and 0-Y MOTOR/AXIS switches while in axis mode.

The robot is first taught to position the probe sensor following a specific pattern of points. In the first sweep the sensor enclosure touches the inside of the phantom head. The SAR is measured on a defined grid of points which are concentrated on the surface of the head closest to the antenna of the transmitting device (EUT).

4.1 ISOTROPIC E-FIELD PROBE SYSTEM

4.2 E-Field Probe

The near-field probe is an implantable isotropic E-field probe that measures the voltages proportional to the $|E|^2$ (electric) or $|H|^2$ (magnetic) fields. The probe is enclosed in a hollow plastic protective cylinder 9 mm. outer diameter, 0.48 mm. thickness and 30 cm. in length. This SAR measurement system and the probe are similar to the one developed by Motorola.[8] The E-probe contains three electrically small array of orthogonal dipoles strategically placed to provide greater accuracy and to compensate for near-field spatial gradients. The probe contains diodes which are placed over the gap of the dipoles to improve RF detection. The electrical signal detected by each diode is amplified by three dc amplifiers and are contained in an shielded container in the robot end effector so its performance is not affected by the presence of incident electromagnetic fields (see Fig. 4).

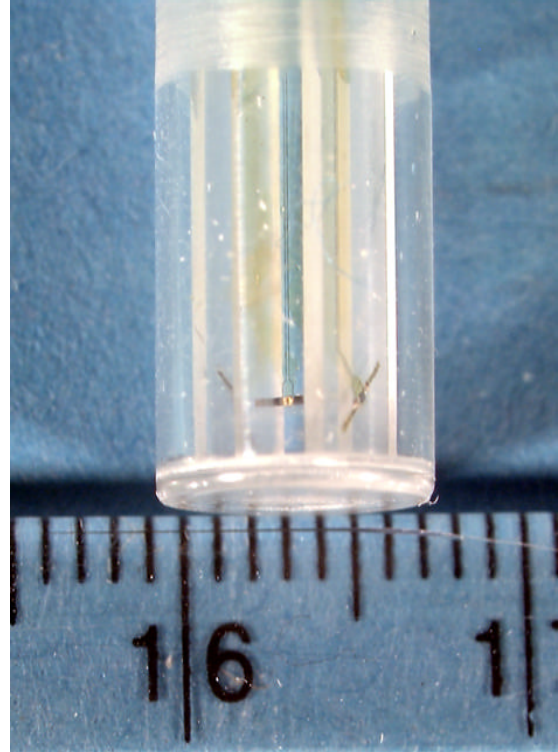


Figure 4. Isotropic E-field Probe



Figure 5. Photograph of the Probe and the Phantom

(See Section 6.2 for E-Probes Specifications)

5.1 E-FIELD PROBE CALIBRATION PROCESS

5.2 E-Probe Calibration

Each E-Probe/Probe amplifier combination has unique calibration parameters. A TEM calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the Probe to a known E-field density (1mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter. The SAR measurement software is used for Probe calibration (see Fig. 6).

Calibration is performed in two steps:

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or some other methodologies above 1 GHz for free space. For the free space calibration, we place the probe in the volumetric center of the cavity and at the proper orientation with the field. We then rotate the probe 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium.

For temperature correlation calibration, a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe. The location of the maximum E-field close to the phantom's bottom is determined as a function of power into the RF source; in this case, a dipole. The E-field probe is moved sideways so that the temperature probe, while affixed to the E-field probe, is placed at the previous location of power levels used for the E-field measurement are recorded. The following equation related SAR to initial temperature slope :

$$SAR = C \frac{\Delta T}{\Delta t} \quad \text{where:}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

$$SAR = \frac{|E|^2 \cdot s}{P} \quad \text{where:}$$

σ = simulated tissue conductivity,

P = Tissue density (1.25 g/cm³ for brain tissue)

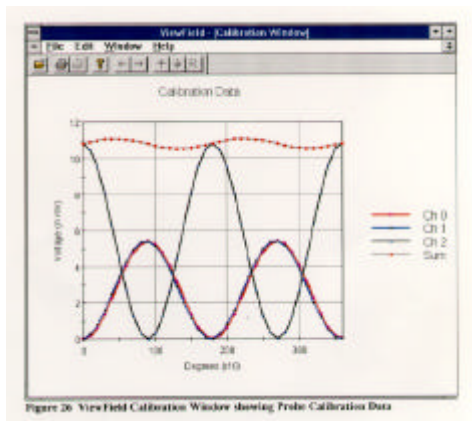


Figure 6. Probe Calibration Data in ViewField Window

5.3 Data Extrapolation

The probe offset is determined by measuring the distance between the center of the sensor to the end of the protective tube. The data is collected when the probe outer surface makes contact with the surface of the phantom and measures the corresponding field in the simulated tissue near the shell surface. An average slope is obtained from these data points nearest the surface and is used to define an exponential decay of the energy density with the depth.

The field attenuation versus depth is recorded and extrapolated to obtain the $|E|^2$ value at the surface of the phantom where the maximum SAR is located.

$$Slope = \frac{\frac{E_{total} \cdot Z_1}{E_{total} \cdot Z_2} + \frac{E_{total} \cdot Z_2}{E_{total} \cdot Z_3}}{2}$$

$$\exp = \ln(slope) \frac{offset}{spacing}$$

$$E_{total} \cdot Z_0 = E_{total} \cdot Z_1 \cdot e^{\exp}$$

5.4 Interpolation and Gram Averaging

The 1 cm. voltage ($E_{total} \cdot 1 \text{ cm}$) above the phantom's surface is needed to calculate the exposure of one gram of tissue. The SAR value (mW/g) estimates the average over a one gram cube obtained from the extrapolated value ($E_{total} \cdot Z_0$) and interpolated value ($E_{total} \cdot 1 \text{ cm}$) obtained by interpolation as shown below.

$$SAR(mW / g) = \frac{E_{total} \cdot Z_0 + E_{total} \cdot 1 \text{ cm}}{2} \cdot \frac{CF}{SensorFactor}$$

$$SensorFactor = \frac{10.8 \text{ mV}}{mW / cm^2} = \frac{0.0108 \text{ V}}{mW / cm^2}$$

Conversion Factor (CF) = *intermediate scaling constant for a particular probe which produced an output of 10.8 mV in the TEM cell when the flux density is 1 mW/cm²*

6.1 PHANTOM with EQUIVALENT TISSUES

6.2 Phantom

The phantom is an anatomically-shaped homogeneous torso model filled with a liquid simulating brain or muscle tissue. The phantom is placed at 0 degrees (horizontal position) with the left/right ear placed on the EUT (see Fig. 5). The phantom is made of a shell of fiberglass 1.5mm. thick (giving the worst case SAR value absorbed by brain or muscle tissue and the skull bones) and the EUT supported by a non-metallic (delrin) material*. Similar phantoms have been used to simulate human head modeling studies[6][7].

6.3 Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 1). Preservation with a bacteriacide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixtures are calibrated to obtain proper dielectric constant (permittivity) and conductivity of either muscle or brain tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove [9].

MIXTURE %	FREQUENCY (BRAIN) 800 - 850 MHz	FREQUENCY (MUSCLE) 800-850 MHz
WATER	40.4	52.4
SUGAR	56.0	45.0
SALT	2.5	1.4
BACTERIACIDE	0.1	0.2
HEC	1.0	1.0

Table 1. Composition of the Brain & Muscle Tissue Equivalent Matter

* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [8]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

7.1 SYSTEM SPECIFICATIONS

7.2 Robotic System Specifications

Specifications

POSITIONER:	IDX Robot with 6 axis
Repeatability:	0.002 in.
Accuracy:	0.004 in.

Data Acquisition

Processor:	Pentium PRO CPU
Clock Speed:	200 MHz
Operating System:	Windows NT
Data Card:	National Instruments Analog Card
Software:	IDX Flexware
AMPLIFIER GAIN:	Adjustable 20 - 40, high isolation between channels
Connecting Lines:	High Impedance 4.5 kohm/foot
Sample Rate:	6000

E-Field Probe

Probe Offset:
Frequency Band:
Conversion Factor:
Conversion Factor:
Dynamic Response:
Input:
Isotropy:
Resolution:

E-Probe #1

2.5 mm
150 - 2200 MHz
0.4801 (800-880MHz)
1.20 (1850-1910MHz)
2 μ W/g - 10 mW/g
2.2 meg
 ± 0.48 dB
0.1 cm³

E-Probe #2

2.5 mm
150 - 2200 MHz
0.79 (800-880MHz)
1.20 (1850-1910MHz)
2 μ W/g - 10 mW/g
2.2 meg
 ± 0.48 dB
0.1 cm³

Phantom

Phantoms:
Shell Material:
Thickness:
Head:

Phantom #1 (Left)

Homogenous
Fiberglass
1 - 1.5 mm
with Left ear

Phantom #2 (Right)

Homogenous
Fiberglass
1 - 1.5 mm
with Right ear

Tissue Parameters

Dielectric Constant: ϵ
Conductivity: σ

BRAIN

800-850 MHz

43.4
0.90

MUSCLE

800-850 MHz

51.7
1.10

8.1 MEASUREMENT PROCESS

The measurement process consists of the process parameters, probe parameters, EUT product data, and measurement scans (teach points). The measurement process is a set of predefined points to be scanned and measured by the probe, DC amplified and process by the cell controller. The corresponding voltages determined by the electric and magnetic fields are extrapolated to determine peak SAR value.

8.2 Area & Zoom Scan Grids

The SAR Measurement System measures field strength by employing three different types of systematic measurement scans; an Area scan, a Zoom scan, and an SAR scan. Area and Zoom scans measure field strength in a rectangular area within the XY plane (a plane parallel to the top of the Robot Table). The measurement area is divided into a grid of small squares defined by equally-spaced grid lines. During an actual measurement process, the probe moves along grid lines systematically recording the field strength at grid line intersections. Typically, after an Area scan is completed, a Zoom scan is conducted at the peak field strength value (hot spots) that was measured in the Area scan. The Zoom scan usually has a greater resolution (smaller grid squares) than the Area scan, and covers only a fraction of the measurement area in the Area scan (see Fig. 7).

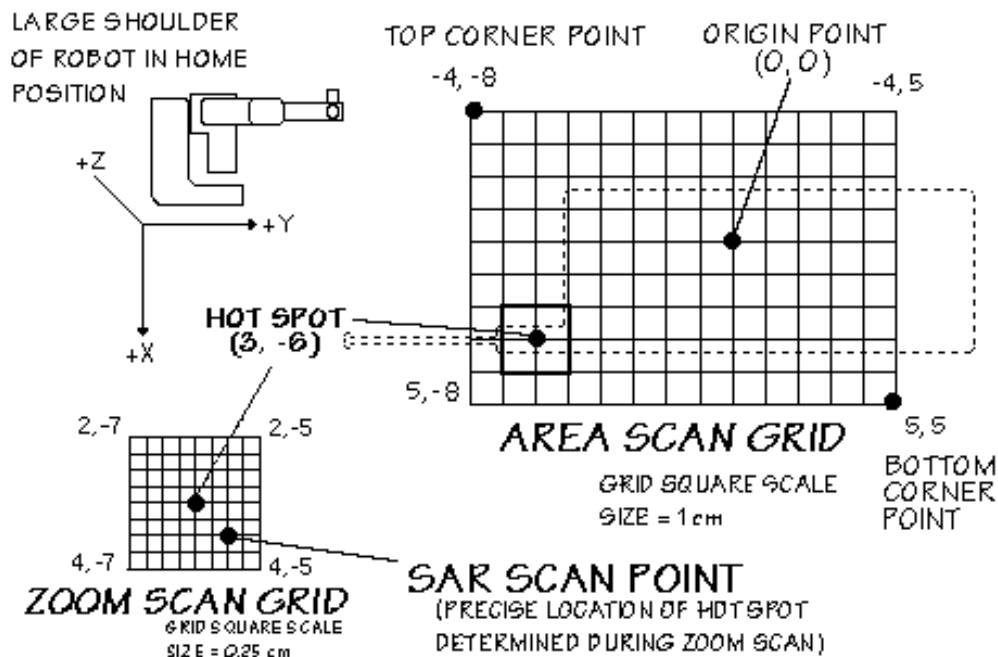


Figure 7. SAR Measurement Points in Area Scan and Zoom Scan Grids
Showing the Typical Hot Spot with respect to the Phone

9.1 TEST POSITION OF THE PHONE

9.2 HANDSET TEST POSITION

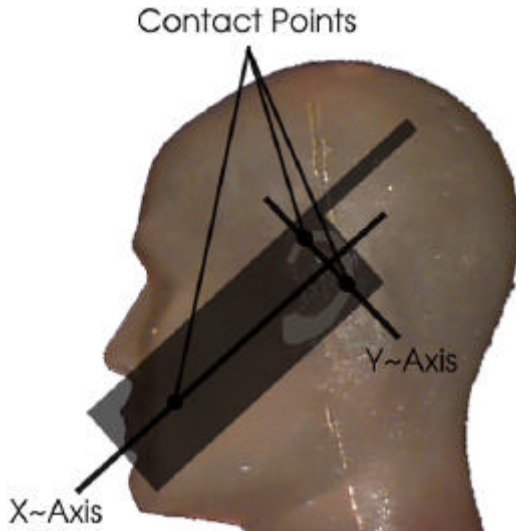


Figure 8. Diagram showing Typical Alignment & Contact Points

The device was placed in a normal operating position with the center of its ear-piece aligned with the location of the ear canal on the phantom (See Fig. 9). With the ear-piece pressed against the head, the vertical center line of the body of the handset was aligned with an imaginary plane consisting of the three lines joining both ears and the tip of the mouth. While maintaining these alignments, the body of the handset was gradually moved towards the cheek until any point on the mouth-piece or keypad contacted the cheek (See Fig 8).

An upper right-hand corner antenna requires the left-hand phantom while handsets with an upper left antenna require the right-hand phantom. The handset was tested both with its antenna extended (out) and retracted (in). A sample diagram of a typical handset shows the ear-piece at the center of the X and Y axis, placed at the center of the ear canal of the phantom (see Fig. 10).



Figure 9. Sample of Handset alignment with the Ear Canal of the Phantom

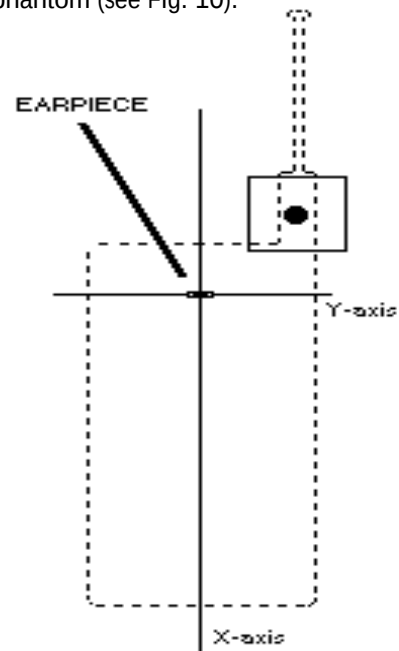


Figure 10. Origin of Axis at Ear-piece Position

10.1 BODY-WORN TEST SETUP

10.2 Ear-Microphone Jack

Portable transmitting devices that have an ear-microphone jack must be evaluated for RF exposure in a body-worn configuration. The testing is performed with the use of a torso phantom filled with muscle equivalent tissue. The EUT is positioned with the keypad facing away from the phantom, and the ear-microphone wires attached to the phone jack, simulating the device placed in a shirt pocket or attached to a body holster. The SAR tests are then performed in both the antenna in and antenna out positions using the low, middle, and high channels to investigate the worst case SAR value (see Figure 11). Please note that body-worn configurations which have not been SAR tested may result in operating conditions that could exceed FCC RF exposure limits, therefore, users are cautioned to use tested and/or approved accessories.

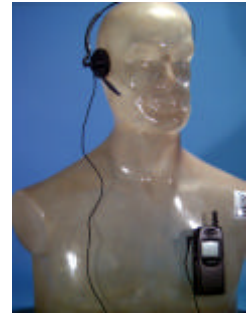


Figure 11.
Ear-Microphone Jack

10.3 Shirt Pocket Configuration

The shirt pocket configuration is used for devices designed to be body-worn, and small enough to be placed inside a shirt pocket. To simulate the worst-case configuration, the EUT is placed in a torso position on the phantom with the keypad facing away from the phantom, and the Ear-Microphone wire connected to the phone to simulate hands-free operation in a shirt-pocket configuration (see Figure 12).




Figure 12.
Shirt Pocket Configuration

10.4 Body Holster/Belt Clip Configuration

The body holster/belt-clip configuration is used for body-worn devices that have a body holster or belt-clip accessory. Typically, a holster, belt-clip, or carrying case is provided or available as an accessory item for supporting headset and body-worn operations. SAR may vary depending on the body separation distance provided by the type of holster/belt-clip and batteries supplied for a phone. In most cases, the antenna may become closer to the user's body than next to the head. The design of the holster/belt-clip permits the phone to be positioned with the keypad facing away from the phantom. Proper usage of the holster restricts the antenna to a specified distance away from the surface of the body. For this test, the EUT is placed into the holster/belt-clip which is placed against the torso of the phantom in a normal operating position. The Ear-Microphone wire is then connected to the phone to simulate hands-free operation in a body holster/belt-clip configuration (see Figure 13).



Figure 13.
Body Holster Configuration

10.5 Other Configurations

If other operating configurations are possible (i.e.: pants pocket, car adapter kit, etc), a warning statement will be placed in the instruction manual informing the user regarding untested conditions and accessories which may exceed FCC RF exposure limits for such use.

11.1 ANSI/IEEE C95.1 - 1992 RF EXPOSURE LIMITS

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 2. Safety Limits for Partial Body Exposure [2]

NOTES:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole-body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

12.1 MEASUREMENT UNCERTAINTIES

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than 15-25 %.

According to ANSI/IEEE C95.3, the overall uncertainty is difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.[3]

According to CENELEC [5], typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

Estimated Errors	Percent
Measurement of the Conductivity/Dielectric Constant of the Tissue Simulant	± 5 %
Temperature Rise Calibration of Probe	± 5 %
Measurement of Thermal Capacity of Tissue Simulant	± 5 %
Accuracy of a Repeatable Phone Position	± 10 %
Probe Isotropic Response	± 12 %
Total Root-Sum Square Calculation	± 17.9 %

Table 3. Breakdown of Individual Errors

13.1 SAR TEST DATA SUMMARY

Ambient TEMPERATURE (°C) _____ 23.9
Relative HUMIDITY (%) _____ 54.0
Atmospheric PRESSURE (kPa) _____ 101.1

Mixture Type: _____ Brain _____

Dielectric Constant: _____ 43.40 _____

Conductivity: _____ 0.90 S/m _____

Closest Distance (between E-Probe & Phone): _____ 1.7 cm _____

13.2 Measurement Results (AMPS Head & Hand SAR)

FREQUENCY		Modulation	POWER (dBm)	Phantom Position	Antenna Position	SAR (W/kg)
MHz	Ch.					
824.04	991	AMPS	28.0	Left Ear	IN	0.5151
824.04	991	AMPS	28.0	Left Ear	OUT	1.0556
836.49	383	AMPS	28.0	Left Ear	IN	0.5250
836.49	383	AMPS	28.0	Left Ear	OUT	1.3440
848.97	799	AMPS	27.8	Left Ear	IN	0.7208
848.97	799	AMPS	27.8	Left Ear	OUT	1.4374
848.97	799	AMPS	27.8	Hand*	IN	0.7430
848.97	799	AMPS	27.8	Hand*	OUT	1.3775
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population			Brain 1.6 W/kg (mW/g) averaged over 1 gram		Hand 4.0 W/kg (mW/g) averaged over 10 grams	

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
- All modes of operation were investigated and the worst-case are reported.
- Power Measured ☒ Conducted ☐ EIRP ☐ ERP
- SAR Measurement System ☐ SPEAG ☒ IDX
- SAR Configuration ☒ Head ☐ Body ☒ Hand


Randy Ortanez
President & Chief Engineer



Figure 14. Head SAR



Figure 15. Hand SAR

13.1 SAR TEST DATA SUMMARY (Continued)

Ambient TEMPERATURE (°C) _____ 23.9

Relative HUMIDITY (%) 54.0
Atmospheric PRESSURE (kPa) 101.1

Mixture Type: Brain

Dielectric Constant: 43.40

Conductivity: 0.90 S/m

Closest Distance (between E-Probe & Phone): 1.7 cm

13.6 Measurement Results (CDMA Head SAR)

FREQUENCY		Modulation	POWER (dBm)	Phantom Position	Antenna Position	SAR (W/kg)
MHz	Ch.					
824.70	1013	CDMA	25.5	Left Ear	IN	0.3052
824.70	1013	CDMA	25.5	Left Ear	OUT	0.7348
835.89	363	CDMA	25.5	Left Ear	IN	0.3082
835.89	363	CDMA	25.5	Left Ear	OUT	0.7031
848.31	777	CDMA	25.5	Left Ear	IN	0.4978
848.31	777	CDMA	25.5	Left Ear	OUT	1.1204
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population			Brain 1.6 W/kg (mW/g) averaged over 1 gram			

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
- All modes of operation were investigated and the worst-case are reported.
- Power Measured ☒ Conducted ☐ EIRP ☐ ERP
- SAR Measurement System ☐ SPEAG ☒ IDX
- SAR Configuration ☒ Head ☐ Body ☐ Hand


Randy Ortanez
President & Chief Engineer



Figure 16. Head SAR
Test Setup

13.1 SAR TEST DATA SUMMARY (Continued)

Ambient TEMPERATURE (°C) 24.1
Relative HUMIDITY (%) 50.0
Atmospheric PRESSURE (kPa) 99.8

Mixture Type: Muscle

Dielectric Constant: 51.7

Conductivity: 1.10 S/m

13.3 Measurement Results (Body SAR)

FREQUENCY		Modulation	POWER * (dBm)	Separation Distance (cm)**	Antenna Position	SAR (W/kg)
MHz	Ch.					
824.04	991	AMPS	28.0	2.54	IN	0.3330
824.04	991	AMPS	28.0	2.54	OUT	0.5846
836.49	383	AMPS	28.0	2.54	IN	0.3484
836.49	383	AMPS	28.0	2.54	OUT	0.4949
848.97	799	AMPS	27.8	2.54	IN	0.4451
848.97	799	AMPS	27.8	2.54	OUT	0.6379
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population				Body 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- All modes of operation were investigated and the worst-case are reported.
- Battery condition is fully charged for all readings.
- * Power Measured ☒ Conducted ☐ EIRP ☐ ERP
- SAR Measurement System ☐ SPEAG ☒ IDX
- SAR Configuration ☐ Head ☒ Body ☐ Hand
- ** Test Configuration ☒ Body Holster ☐ Without Body Holster


Randy Orlanez
President & Chief Engineer



Figure 17. Body SAR
Test Setup

13.1 SAR TEST DATA SUMMARY (Continued)

Ambient TEMPERATURE (°C) _____ 24.1
Relative HUMIDITY (%) _____ 50.0
Atmospheric PRESSURE (kPa) _____ 99.8

Mixture Type: _____ Muscle _____

Dielectric Constant: _____ 51.7 _____

Conductivity: _____ 1.10 S/m _____

13.3 Measurement Results (Body SAR)

FREQUENCY		Modulation	POWER * (dBm)	Separation Distance (cm)**	Antenna Position	SAR (W/kg)
MHz	Ch.					
824.70	1013	CDMA	25.5	2.54	IN	0.1549
824.70	1013	CDMA	25.5	2.54	OUT	0.3287
835.89	363	CDMA	25.5	2.54	IN	0.1895
835.89	363	CDMA	25.5	2.54	OUT	0.3352
848.31	777	CDMA	25.5	2.54	IN	0.2805
848.31	777	CDMA	25.5	2.54	OUT	0.3194
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population				Body 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- All modes of operation were investigated and the worst-case are reported.
- Battery condition is fully charged for all readings.
- * Power Measured ☒ Conducted ☐ EIRP ☐ ERP
- SAR Measurement System ☐ SPEAG ☒ IDX
- SAR Configuration ☐ Head ☒ Body ☐ Hand
- ** Test Configuration ☒ Body Holster ☐ Without Body Holster


Randy Orlanez
President & Chief Engineer



Figure 17. Body SAR
Test Setup

14.1 SAR TEST EQUIPMENT

Type / Model	Calib. Date	S/N
PCTEST Robot Arm	Jan. 00	PCT482
PCTEST Computer 200 MHz Pentium Pro Windows NT	Jan. 00	PCT480
Robot Controller	Jan. 00	PCT464
Teach Pendant (Joystick)	Jan. 00	PCT467
Phantom Head Model (Right)	Jan. 00	PCT484
Phantom Head Model (Left)	Apr. 00	PCT497
Brain Equivalent Matter (800MHz)	Jun. 00	PCTBEM10
Muscle Equivalent Matter (800MHz)	Jun. 00	PCTMEM12
E-Field Probe	Feb. 00	PCT486A
E-Field Probe	Apr. 00	PCT486B
HP Spectrum Analyzer	Dec. 99	PCT200
IFI TEM Cell Model: CC110EXX (DC - 2000 MHz)	Jan. 00	A427-0697
Microwave Amp. Model: 5S1G4 (800MHz - 4.2GHz, 5 Watts)	Jan. 00	22332
Non-metallic Handset Tripod		PCT487

NOTE:

The E-field probe was calibrated by IDX Systems, Inc. The SAR calibration of the E-field probe is performed by temperature measurement procedure. A TEM cell is used for the free space calibration of the probe. The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

The following list of equipment was used to calibrate the system (from IDX):

Power Meter	HP-437B
RF Generator	HP-8657B
Power Amp	Power System Technology (Amplifier Research)
TEM cell	IFI CC-110
Network Analyzer	HP-8753C

15.1 CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.[3]

REFERENCES:

- [1] Federal Communications Commission, ET Docket 93-62, *Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation*, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 1991, *American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz*, New York: IEEE, Aug. 1992
- [3] ANSI/IEEE C95.3 - 1991, *IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave*, New York: IEEE, 1992.
- [4] NCRP, National Council on Radiation Protection and Measurements, *Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields*, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [5] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-Frequency: 10kHz-300GHz*, Jan. 1995.
- [6] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, *The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz*, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [7] N. Kuster and Q. Balzano, *Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz*, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [8] Q. Balzano, O. Garay, T. Manning Jr., *Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones*, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [9] G. Hartsgrrove, A. Kraszewski, A. Surowiec, *Simulated Biological Materials for Electromagnetic Radiation Absorption Studies*, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.

ATTACHMENT O – SAR TEST DATA

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071806_ZOOM.VLT
Start : 18-Jul-100 10:37:24 am End : 18-Jul-100 10:44:16 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.04 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - FM MODE
CHAN 0991 28.0 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.750, Y = -3.250, Z = 0.000 (cm) Value = 8.540

Measured Values (volts) =
7.693E-003 6.770E-003 6.290E-003 5.608E-003 4.964E-003 4.154E-003
3.423E-003 2.753E-003 2.179E-003 1.681E-003 1.408E-003 1.304E-003
1.292E-003 1.410E-003 1.627E-003 1.752E-003 1.833E-003 1.716E-003
1.324E-003 9.952E-004 9.891E-004


Calc. Voltage @ Surface (Vs) = 0.0085

Voltage @ 1.00 cm (Vt) = 0.0056

Ave. Voltage (Vs+Vt)/2 = 0.0071

Ave. SAR over 1 g (mW/g) = 0.5151

SAR Scan
File : 00071806_ZOOM
Start : 18-Jul-100 10:37:24 am End : 18-Jul-100 10:44:16 am
HYUNDAI/DX-10/38;824.04MHz;W;Helical/In;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

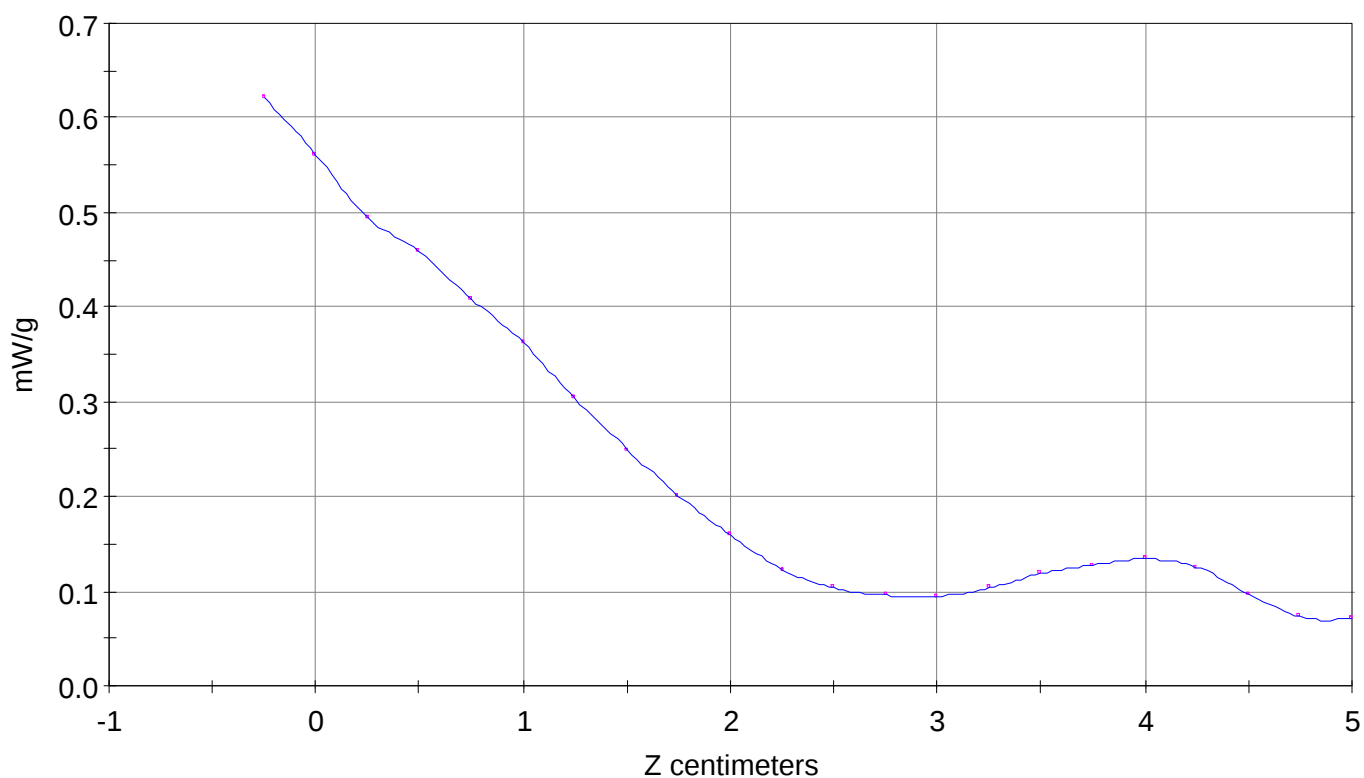


File : 00071806_ZOOM

Start : 18-Jul-100 10:37:24 am End : 18-Jul-100 10:44:16 am

HYUNDAI/DX-10/38;824.04MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

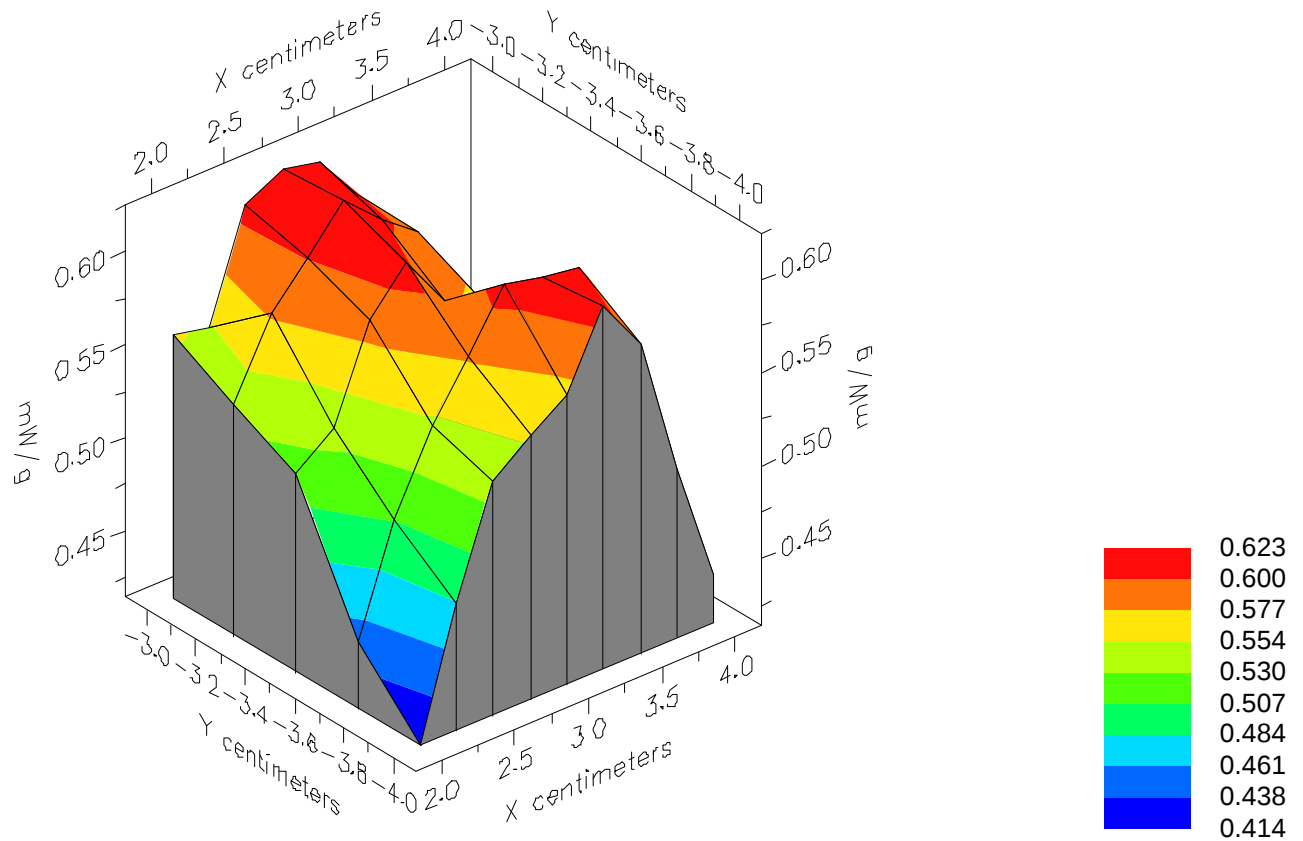


File : 00071806_ZOOM

Start : 18-Jul-100 10:37:24 am End : 18-Jul-100 10:44:16 am

HYUNDAI/DX-10/38;824.04MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

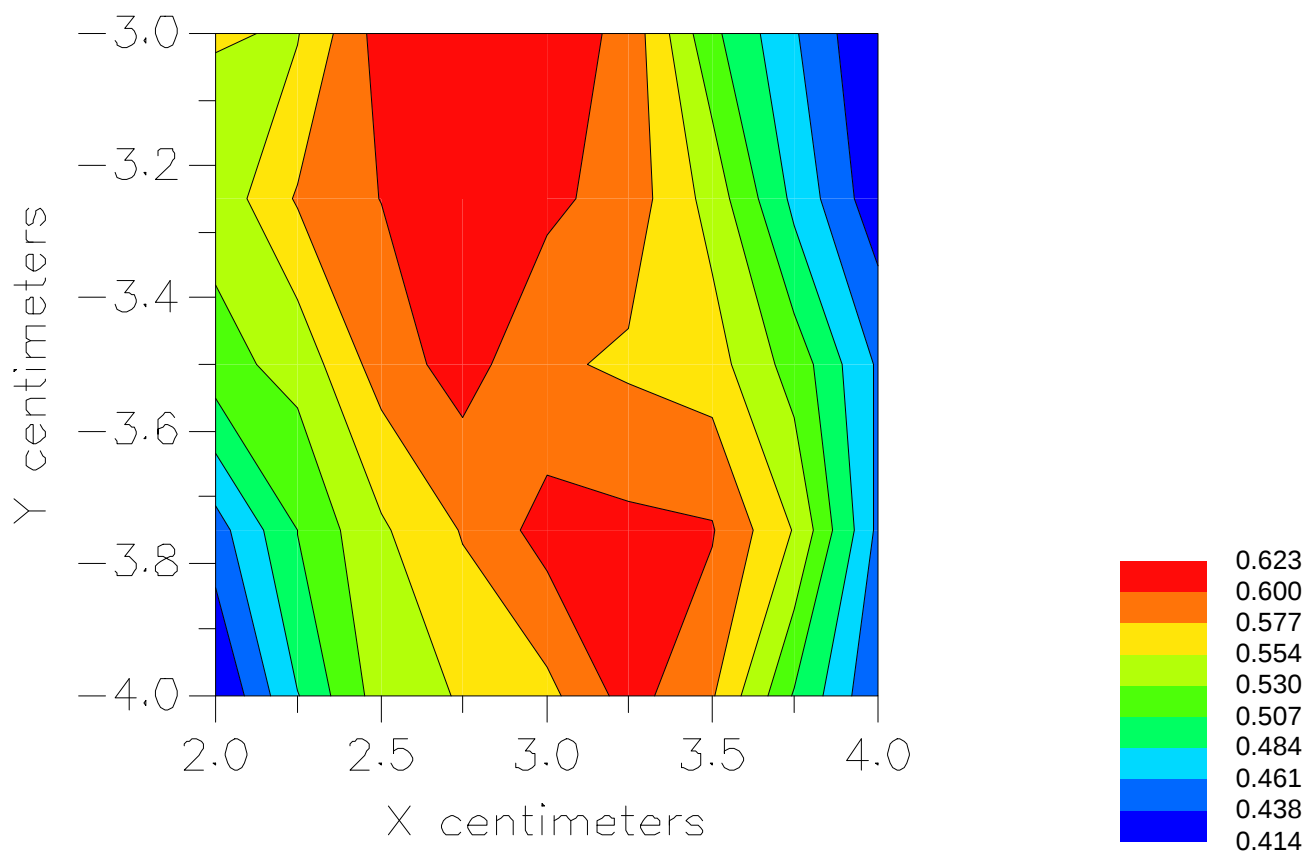

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071808_ZOOM.VLT
Start : 18-Jul-100 10:51:57 am End : 18-Jul-100 10:57:45 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.04 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - FM MODE
CHAN 0991 28.0 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 3.000, Y = -3.500, Z = 0.000 (cm) Value = 16.559

Measured Values (volts) =
1.601E-002 1.404E-002 1.234E-002 1.069E-002 9.106E-003 7.611E-003
6.020E-003 4.708E-003 3.616E-003 2.825E-003 2.411E-003 2.302E-003
2.462E-003 2.761E-003 3.111E-003 3.337E-003 3.280E-003 2.702E-003
1.905E-003 1.660E-003 1.381E-003


Calc. Voltage @ Surface (Vs) = 0.0182

Voltage @ 1.00 cm (Vt) = 0.0107

Ave. Voltage (Vs+Vt)/2 = 0.0145

Ave. SAR over 1 g (mW/g) = 1.0556

SAR Scan
File : 00071808_ZOOM
Start : 18-Jul-100 10:51:57 am End : 18-Jul-100 10:57:45 am
HYUNDAI/DX-10/38;824.04MHz;W;Helical/Out;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

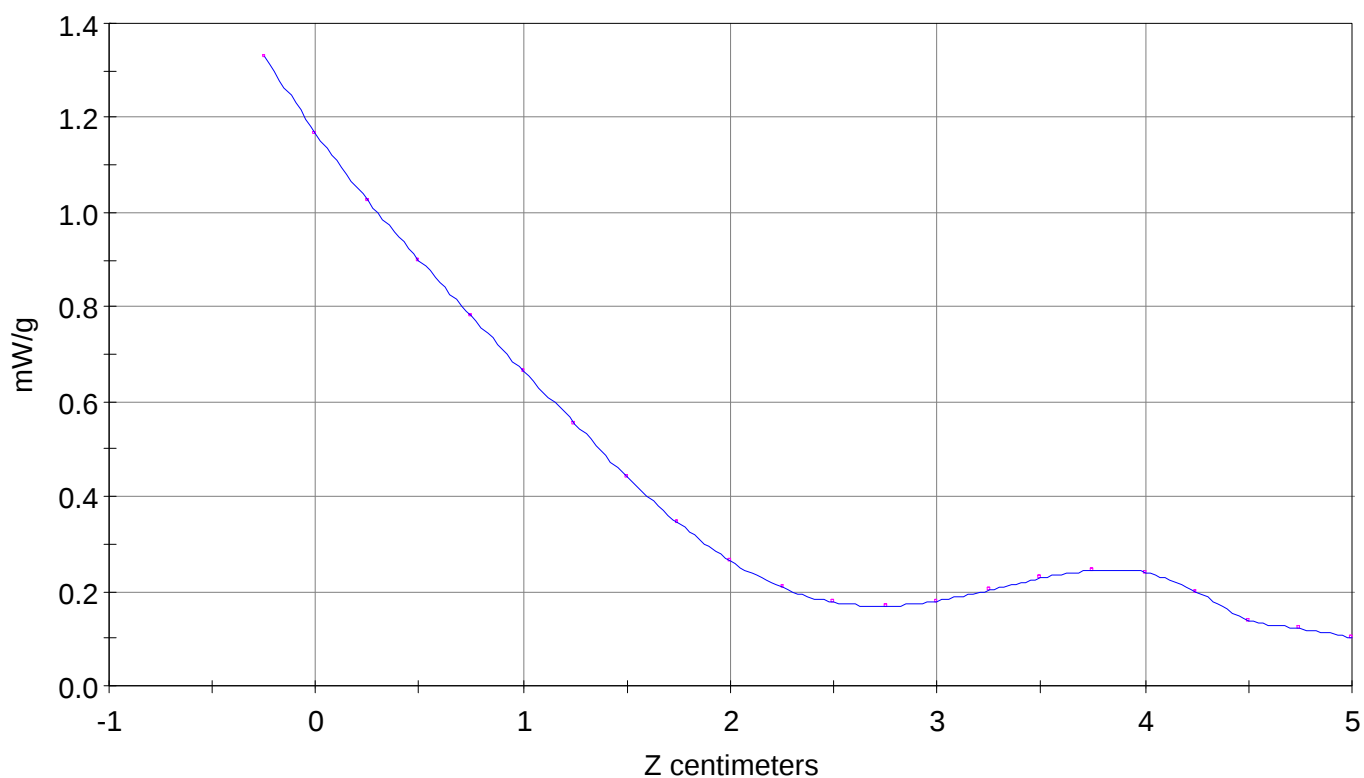


File : 00071808_ZOOM

Start : 18-Jul-100 10:51:57 am End : 18-Jul-100 10:57:45 am

HYUNDAI/DX-10/38;824.04MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

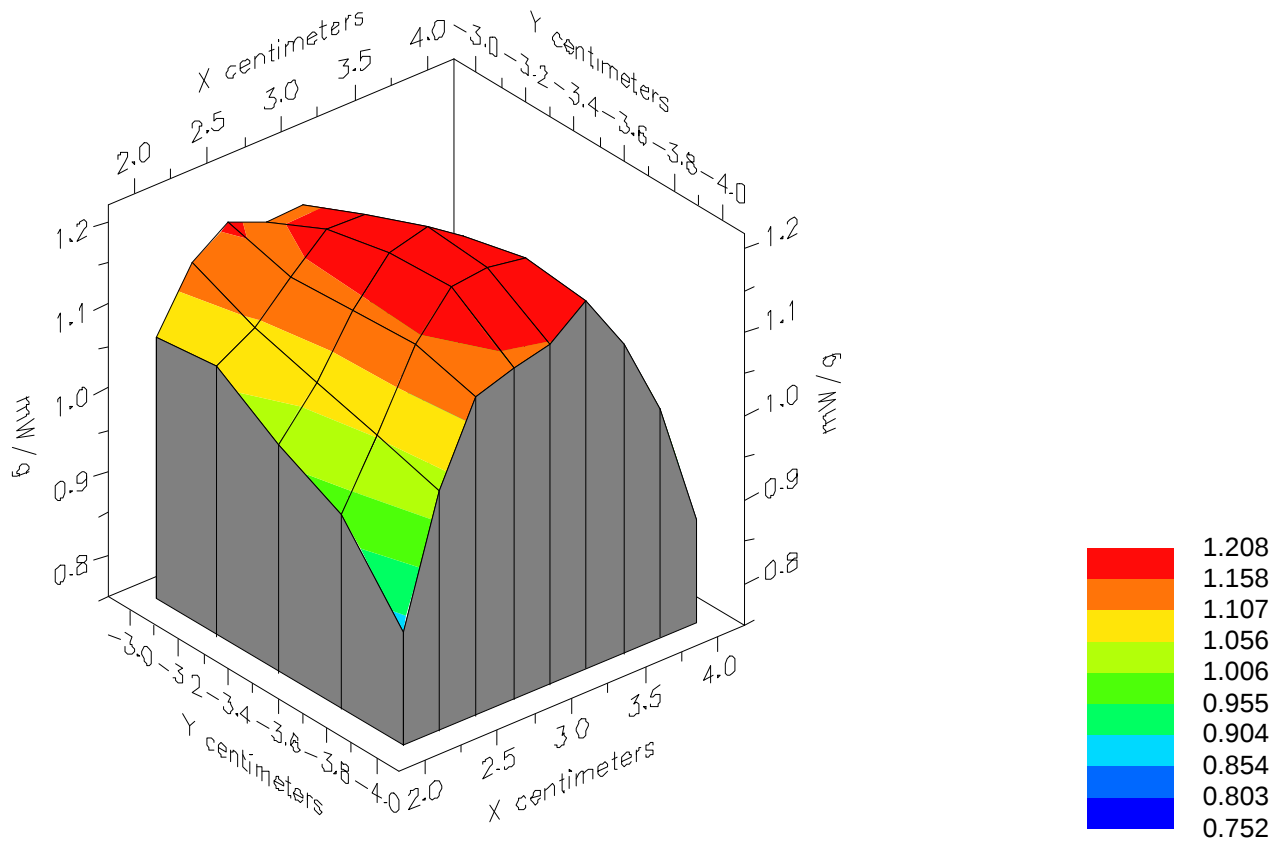


File : 00071808_ZOOM

Start : 18-Jul-100 10:51:57 am End : 18-Jul-100 10:57:45 am

HYUNDAI/DX-10/38;824.04MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

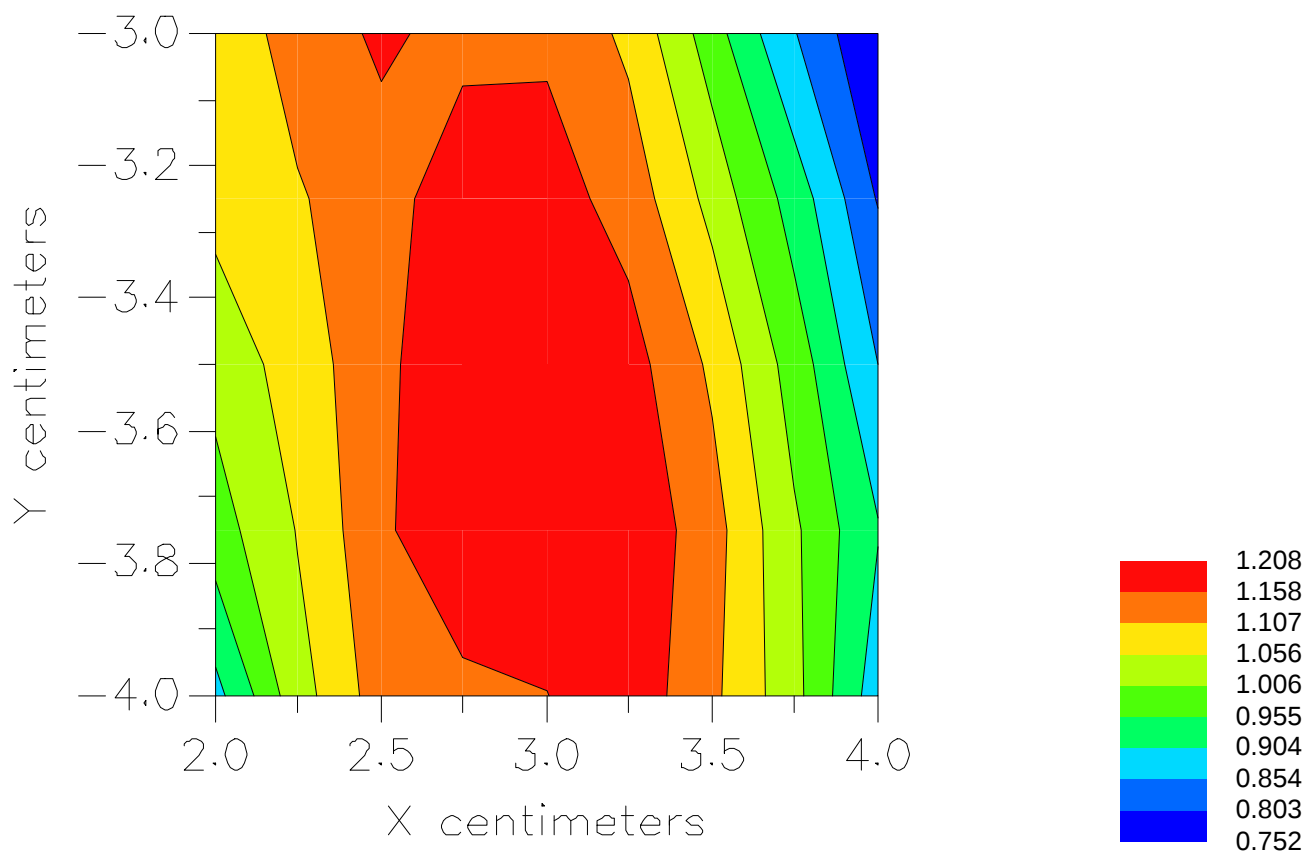

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071804_ZOOM.VLT
Start : 18-Jul-100 09:47:46 am End : 18-Jul-100 09:59:38 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 836.49 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - FM MODE
CHAN 0383 28.0 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.500, Y = -2.500, Z = 0.000 (cm) Value = 8.281

Measured Values (volts) =
7.839E-003 6.901E-003 6.115E-003 5.515E-003 5.028E-003 4.406E-003
3.771E-003 3.094E-003 2.476E-003 1.881E-003 1.504E-003 1.245E-003
1.151E-003 1.196E-003 1.407E-003 1.553E-003 1.747E-003 1.781E-003
1.661E-003 1.271E-003 8.718E-004


Calc. Voltage @ Surface (Vs) = 0.0089

Voltage @ 1.00 cm (Vt) = 0.0055

Ave. Voltage (Vs+Vt)/2 = 0.0072

Ave. SAR over 1 g (mW/g) = 0.5250

SAR Scan
File : 00071804_ZOOM
Start : 18-Jul-100 09:47:46 am End : 18-Jul-100 09:59:38 am
HYUNDAI/DX-10/38;836.49MHz;W;Helical/In;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

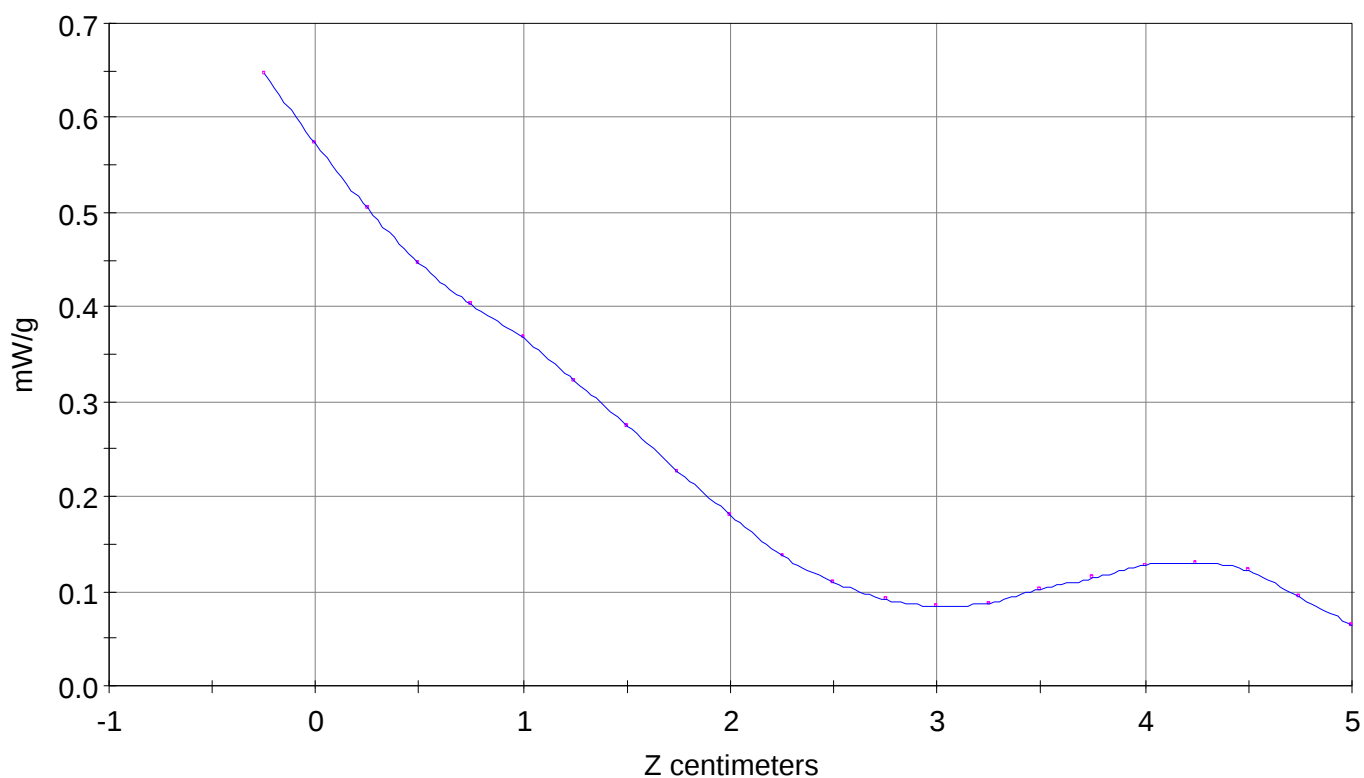


File : 00071804_ZOOM

Start : 18-Jul-100 09:47:46 am End : 18-Jul-100 09:59:38 am

HYUNDAI/DX-10/38;836.49MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

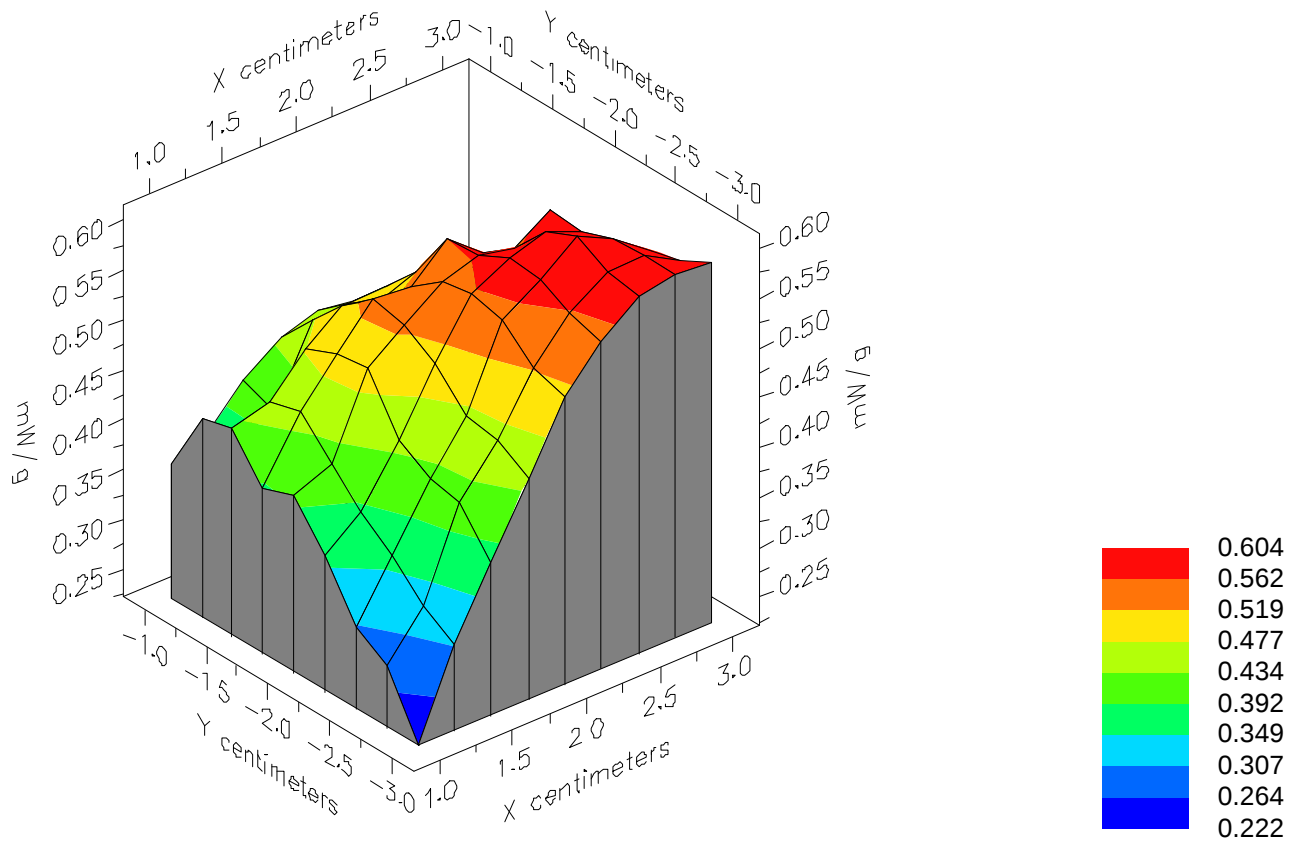


File : 00071804_ZOOM

Start : 18-Jul-100 09:47:46 am End : 18-Jul-100 09:59:38 am

HYUNDAI/DX-10/38;836.49MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

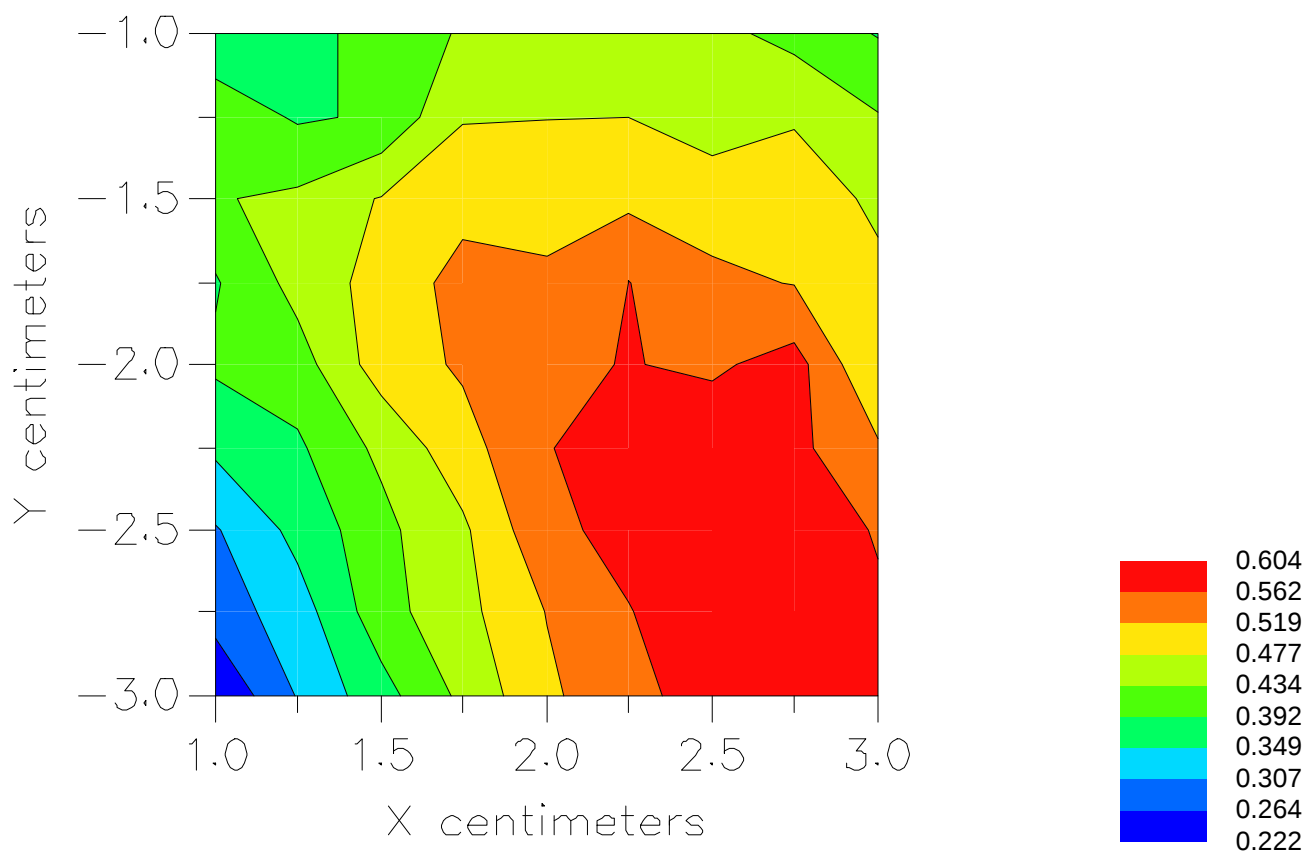

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071805_ZOOM.VLT
Start : 18-Jul-100 10:12:13 am End : 18-Jul-100 10:24:13 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 836.49 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - FM MODE
CHAN 0383 28.0 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.500, Y = -2.250, Z = 0.000 (cm) Value = 20.335

Measured Values (volts) =
2.014E-002 1.677E-002 1.472E-002 1.327E-002 1.175E-002 1.039E-002
8.832E-003 7.257E-003 5.703E-003 4.304E-003 3.249E-003 2.653E-003
2.450E-003 2.575E-003 2.895E-003 3.271E-003 3.545E-003 3.893E-003
3.595E-003 2.817E-003 1.891E-003


Calc. Voltage @ Surface (Vs) = 0.0236

Voltage @ 1.00 cm (Vt) = 0.0133

Ave. Voltage (Vs+Vt)/2 = 0.0184

Ave. SAR over 1 g (mW/g) = 1.3440

SAR Scan
File : 00071805_ZOOM
Start : 18-Jul-100 10:12:13 am End : 18-Jul-100 10:24:13 am
HYUNDAI/DX-10/38;836.49MHz;W;Helical/Out;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

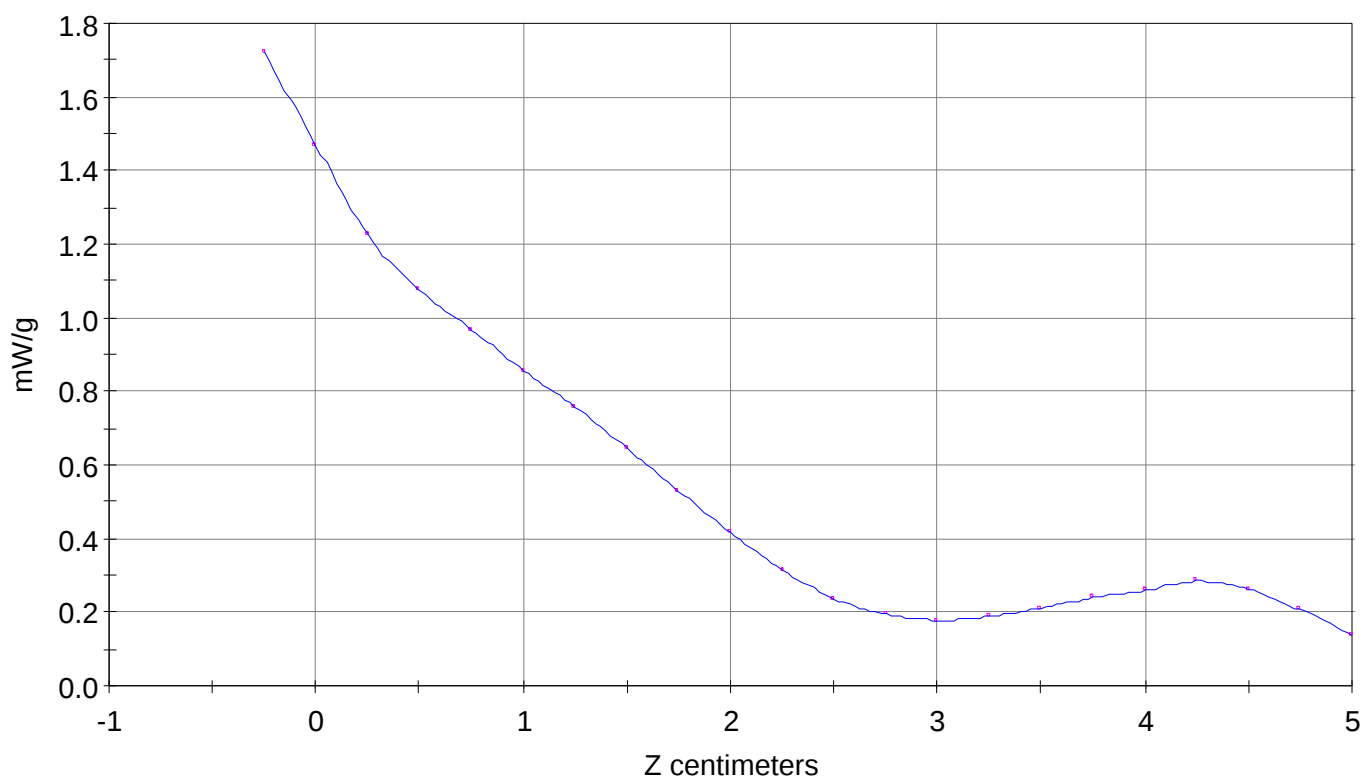


File : 00071805_ZOOM


Start : 18-Jul-100 10:12:13 am End : 18-Jul-100 10:24:13 am

HYUNDAI/DX-10/38;836.49MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

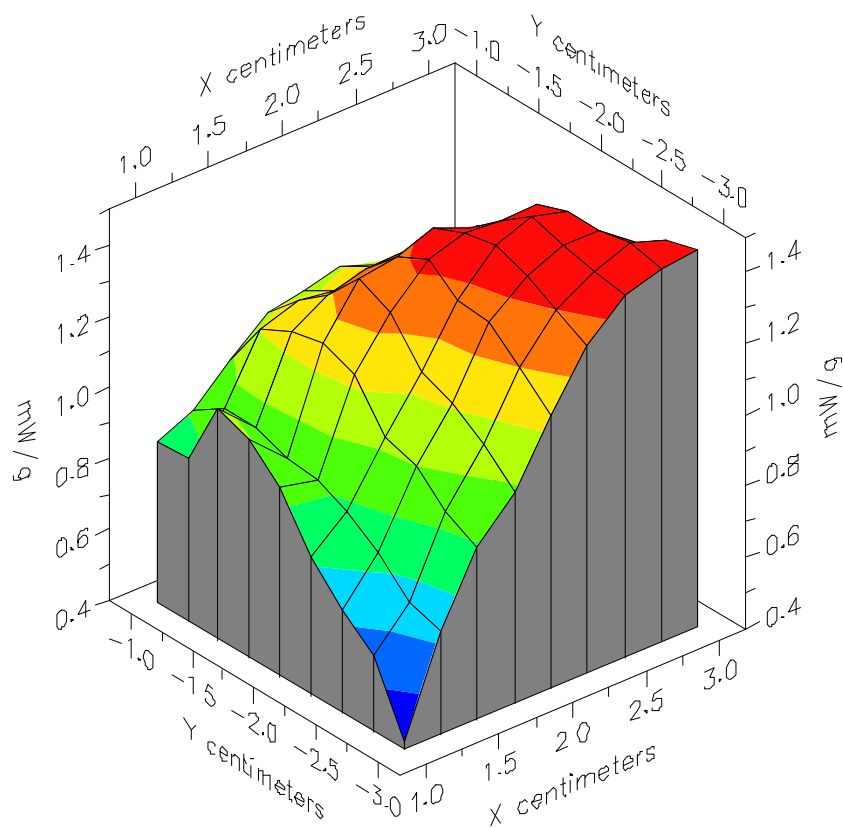

File : 00071805_ZOOM
Start : 18-Jul-100 10:12:13 am End : 18-Jul-100 10:24:13 am
HYUNDAI/DX-10/38;836.49MHz;W;Helical/Out;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

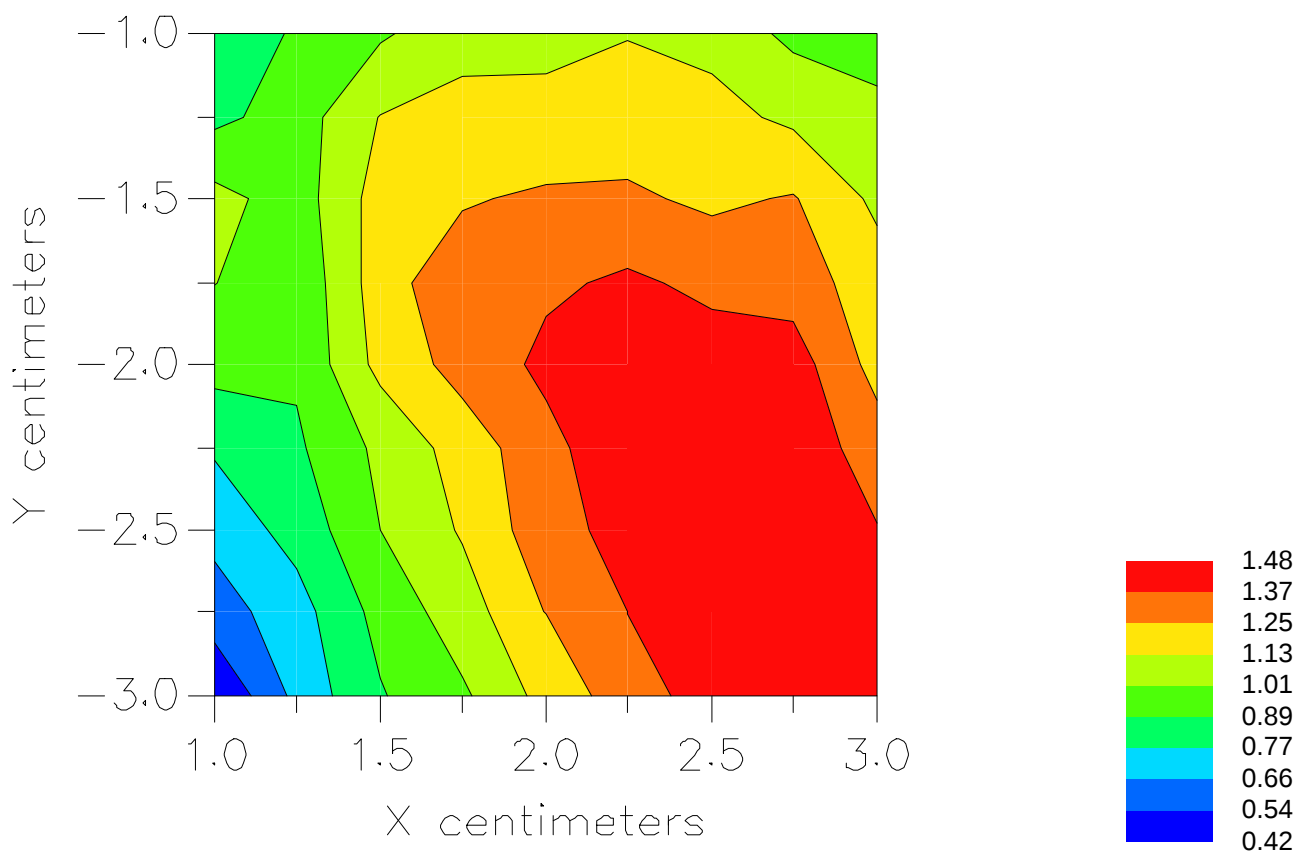

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071809_ZOOM.VLT
Start : 18-Jul-100 11:06:04 am End : 18-Jul-100 11:11:53 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.97 MHz
Peak Trans. Pwr : 0.605 W
Start Trans. Pwr: 0.605 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - FM MODE
CHAN 0799 27.8 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 3.000, Y = -3.750, Z = 0.000 (cm) Value = 11.050

Measured Values (volts) =
1.092E-002 9.769E-003 8.373E-003 7.280E-003 6.365E-003 5.265E-003
4.281E-003 3.340E-003 2.601E-003 2.068E-003 1.801E-003 1.763E-003
1.848E-003 2.112E-003 2.339E-003 2.487E-003 2.431E-003 1.982E-003
1.386E-003 1.237E-003 6.243E-004


Calc. Voltage @ Surface (Vs) = 0.0125

Voltage @ 1.00 cm (Vt) = 0.0073

Ave. Voltage (Vs+Vt)/2 = 0.0099

Ave. SAR over 1 g (mW/g) = 0.7208

SAR Scan
File : 00071809_ZOOM
Start : 18-Jul-100 11:06:04 am End : 18-Jul-100 11:11:53 am
HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

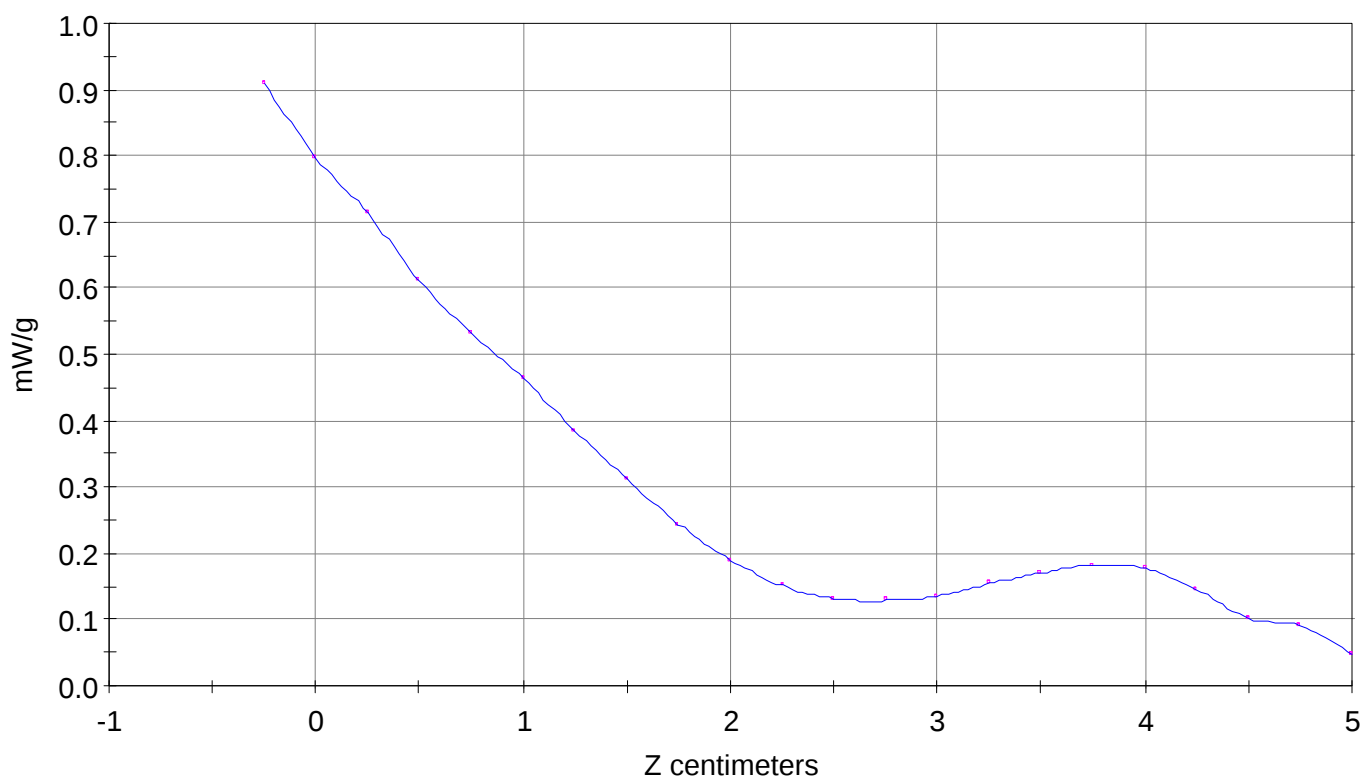


File : 00071809_ZOOM

Start : 18-Jul-100 11:06:04 am End : 18-Jul-100 11:11:53 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

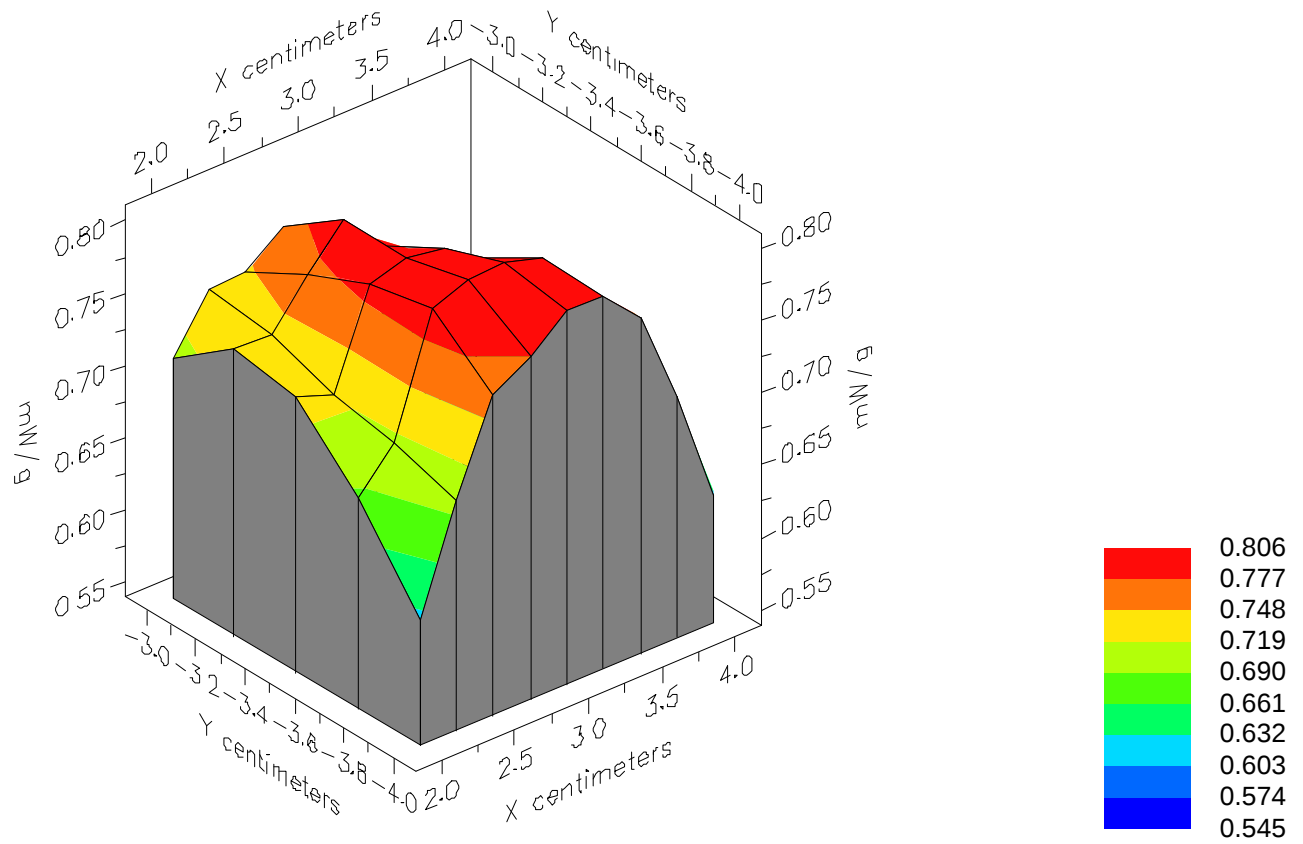


File : 00071809_ZOOM

Start : 18-Jul-100 11:06:04 am End : 18-Jul-100 11:11:53 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

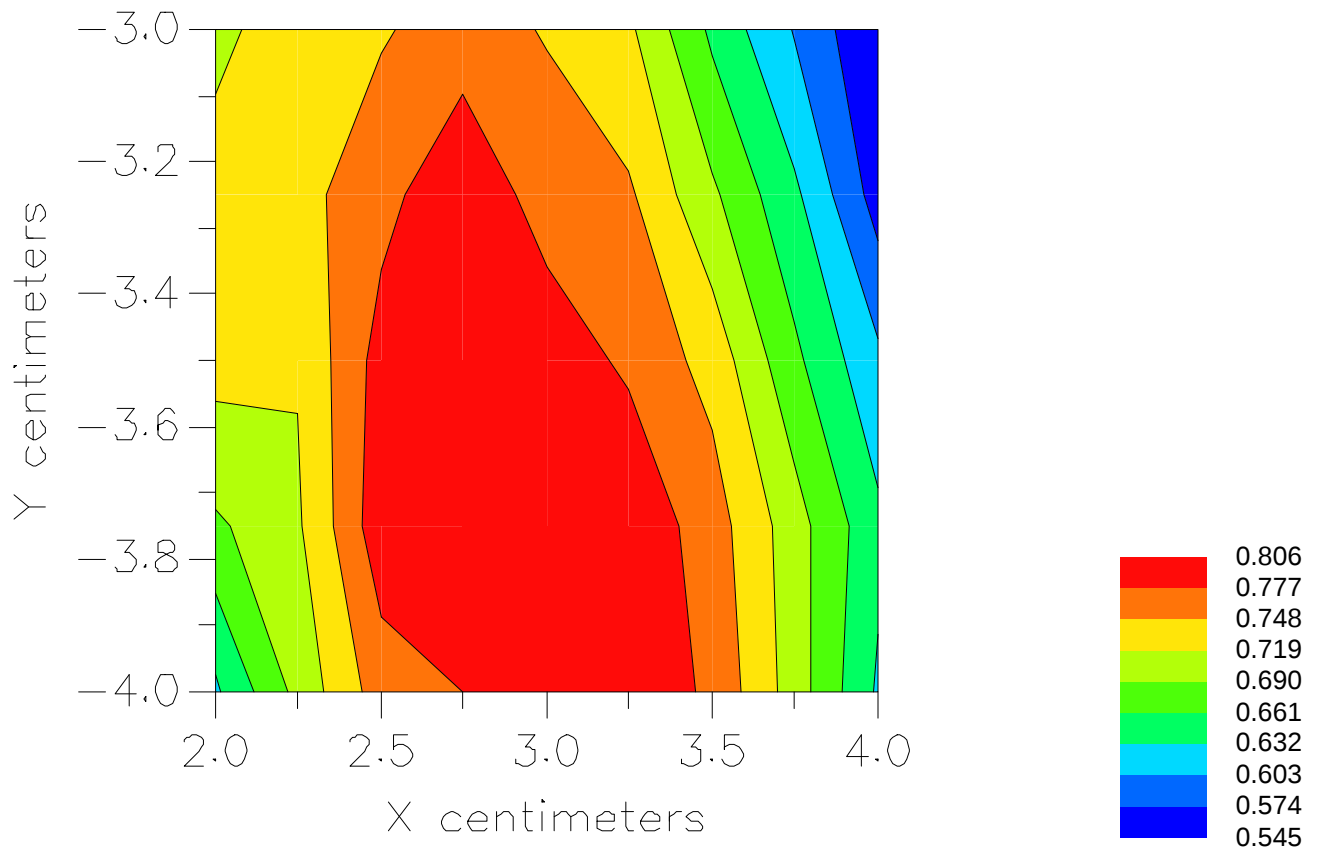

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071811_ZOOM.VLT
Start : 18-Jul-100 11:42:21 am End : 18-Jul-100 11:48:10 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.97 MHz
Peak Trans. Pwr : 0.605 W
Start Trans. Pwr: 0.605 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - FM MODE
CHAN 0799 27.8 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 3.000, Y = -3.500, Z = 0.000 (cm) Value = 22.104

Measured Values (volts) =
2.175E-002 1.911E-002 1.684E-002 1.468E-002 1.259E-002 1.063E-002
8.457E-003 6.537E-003 5.021E-003 3.974E-003 3.364E-003 3.225E-003
3.459E-003 3.930E-003 4.422E-003 4.761E-003 4.571E-003 3.764E-003
2.720E-003 2.532E-003 2.099E-003


Calc. Voltage @ Surface (Vs) = 0.0247

Voltage @ 1.00 cm (Vt) = 0.0147

Ave. Voltage (Vs+Vt)/2 = 0.0197

Ave. SAR over 1 g (mW/g) = 1.4374

SAR Scan
File : 00071811_ZOOM
Start : 18-Jul-100 11:42:21 am End : 18-Jul-100 11:48:10 am
HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

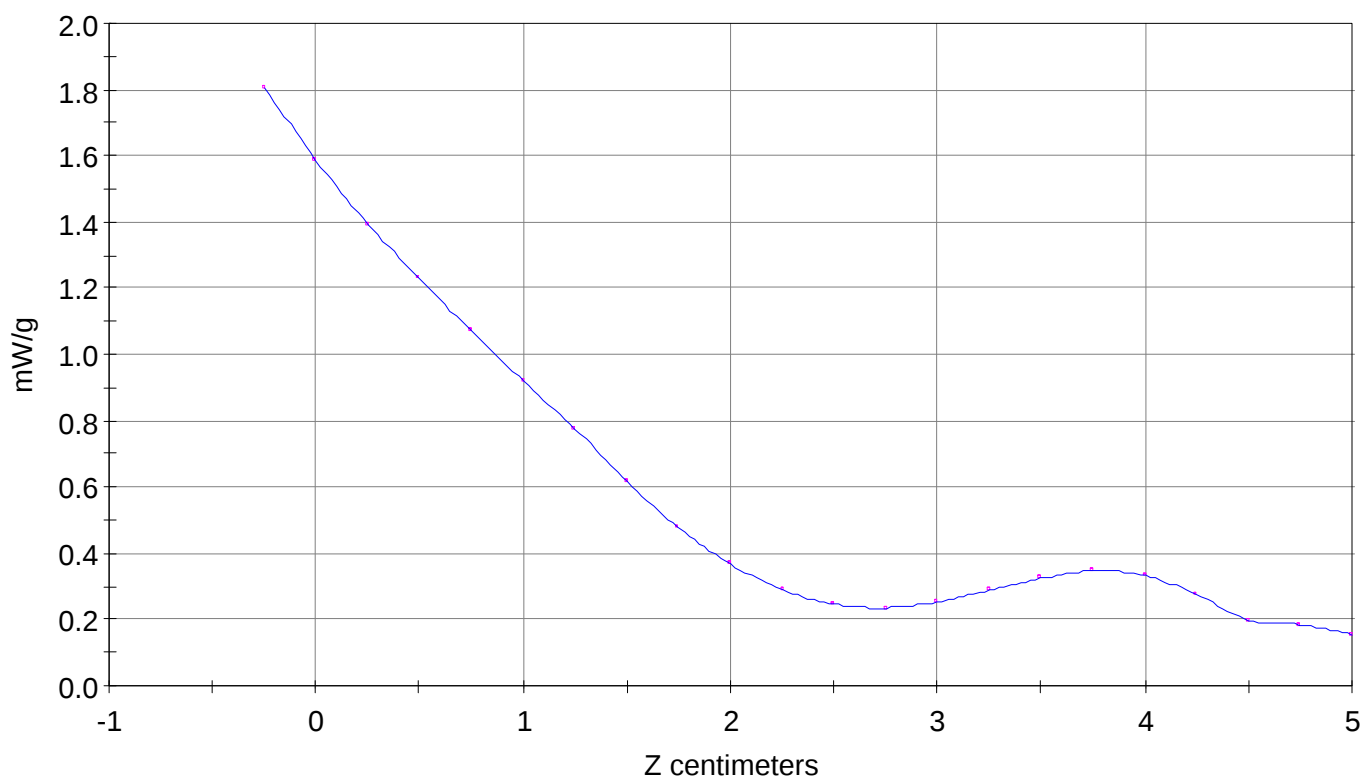


File : 00071811_ZOOM

Start : 18-Jul-100 11:42:21 am End : 18-Jul-100 11:48:10 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

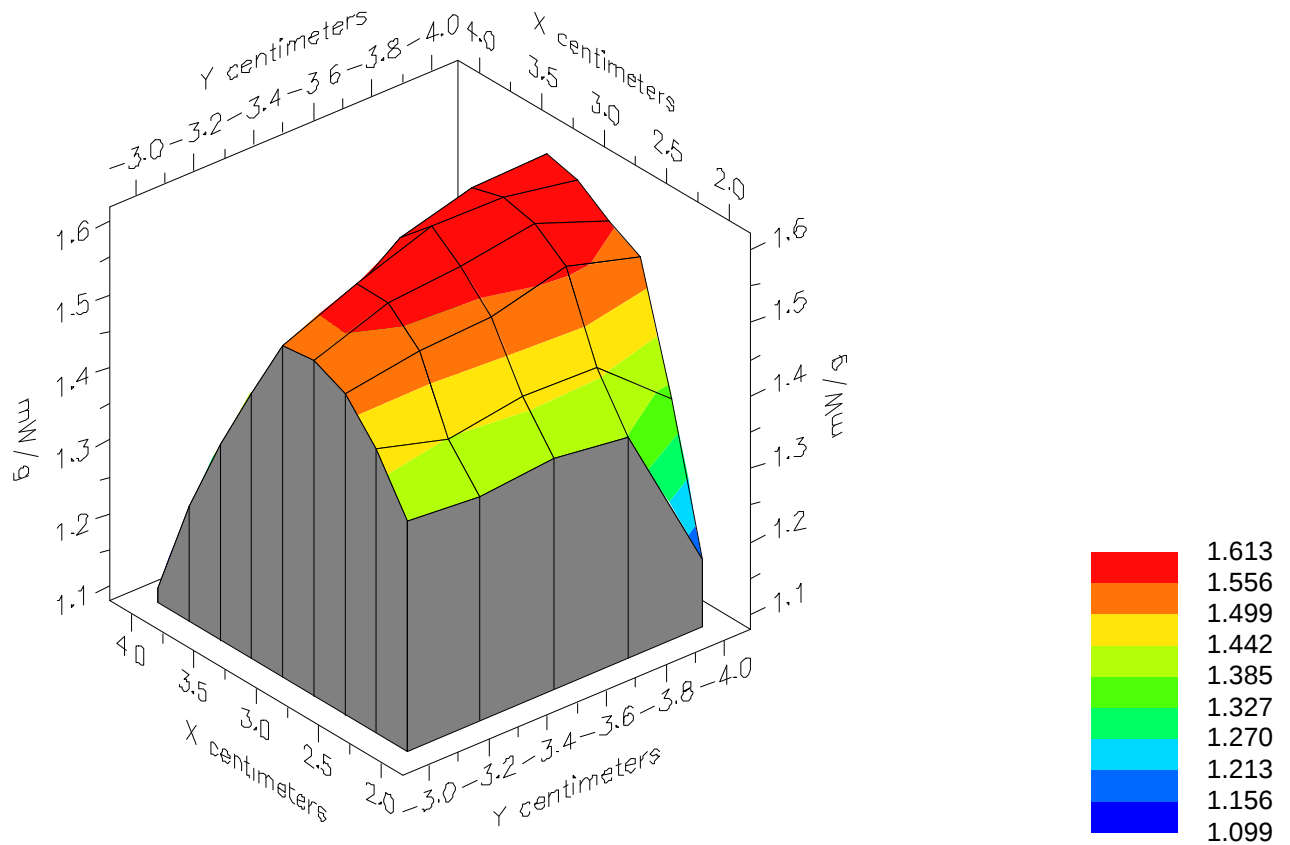


File : 00071811_ZOOM

Start : 18-Jul-100 11:42:21 am End : 18-Jul-100 11:48:10 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

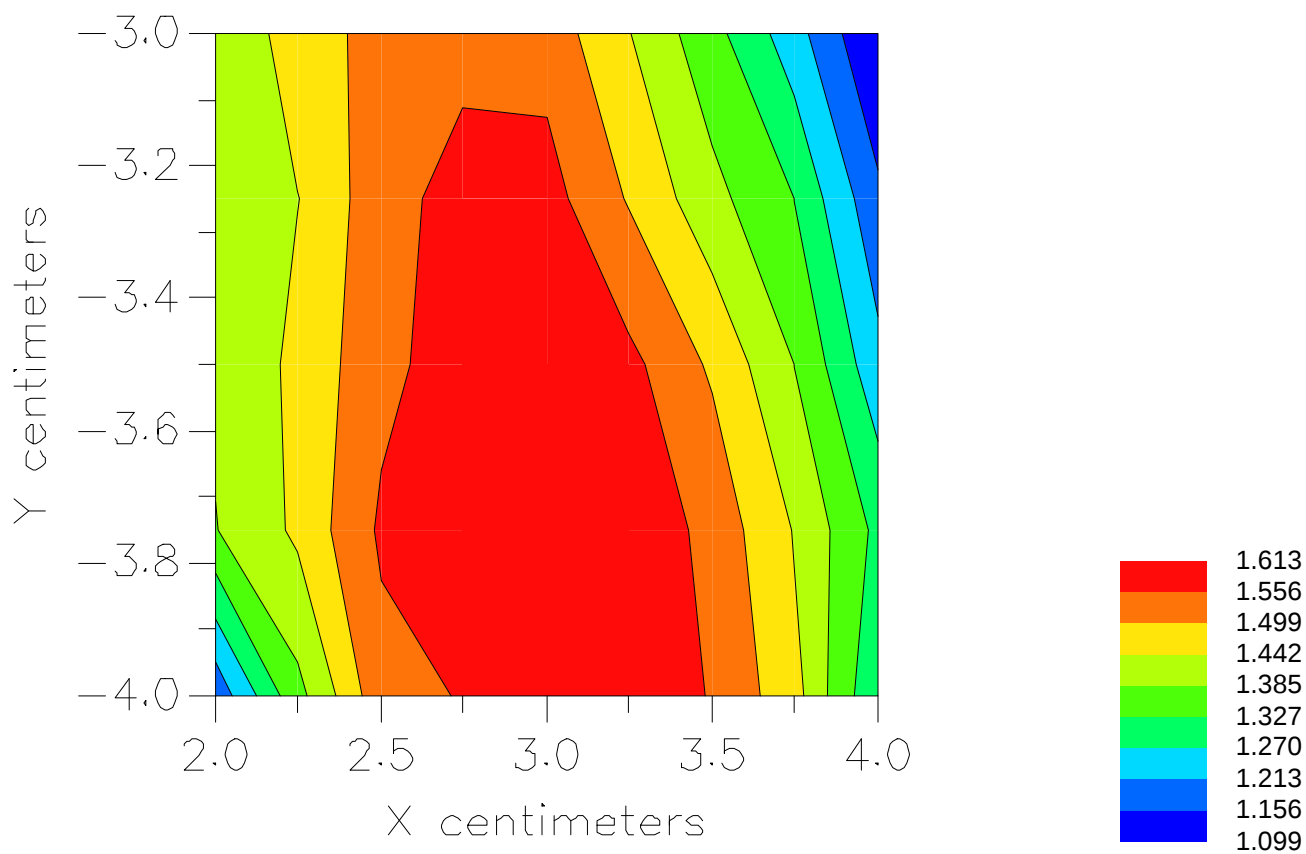

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071823_ZOOM.VLT
Start : 18-Jul-100 04:37:42 pm End : 18-Jul-100 04:50:00 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.04 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0991 28.0 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -1.000, Y = 0.750, Z = 0.000 (cm) Value = 4.418

Measured Values (volts) =
4.436E-003 3.565E-003 2.837E-003 2.497E-003 2.304E-003 2.296E-003
2.254E-003 2.218E-003 2.044E-003 1.749E-003 1.366E-003 9.757E-004
5.939E-004 3.627E-004 3.515E-004 4.814E-004 7.130E-004 9.179E-004
1.005E-003 8.222E-004 5.661E-004


Calc. Voltage @ Surface (Vs) = 0.0055

Voltage @ 1.00 cm (Vt) = 0.0025

Ave. Voltage (Vs+Vt)/2 = 0.0040

Ave. SAR over 1 g (mW/g) = 0.3330

SAR Scan
File : 00071823_ZOOM
Start : 18-Jul-100 04:37:42 pm End : 18-Jul-100 04:50:00 pm
HYUNDAI/DX-10/38;824.04MHz;W;Helical/In;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

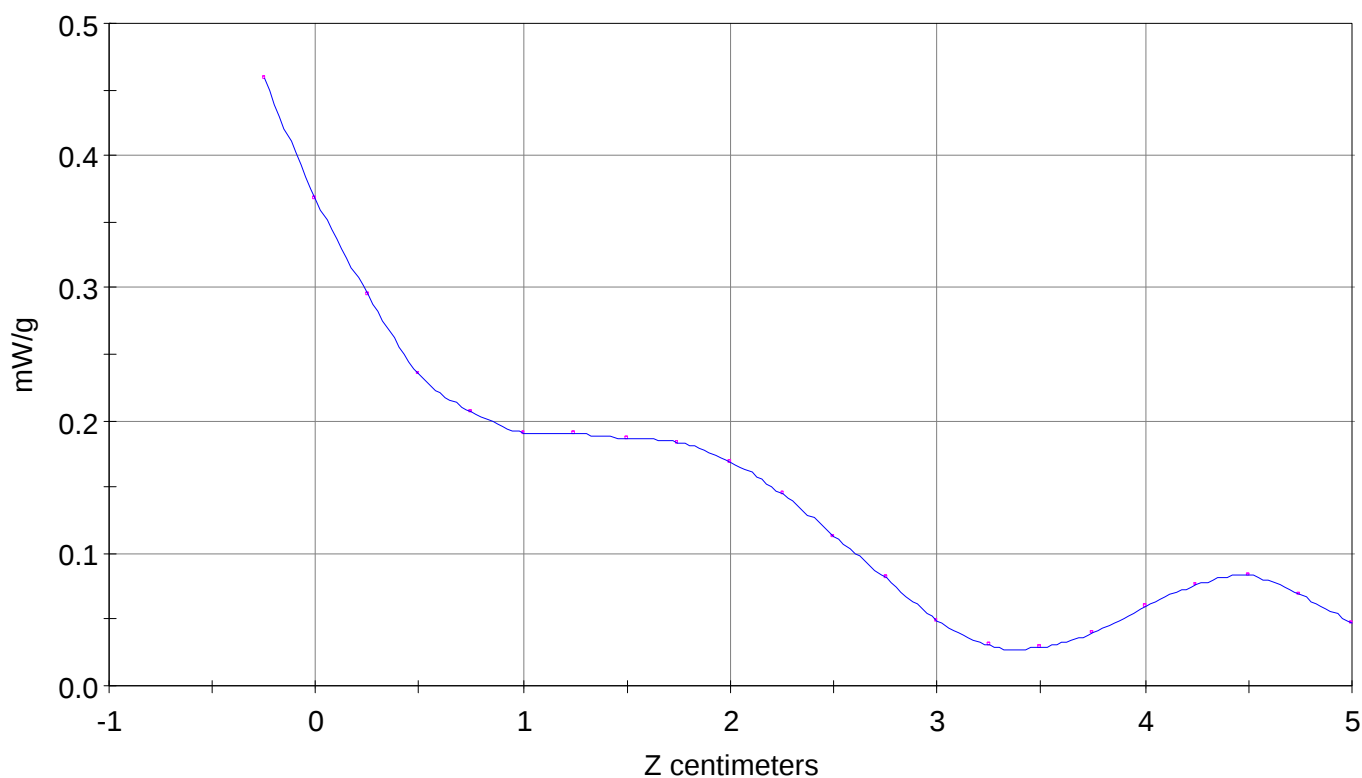


File : 00071823_ZOOM

Start : 18-Jul-100 04:37:42 pm End : 18-Jul-100 04:50:00 pm

HYUNDAI/DX-10/38;824.04MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

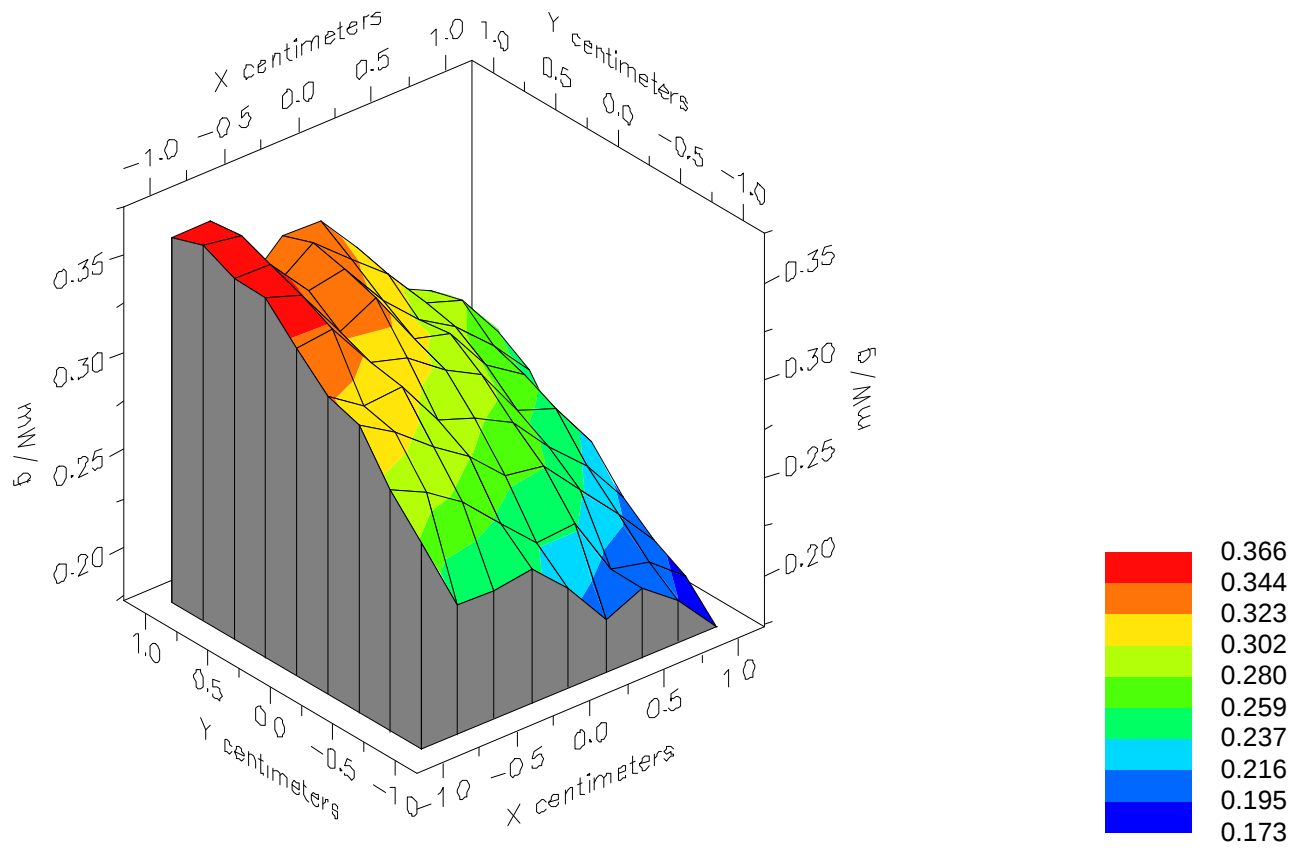


File : 00071823_ZOOM

Start : 18-Jul-100 04:37:42 pm End : 18-Jul-100 04:50:00 pm

HYUNDAI/DX-10/38;824.04MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

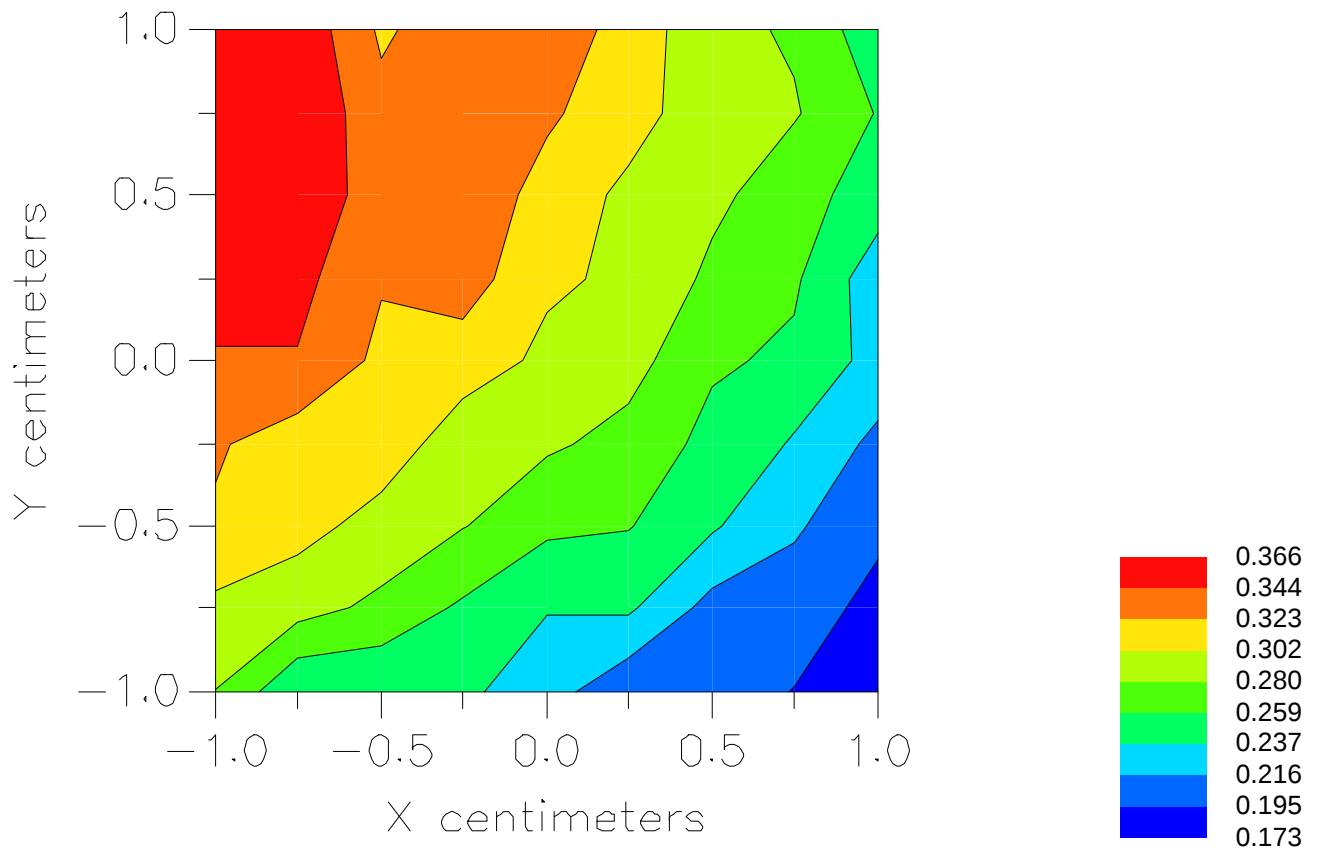

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071902_ZOOM.VLT
Start : 19-Jul-100 10:16:20 am End : 19-Jul-100 10:24:49 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.04 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0991 28.0 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -4.500, Y = -2.000, Z = 0.000 (cm) Value = 8.397

Measured Values (volts) =
7.825E-003 7.287E-003 6.595E-003 5.599E-003 4.322E-003 2.988E-003
2.082E-003 1.377E-003 1.105E-003 1.357E-003 1.853E-003 2.337E-003
2.596E-003 2.242E-003 1.620E-003 1.652E-003 6.796E-004 5.234E-004
4.140E-004 3.387E-004 3.042E-004


Calc. Voltage @ Surface (Vs) = 0.0085

Voltage @ 1.00 cm (Vt) = 0.0056

Ave. Voltage (Vs+Vt)/2 = 0.0071

Ave. SAR over 1 g (mW/g) = 0.5846

SAR Scan
File : 00071902_ZOOM
Start : 19-Jul-100 10:16:20 am End : 19-Jul-100 10:24:49 am
HYUNDAI/DX-10/38;824.04MHz;W;Helical/Out;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

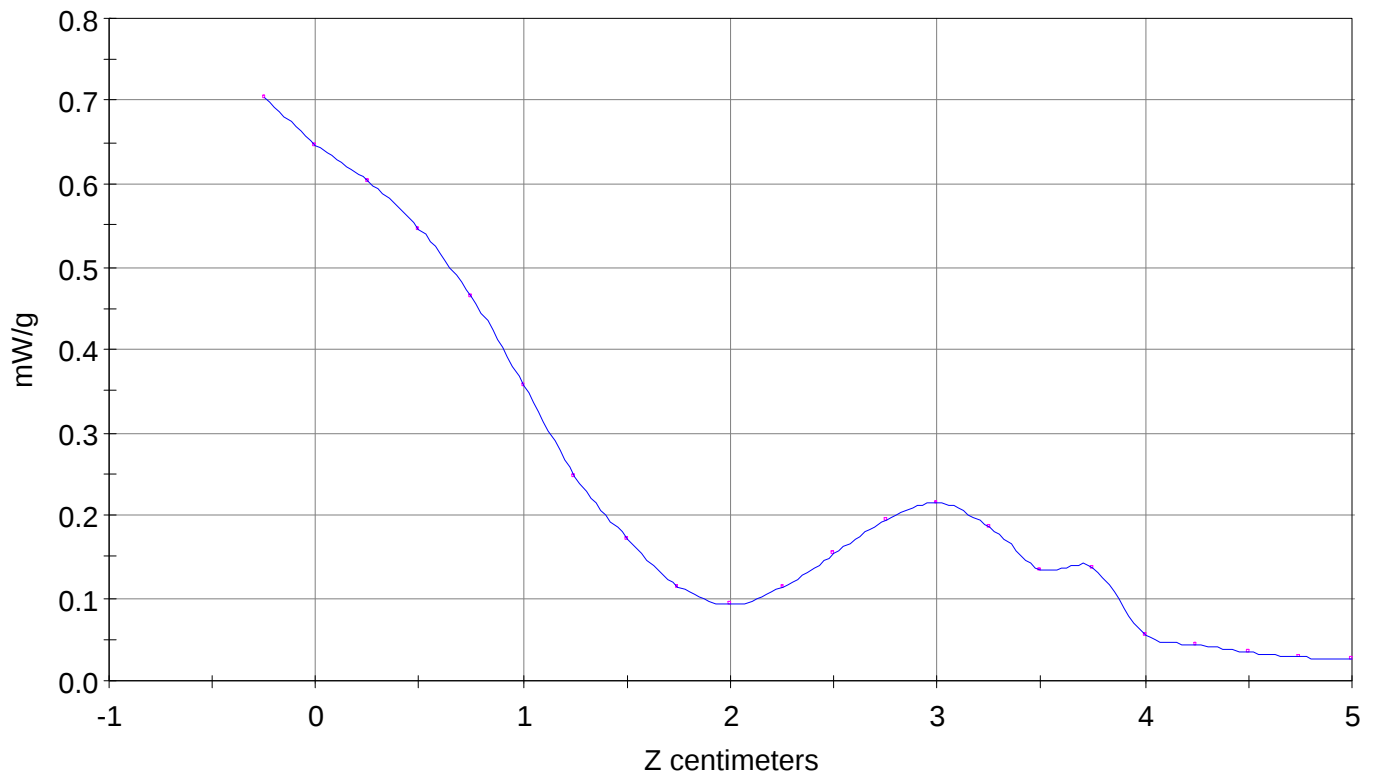


File : 00071902_ZOOM

Start : 19-Jul-100 10:16:20 am End : 19-Jul-100 10:24:49 am

HYUNDAI/DX-10/38;824.04MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

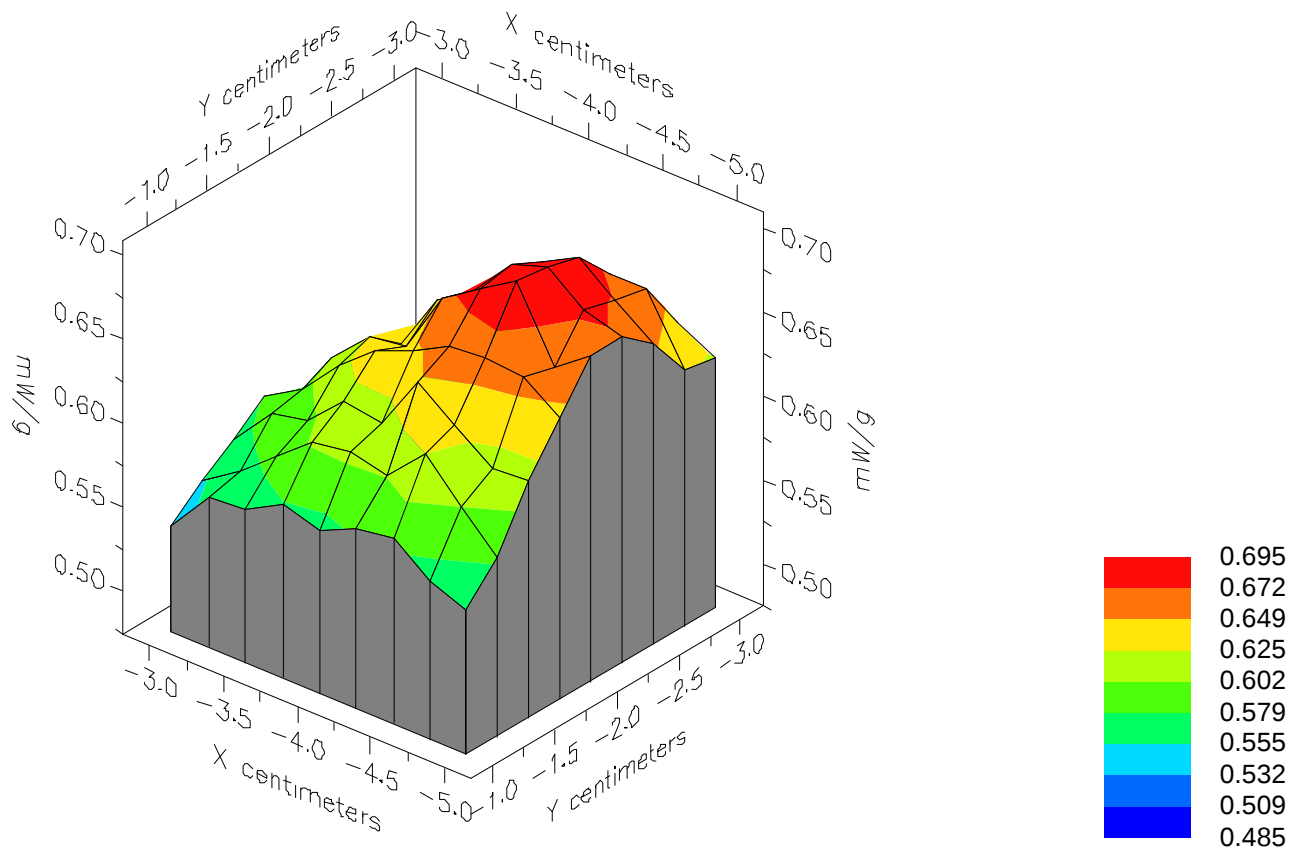


File : 00071902_ZOOM

Start : 19-Jul-100 10:16:20 am End : 19-Jul-100 10:24:49 am

HYUNDAI/DX-10/38;824.04MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

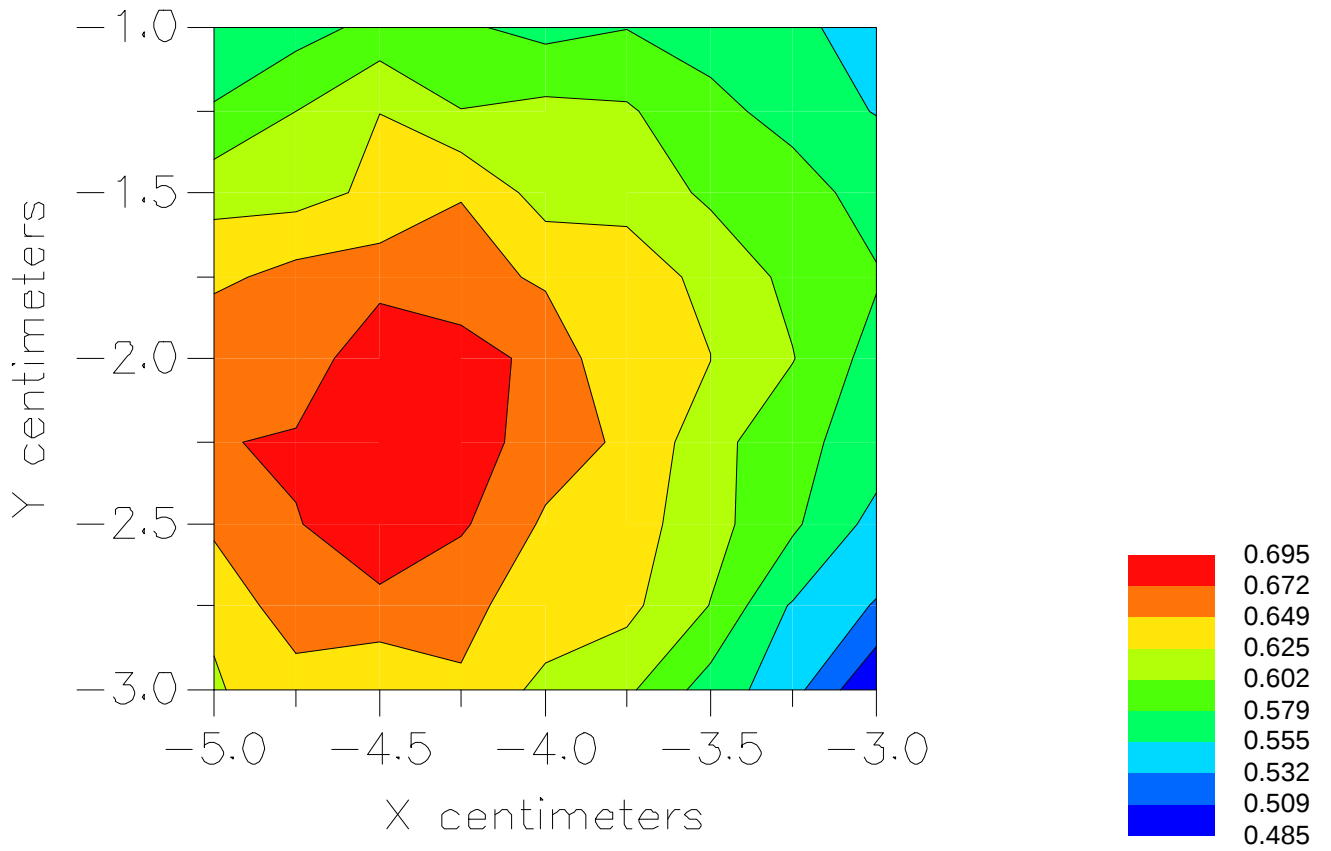

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071821_ZOOM.VLT
Start : 18-Jul-100 03:49:44 pm End : 18-Jul-100 04:01:45 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 836.49 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0383 28.0 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -1.000, Y = 0.750, Z = 0.000 (cm) Value = 4.710

Measured Values (volts) =
4.631E-003 3.657E-003 2.877E-003 2.542E-003 2.318E-003 2.259E-003
2.249E-003 2.259E-003 2.104E-003 1.785E-003 1.432E-003 1.006E-003
6.588E-004 4.038E-004 3.600E-004 4.807E-004 7.471E-004 9.430E-004
9.898E-004 7.613E-004 6.343E-004


Calc. Voltage @ Surface (Vs) = 0.0059

Voltage @ 1.00 cm (Vt) = 0.0025

Ave. Voltage (Vs+Vt)/2 = 0.0042

Ave. SAR over 1 g (mW/g) = 0.3484

SAR Scan
File : 00071821_ZOOM
Start : 18-Jul-100 03:49:44 pm End : 18-Jul-100 04:01:45 pm
HYUNDAI/DX-10/38;836.49MHz;W;Helical/In;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

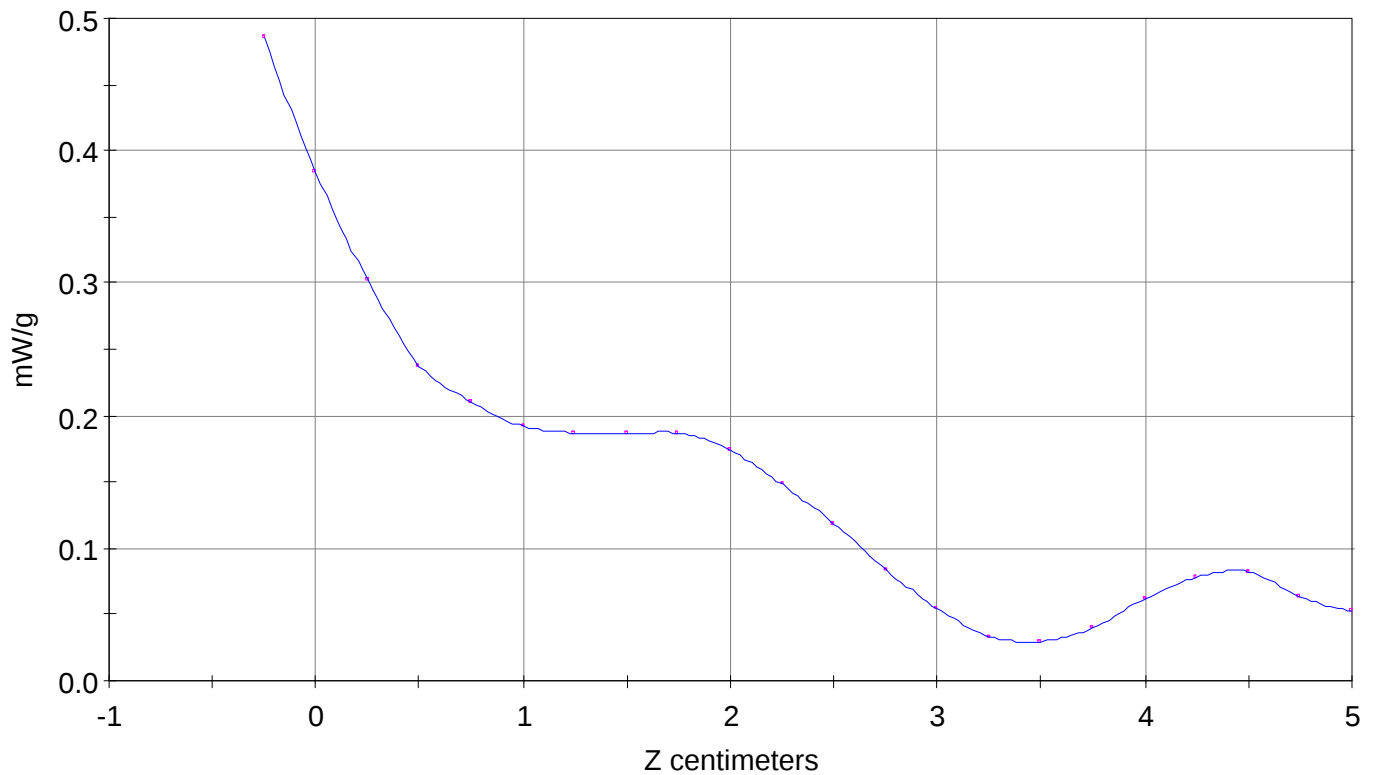


File : 00071821_ZOOM

Start : 18-Jul-100 03:49:44 pm End : 18-Jul-100 04:01:45 pm

HYUNDAI/DX-10/38;836.49MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

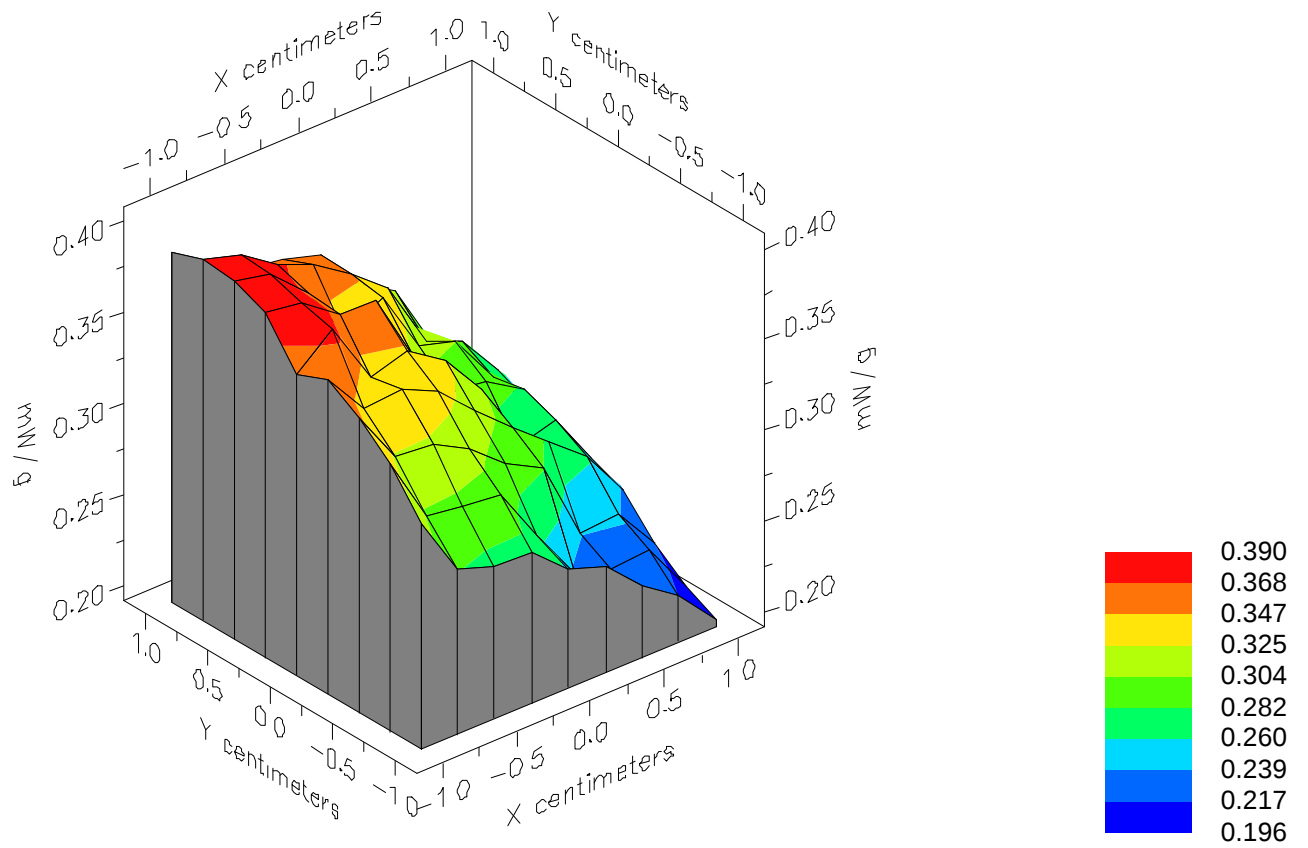


File : 00071821_ZOOM

Start : 18-Jul-100 03:49:44 pm End : 18-Jul-100 04:01:45 pm

HYUNDAI/DX-10/38;836.49MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

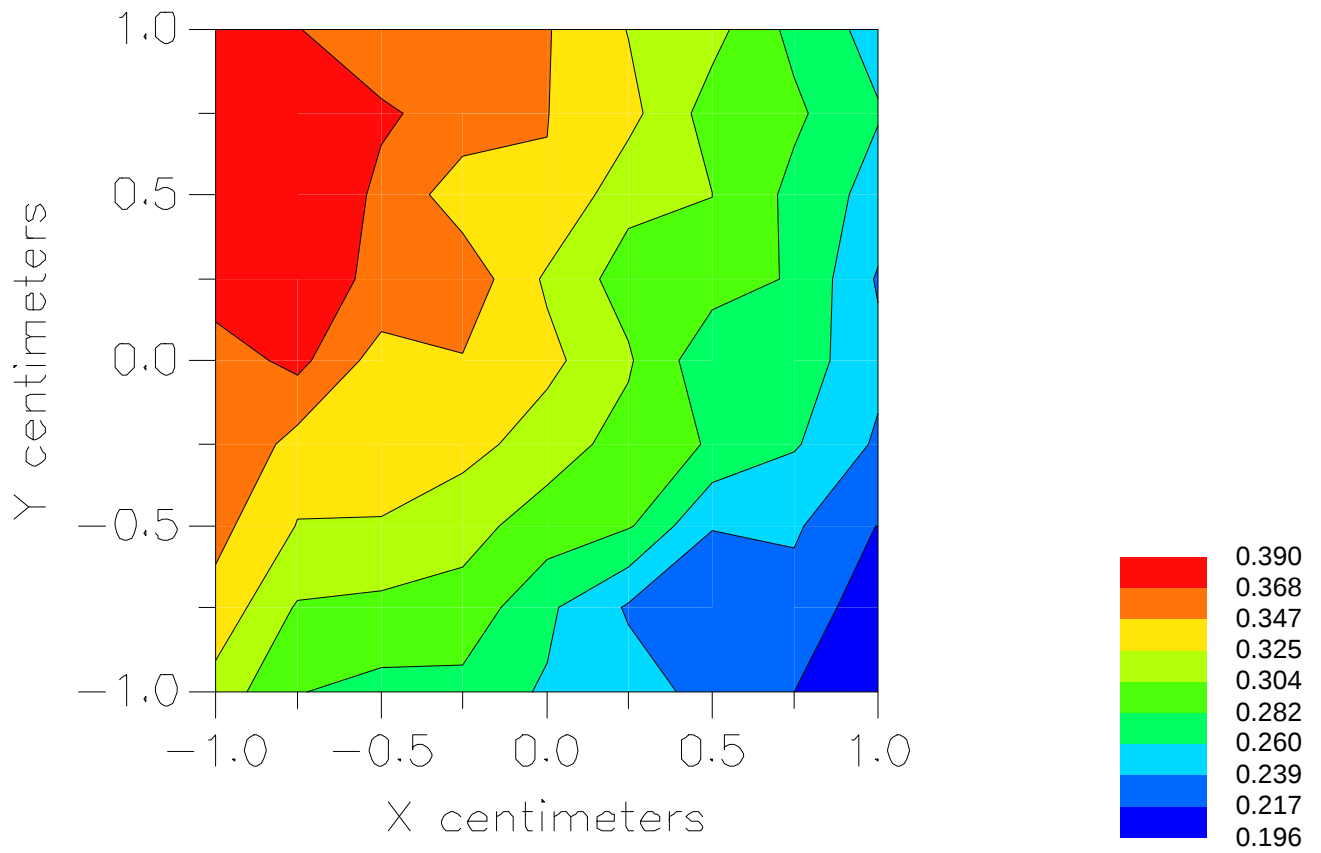

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071822_ZOOM.VLT
Start : 18-Jul-100 04:13:42 pm End : 18-Jul-100 04:26:19 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 836.49 MHz
Peak Trans. Pwr : 0.640 W
Start Trans. Pwr: 0.640 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0383 28.0 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -0.750, Y = 0.750, Z = 0.000 (cm) Value = 7.579

Measured Values (volts) =
6.660E-003 5.518E-003 4.450E-003 3.809E-003 3.561E-003 3.513E-003
3.544E-003 3.522E-003 3.299E-003 2.856E-003 2.286E-003 1.521E-003
9.629E-004 6.315E-004 5.498E-004 7.079E-004 1.078E-003 1.414E-003
1.570E-003 1.382E-003 1.033E-003


Calc. Voltage @ Surface (Vs) = 0.0081

Voltage @ 1.00 cm (Vt) = 0.0038

Ave. Voltage (Vs+Vt)/2 = 0.0060

Ave. SAR over 1 g (mW/g) = 0.4949

SAR Scan
File : 00071822_ZOOM
Start : 18-Jul-100 04:13:42 pm End : 18-Jul-100 04:26:19 pm
HYUNDAI/DX-10/38;836.49MHz;W;Helical/Out;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

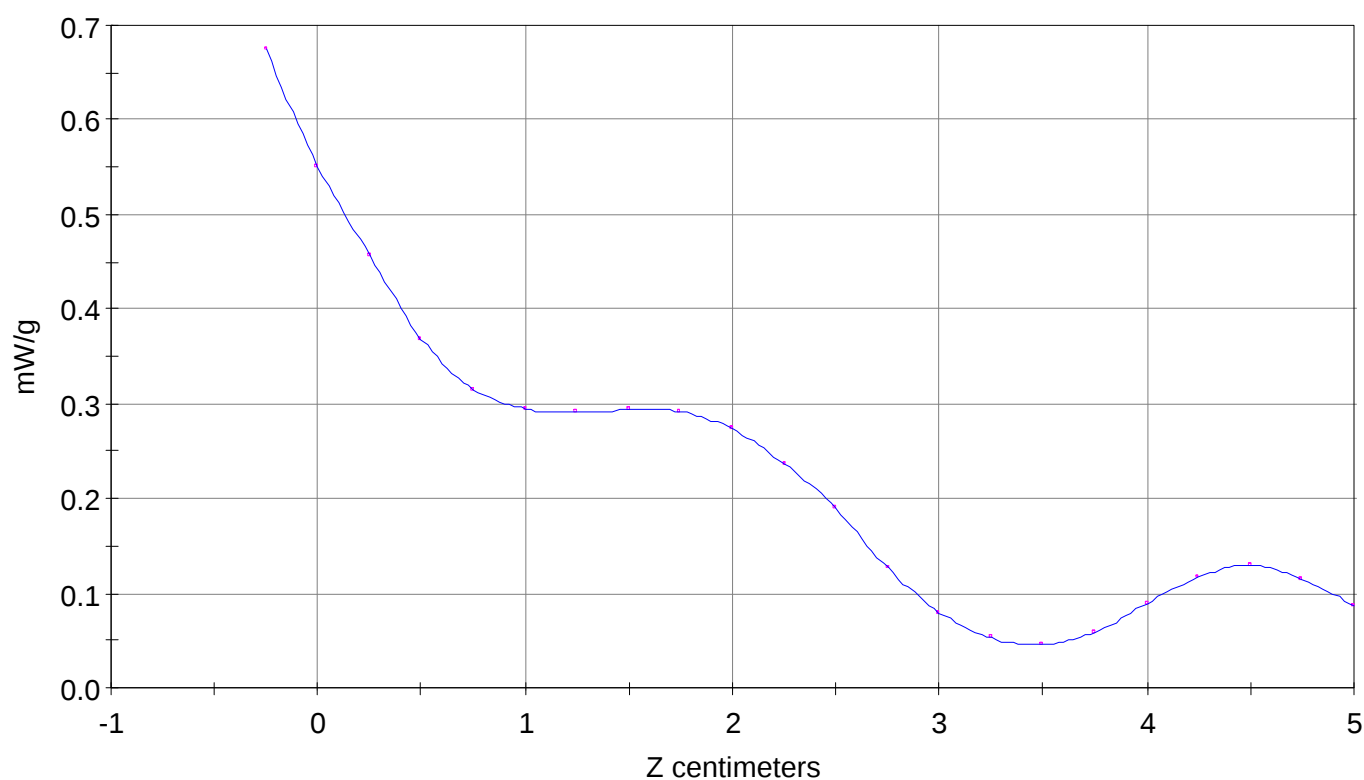


File : 00071822_ZOOM

Start : 18-Jul-100 04:13:42 pm End : 18-Jul-100 04:26:19 pm

HYUNDAI/DX-10/38;836.49MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

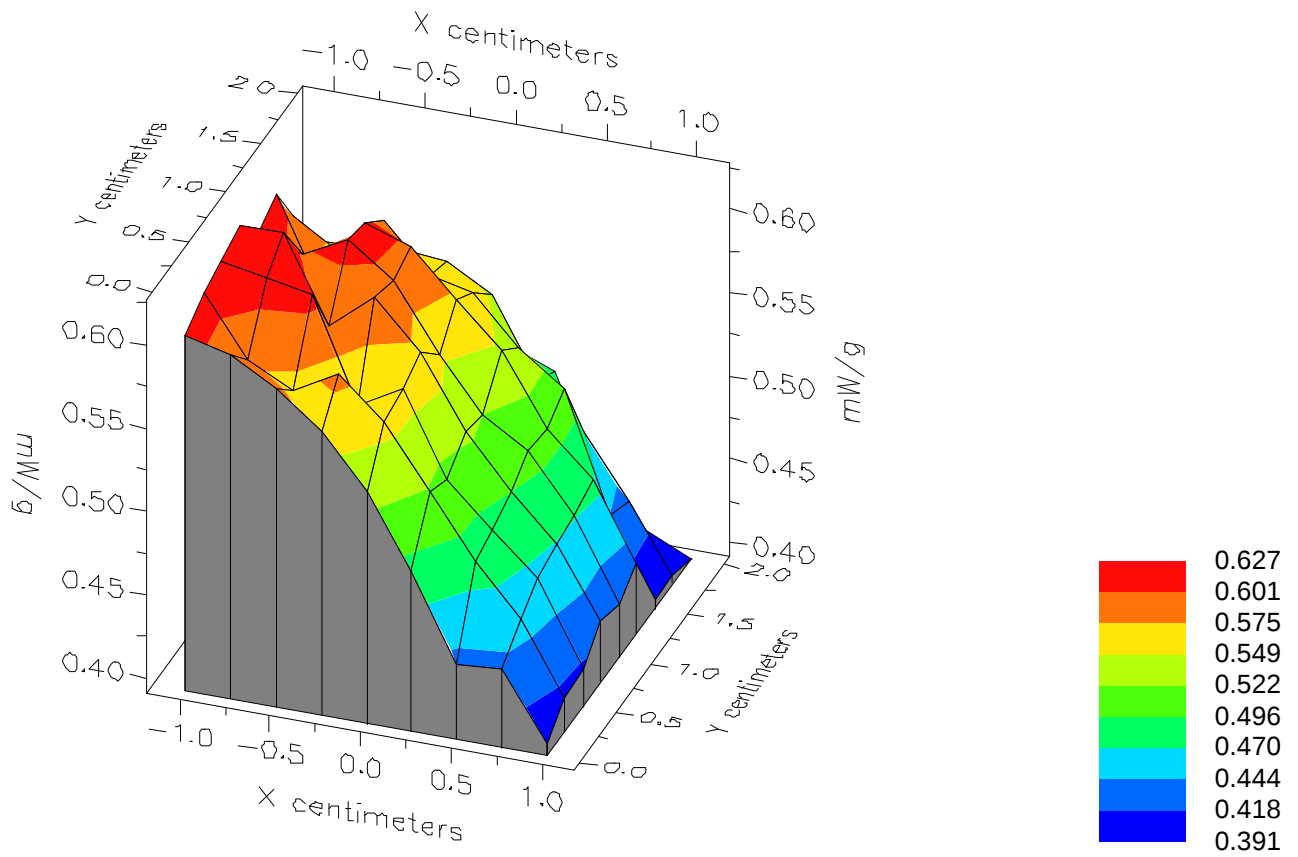


File : 00071822_ZOOM

Start : 18-Jul-100 04:13:42 pm End : 18-Jul-100 04:26:19 pm

HYUNDAI/DX-10/38;836.49MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

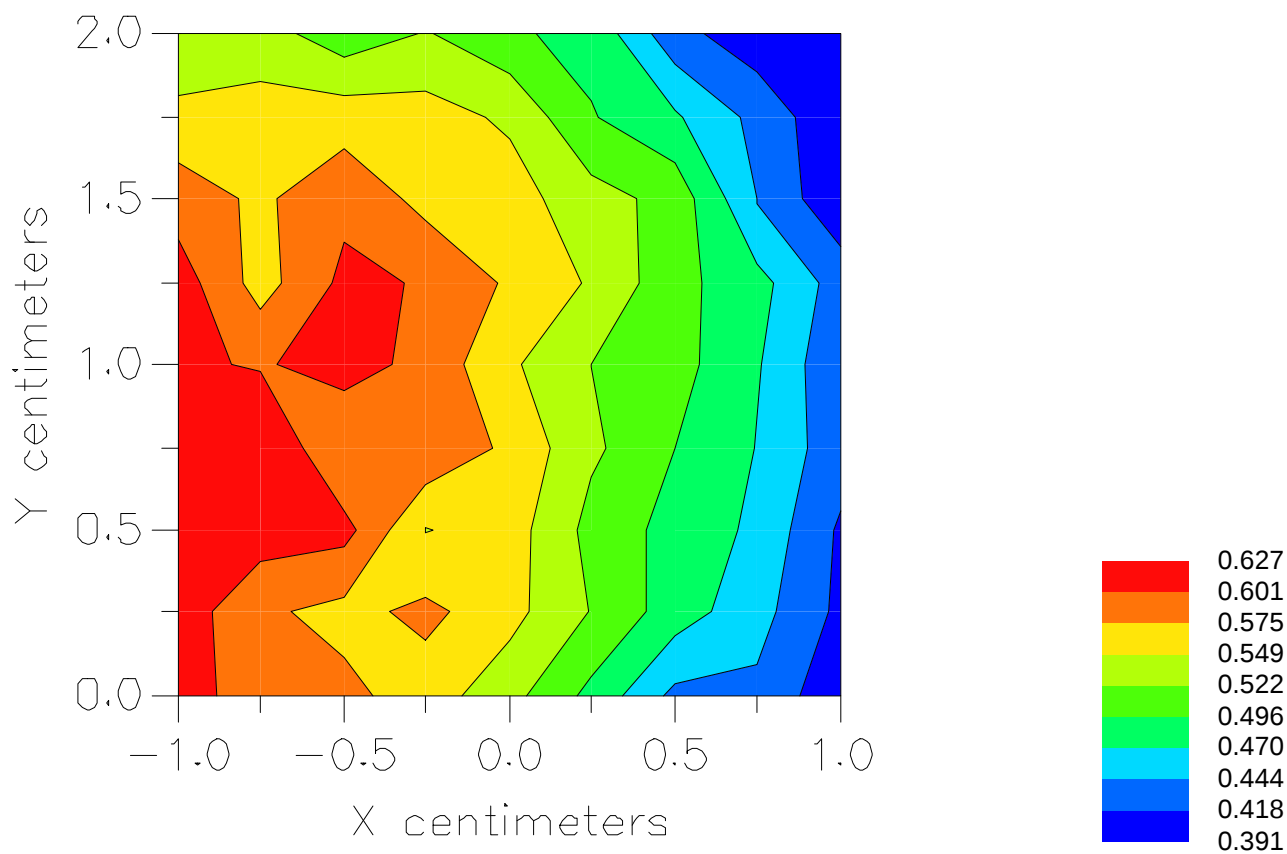

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071903_ZOOM.VLT
Start : 19-Jul-100 10:39:28 am End : 19-Jul-100 10:49:10 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.97 MHz
Peak Trans. Pwr : 0.605 W
Start Trans. Pwr: 0.605 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0799 27.8 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -0.750, Y = 0.000, Z = 0.000 (cm) Value = 6.406

Measured Values (volts) =
5.923E-003 4.769E-003 3.935E-003 3.486E-003 3.302E-003 3.241E-003
3.205E-003 3.108E-003 2.757E-003 2.277E-003 1.744E-003 1.187E-003
7.682E-004 5.907E-004 6.336E-004 8.696E-004 1.210E-003 1.398E-003
1.333E-003 1.007E-003 8.831E-004


Calc. Voltage @ Surface (Vs) = 0.0073

Voltage @ 1.00 cm (Vt) = 0.0035

Ave. Voltage (Vs+Vt)/2 = 0.0054

Ave. SAR over 1 g (mW/g) = 0.4451

SAR Scan
File : 00071903_ZOOM
Start : 19-Jul-100 10:39:28 am End : 19-Jul-100 10:49:10 am
HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

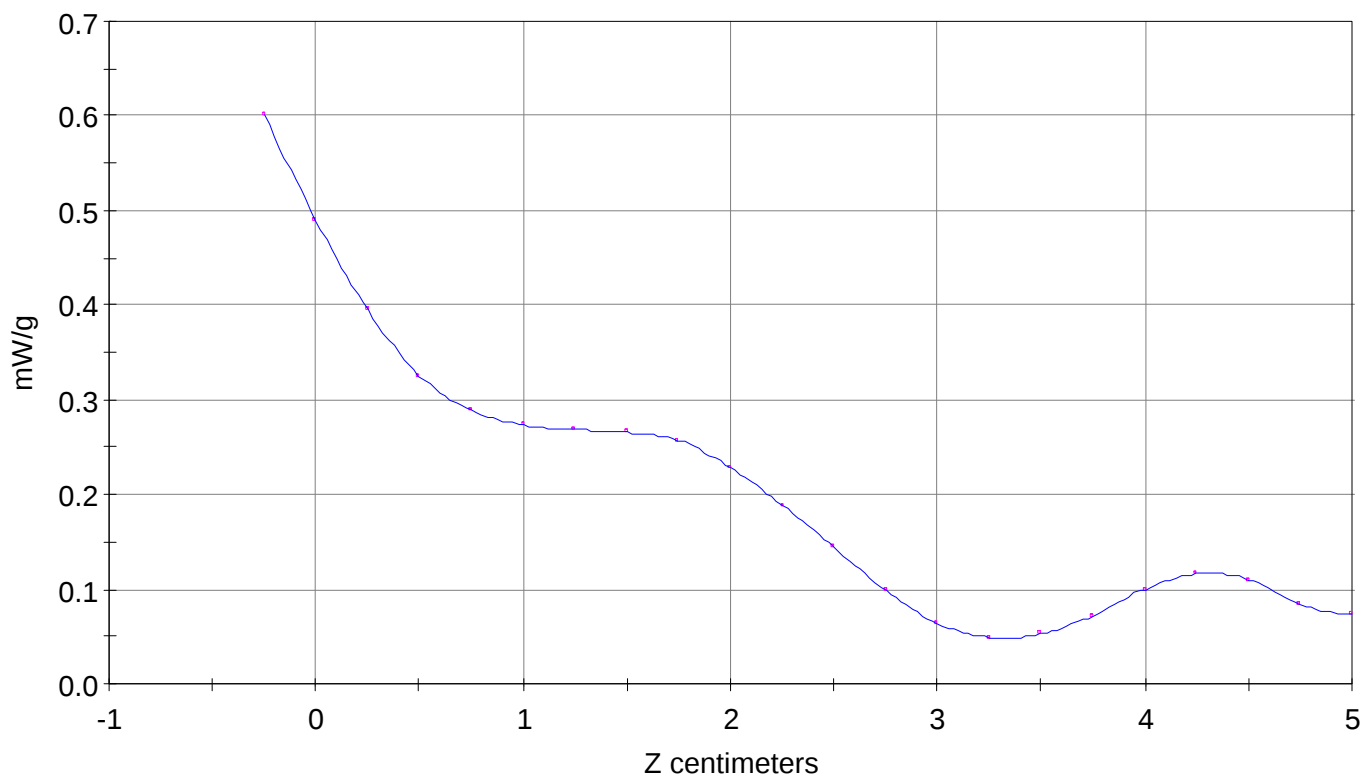


File : 00071903_ZOOM

Start : 19-Jul-100 10:39:28 am End : 19-Jul-100 10:49:10 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

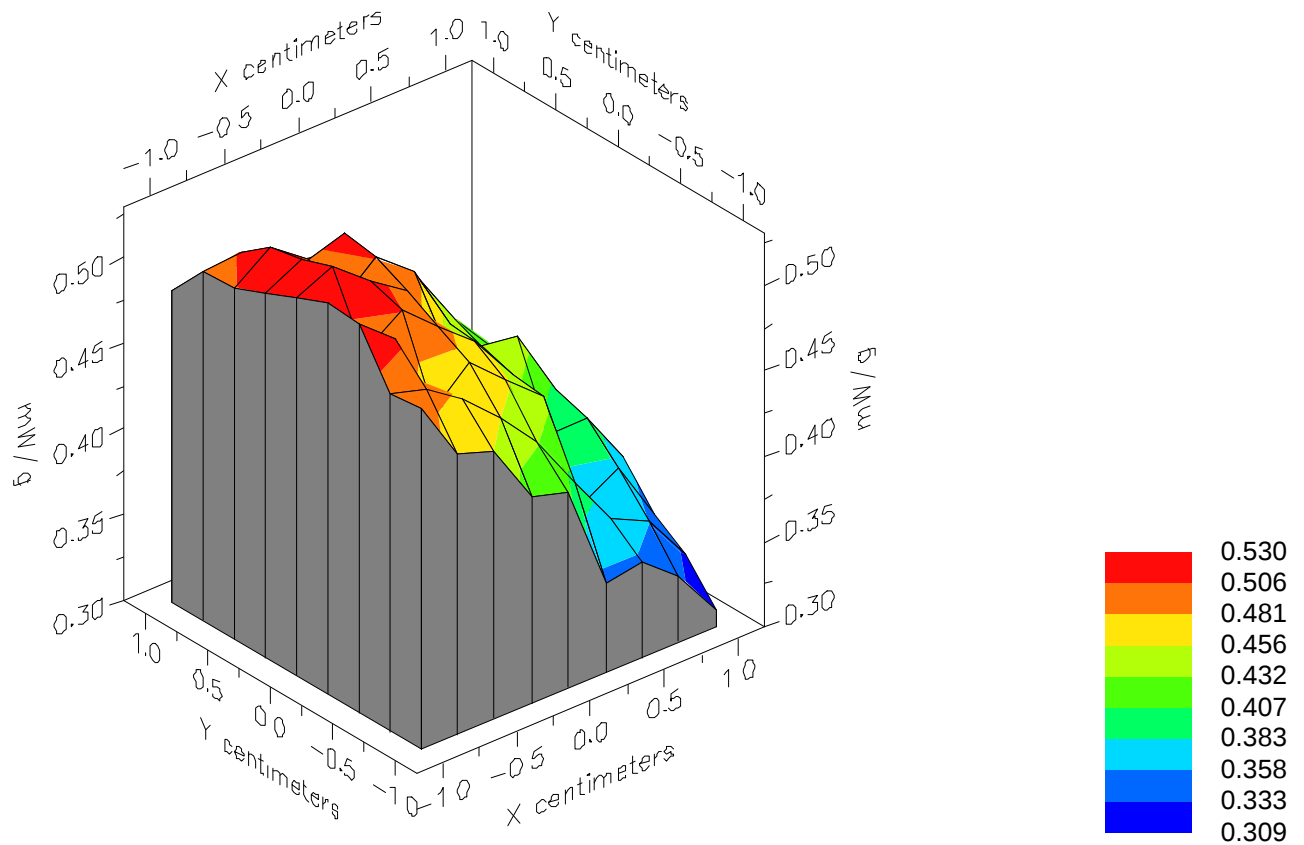


File : 00071903_ZOOM

Start : 19-Jul-100 10:39:28 am End : 19-Jul-100 10:49:10 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

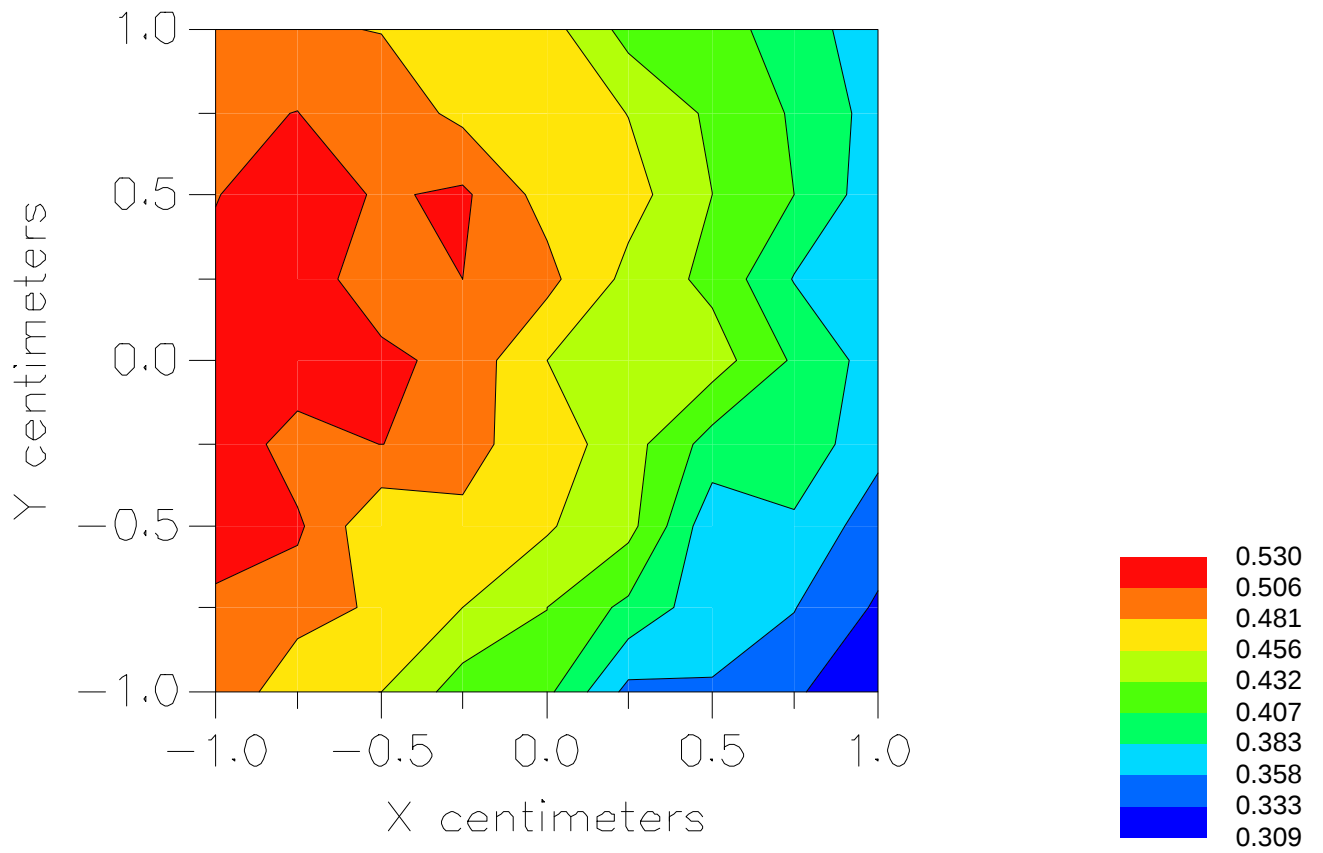

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071904_ZOOM.VLT
Start : 19-Jul-100 11:02:10 am End : 19-Jul-100 11:10:28 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.97 MHz
Peak Trans. Pwr : 0.605 W
Start Trans. Pwr: 0.605 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0799 27.8 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -4.750, Y = -2.250, Z = 0.000 (cm) Value = 8.930

Measured Values (volts) =
8.668E-003 7.755E-003 6.851E-003 5.663E-003 4.300E-003 2.962E-003
1.895E-003 1.346E-003 1.337E-003 1.756E-003 2.417E-003 2.852E-003
2.705E-003 2.006E-003 1.898E-003 8.013E-004 6.439E-004 5.040E-004
4.456E-004 3.756E-004 3.181E-004


Calc. Voltage @ Surface (Vs) = 0.0098

Voltage @ 1.00 cm (Vt) = 0.0057

Ave. Voltage (Vs+Vt)/2 = 0.0077

Ave. SAR over 1 g (mW/g) = 0.6379

SAR Scan
File : 00071904_ZOOM
Start : 19-Jul-100 11:02:10 am End : 19-Jul-100 11:10:28 am
HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

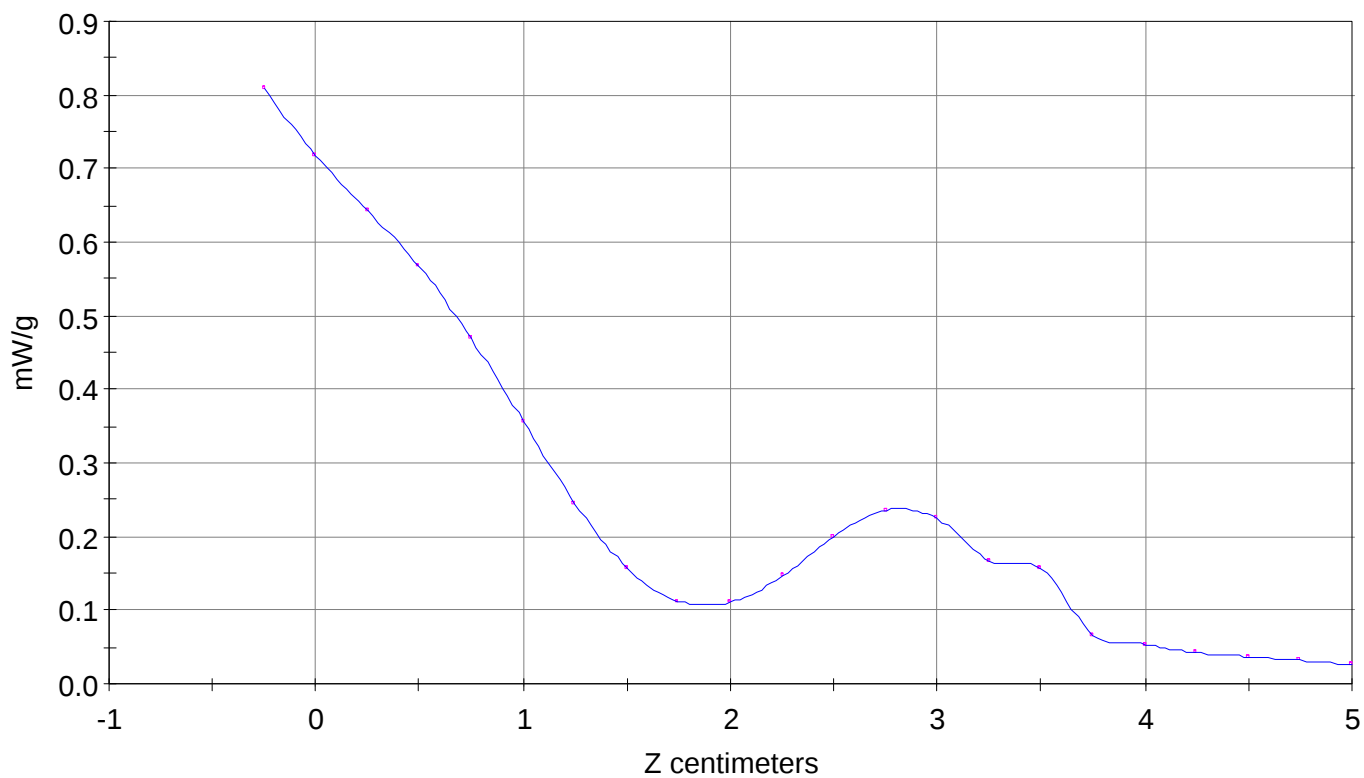


File : 00071904_ZOOM

Start : 19-Jul-100 11:02:10 am End : 19-Jul-100 11:10:28 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

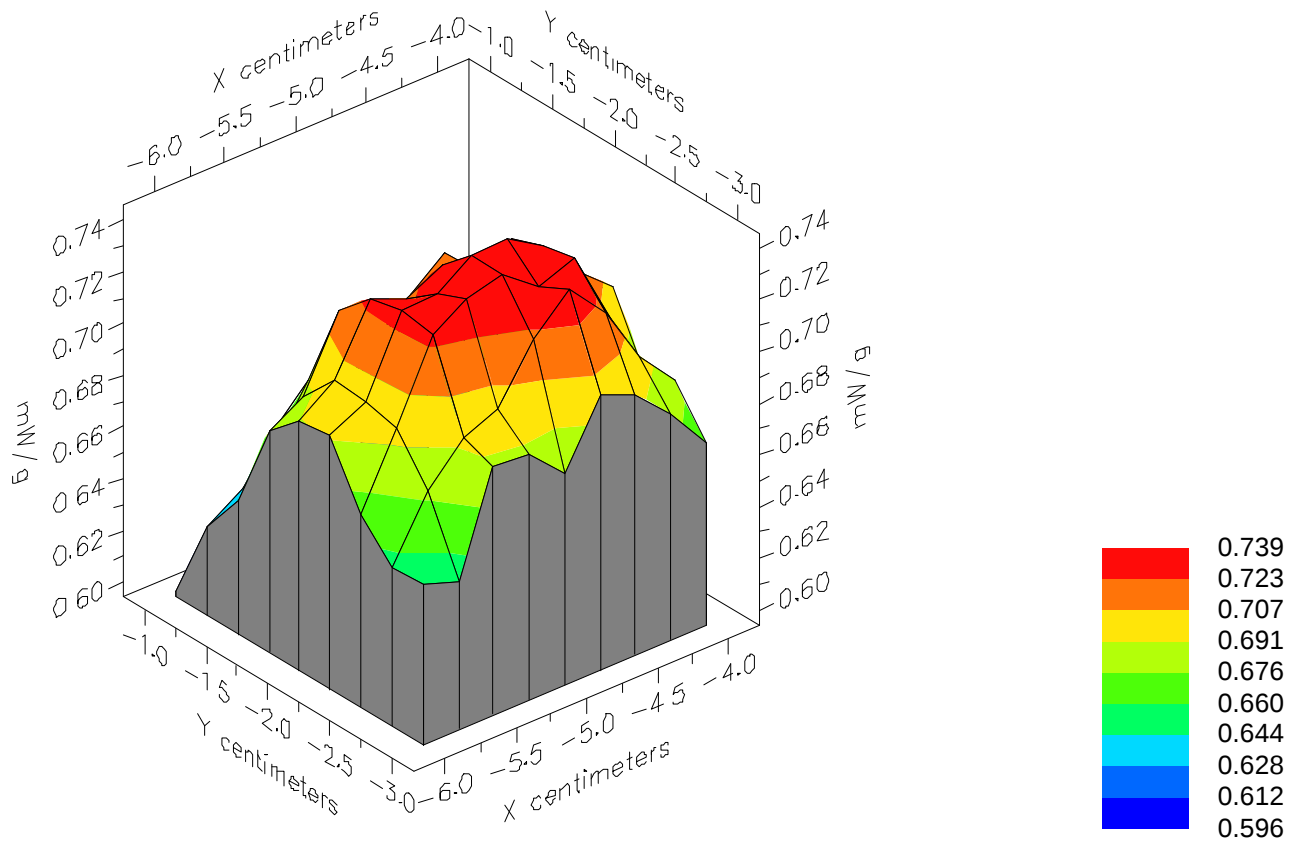


File : 00071904_ZOOM

Start : 19-Jul-100 11:02:10 am End : 19-Jul-100 11:10:28 am

HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

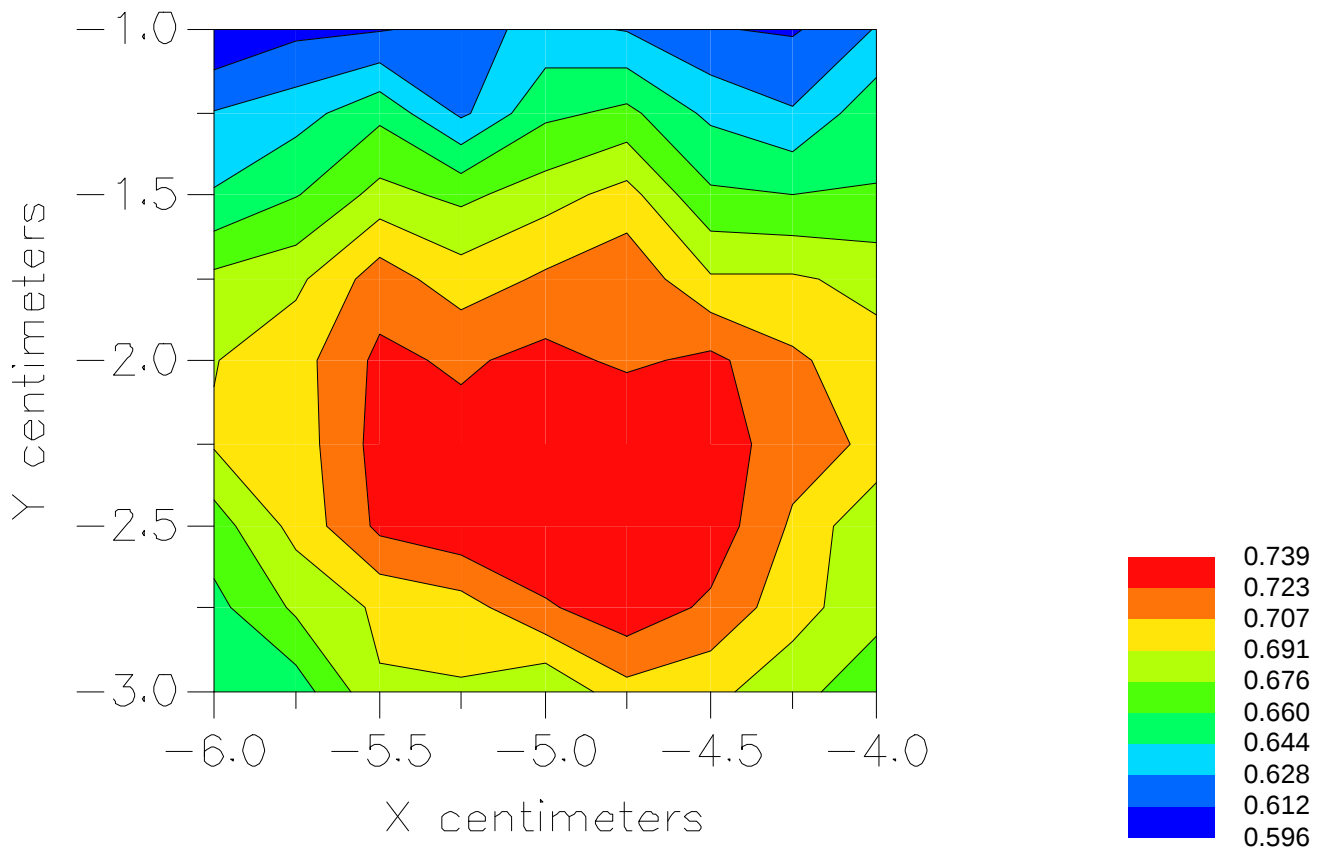

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071819_ZOOM.VLT
Start : 18-Jul-100 02:32:47 pm End : 18-Jul-100 02:39:57 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.70 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 1013 25.5 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.750, Y = -3.500, Z = 0.000 (cm) Value = 4.786

Measured Values (volts) =
4.656E-003 4.018E-003 3.522E-003 3.013E-003 2.585E-003 2.144E-003
1.701E-003 1.366E-003 1.064E-003 8.509E-004 7.489E-004 7.329E-004
7.912E-004 8.671E-004 9.512E-004 1.037E-003 9.860E-004 8.603E-004
6.190E-004 5.375E-004 3.743E-004


Calc. Voltage @ Surface (Vs) = 0.0054

Voltage @ 1.00 cm (Vt) = 0.0030

Ave. Voltage (Vs+Vt)/2 = 0.0042

Ave. SAR over 1 g (mW/g) = 0.3052

SAR Scan
File : 00071819_ZOOM
Start : 18-Jul-100 02:32:47 pm End : 18-Jul-100 02:39:57 pm
HYUNDAI/DX-10/38;824.70MHz;W;Helical/In;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

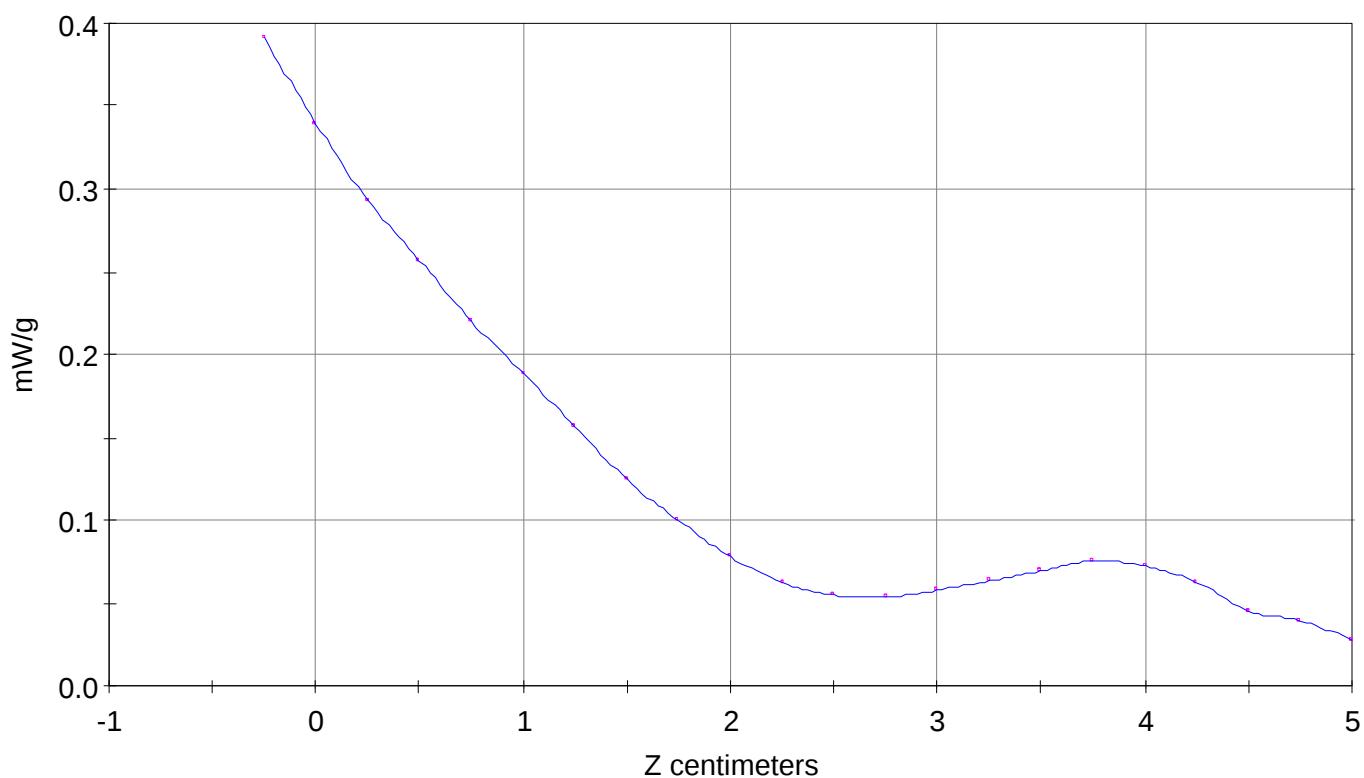


File : 00071819_ZOOM

Start : 18-Jul-100 02:32:47 pm End : 18-Jul-100 02:39:57 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

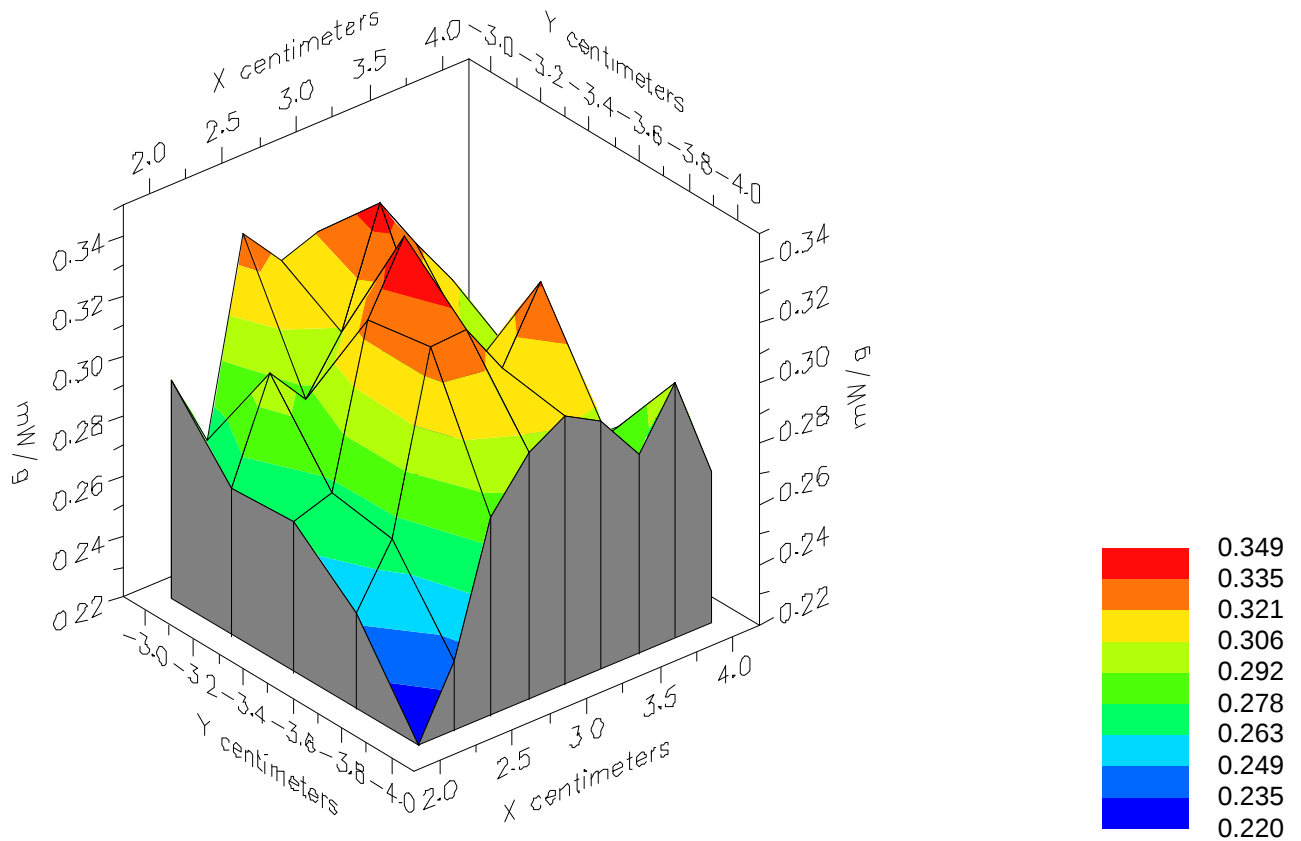


File : 00071819_ZOOM

Start : 18-Jul-100 02:32:47 pm End : 18-Jul-100 02:39:57 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

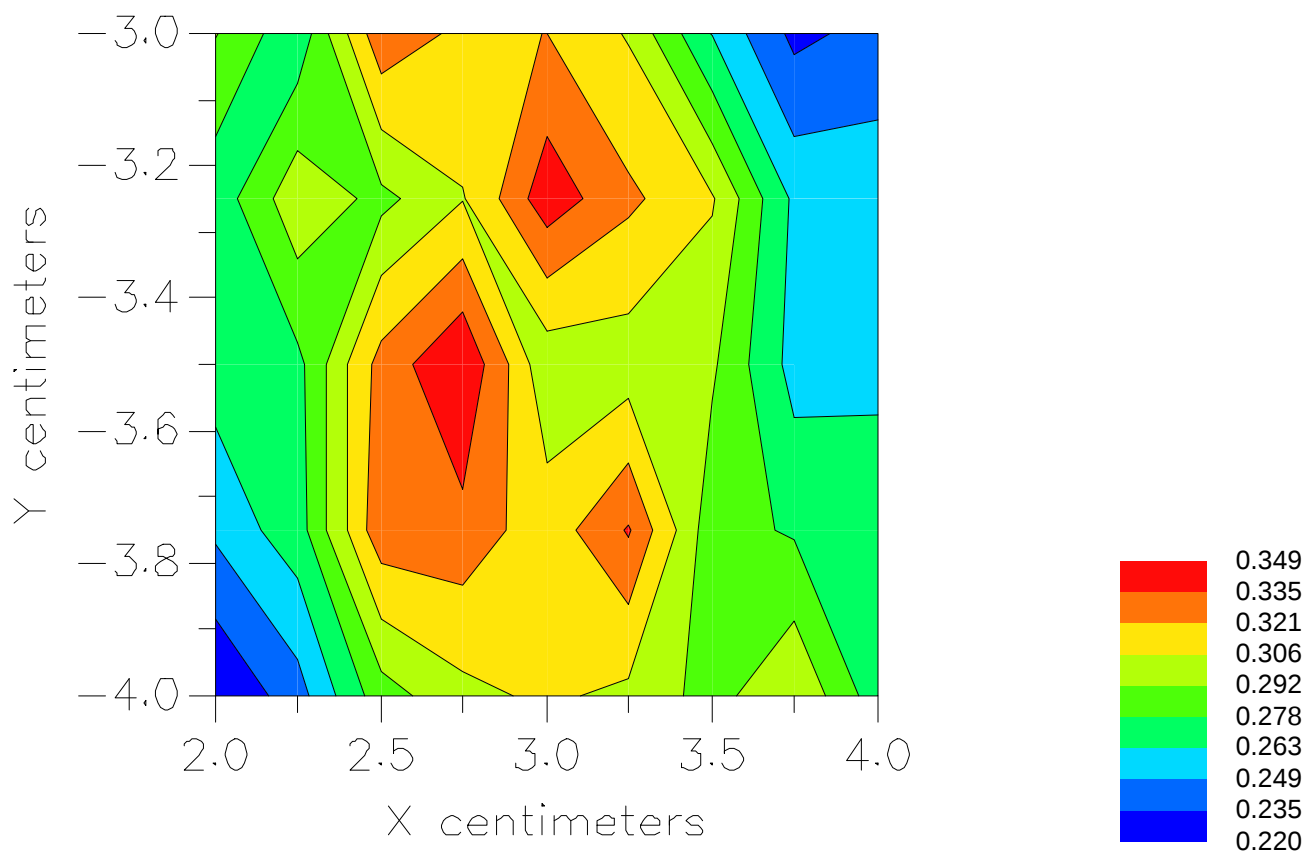

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071820_ZOOM.VLT
Start : 18-Jul-100 02:51:17 pm End : 18-Jul-100 03:03:52 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.70 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 1013 25.5 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.500, Y = -2.500, Z = 0.000 (cm) Value = 11.356

Measured Values (volts) =
1.101E-002 9.668E-003 8.631E-003 7.698E-003 6.696E-003 5.841E-003
4.781E-003 3.863E-003 3.061E-003 2.371E-003 1.848E-003 1.566E-003
1.527E-003 1.662E-003 1.857E-003 2.100E-003 2.371E-003 2.425E-003
2.153E-003 1.622E-003 1.264E-003


Calc. Voltage @ Surface (Vs) = 0.0124

Voltage @ 1.00 cm (Vt) = 0.0077

Ave. Voltage (Vs+Vt)/2 = 0.0101

Ave. SAR over 1 g (mW/g) = 0.7348

SAR Scan
File : 00071820_ZOOM
Start : 18-Jul-100 02:51:17 pm End : 18-Jul-100 03:03:52 pm
HYUNDAI/DX-10/38;824.70MHz;W;Helical/Out;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

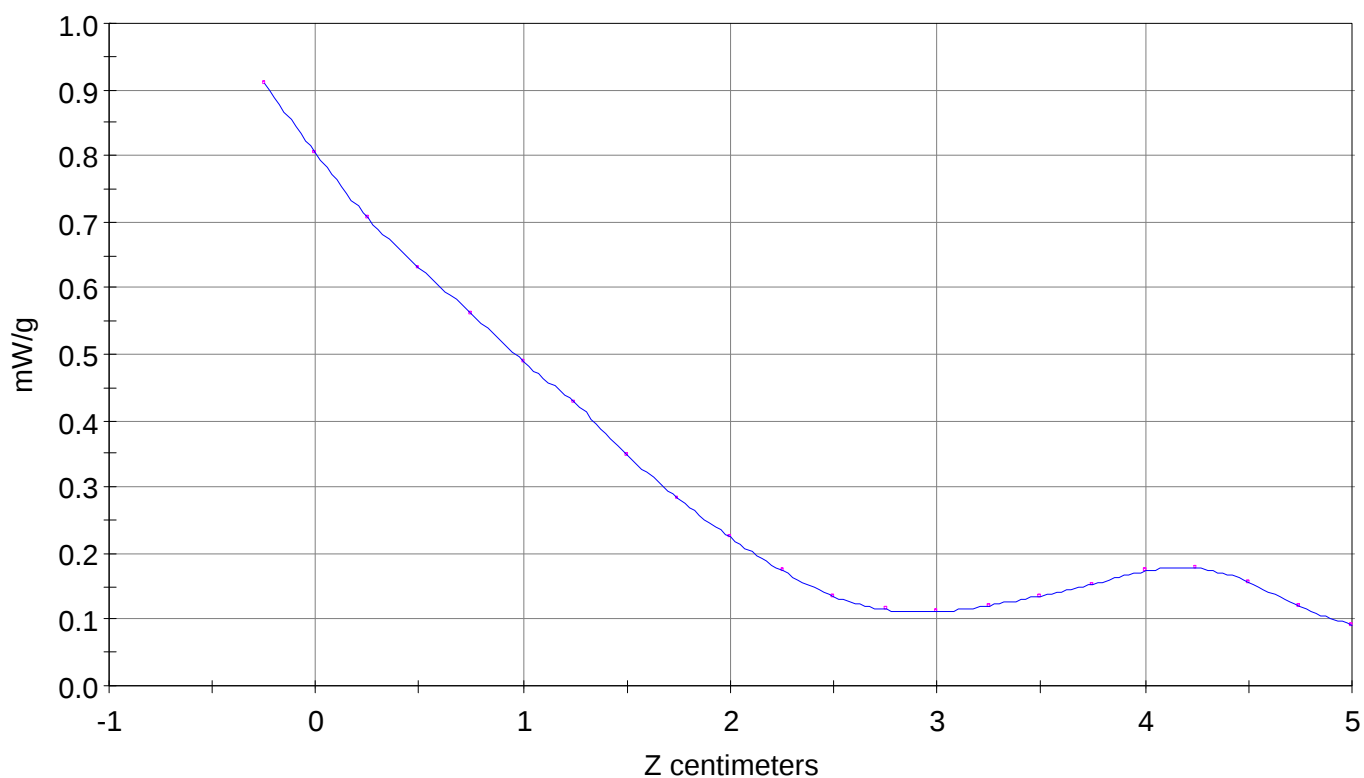


File : 00071820_ZOOM

Start : 18-Jul-100 02:51:17 pm End : 18-Jul-100 03:03:52 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

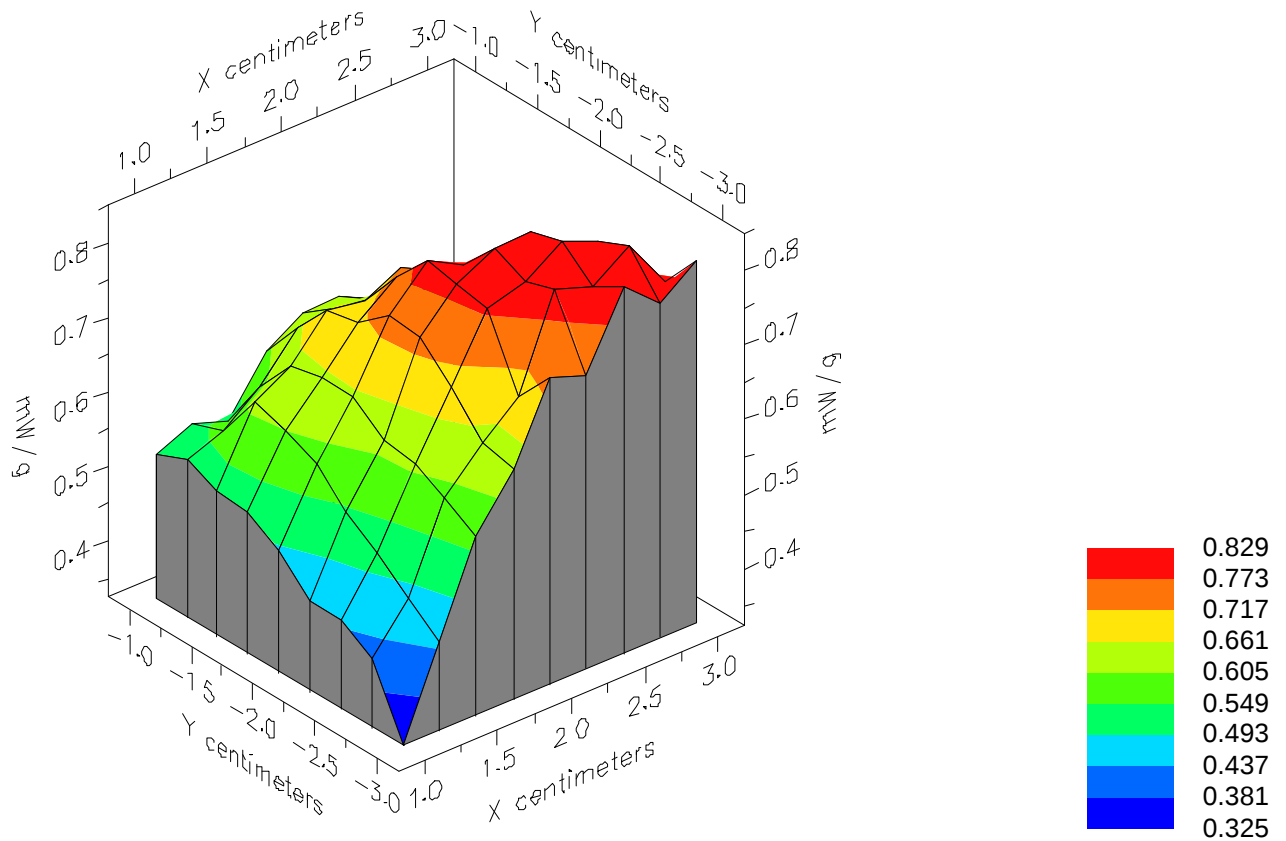


File : 00071820_ZOOM

Start : 18-Jul-100 02:51:17 pm End : 18-Jul-100 03:03:52 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

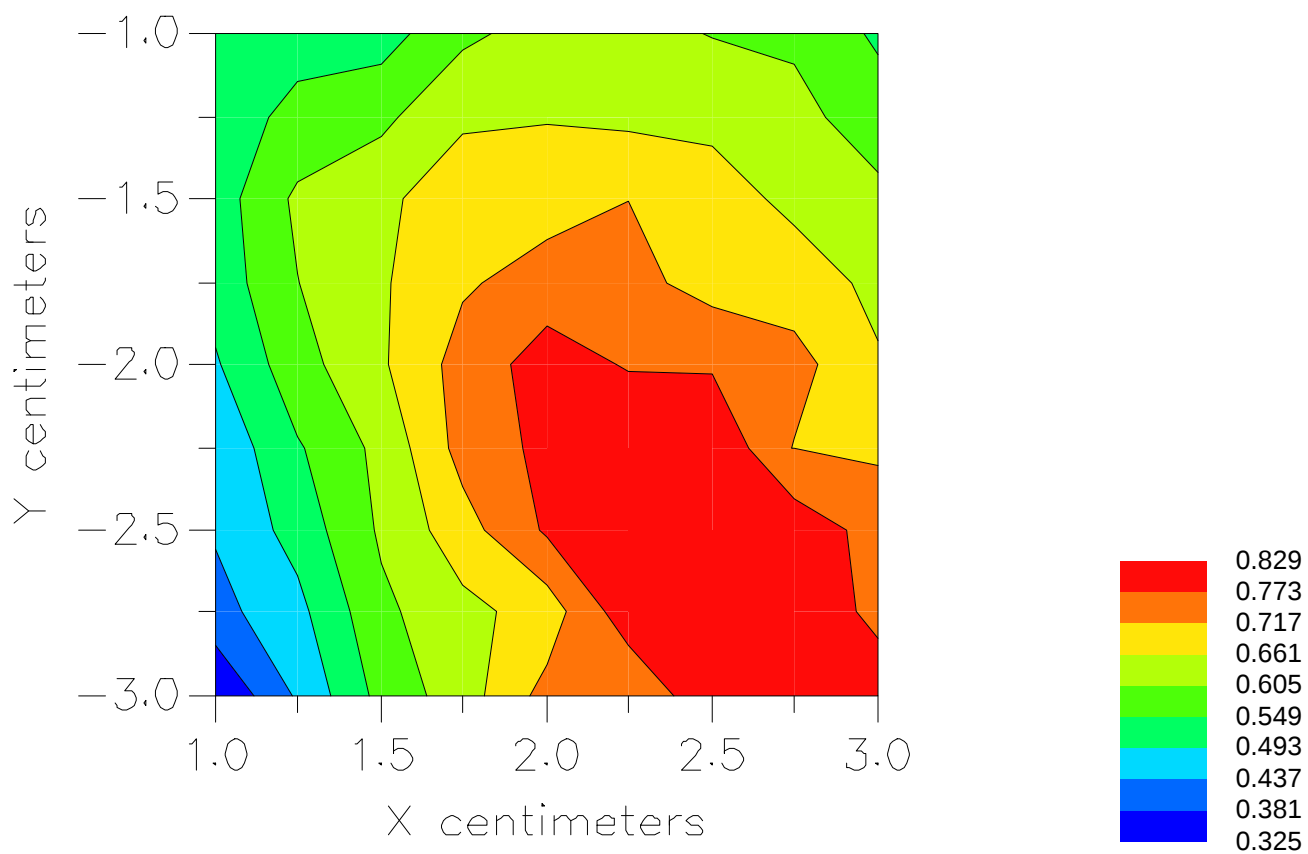

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071814_ZOOM.VLT
Start : 18-Jul-100 12:06:33 pm End : 18-Jul-100 12:17:25 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 835.89 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0363 25.5 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.750, Y = -3.750, Z = 0.000 (cm) Value = 4.961

Measured Values (volts) =
4.679E-003 4.152E-003 3.616E-003 3.127E-003 2.736E-003 2.286E-003
1.836E-003 1.475E-003 1.114E-003 9.255E-004 7.766E-004 7.462E-004
7.953E-004 8.597E-004 1.015E-003 1.048E-003 1.118E-003 9.260E-004
6.555E-004 5.905E-004 2.869E-004


Calc. Voltage @ Surface (Vs) = 0.0053

Voltage @ 1.00 cm (Vt) = 0.0031

Ave. Voltage (Vs+Vt)/2 = 0.0042

Ave. SAR over 1 g (mW/g) = 0.3082

SAR Scan
File : 00071814_ZOOM
Start : 18-Jul-100 12:06:33 pm End : 18-Jul-100 12:17:25 pm
HYUNDAI/DX-10/38;835.89MHz;W;Helical/In;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

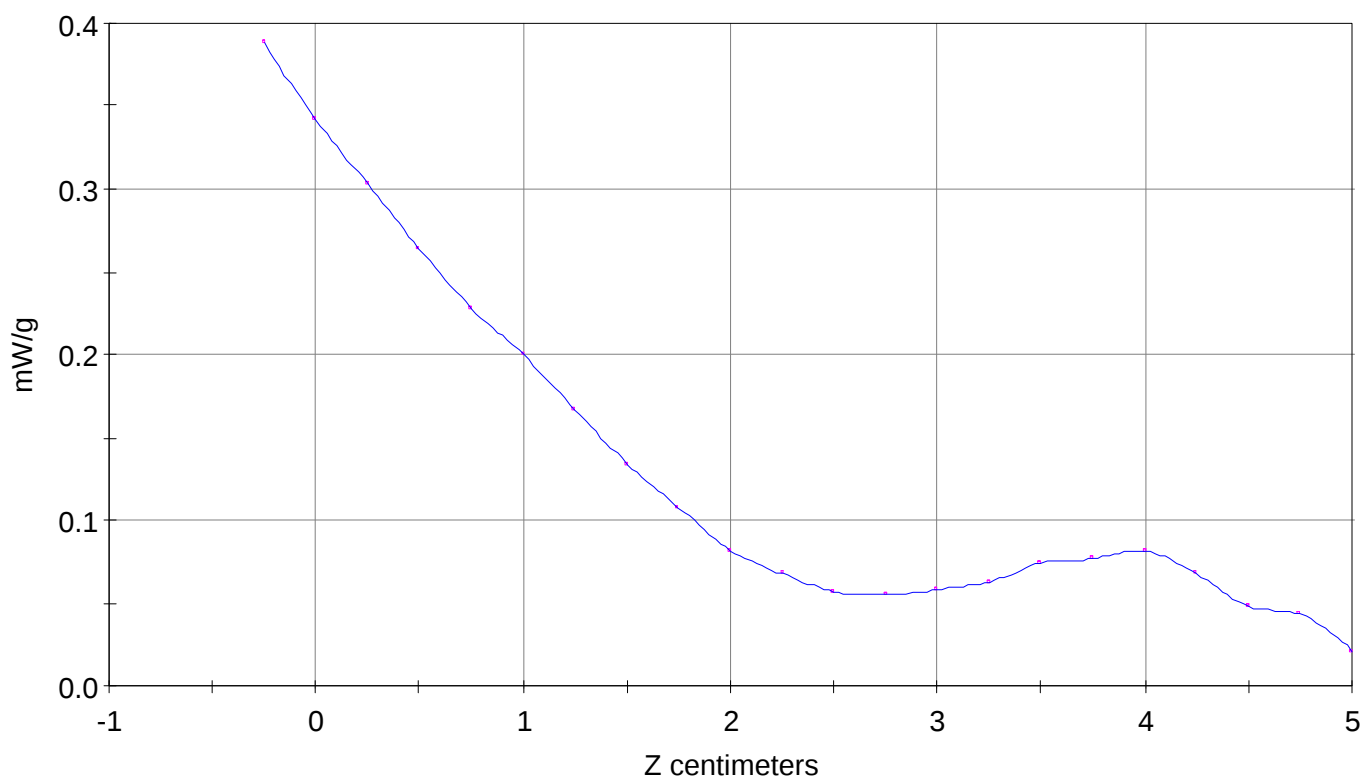


File : 00071814_ZOOM

Start : 18-Jul-100 12:06:33 pm End : 18-Jul-100 12:17:25 pm

HYUNDAI/DX-10/38;835.89MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

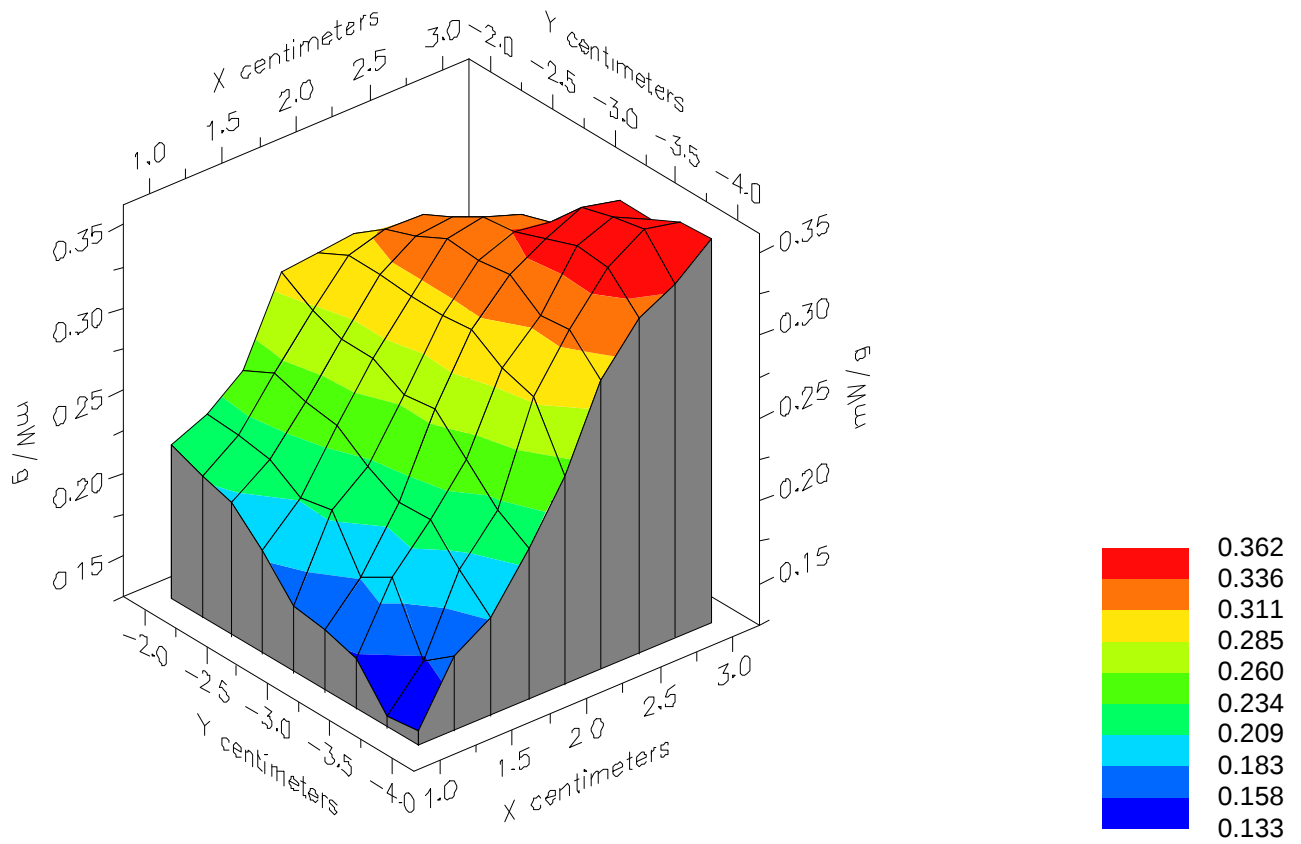


File : 00071814_ZOOM

Start : 18-Jul-100 12:06:33 pm End : 18-Jul-100 12:17:25 pm

HYUNDAI/DX-10/38;835.89MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

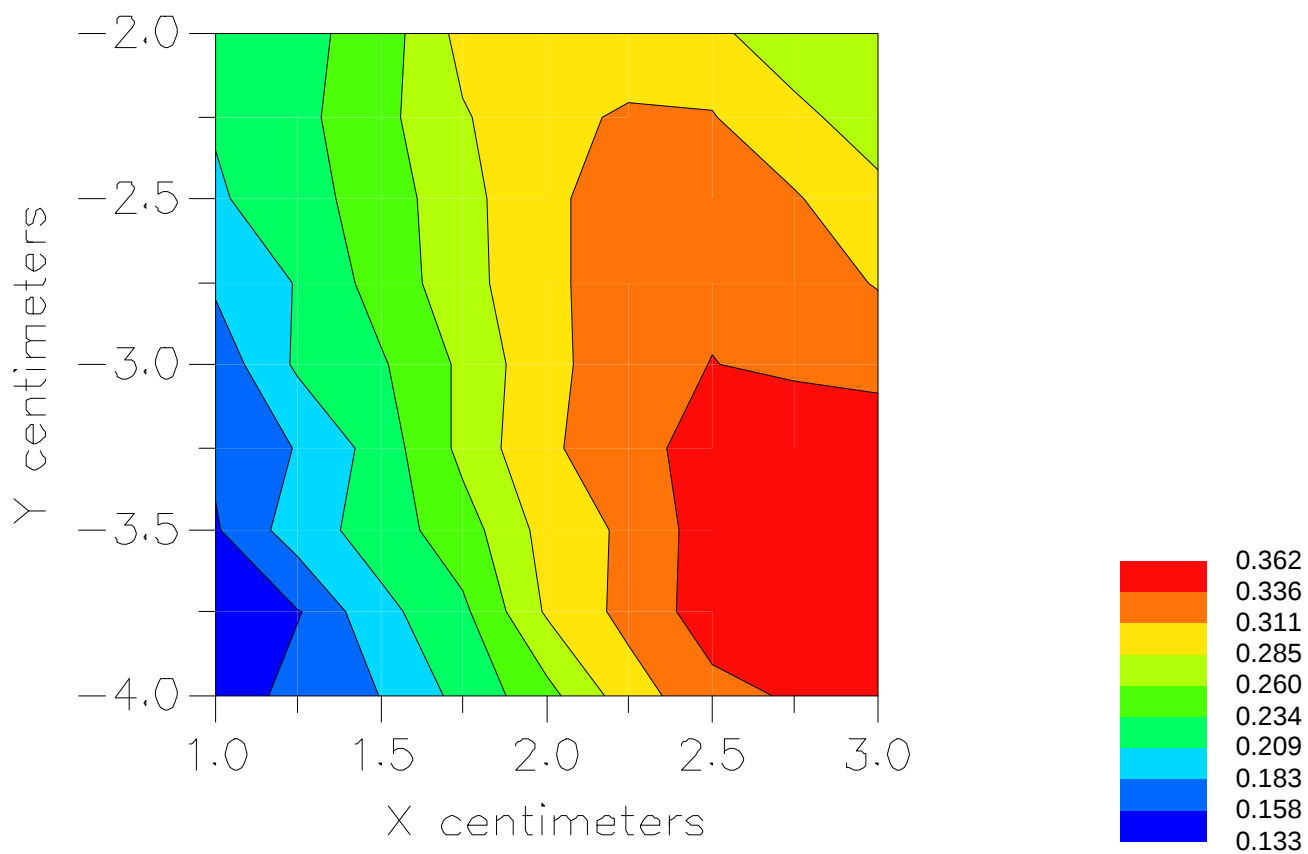

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071815_ZOOM.VLT
Start : 18-Jul-100 12:19:31 pm End : 18-Jul-100 12:31:33 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 835.89 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0363 25.5 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 3.000, Y = -3.250, Z = 0.000 (cm) Value = 10.735

Measured Values (volts) =
1.069E-002 9.199E-003 8.174E-003 7.047E-003 6.115E-003 5.113E-003
4.083E-003 3.187E-003 2.459E-003 1.940E-003 1.626E-003 1.550E-003
1.641E-003 1.830E-003 2.105E-003 2.241E-003 2.227E-003 1.912E-003
1.415E-003 1.178E-003 1.144E-003


Calc. Voltage @ Surface (Vs) = 0.0122

Voltage @ 1.00 cm (Vt) = 0.0070

Ave. Voltage (Vs+Vt)/2 = 0.0096

Ave. SAR over 1 g (mW/g) = 0.7031

SAR Scan
File : 00071815_ZOOM
Start : 18-Jul-100 12:19:31 pm End : 18-Jul-100 12:31:33 pm
HYUNDAI/DX-10/38;835.89MHz;W;Helical/Out;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

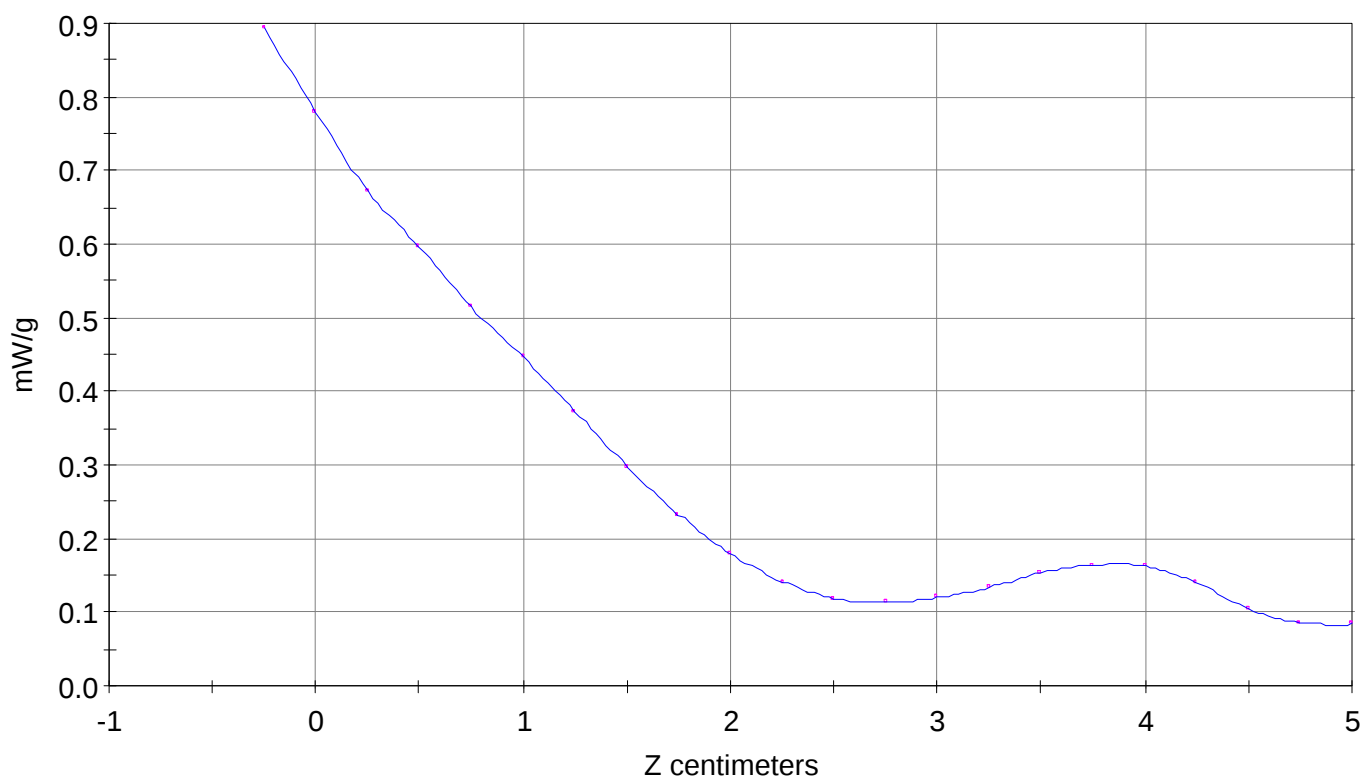


File : 00071815_ZOOM

Start : 18-Jul-100 12:19:31 pm End : 18-Jul-100 12:31:33 pm

HYUNDAI/DX-10/38;835.89MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

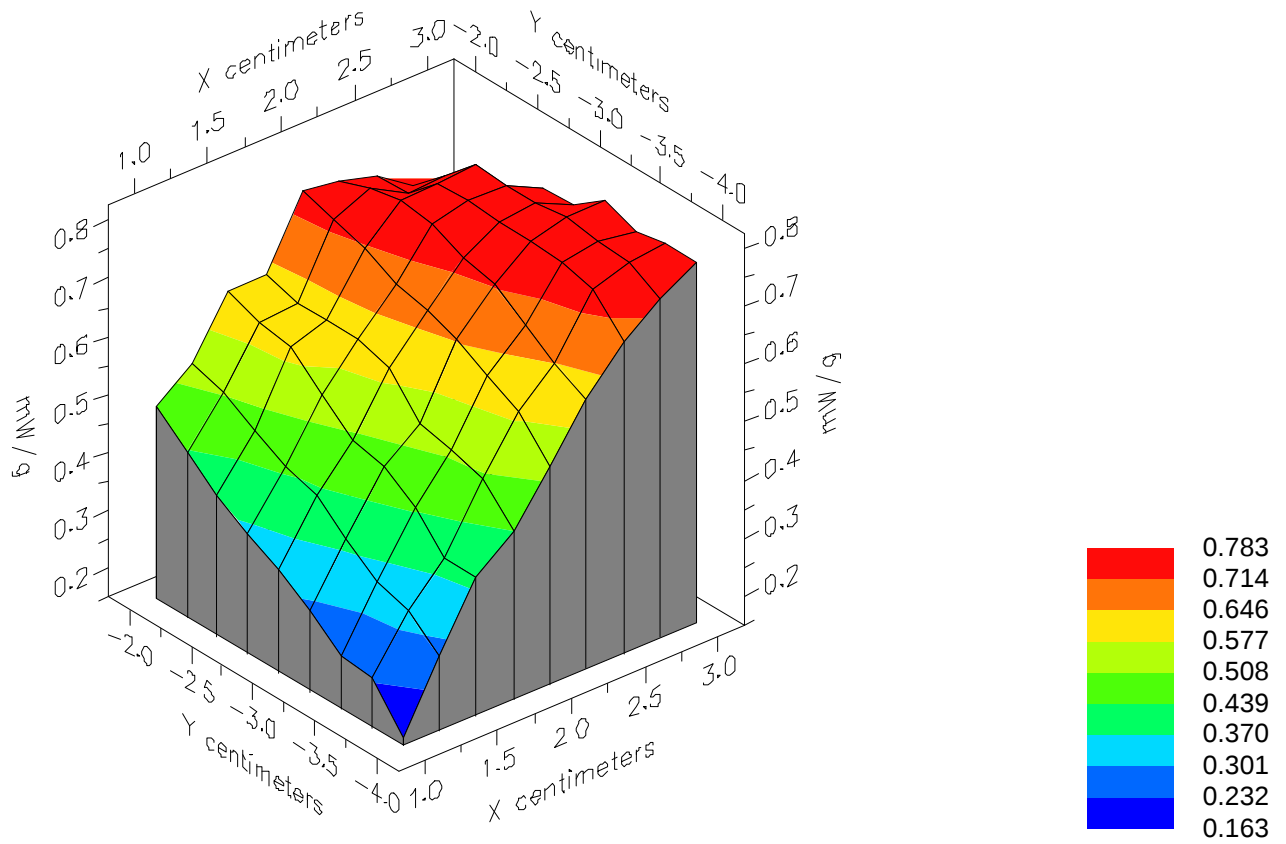


File : 00071815_ZOOM

Start : 18-Jul-100 12:19:31 pm End : 18-Jul-100 12:31:33 pm

HYUNDAI/DX-10/38;835.89MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

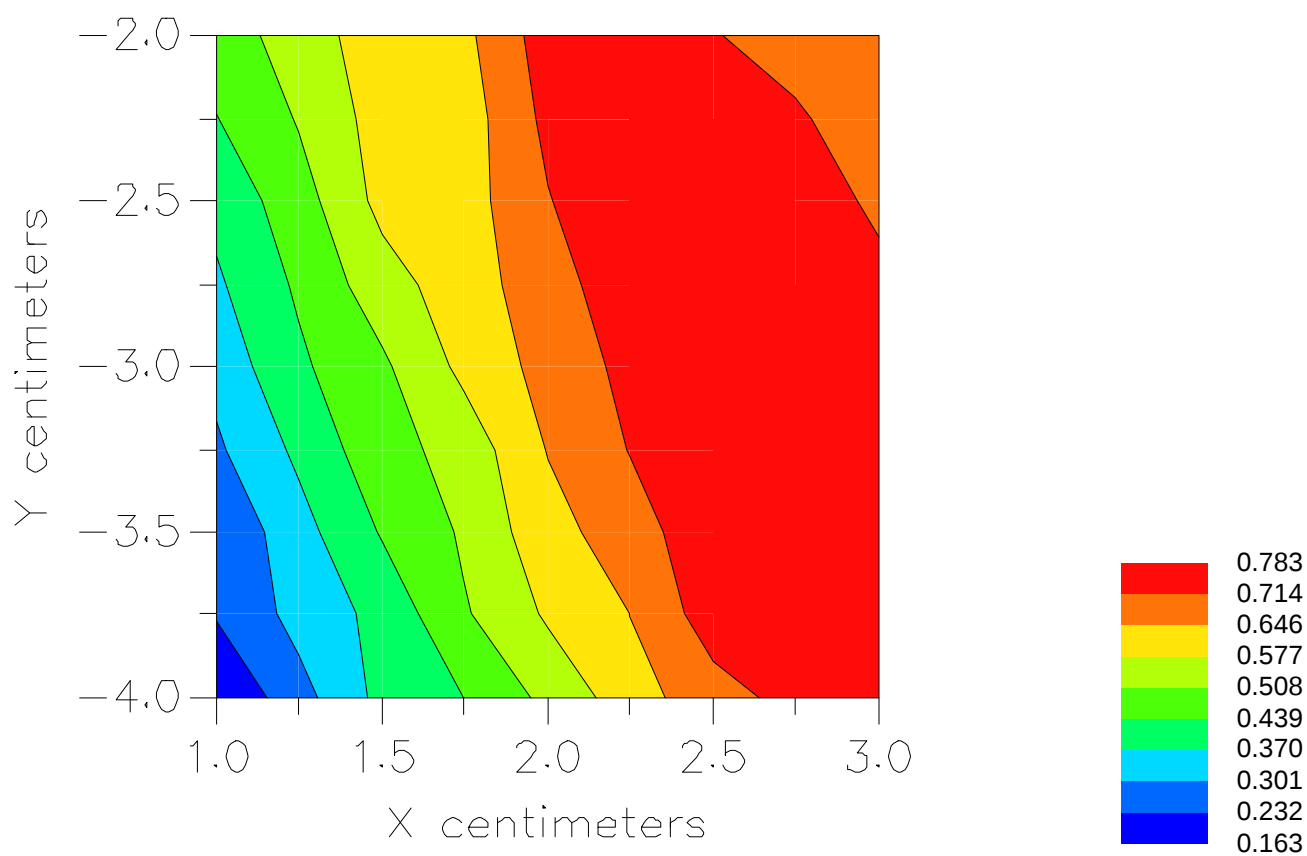

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071817_ZOOM.VLT
Start : 18-Jul-100 01:50:56 pm End : 18-Jul-100 02:03:07 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.31 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0777 25.5 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.500, Y = -3.500, Z = 0.000 (cm) Value = 7.868

Measured Values (volts) =
7.462E-003 6.471E-003 5.652E-003 5.072E-003 4.338E-003 3.699E-003
3.023E-003 2.327E-003 1.862E-003 1.445E-003 1.236E-003 1.156E-003
1.214E-003 1.408E-003 1.589E-003 1.753E-003 1.790E-003 1.545E-003
1.123E-003 9.164E-004 8.393E-004


Calc. Voltage @ Surface (Vs) = 0.0086

Voltage @ 1.00 cm (Vt) = 0.0051

Ave. Voltage (Vs+Vt)/2 = 0.0068

Ave. SAR over 1 g (mW/g) = 0.4978

SAR Scan
File : 00071817_ZOOM
Start : 18-Jul-100 01:50:56 pm End : 18-Jul-100 02:03:07 pm
HYUNDAI/DX-10/38;848.31MHz;W;Helical/In;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

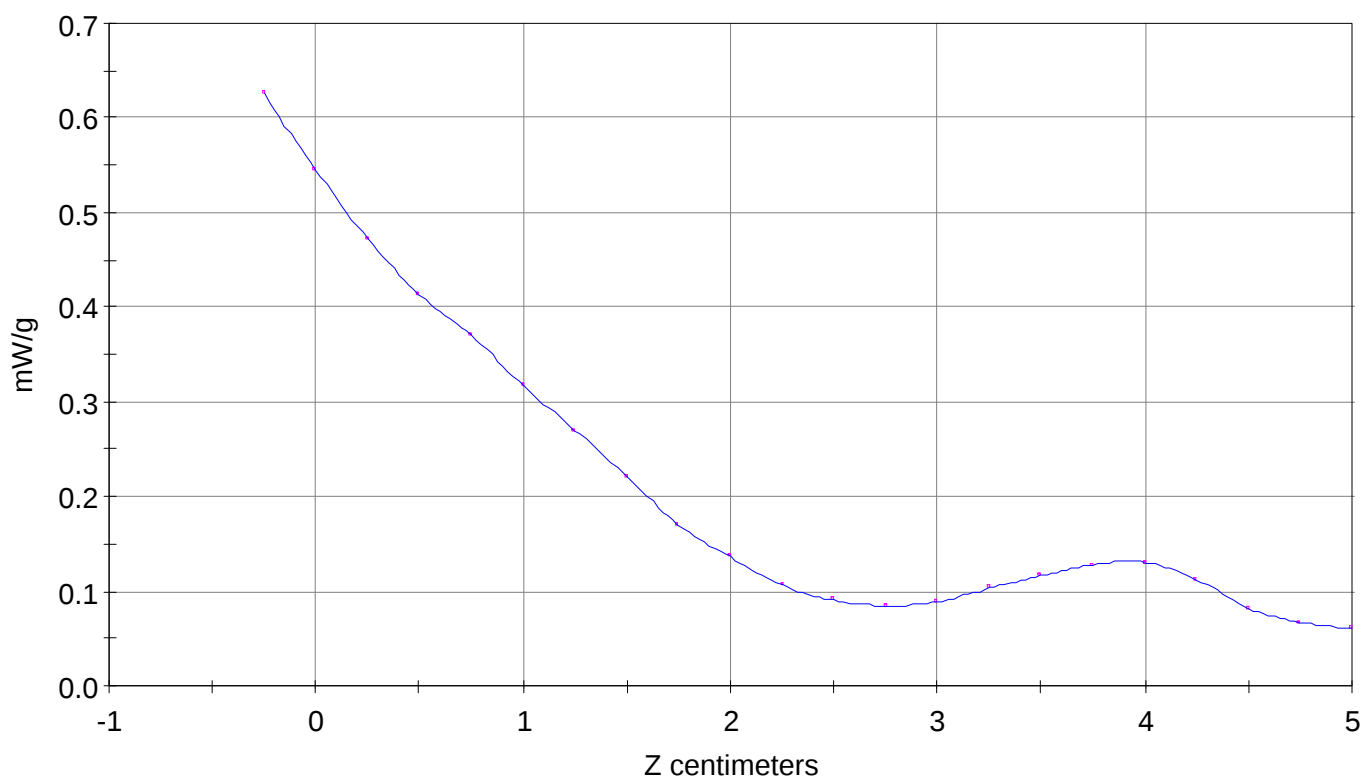


File : 00071817_ZOOM

Start : 18-Jul-100 01:50:56 pm End : 18-Jul-100 02:03:07 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

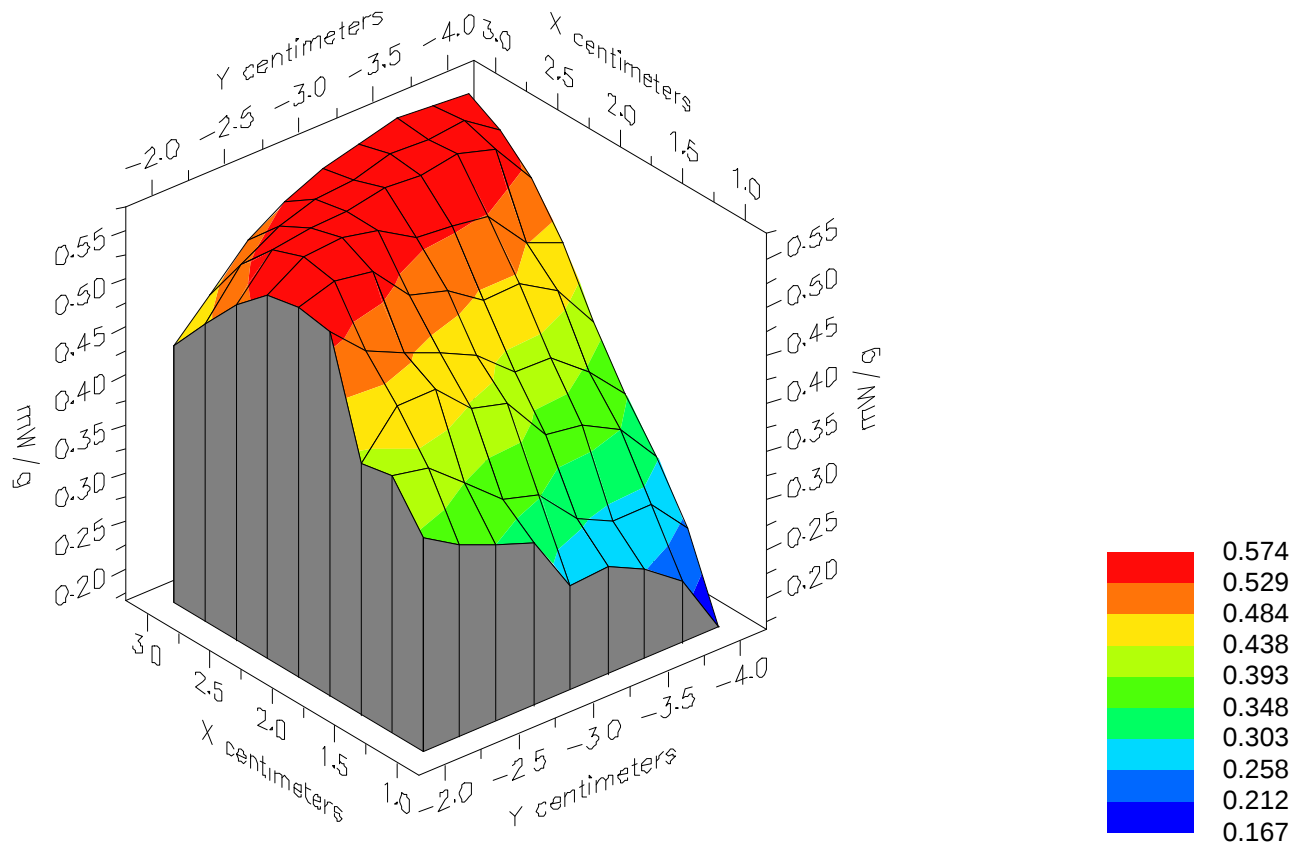


File : 00071817_ZOOM

Start : 18-Jul-100 01:50:56 pm End : 18-Jul-100 02:03:07 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/In;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

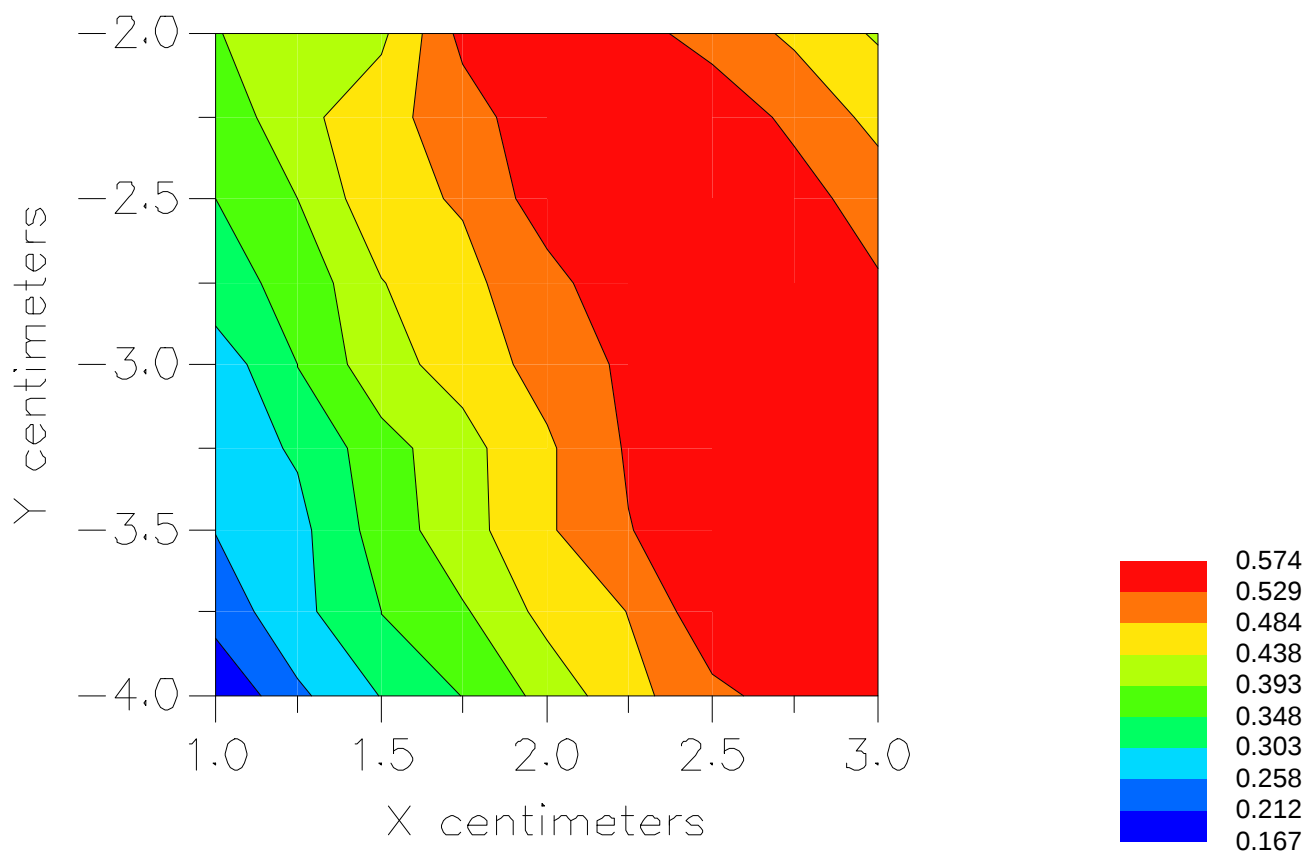

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071818_ZOOM.VLT
Start : 18-Jul-100 02:10:30 pm End : 18-Jul-100 02:23:17 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.31 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Head
Phantom Posn. : Left Ear
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Brain
Mixture Dielectric Constant = 43.400
Mixture Conductivity = 0.900

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0777 25.5 dBm conducted
HYUNDAI DUAL MODE PHONE

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.788

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = 2.500, Y = -3.000, Z = 0.000 (cm) Value = 18.070

Measured Values (volts) =
1.671E-002 1.452E-002 1.293E-002 1.171E-002 1.032E-002 8.852E-003
7.046E-003 5.724E-003 4.358E-003 3.341E-003 2.650E-003 2.344E-003
2.514E-003 2.883E-003 3.338E-003 3.832E-003 3.948E-003 3.773E-003
2.954E-003 2.155E-003 2.094E-003


Calc. Voltage @ Surface (Vs) = 0.0190

Voltage @ 1.00 cm (Vt) = 0.0117

Ave. Voltage (Vs+Vt)/2 = 0.0154

Ave. SAR over 1 g (mW/g) = 1.1204

SAR Scan
File : 00071818_ZOOM
Start : 18-Jul-100 02:10:30 pm End : 18-Jul-100 02:23:17 pm
HYUNDAI/DX-10/38;848.31MHz;W;Helical/Out;
Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

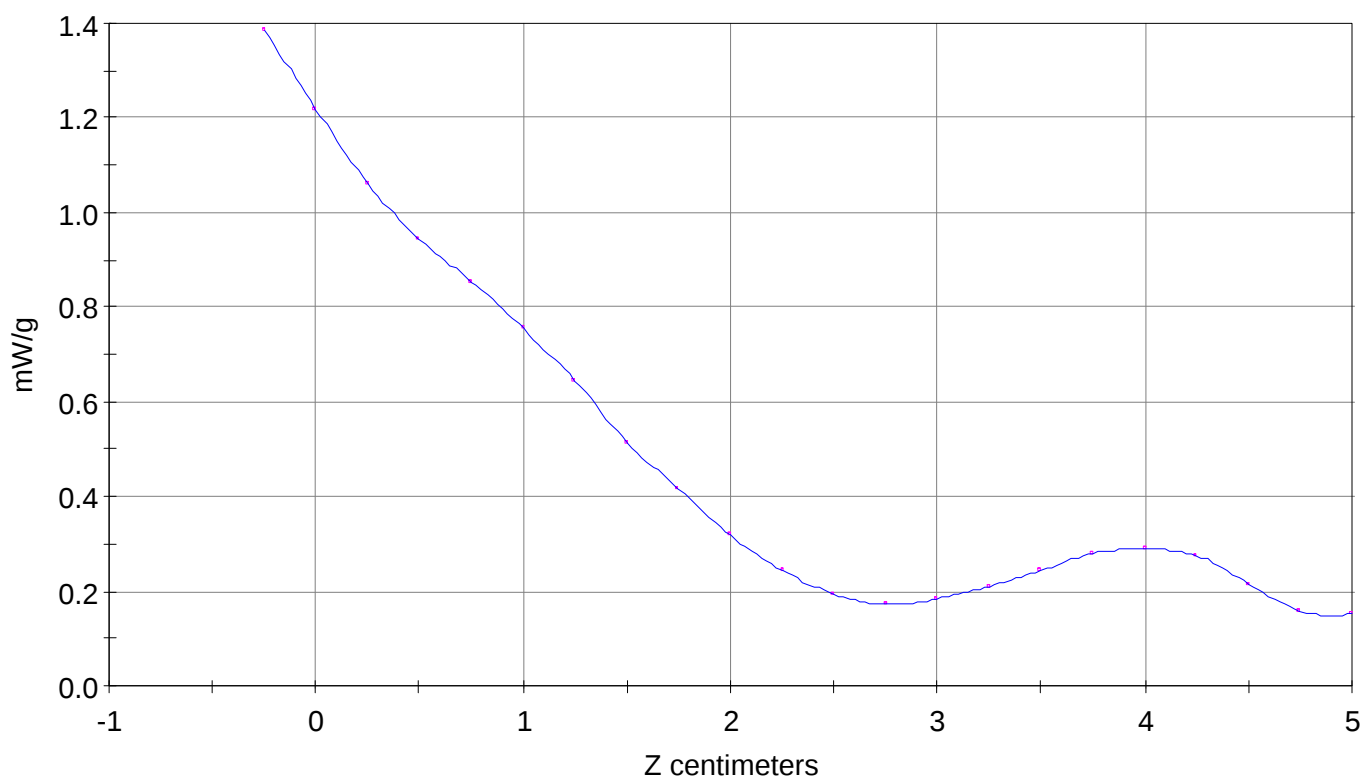


File : 00071818_ZOOM

Start : 18-Jul-100 02:10:30 pm End : 18-Jul-100 02:23:17 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

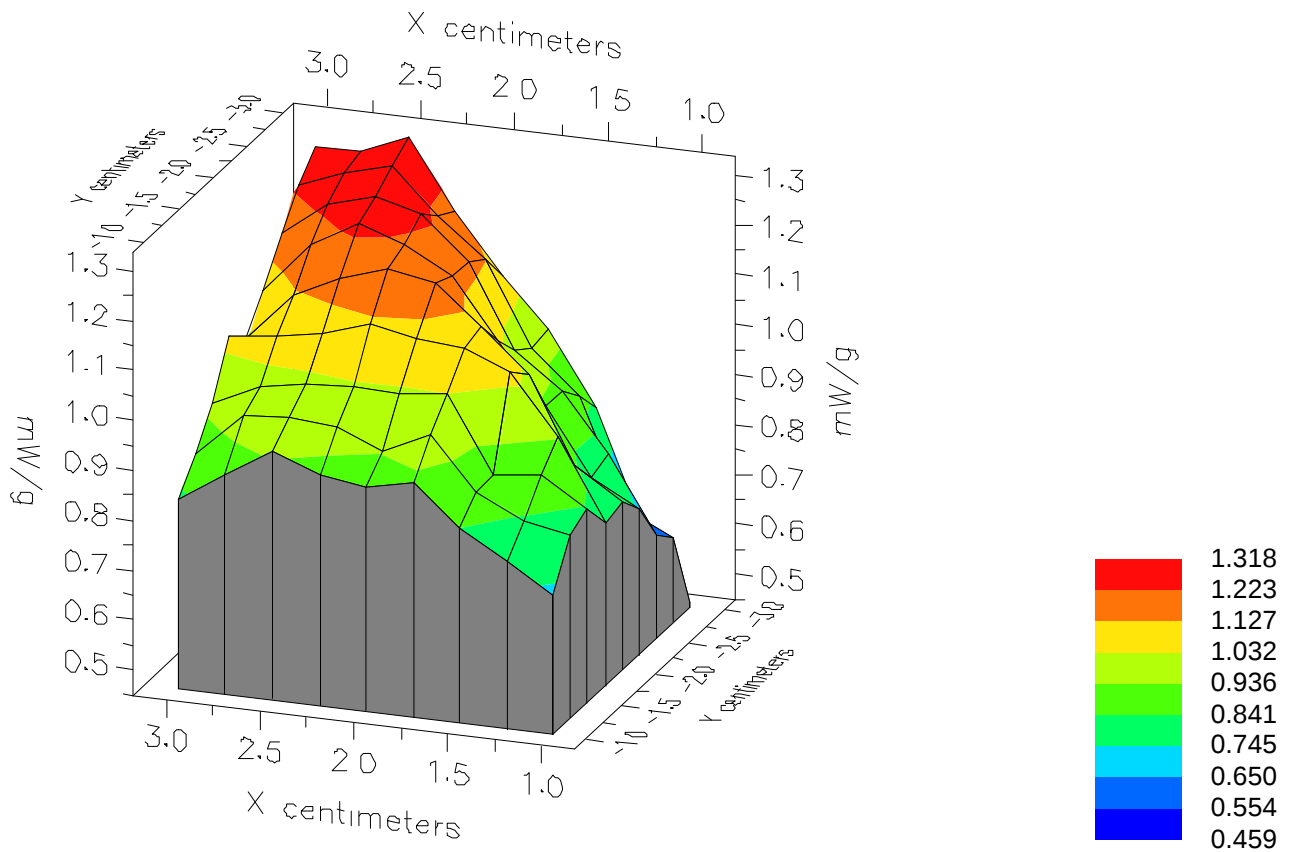


File : 00071818_ZOOM

Start : 18-Jul-100 02:10:30 pm End : 18-Jul-100 02:23:17 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/Out;

Head/Left Ear;ZOOM/SAR;PCTEST/E Field/0 DegreesBrain/43.400/0.900

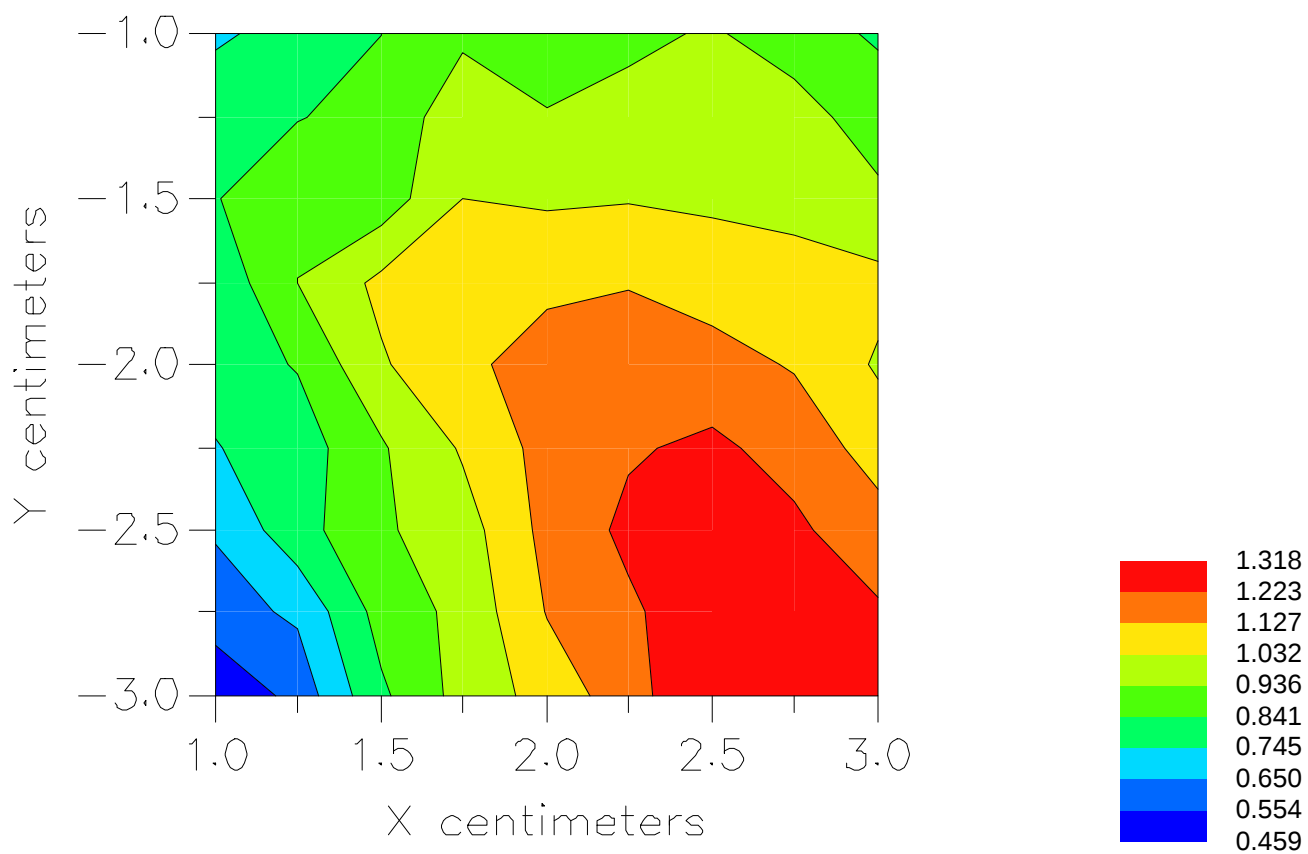

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071911_ZOOM.VLT
Start : 19-Jul-100 02:30:31 pm End : 19-Jul-100 02:38:11 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.70 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 1013 25.5 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -0.750, Y = 1.000, Z = 0.000 (cm) Value = 2.282

Measured Values (volts) =
2.098E-003 1.689E-003 1.373E-003 1.149E-003 1.075E-003 1.028E-003
1.049E-003 1.076E-003 1.040E-003 9.182E-004 7.300E-004 5.404E-004
3.374E-004 1.822E-004 1.724E-004 2.148E-004 3.170E-004 4.560E-004
4.973E-004 4.302E-004 3.316E-004


Calc. Voltage @ Surface (Vs) = 0.0026

Voltage @ 1.00 cm (Vt) = 0.0011

Ave. Voltage (Vs+Vt)/2 = 0.0019

Ave. SAR over 1 g (mW/g) = 0.1549

SAR Scan
File : 00071911_ZOOM
Start : 19-Jul-100 02:30:31 pm End : 19-Jul-100 02:38:11 pm
HYUNDAI/DX-10/38;824.70MHz;W;Helical/In;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

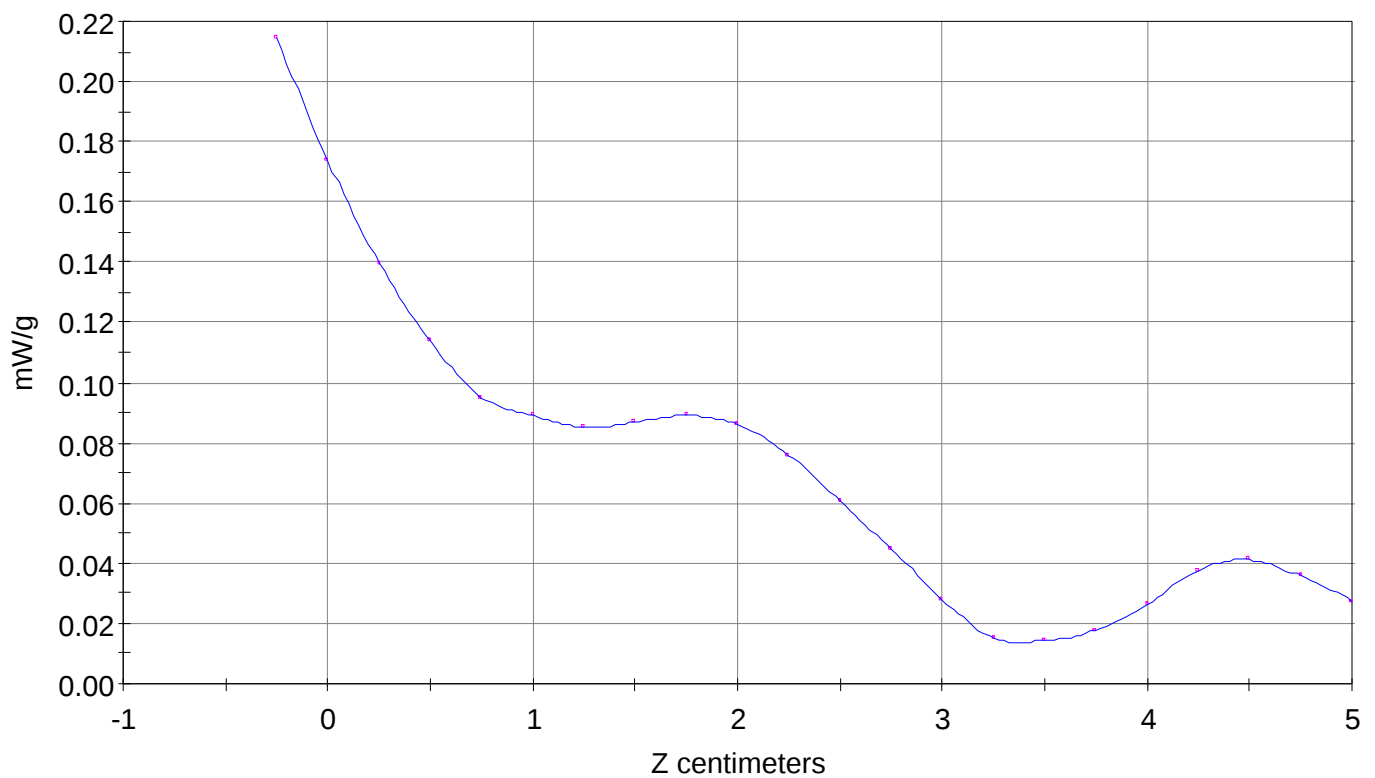


File : 00071911_ZOOM

Start : 19-Jul-100 02:30:31 pm End : 19-Jul-100 02:38:11 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

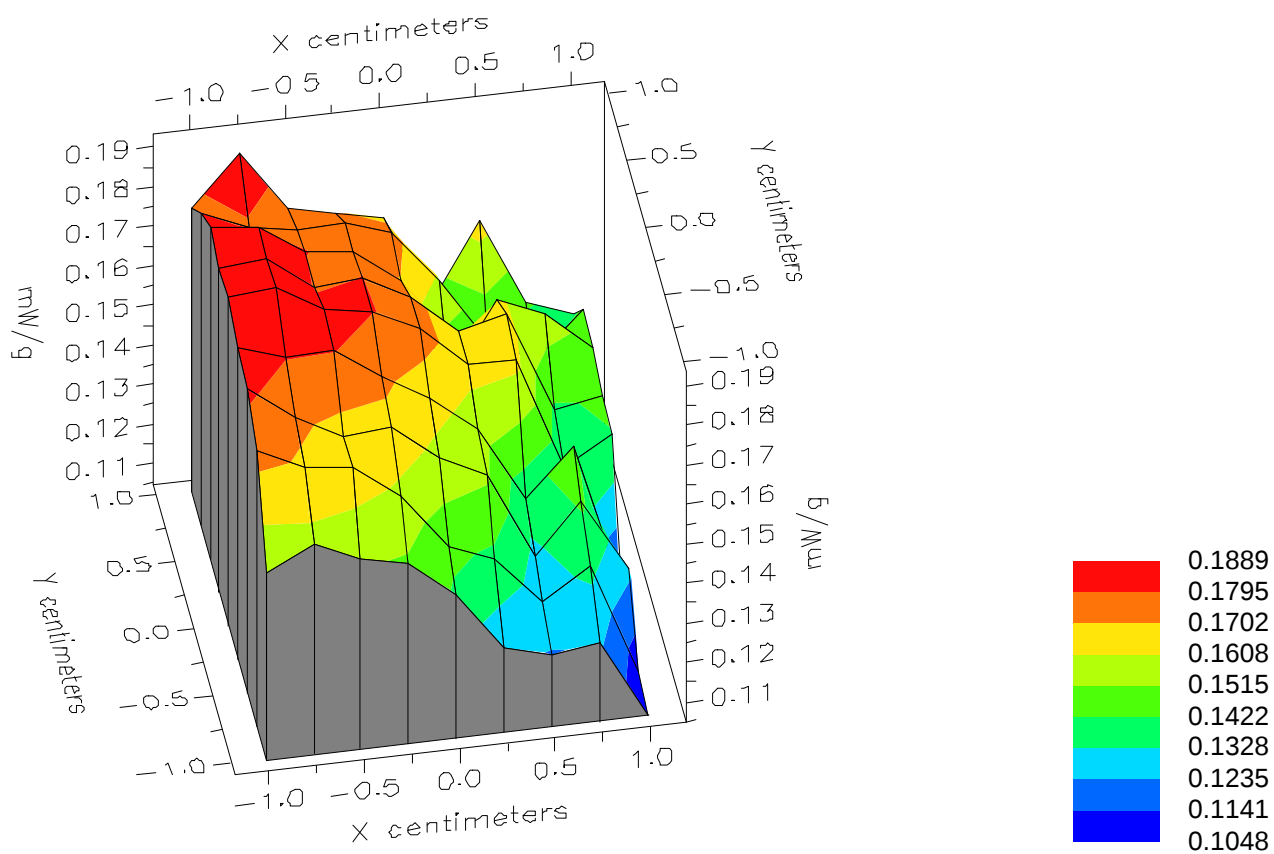


File : 00071911_ZOOM

Start : 19-Jul-100 02:30:31 pm End : 19-Jul-100 02:38:11 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

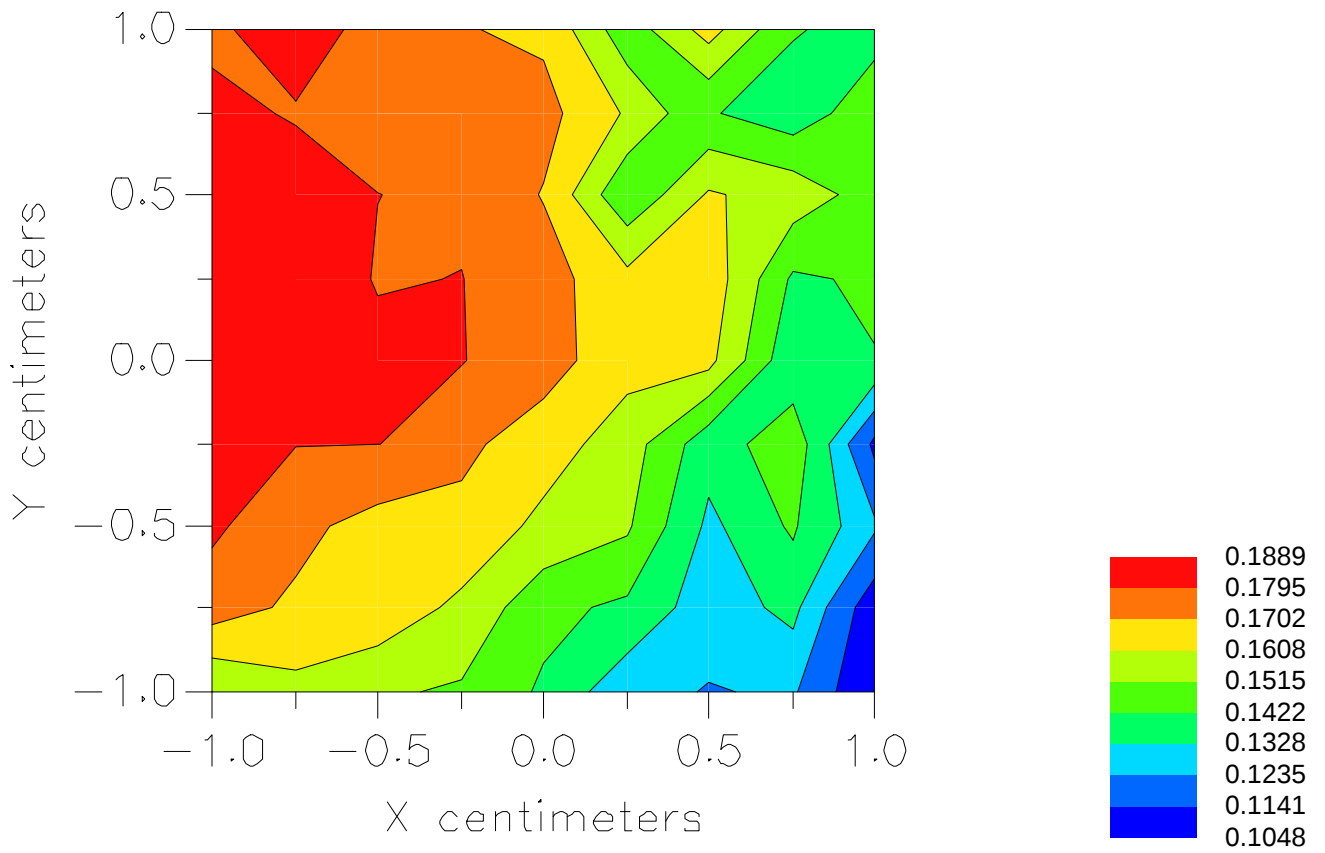

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071913_ZOOM.VLT
Start : 19-Jul-100 02:50:21 pm End : 19-Jul-100 02:59:20 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 824.70 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 1013 25.5 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -4.750, Y = -2.250, Z = 0.000 (cm) Value = 4.637

Measured Values (volts) =
4.543E-003 3.983E-003 3.431E-003 2.714E-003 2.064E-003 1.376E-003
8.853E-004 6.640E-004 6.896E-004 9.246E-004 1.209E-003 1.427E-003
1.359E-003 1.018E-003 9.684E-004 4.345E-004 3.530E-004 2.813E-004
2.283E-004 1.938E-004 1.421E-004


Calc. Voltage @ Surface (Vs) = 0.0052

Voltage @ 1.00 cm (Vt) = 0.0027

Ave. Voltage (Vs+Vt)/2 = 0.0040

Ave. SAR over 1 g (mW/g) = 0.3287

SAR Scan
File : 00071913_ZOOM
Start : 19-Jul-100 02:50:21 pm End : 19-Jul-100 02:59:20 pm
HYUNDAI/DX-10/38;824.70MHz;W;Helical/Out;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

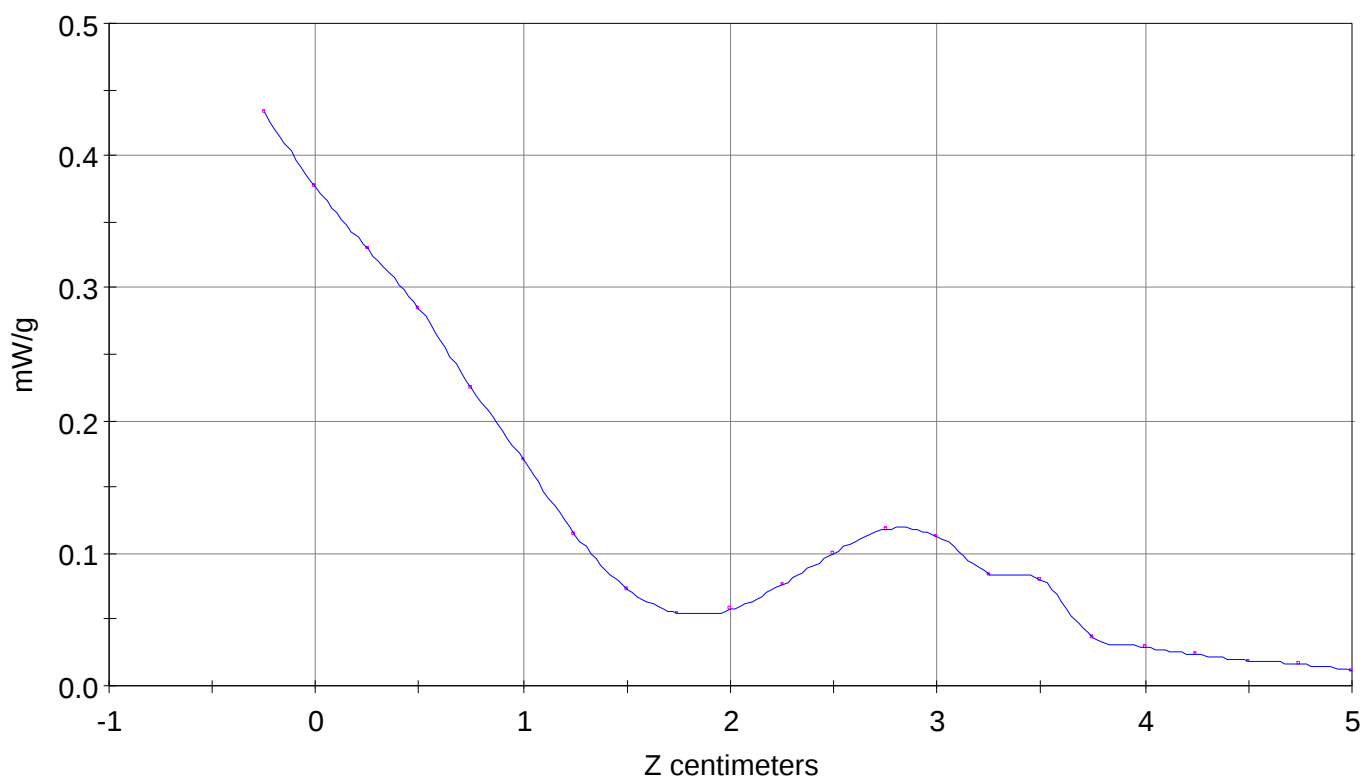


File : 00071913_ZOOM

Start : 19-Jul-100 02:50:21 pm End : 19-Jul-100 02:59:20 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

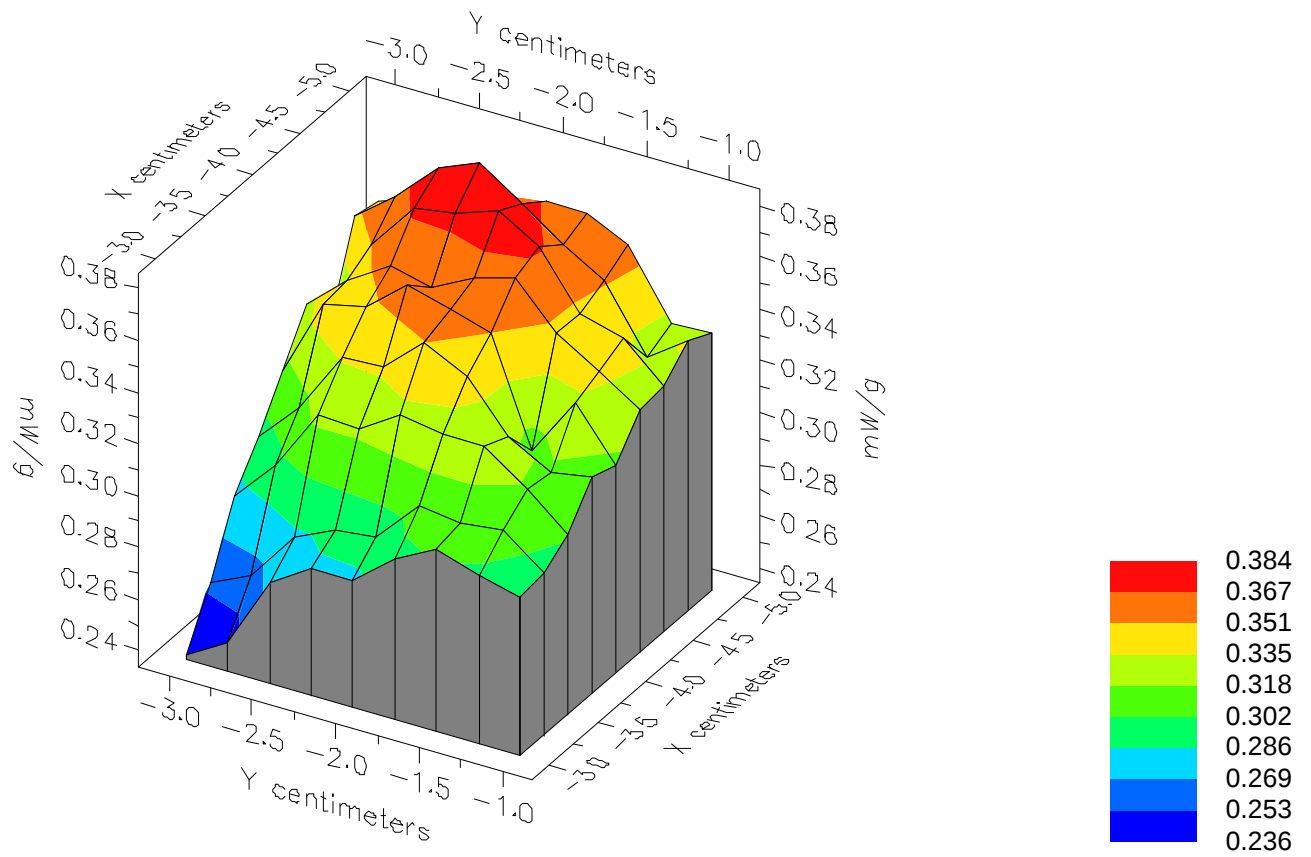


File : 00071913_ZOOM

Start : 19-Jul-100 02:50:21 pm End : 19-Jul-100 02:59:20 pm

HYUNDAI/DX-10/38;824.70MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

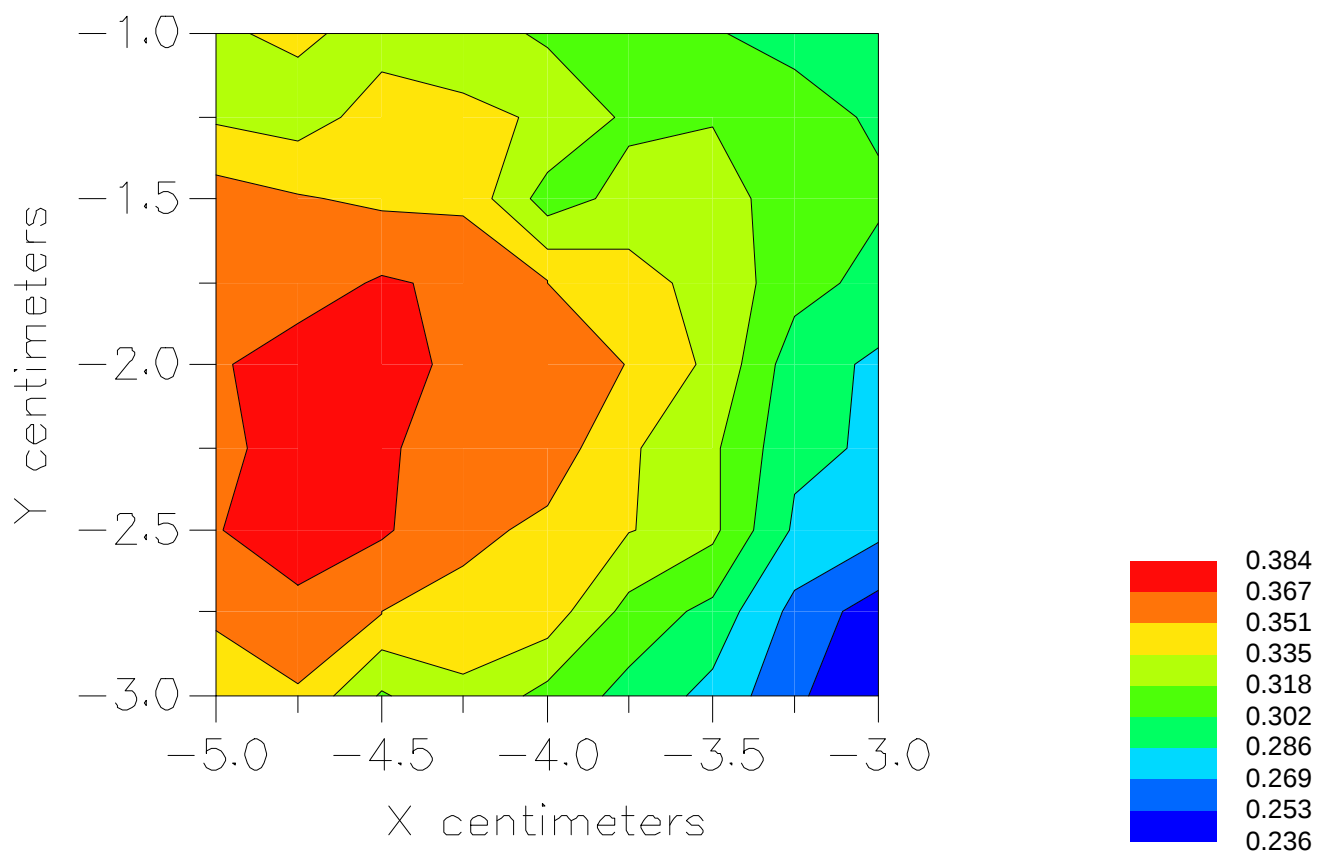

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071905_ZOOM.VLT
Start : 19-Jul-100 11:25:25 am End : 19-Jul-100 11:35:39 am

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 835.89 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0363 25.5 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -1.000, Y = 0.000, Z = 0.000 (cm) Value = 2.587

Measured Values (volts) =
2.513E-003 2.002E-003 1.681E-003 1.505E-003 1.456E-003 1.439E-003
1.427E-003 1.341E-003 1.170E-003 9.880E-004 7.234E-004 4.609E-004
2.893E-004 2.440E-004 3.074E-004 3.985E-004 5.312E-004 6.185E-004
5.656E-004 4.260E-004 4.266E-004


Calc. Voltage @ Surface (Vs) = 0.0031

Voltage @ 1.00 cm (Vt) = 0.0015

Ave. Voltage (Vs+Vt)/2 = 0.0023

Ave. SAR over 1 g (mW/g) = 0.1895

SAR Scan
File : 00071905_ZOOM
Start : 19-Jul-100 11:25:25 am End : 19-Jul-100 11:35:39 am
HYUNDAI/DX-10/38;835.89MHz;W;Helical/In;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

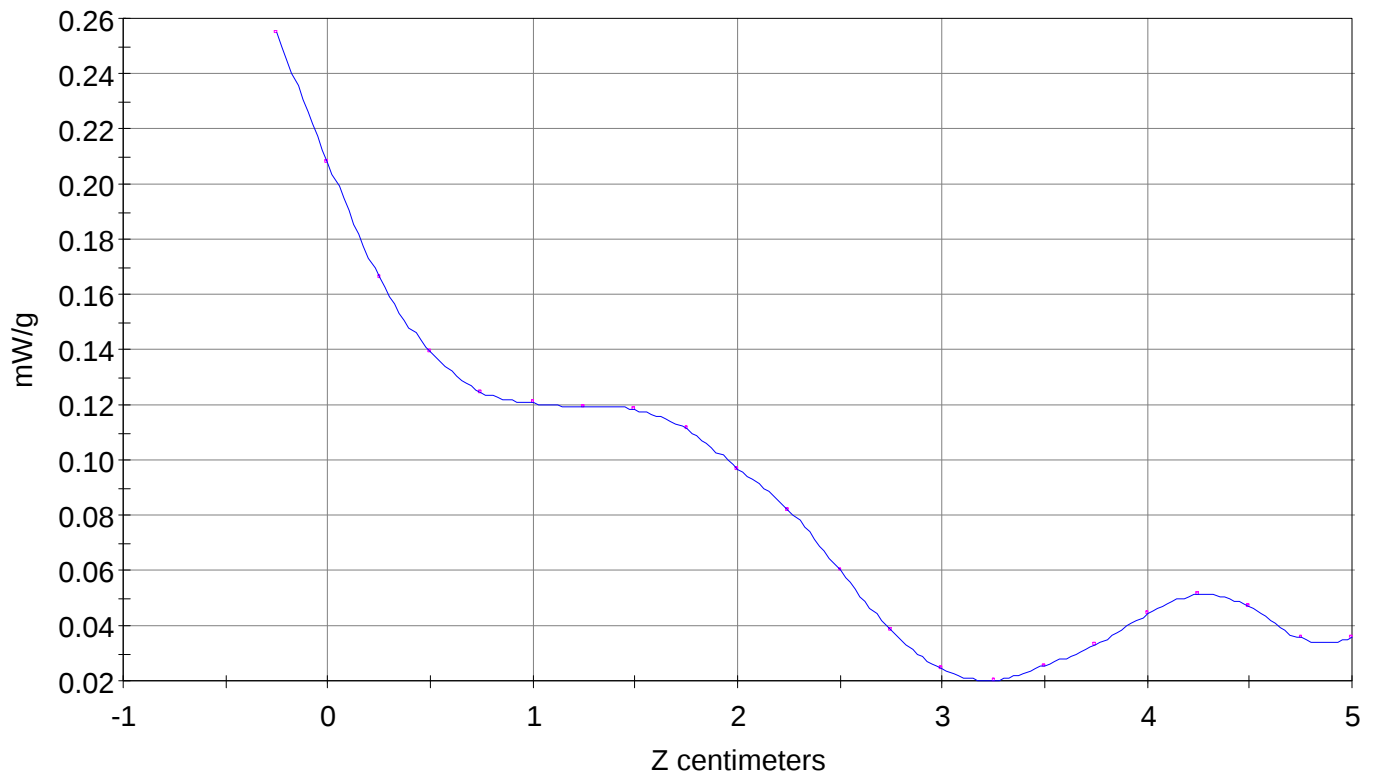


File : 00071905_ZOOM

Start : 19-Jul-100 11:25:25 am End : 19-Jul-100 11:35:39 am

HYUNDAI/DX-10/38;835.89MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

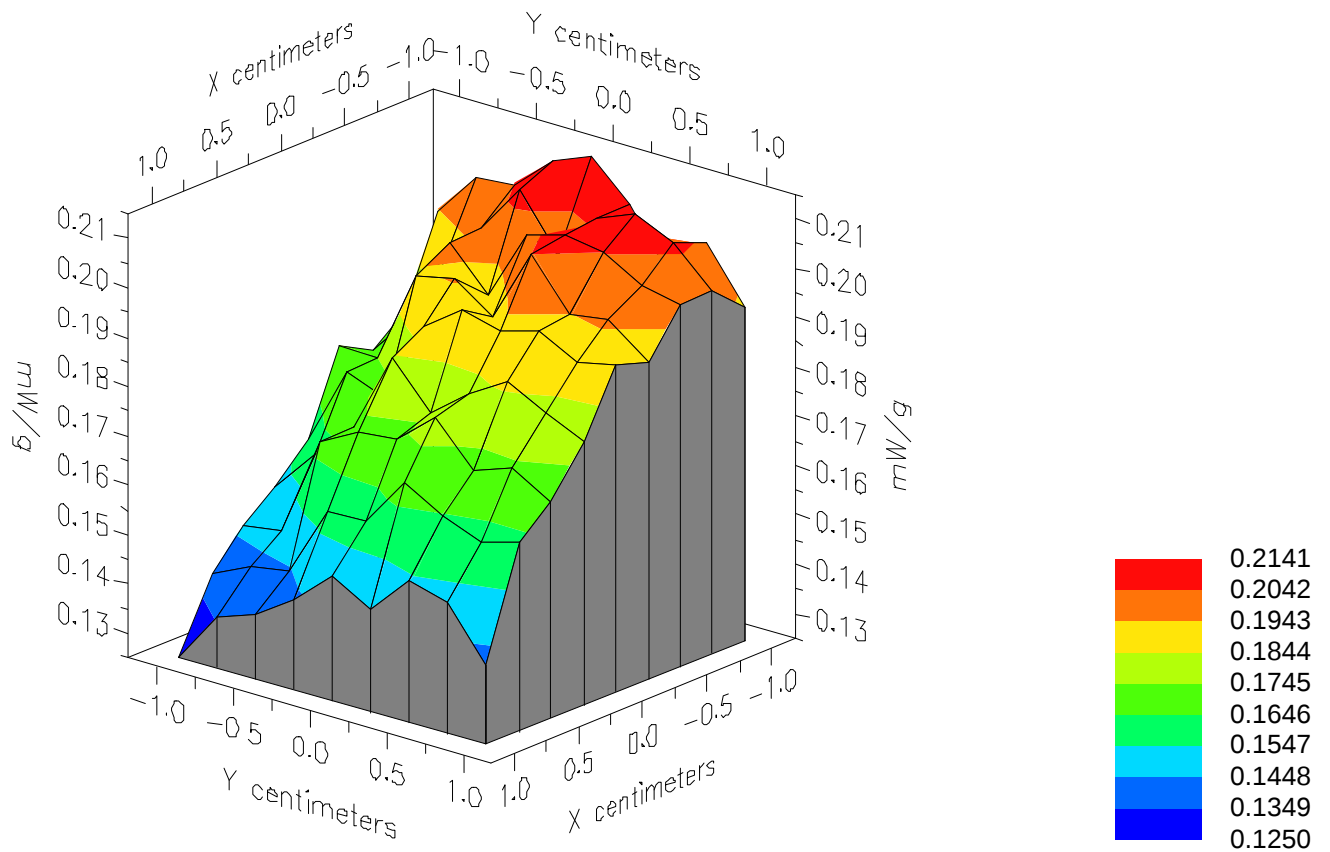


File : 00071905_ZOOM

Start : 19-Jul-100 11:25:25 am End : 19-Jul-100 11:35:39 am

HYUNDAI/DX-10/38;835.89MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

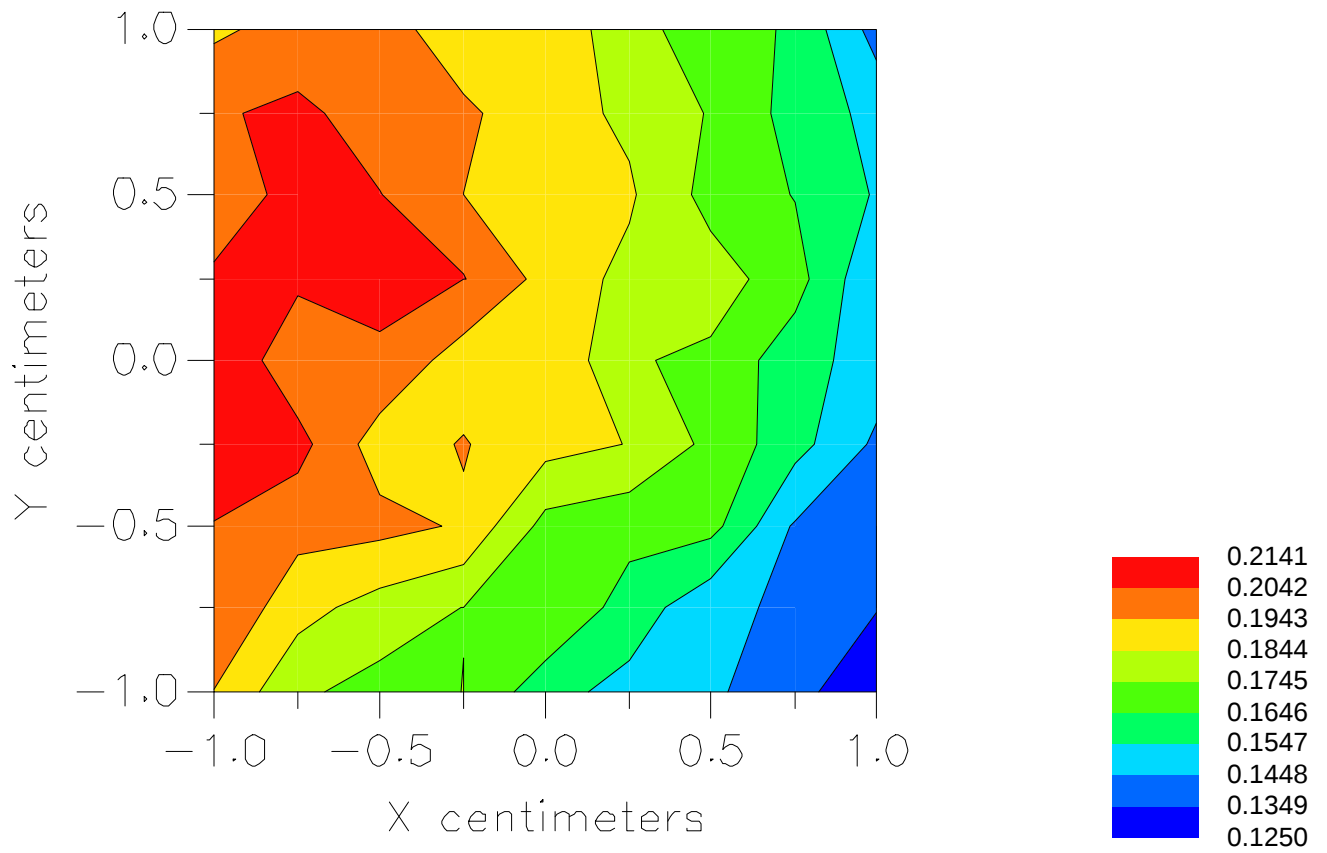

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071907_ZOOM.VLT
Start : 19-Jul-100 12:13:54 pm End : 19-Jul-100 12:22:49 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 835.89 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0363 25.5 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -4.500, Y = -2.250, Z = 0.000 (cm) Value = 4.784

Measured Values (volts) =
4.534E-003 4.075E-003 3.612E-003 3.020E-003 2.359E-003 1.624E-003
1.074E-003 7.208E-004 6.533E-004 7.731E-004 1.077E-003 1.327E-003
1.426E-003 1.160E-003 9.146E-004 9.310E-004 3.473E-004 2.904E-004
2.319E-004 1.998E-004 1.625E-004


Calc. Voltage @ Surface (Vs) = 0.0051

Voltage @ 1.00 cm (Vt) = 0.0030

Ave. Voltage (Vs+Vt)/2 = 0.0040

Ave. SAR over 1 g (mW/g) = 0.3352

SAR Scan
File : 00071907_ZOOM
Start : 19-Jul-100 12:13:54 pm End : 19-Jul-100 12:22:49 pm
HYUNDAI/DX-10/38;835.89MHz;W;Helical/Out;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

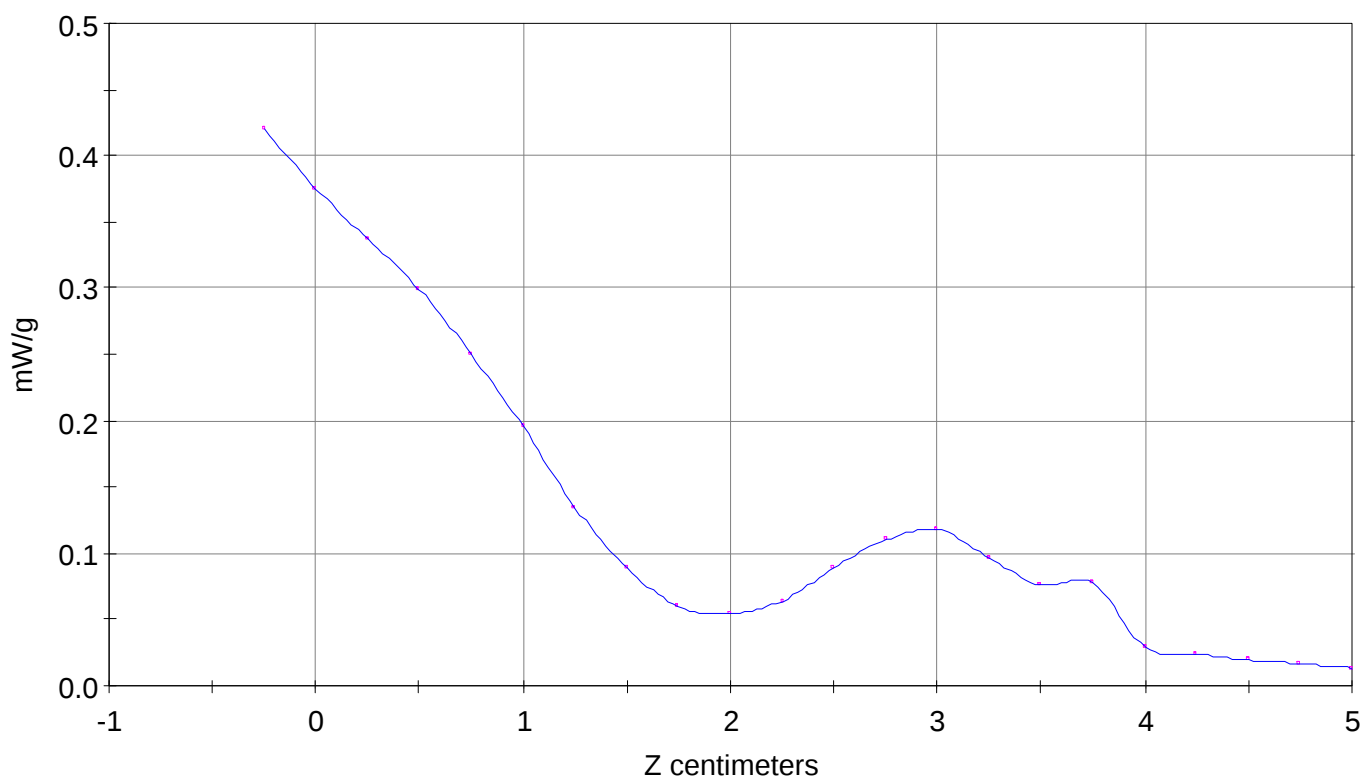


File : 00071907_ZOOM

Start : 19-Jul-100 12:13:54 pm End : 19-Jul-100 12:22:49 pm

HYUNDAI/DX-10/38;835.89MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

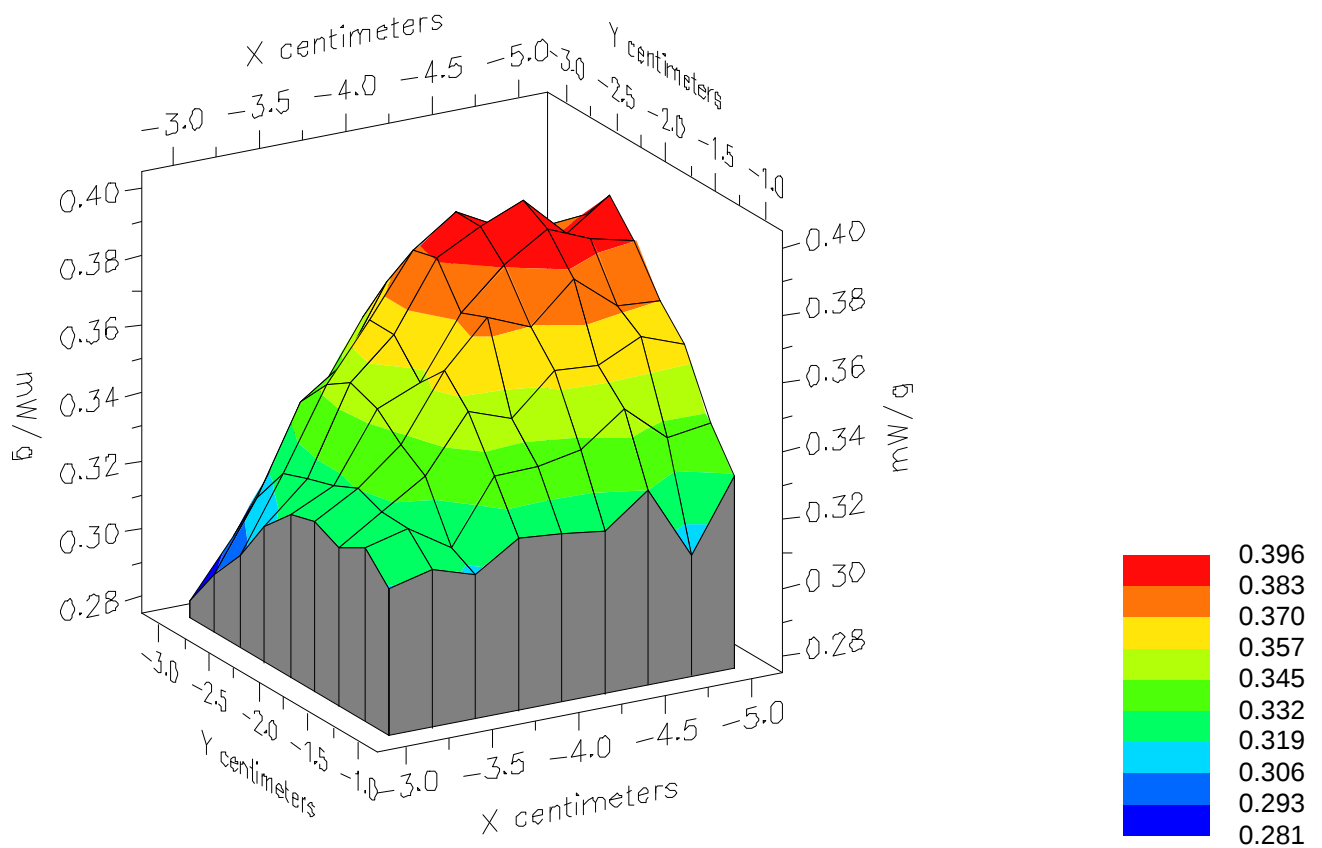


File : 00071907_ZOOM

Start : 19-Jul-100 12:13:54 pm End : 19-Jul-100 12:22:49 pm

HYUNDAI/DX-10/38;835.89MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

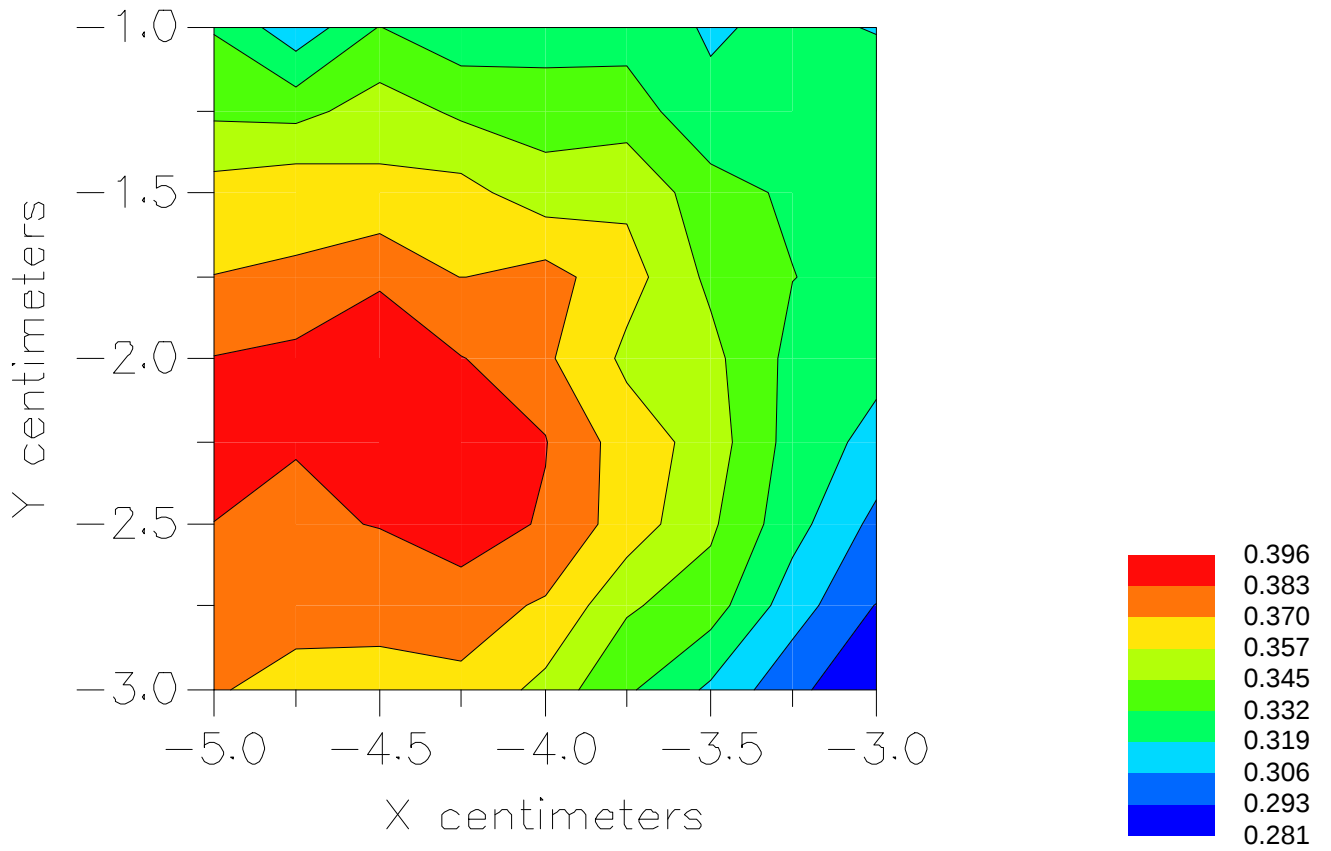

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071908_ZOOM.VLT
Start : 19-Jul-100 12:37:23 pm End : 19-Jul-100 12:47:36 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.31 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0777 25.5 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -0.750, Y = 0.250, Z = 0.000 (cm) Value = 3.833

Measured Values (volts) =
3.772E-003 3.031E-003 2.476E-003 2.122E-003 1.981E-003 1.909E-003
1.878E-003 1.871E-003 1.691E-003 1.458E-003 1.105E-003 7.619E-004
4.856E-004 3.494E-004 3.368E-004 4.605E-004 6.629E-004 7.731E-004
8.183E-004 6.301E-004 5.120E-004


Calc. Voltage @ Surface (Vs) = 0.0047

Voltage @ 1.00 cm (Vt) = 0.0021

Ave. Voltage (Vs+Vt)/2 = 0.0034

Ave. SAR over 1 g (mW/g) = 0.2805

SAR Scan
File : 00071908_ZOOM
Start : 19-Jul-100 12:37:23 pm End : 19-Jul-100 12:47:36 pm
HYUNDAI/DX-10/38;848.31MHz;W;Helical/In;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

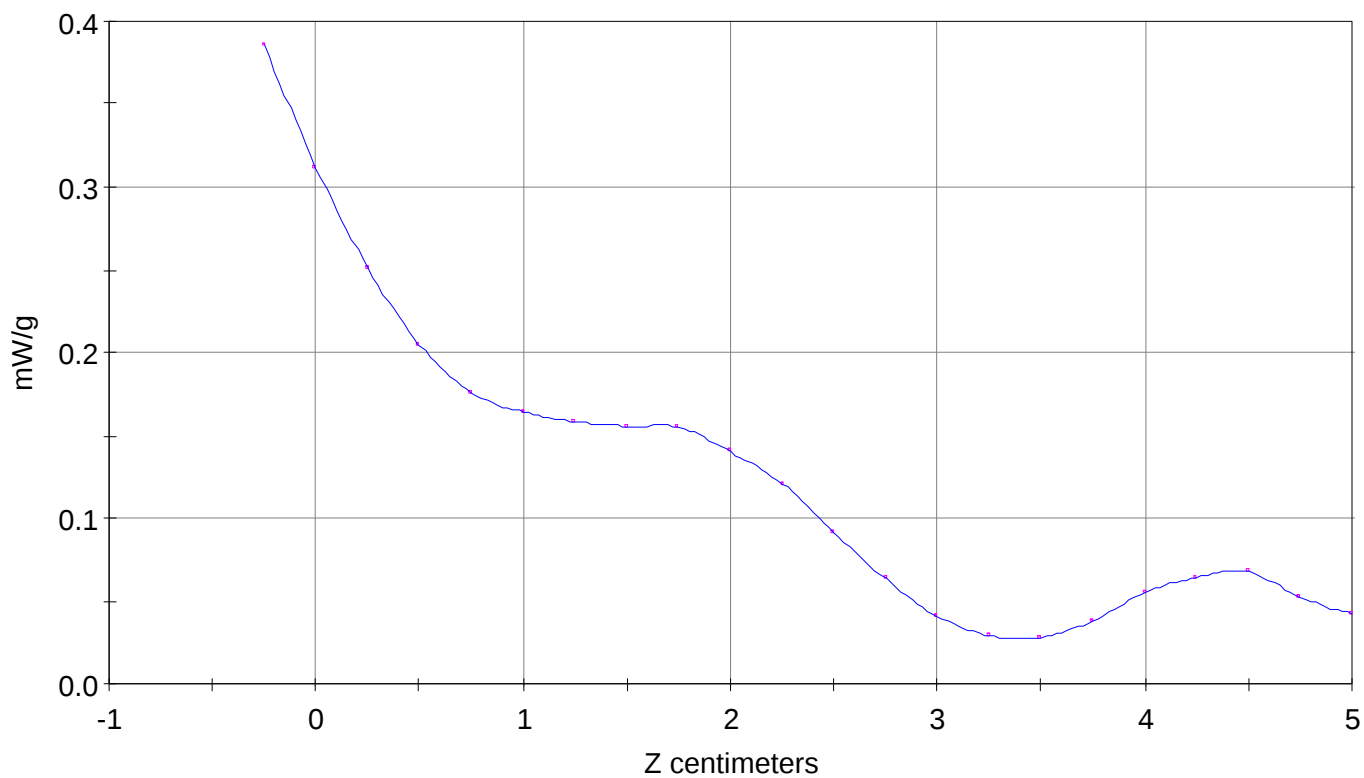


File : 00071908_ZOOM

Start : 19-Jul-100 12:37:23 pm End : 19-Jul-100 12:47:36 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

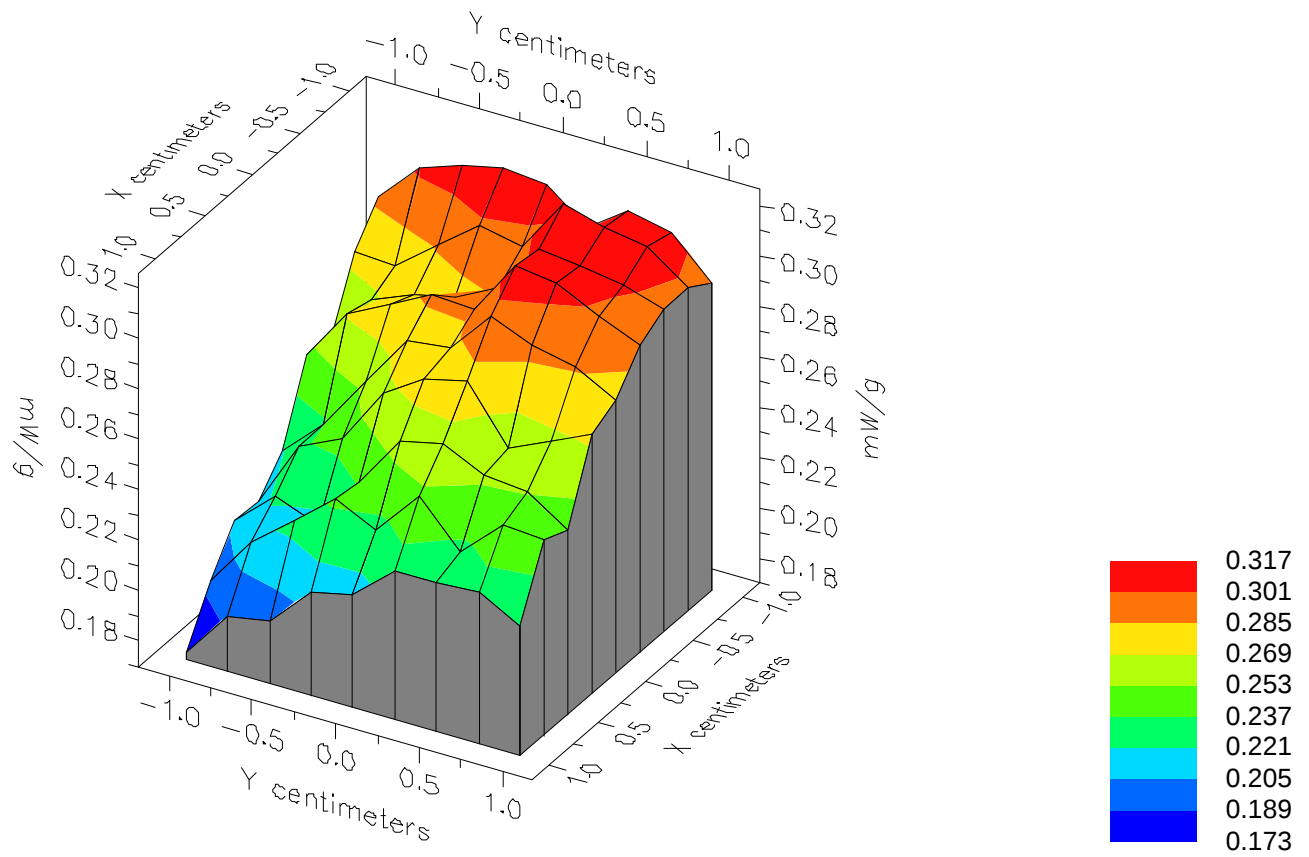


File : 00071908_ZOOM

Start : 19-Jul-100 12:37:23 pm End : 19-Jul-100 12:47:36 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

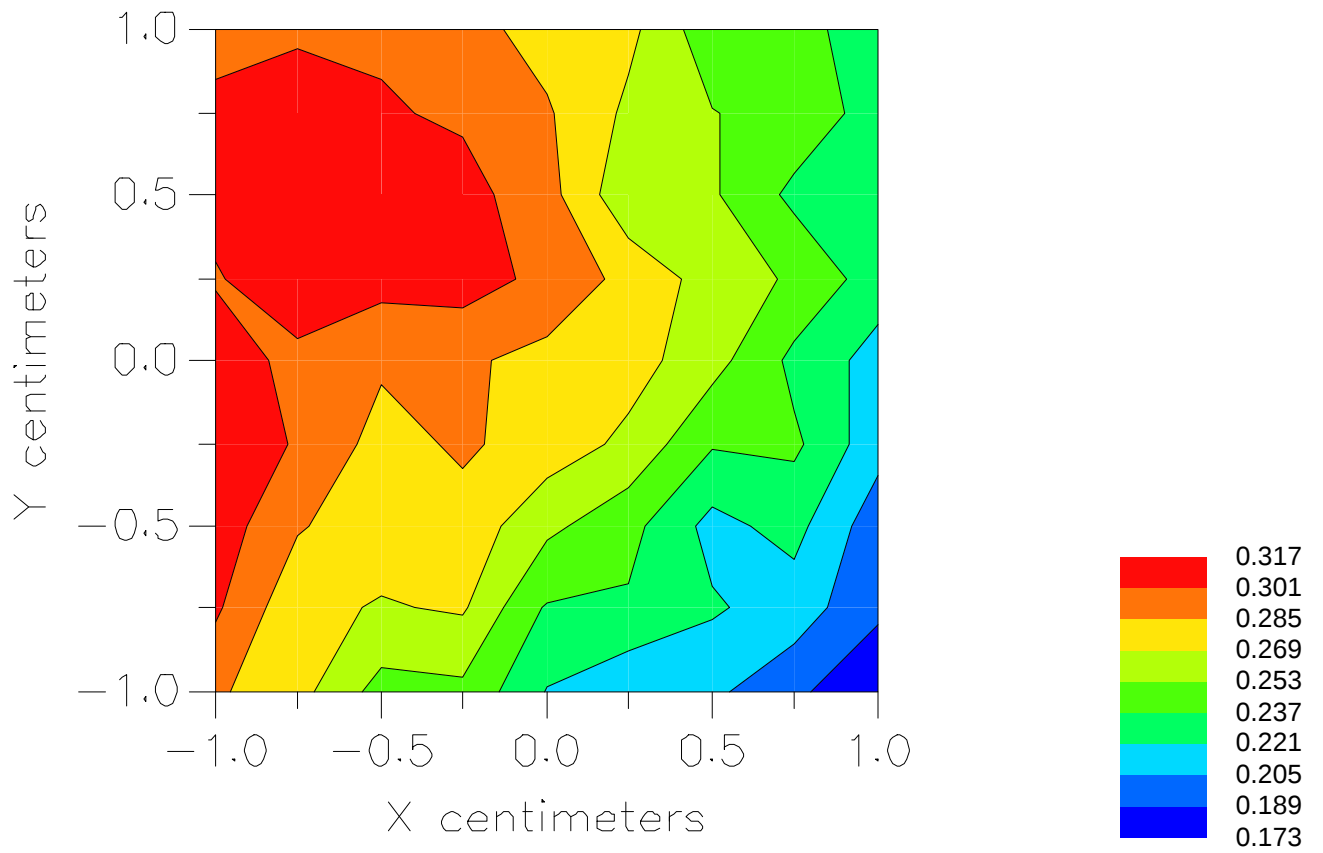

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071909_ZOOM.VLT
Start : 19-Jul-100 01:48:03 pm End : 19-Jul-100 01:56:57 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.31 MHz
Peak Trans. Pwr : 0.355 W
Start Trans. Pwr: 0.355 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - CDMA MODE
CHAN 0777 25.5 dBm conducted
BODY SAR w/ holster

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -5.000, Y = -2.250, Z = 0.000 (cm) Value = 4.517

Measured Values (volts) =
4.396E-003 3.883E-003 3.353E-003 2.684E-003 2.048E-003 1.328E-003
8.503E-004 6.348E-004 6.649E-004 9.085E-004 1.195E-003 1.340E-003
1.263E-003 9.067E-004 9.087E-004 4.257E-004 3.005E-004 2.542E-004
2.006E-004 1.776E-004 1.538E-004


Calc. Voltage @ Surface (Vs) = 0.0050

Voltage @ 1.00 cm (Vt) = 0.0027

Ave. Voltage (Vs+Vt)/2 = 0.0039

Ave. SAR over 1 g (mW/g) = 0.3194

SAR Scan
File : 00071909_ZOOM
Start : 19-Jul-100 01:48:03 pm End : 19-Jul-100 01:56:57 pm
HYUNDAI/DX-10/38;848.31MHz;W;Helical/Out;
Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

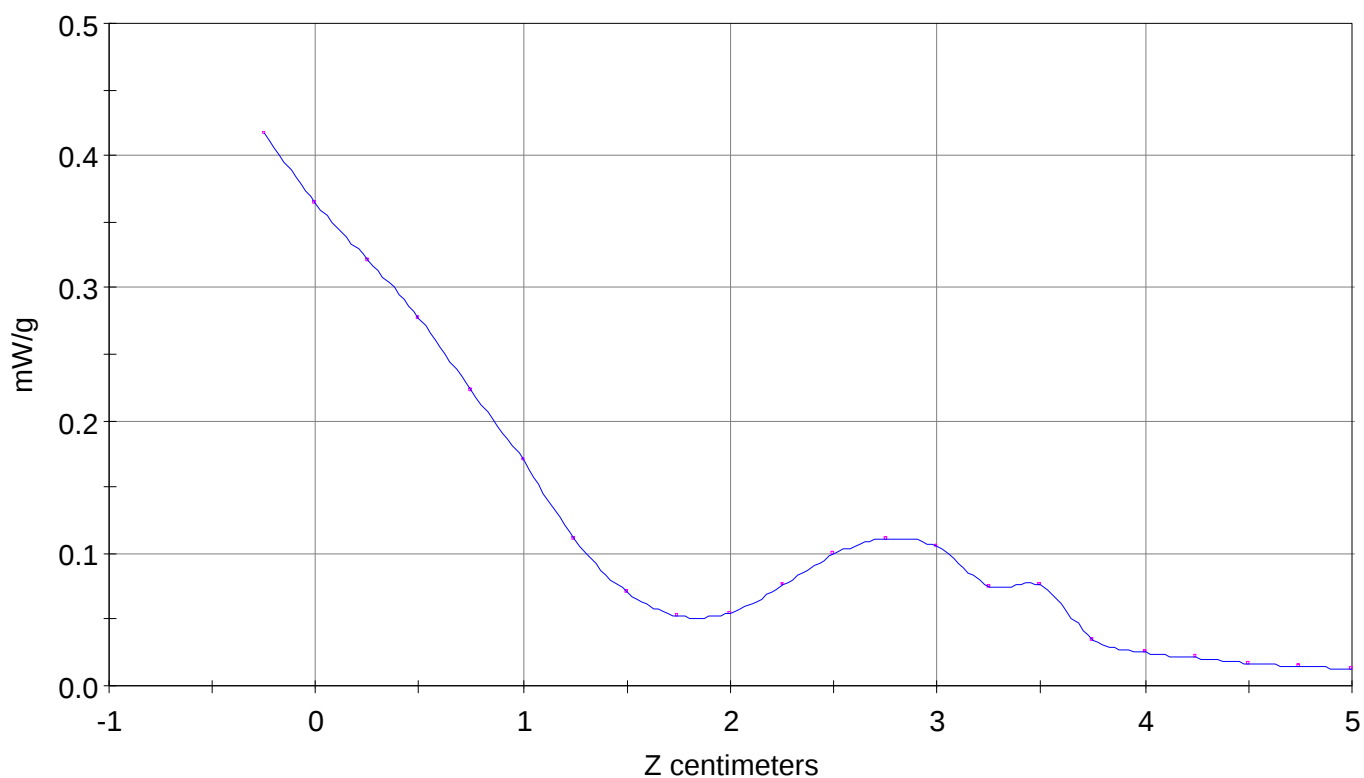


File : 00071909_ZOOM

Start : 19-Jul-100 01:48:03 pm End : 19-Jul-100 01:56:57 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

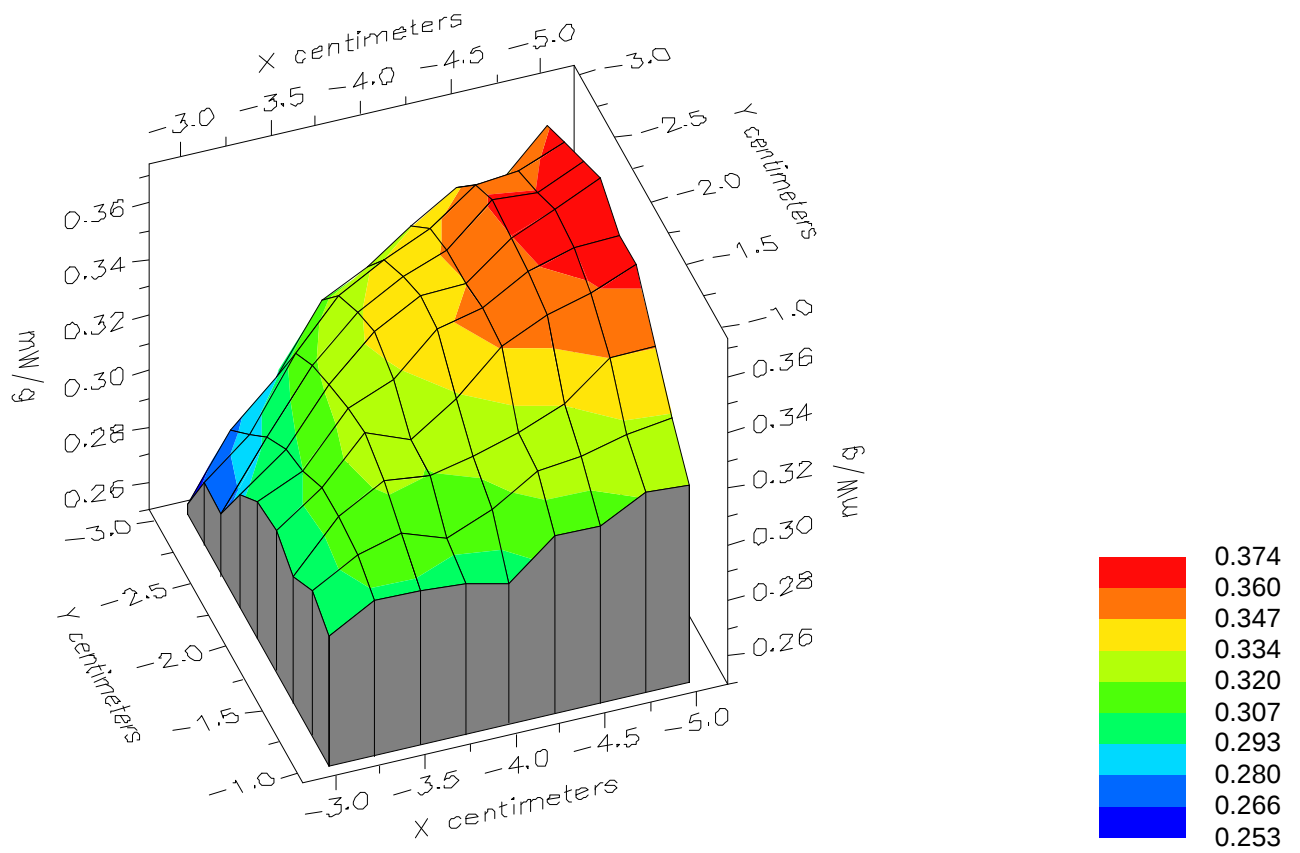


File : 00071909_ZOOM

Start : 19-Jul-100 01:48:03 pm End : 19-Jul-100 01:56:57 pm

HYUNDAI/DX-10/38;848.31MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

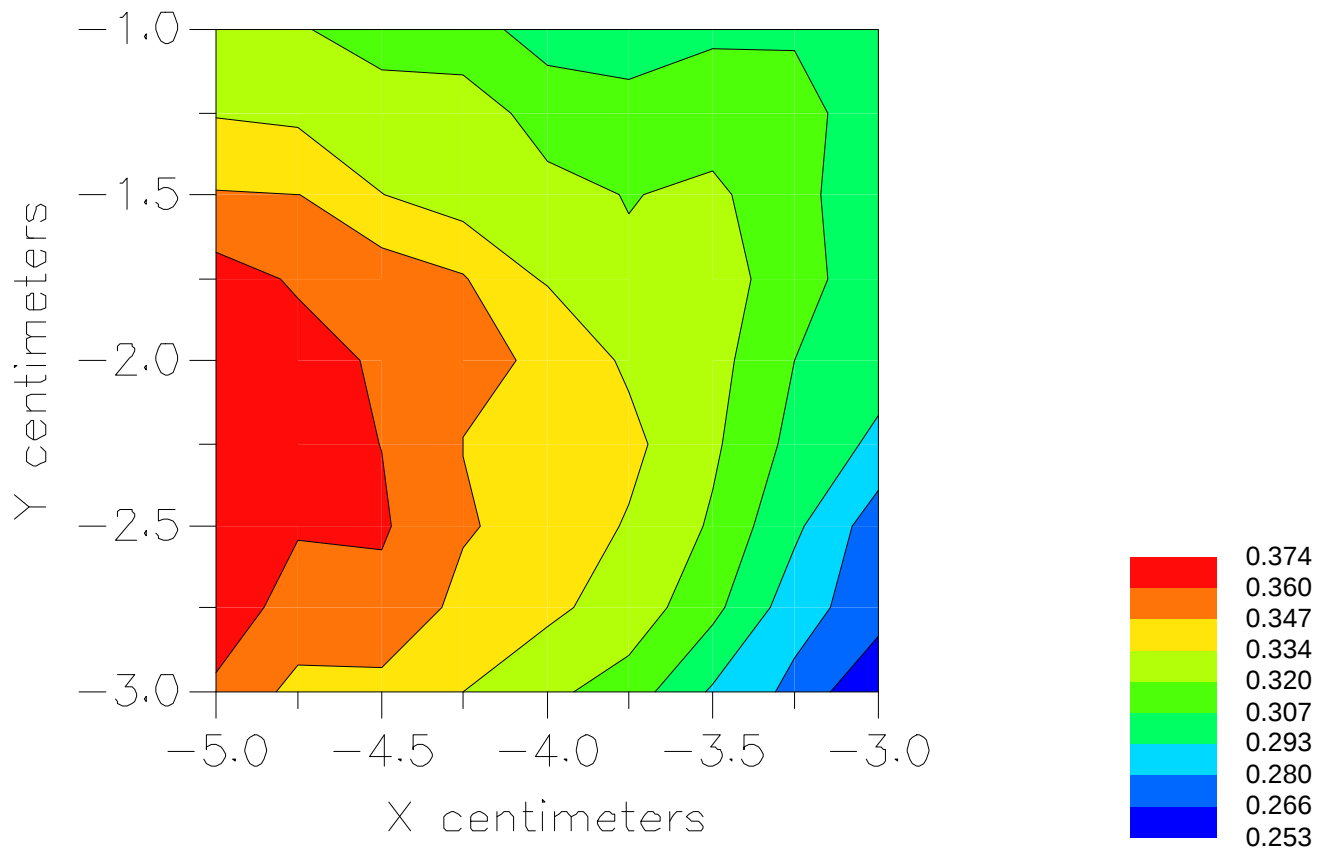

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071914_SAR.VLT
Start : 19-Jul-100 03:55:08 pm End : 19-Jul-100 04:01:17 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.97 MHz
Peak Trans. Pwr : 0.605 W
Start Trans. Pwr: 0.605 W
Antenna Type : Helical
Antenna Posn. : In
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR 10g
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0799 27.8 dBm conducted
HYUNDAI DUAL MODE PHONE Hand SAR

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -2.500, Y = -1.500, Z = 0.000 (cm) Value = 16.635

Ave. SAR over 10 g (mW/g) = 0.7430


X-Z Plane Slice Y=-1.500

File : 00071914_SAR

Start : 19-Jul-100 03:55:08 pm End : 19-Jul-100 04:01:17 pm

HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

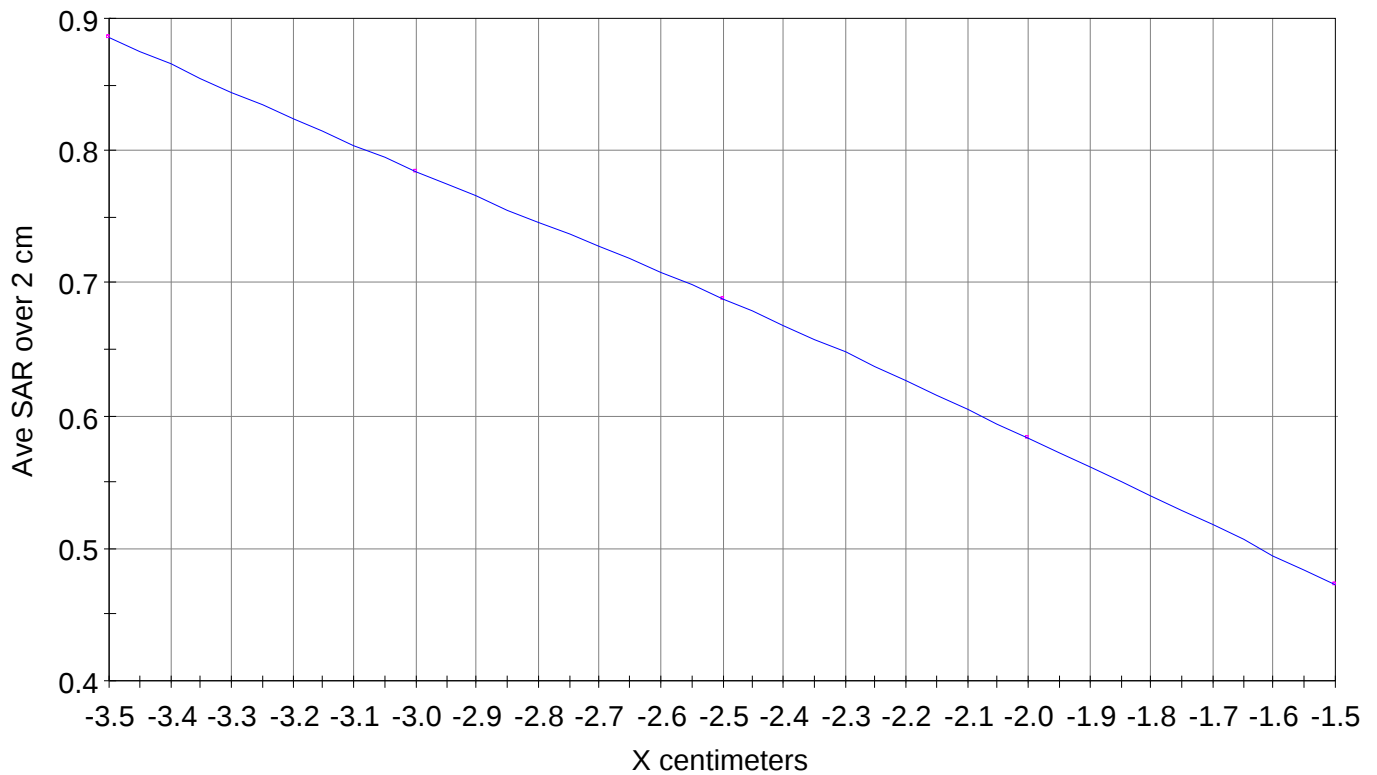


File : 00071914_SAR

Start : 19-Jul-100 03:55:08 pm End : 19-Jul-100 04:01:17 pm

HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

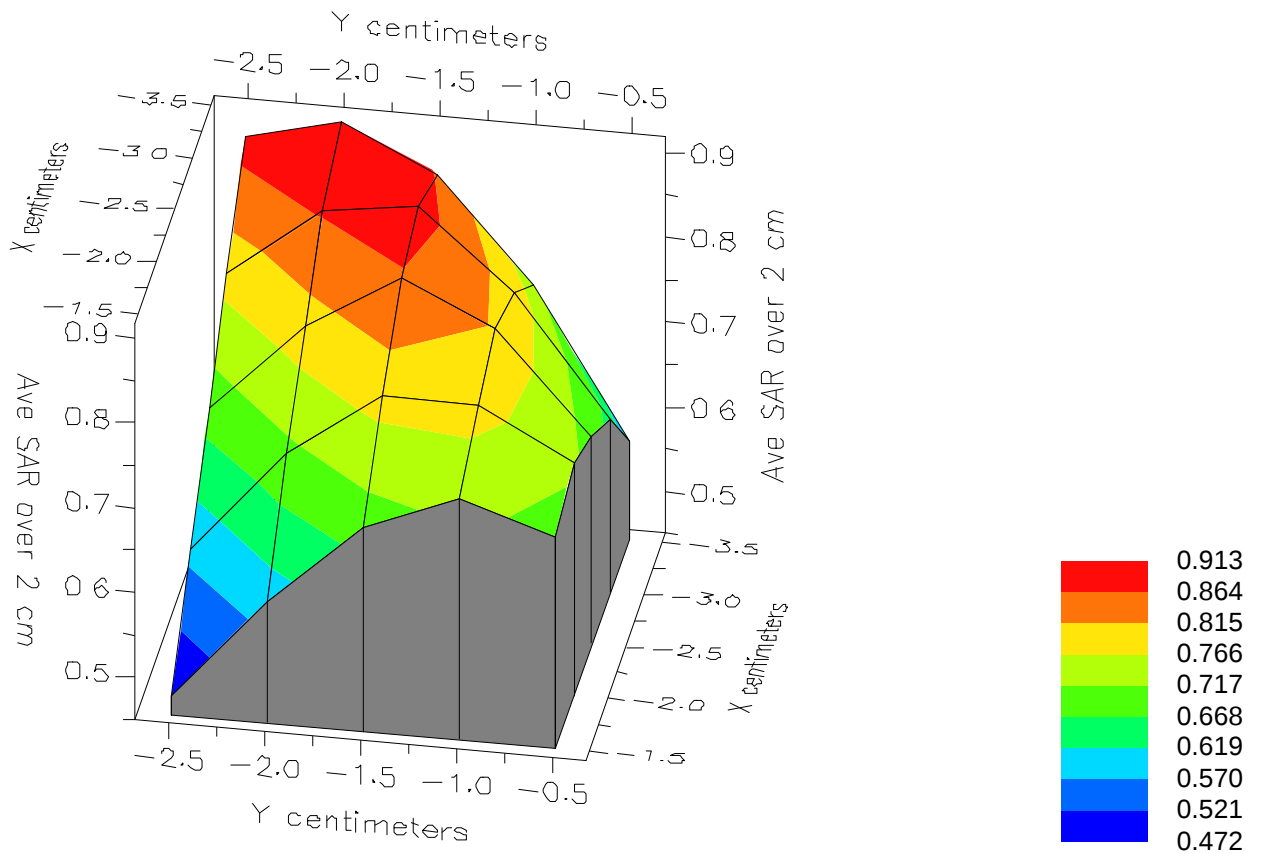


File : 00071914_SAR

Start : 19-Jul-100 03:55:08 pm End : 19-Jul-100 04:01:17 pm

HYUNDAI/DX-10/38;848.97MHz;W;Helical/In;

Body/Abdomen;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

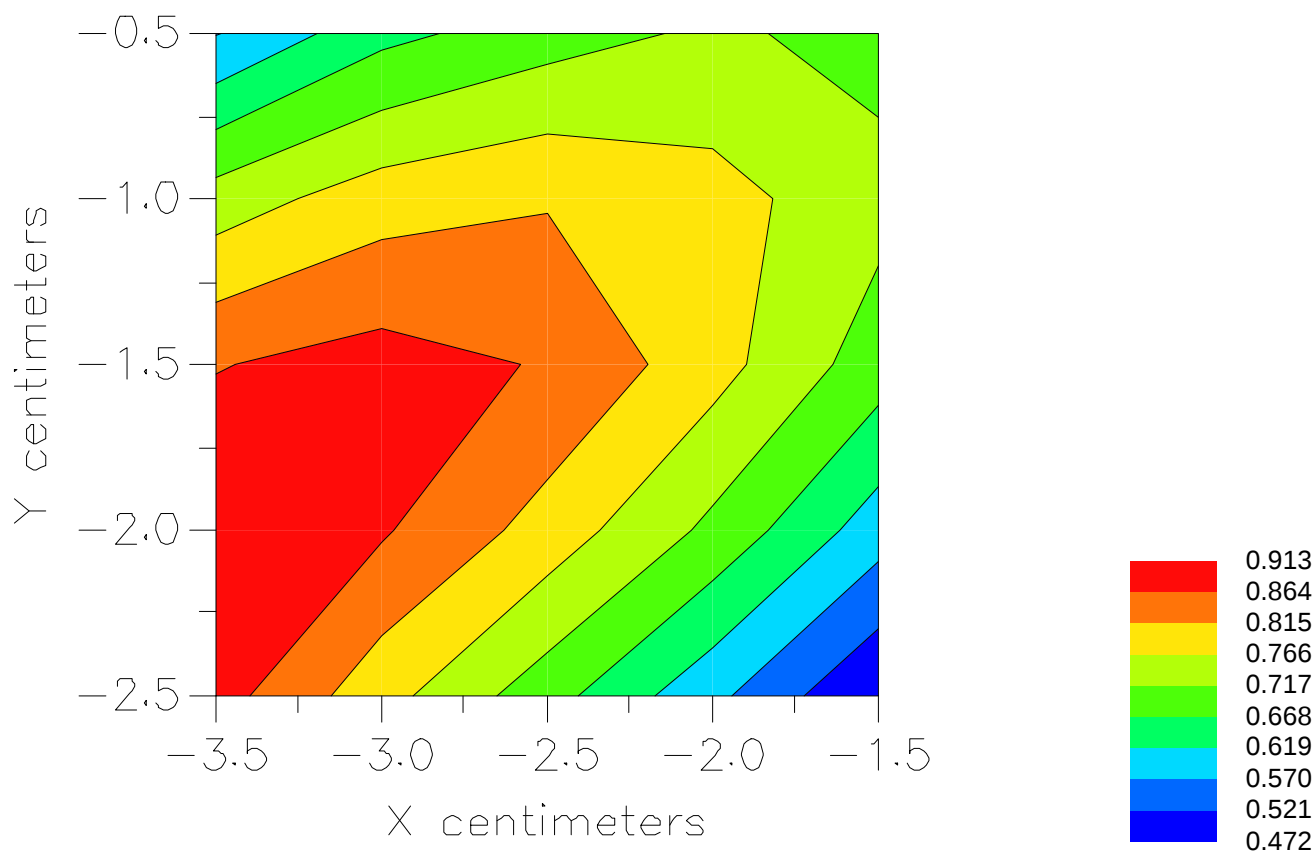

File : c:/idx3/SYSTEM/SARMEAS3/data/Normal/00071916_SAR.VLT
Start : 19-Jul-100 04:42:33 pm End : 19-Jul-100 04:48:45 pm

Radio Type : HYUNDAI
Model Number : DX-10
Serial Number : 38
Frequency : 848.97 MHz
Peak Trans. Pwr : 0.605 W
Start Trans. Pwr: 0.605 W
Antenna Type : Helical
Antenna Posn. : Out
Phantom Type : Body
Phantom Posn. : Abdomen
Scan Type : ZOOM/SAR 10g
Probe Name : PCTEST
Field Type : E Field
Orientation : 0 Degrees

Mixture Type = Muscle
Mixture Dielectric Constant = 51.700
Mixture Conductivity = 1.100

Comment :
HYUNDAI DUAL MODE PHONE - AMPS MODE
CHAN 0799 27.8 dBm conducted
HYUNDAI DUAL MODE PHONE Hand SAR

Robot : PCTEST

Probe Offset = 0.25 cm
Sensor Factor = 0.0108
Conversion Factor = 0.894

PCTEST Amplifier Channel Settings : 0.166 0.135 0.132

Max Location : X = -3.750, Y = -2.250, Z = 0.000 (cm) Value = 31.934

Ave. SAR over 10 g (mW/g) = 1.3775


X-Z Plane Slice Y=-2.250

File : 00071916_SAR

Start : 19-Jul-100 04:42:33 pm End : 19-Jul-100 04:48:45 pm

HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

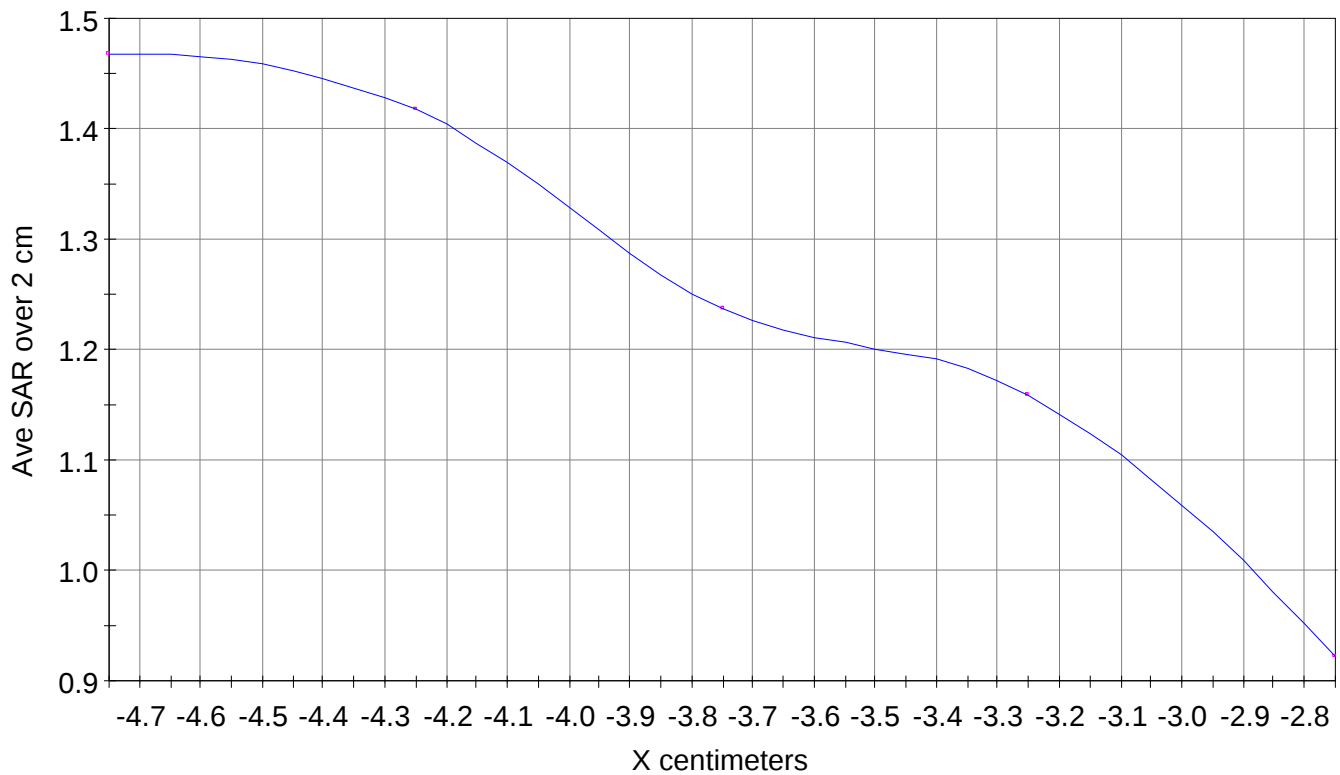


File : 00071916_SAR

Start : 19-Jul-100 04:42:33 pm End : 19-Jul-100 04:48:45 pm

HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

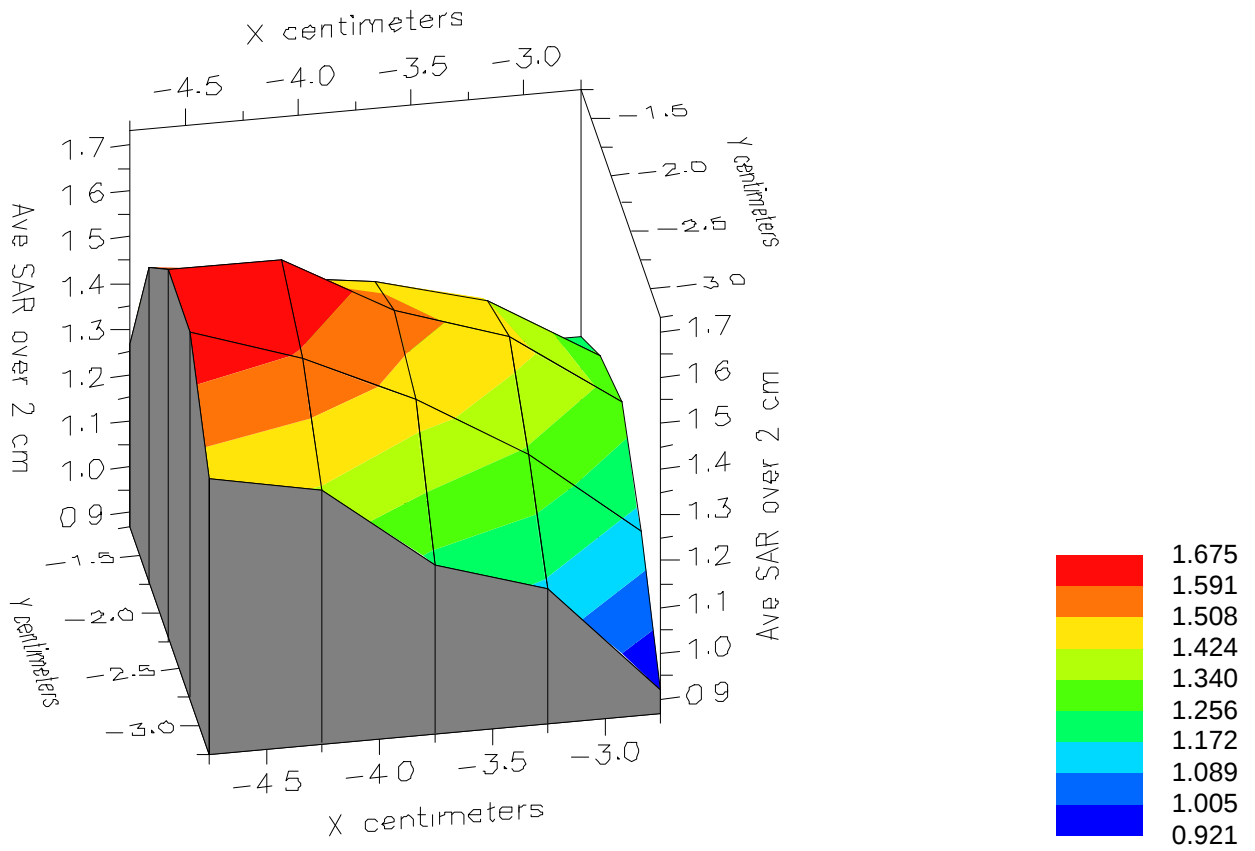

File : 00071916_SAR

Start : 19-Jul-100 04:42:33 pm End : 19-Jul-100 04:48:45 pm

HYUNDAI/DX-10/38;848.97MHz;W;Helical/Out;

Body/Abdomen;ZOOM/SAR 10g;PCTEST/E Field/0 DegreesMuscle/51.700/1.100

