


HYUNDAI
RFI Voltage Test

E.U.T.: S770
Oper. condition: 1024M758 (Hf=58.7KHz, Vrf=85Hz)
Test spec:
FCC PART 15 SUBPART B CLASS B

Start Fr.	Stop Fr.	If-BW	Detect	Att.	Meas.T.	Transd.
MHz	MHz	KHz	type	dB	s	type
0.4500	5.0000	10	Peak	LN	0.020	
5.0000	30.0000	10	Peak	LN	0.010	

dBuV
Final evaluation: Quasi Peak
* = QUASI PEAK on phase: L1

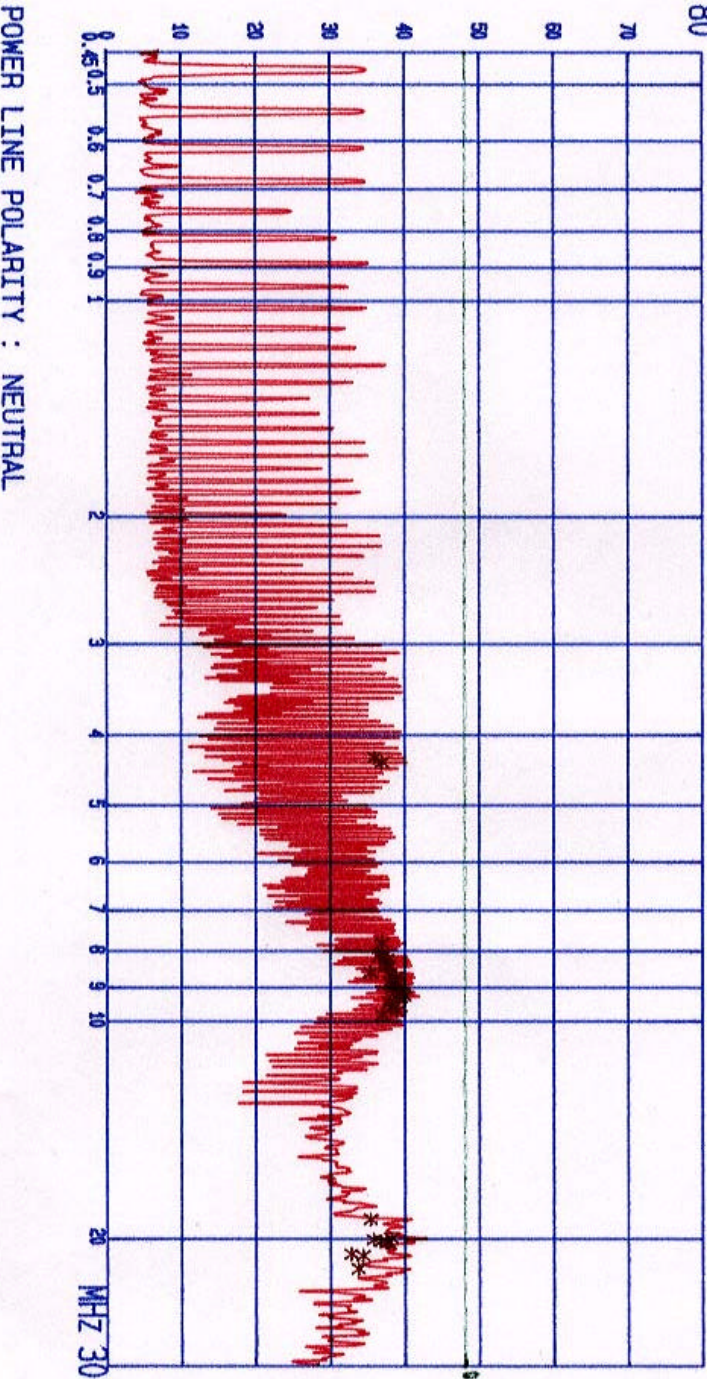

HYUNDAI RFI Voltage Test

E.U.T.: S770
 Oper. condition: 1024x768 (Hf=68.7KHz, Vf=65Hz)
 Test spec:
 FCC PART 15 SUBPART B CLASS B

Exceeding values on phase: L1			
Frequency MHz	Peak dBuV	G-Peak dBuV	Gp-Margin dB
4.3173	37.8	36.9	-12.2
4.3848	38.8	36.8	-11.3
7.8100	39.4	36.9	-11.2
8.1500	38.8	36.4	-11.7
8.2200	40.5	37.5	-10.5
8.2898	40.5	37.2	-10.9
8.3600	40.2	37.7	-10.3
8.4300	40.0	37.2	-10.8
8.5600	36.6	35.3	-12.7
8.6300	40.6	37.9	-10.1
8.7000	41.5	38.6	-9.4
8.7700	41.9	38.7	-9.3
8.8400	41.3	38.7	-9.3
8.9100	40.6	38.0	-10.0
9.0399	41.9	38.2	-9.9
9.1100	41.6	39.3	-8.7
9.1800	41.4	39.6	-8.4
9.2500	42.1	39.8	-8.2
9.3200	42.6	39.1	-8.9
9.3900	41.0	37.8	-10.2
9.5900	40.1	36.0	-10.0
9.6600	41.7	38.8	-9.2
9.8000	40.0	36.6	-11.2
18.8400	39.2	35.3	-12.7
20.0700	42.1	38.1	-9.9
20.1400	39.4	35.6	-12.4
20.2100	40.8	36.7	-11.4
20.2800	41.8	37.6	-10.5
20.3500	39.9	37.4	-10.6
21.1000	36.6	32.7	-15.3
21.1700	36.2	34.3	-19.7
22.1300	39.0	33.7	-14.3

* Limit exceeded

POWER LINE POLARITY : NEUTRAL


HYUNDAI
RFI Voltage Test

E.U.T.: S770
Oper. condition: 1024*768 (Hf=68.7kHz, Vf=85Hz)
Test spec:
FCC PART 15 SUBPART B CLASS B

Start Fr.	Stop Fr.	IF-BW	Detect	Att.	Meas. T.	Transd.
MHz	MHz	KHz	tor	dB	s	type
0.4500	5.0000	10	Peak	LN	0.020	
5.0000	30.0000	10	Peak	LN	0.010	

dBuV

Final evaluation: Quasi Peak
* = QUASI PEAK on phase: L1

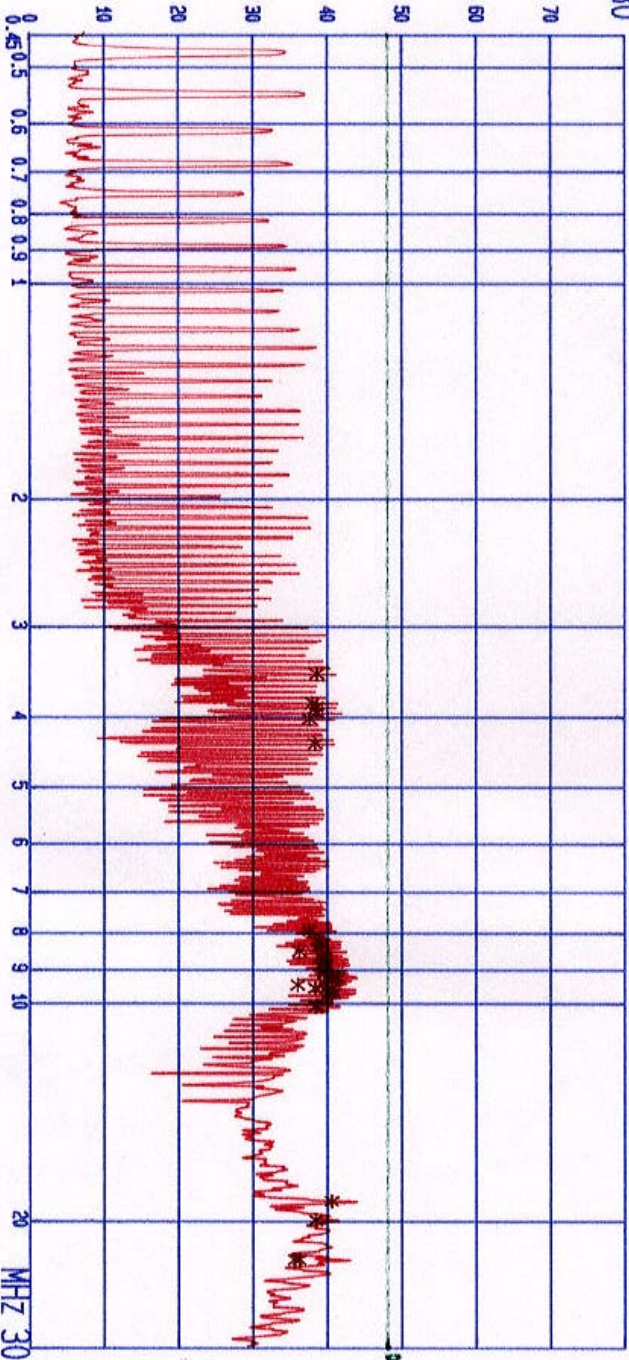

POWER LINE POLARITY : HOT

HYUNDAI RFI Voltage Test

E.U.T.: S770
 Oper. condition: 1024*768 (Hf=68.7KHz, Vf=85Hz)
 Test spec:
 FCC PART 15 SUBPART B CLASS B

Frequency MHz	Exceeding values on phase: L1		
	Peak dBu	g-peak dBu	g-peak dB
3.4950	40.5	38.6	-9.4
3.6357	41.0	38.0	-10.0
3.9032	40.7	38.7	-9.3
3.9719	41.9	38.6	-9.4
4.0418	40.3	37.6	-10.4
4.3848	40.7	38.4	-9.6
7.9500	40.4	37.7	-10.3
8.2200	41.5	38.9	-9.1
8.2899	41.9	39.3	-8.7
8.3600	41.9	38.8	-9.2
8.5000	41.0	36.3	-11.7
8.6300	41.6	39.3	-8.7
8.7000	42.8	39.6	-8.4
8.7700	42.5	39.6	-8.4
8.8400	42.9	39.6	-8.2
8.9100	41.9	39.0	-9.0
9.0399	43.2	39.6	-8.4
9.1100	43.5	39.6	-8.4
9.1800	44.5	40.6	-7.2
9.2500	44.6	41.4	-6.6
9.3200	43.3	40.6	-7.4
9.3900	43.6	39.7	-8.3
9.4600	39.5	36.1	-11.9
9.5200	41.1	38.4	-9.6
9.5900	43.6	40.7	-7.3
9.6600	43.7	40.8	-7.2
9.7300	43.3	40.3	-7.7
9.8000	43.2	39.8	-8.2
10.0700	41.9	38.6	-9.4
10.1400	42.1	38.4	-9.6
18.8400	43.9	40.6	-7.4
20.0700	42.1	38.5	-9.5
22.6800	39.3	36.3	-11.7
22.7500	42.4	35.7	-12.3

* Limit exceeded

POWER LINE POLARITY : HOT