



RF TEST REPORT

Report No.: SET2014-00180

Product: GSM/WCDMA MOBILE PHONE

FCC ID: CLNSS10501

Model No.: M4 SS1050

Applicant: MFOURTEL MEXICO S.A. DE C.V.

Address: Homero No. 136 – 101 Col. Chapultepec Morales, C.P. 11570,
Delegación Miguel Hidalgo

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District,
Shenzhen China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: GSM/WCDMA MOBILE PHONE

Brand Name.....: N/A

Trade Name.....: M4

Applicant.....: MFOURTEL MEXICO S.A. DE C.V.


Applicant Address: Homero No. 136 – 101 Col. Chapultepec Morales, C.P.
11570, Delegación Miguel Hidalgo


Manufacturer: CK Telecom Limited

Manufacturer Address: Technology Road.High-Tech Development Zone. Heyuan,
Guangdong,P.R.China.

Test Standards: 47 CFR Part 2(10-1-12 Edition) Frequency Allocations and
Radio Treaty Matters; General Rules and Regulations
47 CFR Part 22(10-1-12 Edition) Public Mobile Services
47 CFR Part 24(10-1-12 Edition)Personal Communications
Services

Test Result.....: PASS

Tested by : 
2014.01.04
Lu Lei, Test Engineer

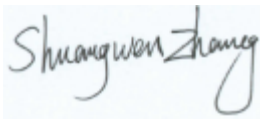Reviewed by : 
2014.01.04
Shuangwen Zhang, Senior EGINEER


Approved by.....: 
2014.01.04
Wu Li'an, Manager



Table of Contents

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results.....5**
- 1.3 Facilities and Accreditations6**
- 2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS7**
- 2.1 Conducted RF Output Power7**
- 2.2 Peak to Average Ratio15**
- 2.3 99% Occupied Bandwidth19**
- 2.4 Frequency Stability.....32**
- 2.5 Conducted Out of Band Emissions34**
- 2.6 Band Edge41**
- 2.7 Transmitter Radiated Power (EIRP/ERP)44**
- 2.8 Radiated Out of Band Emissions49**
- ANNEX A ACCREDITATION CERTIFICATE63**
- ANNEX B PHOTOGRAPHS OF THE EUT64**
- ANNEX C PHOTOGRAPHS OF THE TEST SETUP65**

Change History		
Issue	Date	Reason for change
1.0	Jan.04 2014	First edition



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-12 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-12 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2	2.1049	99% Occupied Bandwidth	PASS
3	2.1055 22.355 24.235	Frequency Stability	PASS
4	2.1051 2.1057 22.917 24.238	Conducted Out of Band Emissions	PASS
5	2.1051 2.1057 22.917 24.238	Band Edge	PASS
6	22.913 24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053 2.1057 22.917 24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010



1.3 Facilities and Accreditations

1.3.1 Test Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, Renewal date Nov. 19, 2011, valid time is until Nov. 18, 2014.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

1. Test Setup:

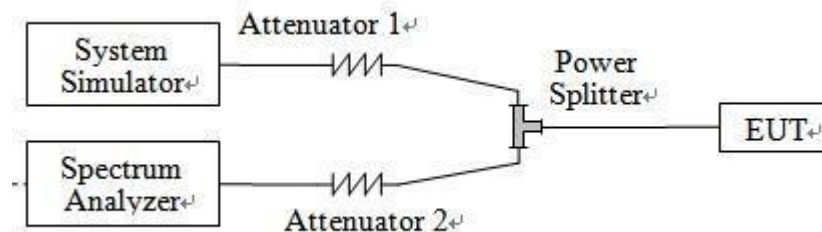

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
System Simulator	Agilent	E5515C	MY47510547	2014.09.13
Spectrum Analyzer	R&S	FSP40	MY4510810	2014.06.09
Spectrum Analyzer	Agilent	E4407B	1164.4391.40	2014.06.09
Power Meter	Agilent	E4418B	GB43318055	2014.06.09
Power Splitter	Weinschel	1506A	NW521	2014.06.11
Attenuator 1	MCE/weinschel	10dB	BN3693	2014.06.11
Attenuator 2	Resnet	3dB	(n.a.)	2014.06.09



2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.


1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Verdict
			dBm	Refer to Plot	
GSM 850MHz	128	824.2	32.23	Plot A1 to A3	PASS
	190	836.6	32.24		PASS
	251	848.8	32.18		PASS
GSM 1900MHz	512	1850.2	29.76	Plot B1 to B3	PASS
	661	1880.0	29.75		PASS
	810	1909.8	29.82		PASS
GPRS 850MHz	128	824.2	31.46	Plot C1 to C3 ^{Note 1}	PASS
	190	836.6	31.49		PASS
	251	848.8	31.39		PASS
GPRS 1900MHz	512	1850.2	29.01	Plot D1 to D3 ^{Note 1}	PASS
	661	1880.0	29.19		PASS
	810	1909.8	29.29		PASS


Note 1: For the GPRS model, all the slots were tested and just the worst data was record in this report.




2. GSM Model Test Plots:

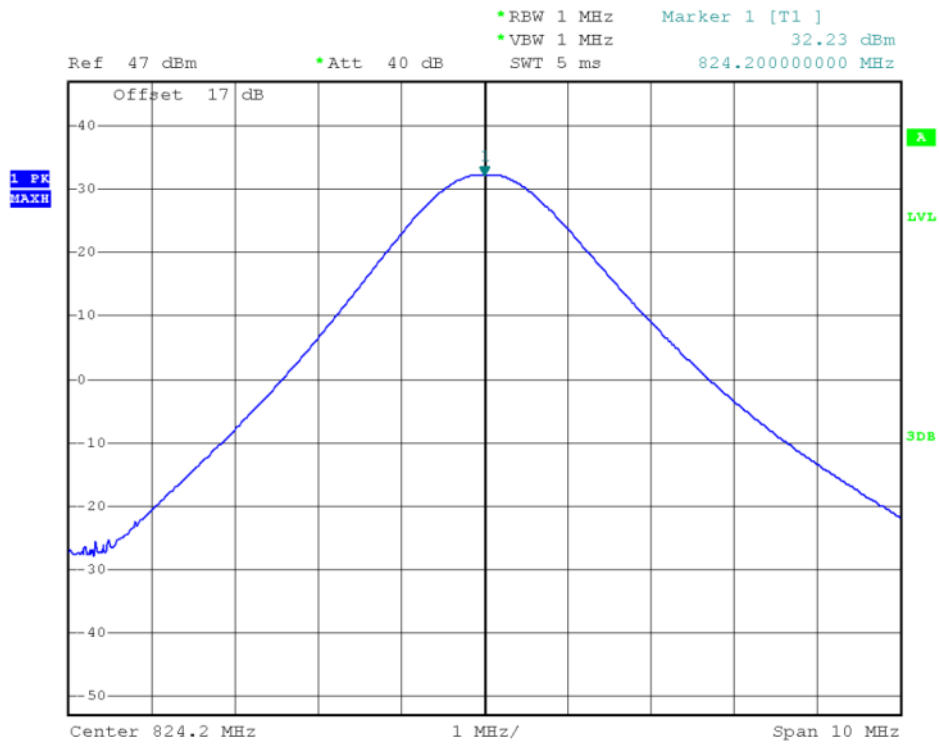


(Plot A1: GSM 850MHz Channel = 128)

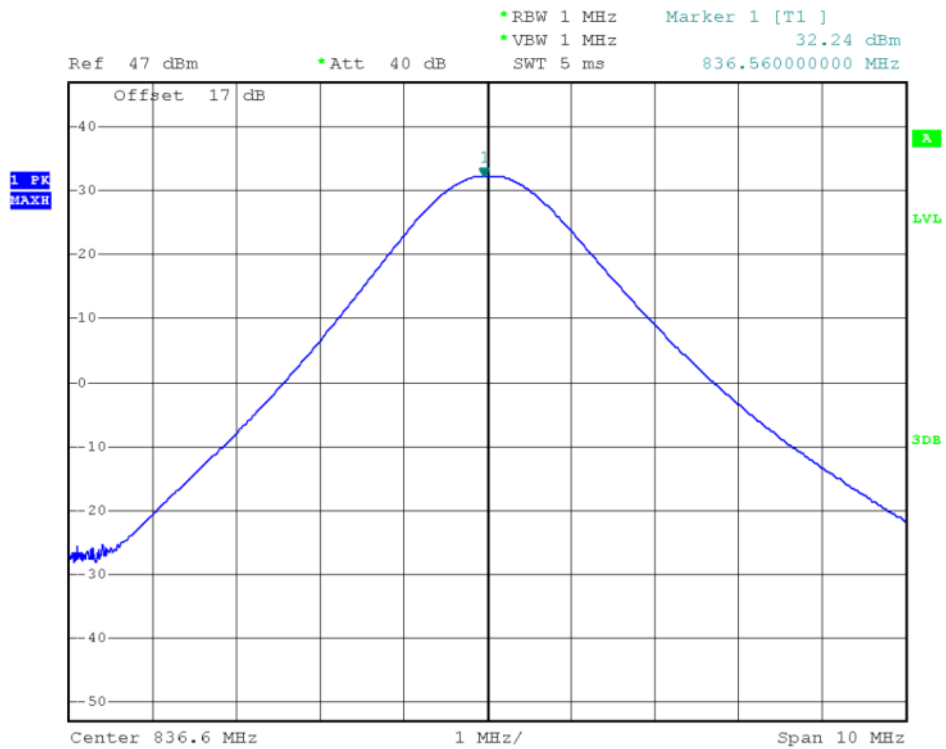


(Plot A2: GSM 850MHz Channel = 190)

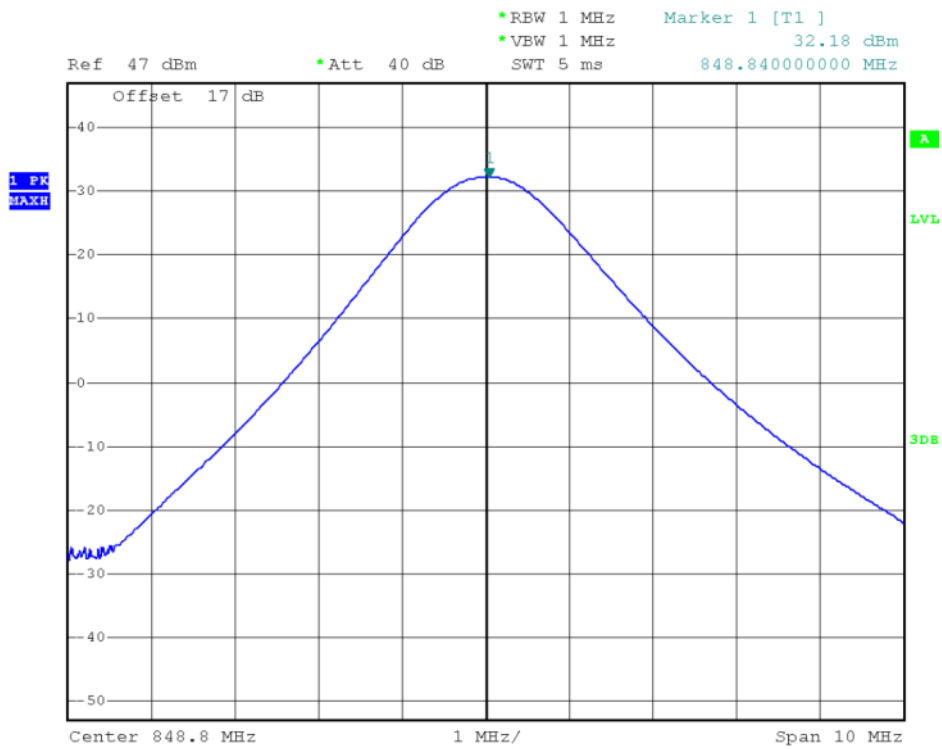


(Plot A3: GSM 850MHz Channel = 251)

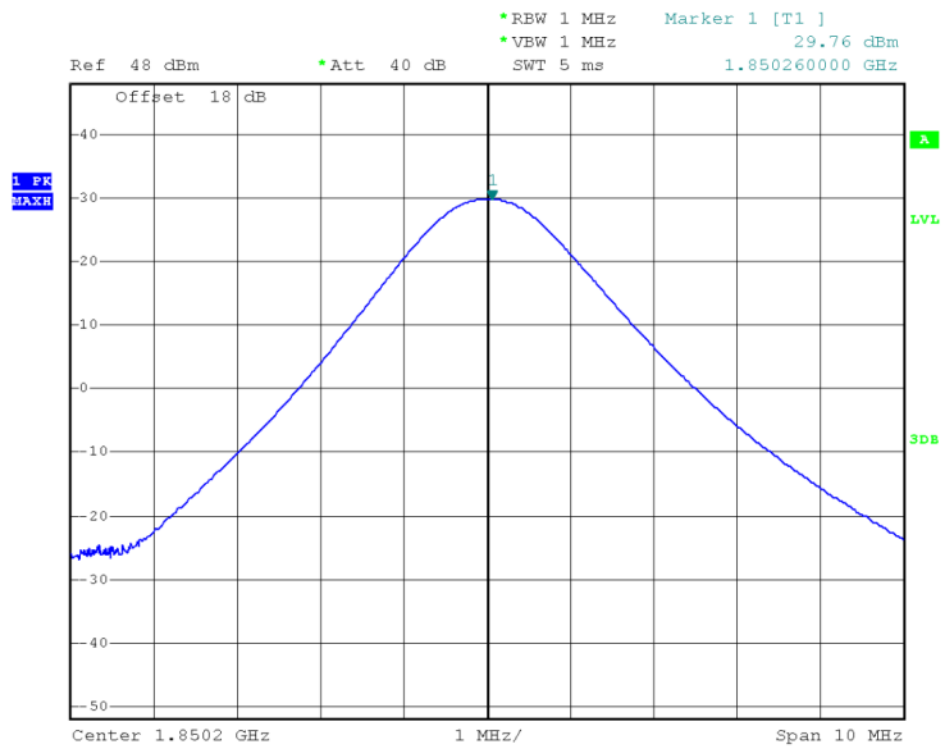

(Plot B1: GSM 1900MHz Channel = 512)

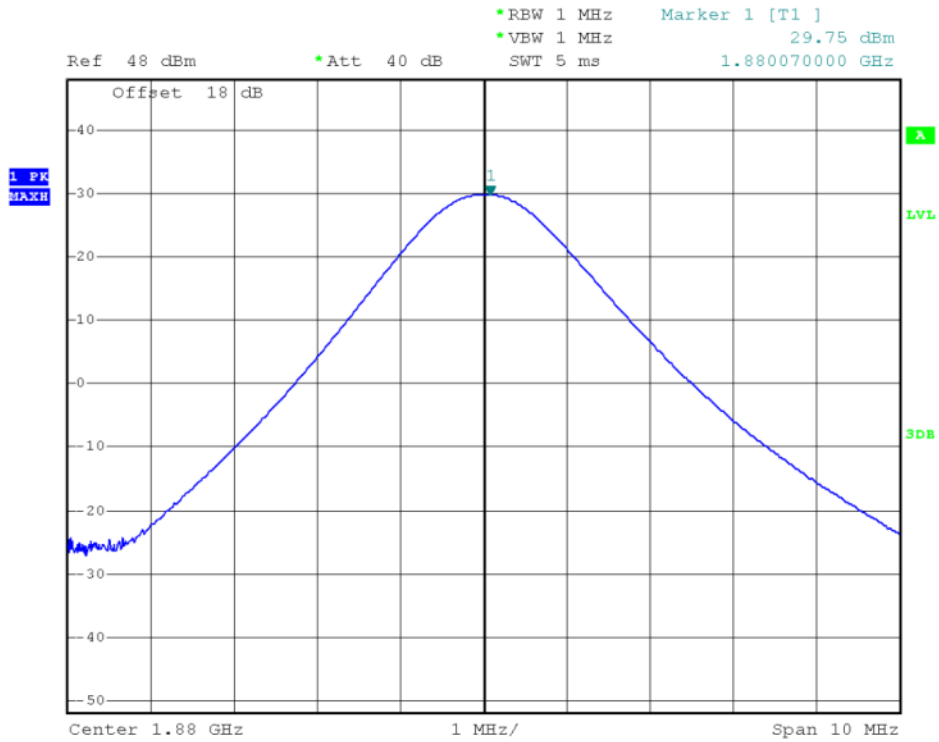


(Plot B2: GSM 1900MHz Channel = 661)

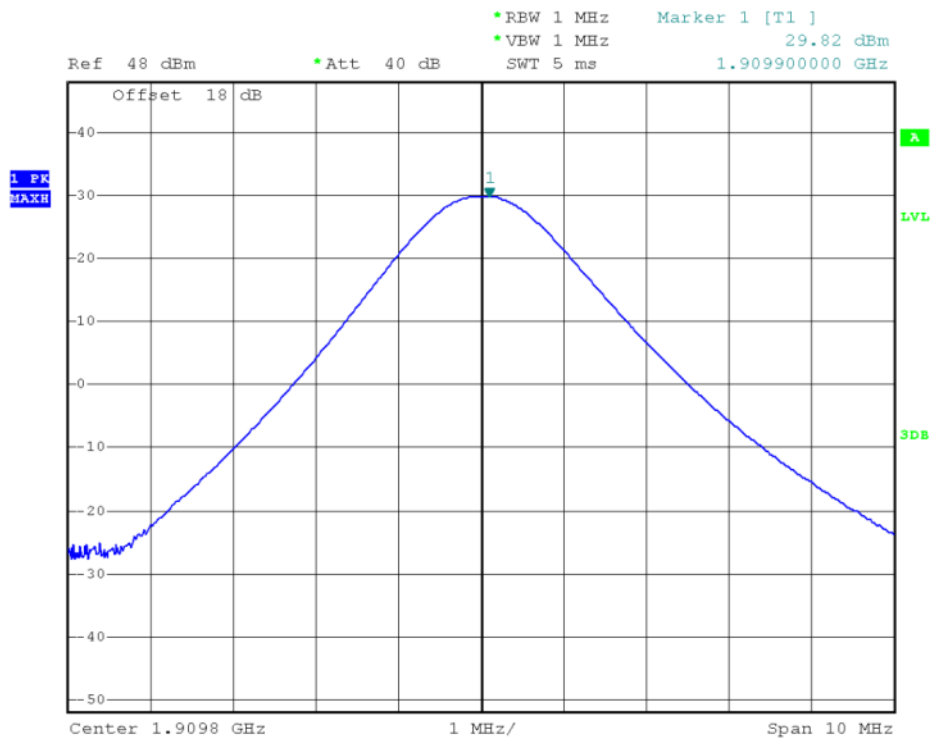


(Plot B3: GSM 1900MHz Channel = 810)




3. GPRS Model Test Plots:

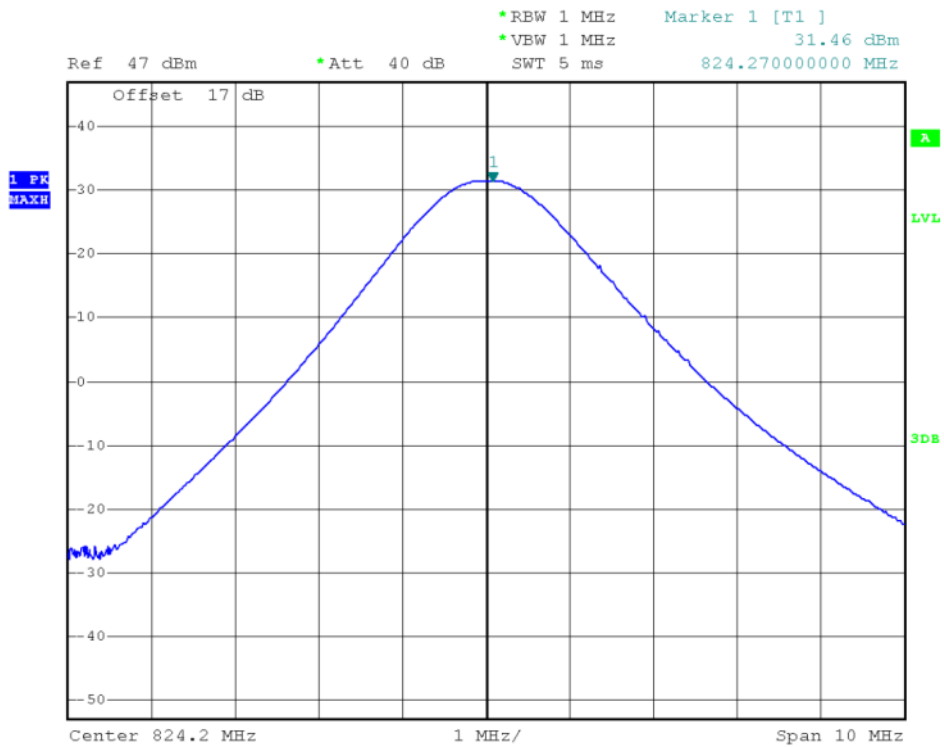


(Plot C1: GPRS 850MHz Channel = 128)

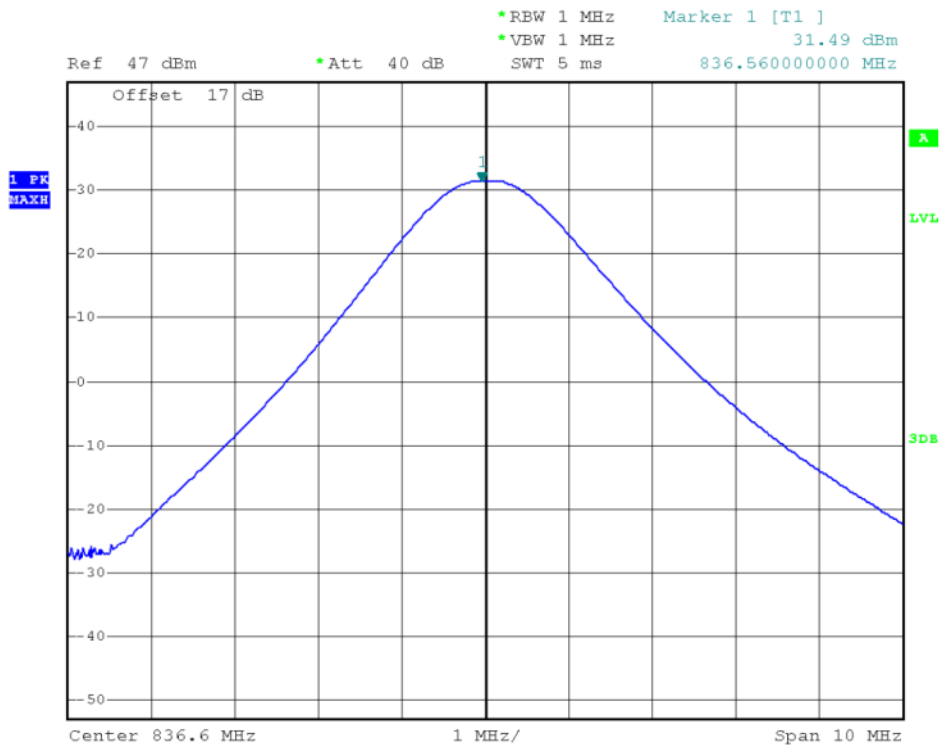


(Plot C2: GPRS 850MHz Channel = 190)

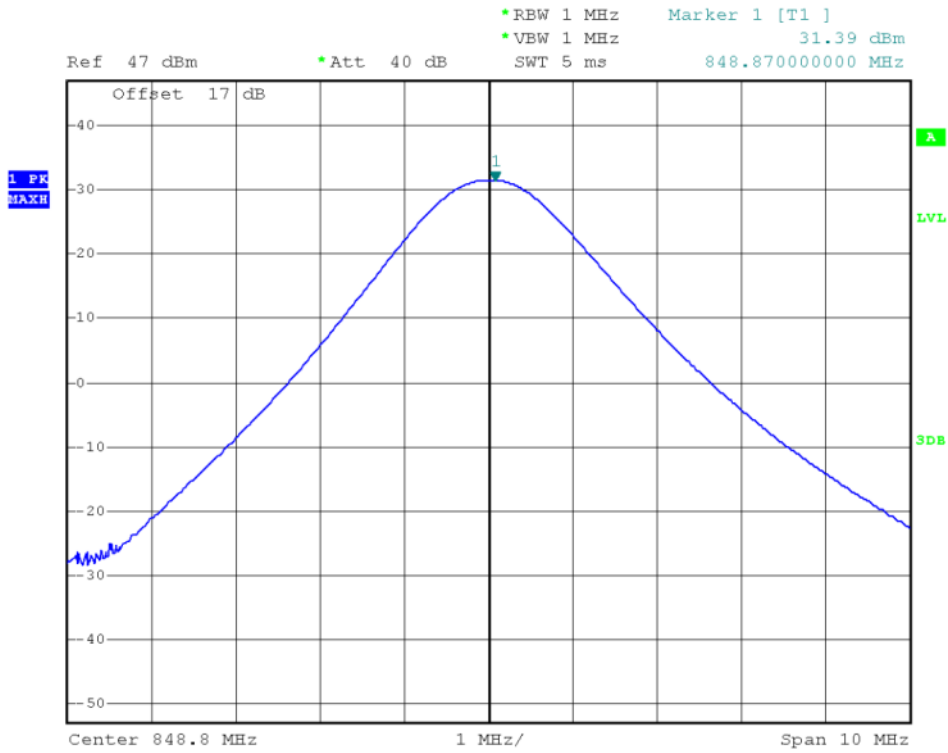


(Plot C3: GPRS 850MHz Channel = 251)

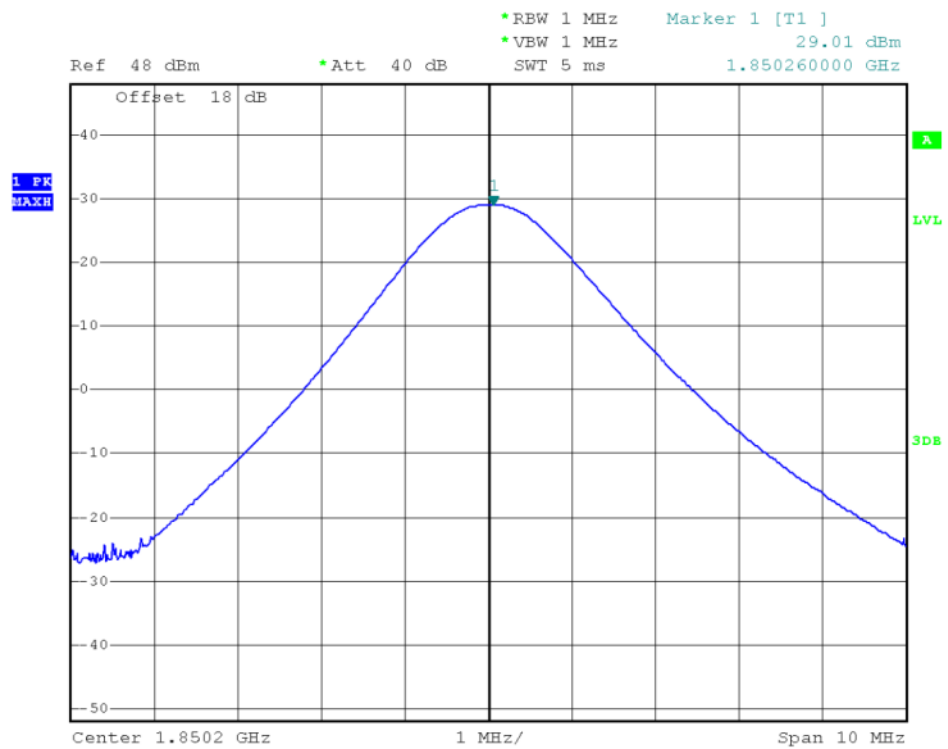

(Plot D1: GPRS 1900MHz Channel = 512)

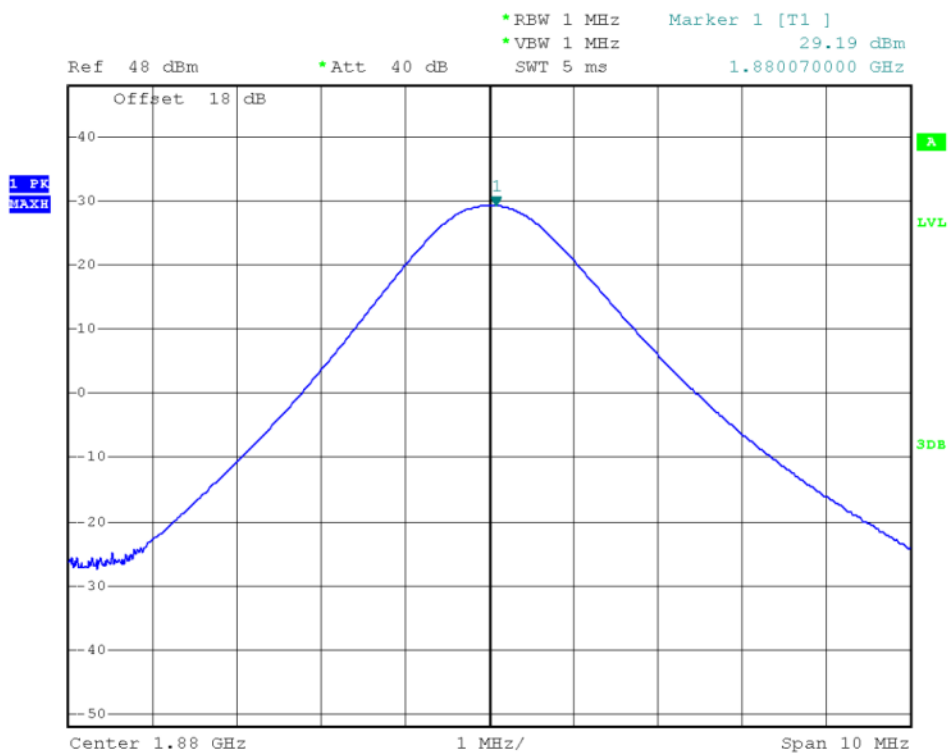

(Plot D2: GPRS 1900MHz Channel = 661)

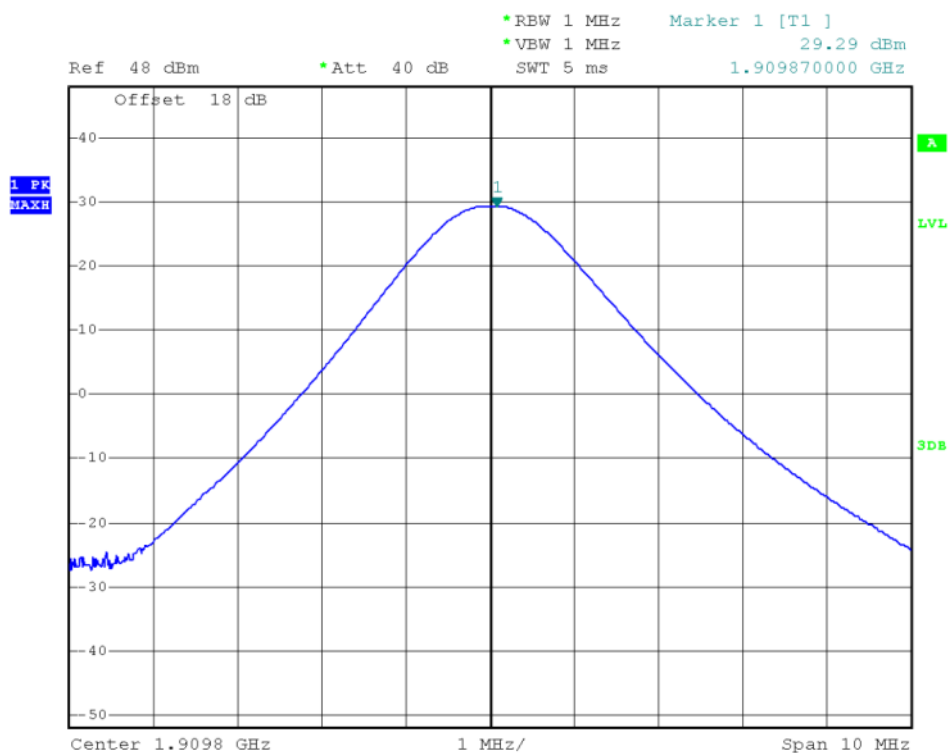

(Plot D3: GPRS 1900MHz Channel = 810)



2.2 Peak to Average Ratio

2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A. For GSM operating mode:

- a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- b. Set EUT in maximum output power, and triggered the bust signal.
- c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.


B. For UMTS operating mode:

- a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.


1. Test Verdict:

Band	Channel	Frequency (MHz)	Peak to Average ratio		Limit dBm	Verdict
			dBm	Refer to Plot		
GSM 1900MHz	512	1850.2	0.07	Plot A1-1 to A3-2	13	PASS
	661	1880.0	0.07			PASS
	810	1909.8	0.06			PASS


2. GSM Model Test Plots:

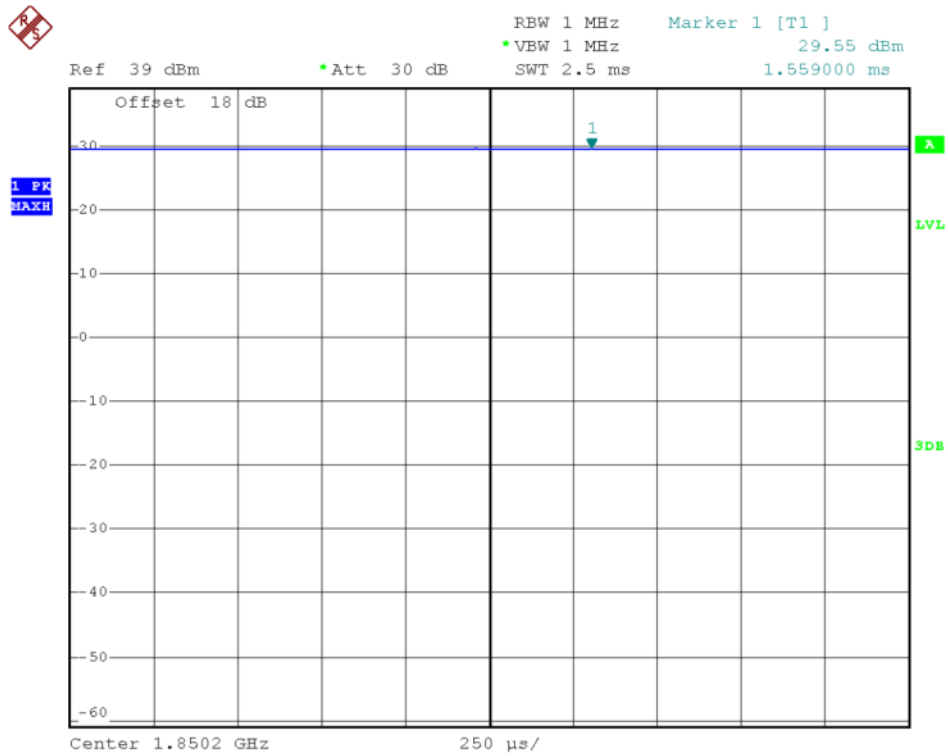


(Plot A1-1: GSM 1900 MHz Channel = 512)

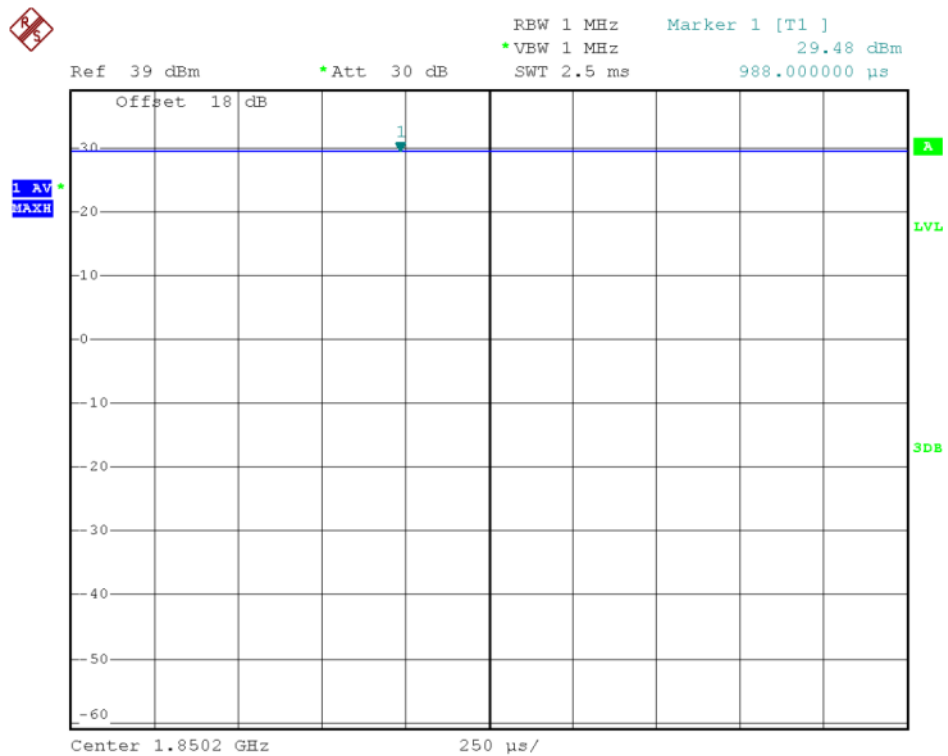


(Plot A1-2: GSM 1900 MHz Channel = 512)

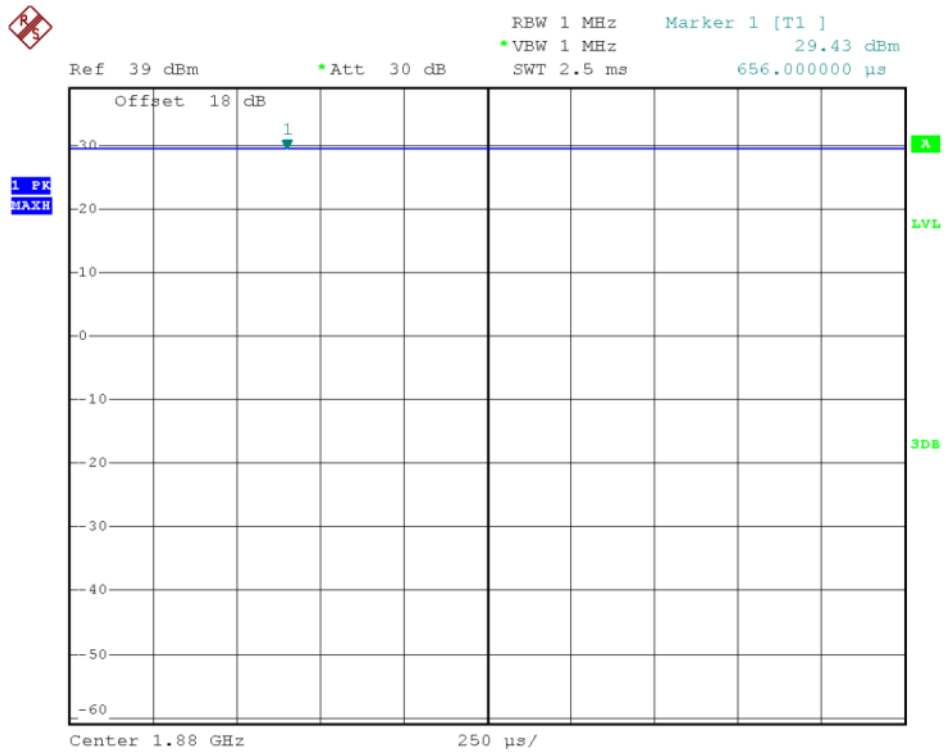


(Plot A2-1: GSM 1900 MHz Channel = 661)

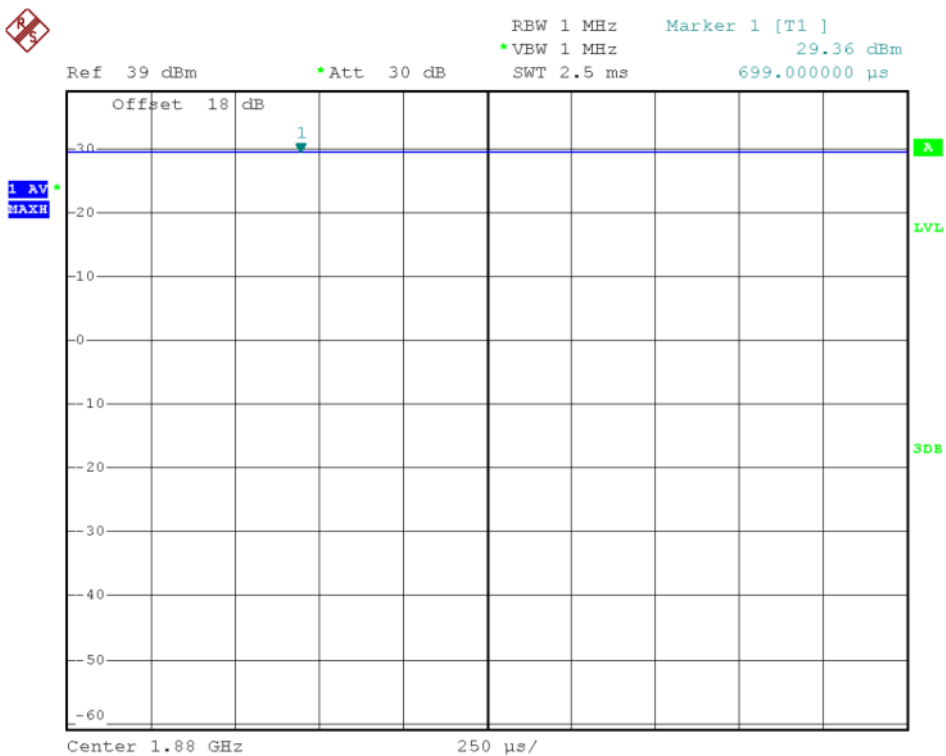

(Plot A2-2: GSM 1900 MHz Channel = 661)

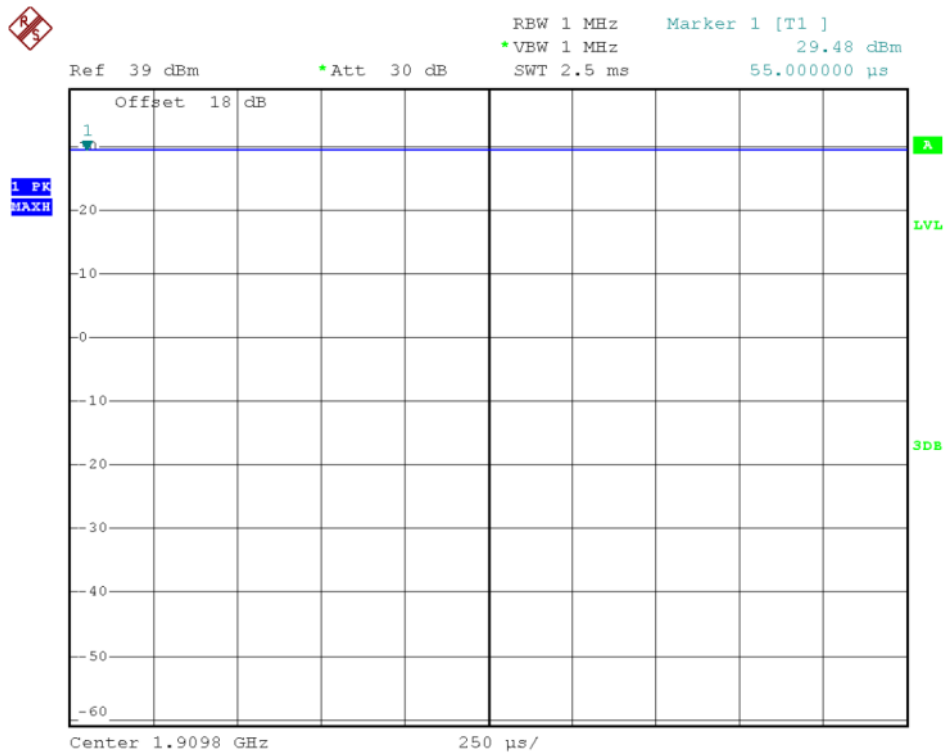

(Plot A3-1: GSM 1900MHz Channel = 810)

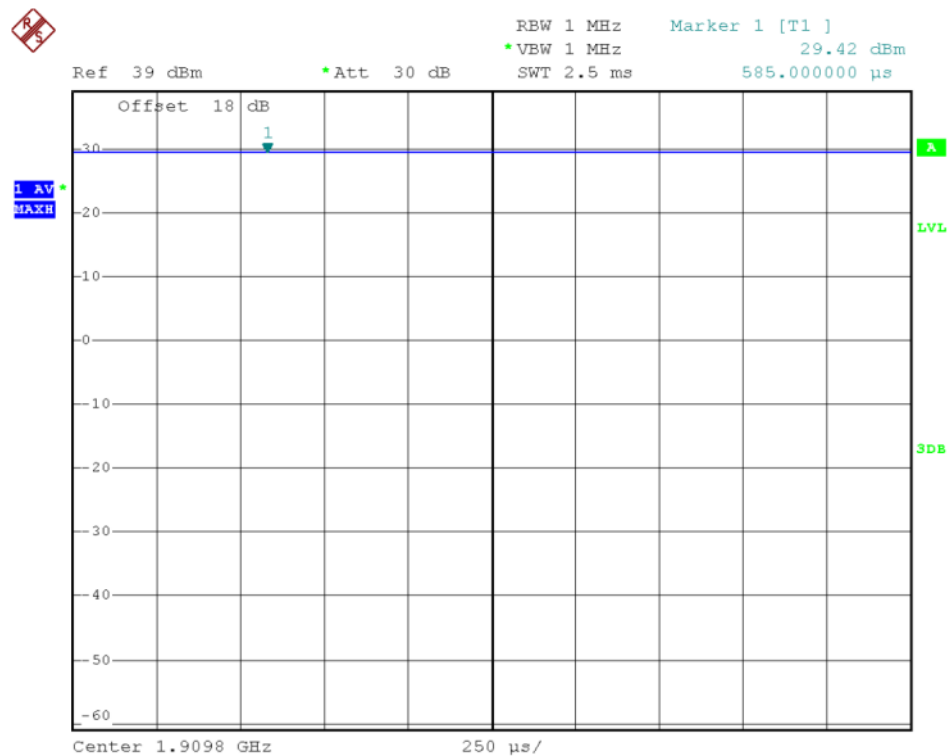

(Plot A3-2: GSM 1900MHz Channel = 810)



2.3 99% Occupied Bandwidth

2.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.3.2 Test Description

See section 2.1.2 of this report.


2.3.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.


1. Test Verdict:

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
GSM 850MHz	128	824.2	320KHz	246KHz	Plot A1-A2
	190	836.6	318KHz	246KHz	Plot B1-B2
	251	848.8	320KHz	248KHz	Plot C1-C2
GSM 1900MHz	512	1850.2	318KHz	242KHz	Plot D1-D2
	661	1880.0	318KHz	244KHz	Plot E1-E2
	810	1909.8	314KHz	246KHz	Plot F1-F2
GPRS 850MHz	128	824.2	318KHz	244KHz	Plot G1-G2
	190	836.6	312KHz	244KHz	Plot H1-H2
	251	848.8	324KHz	248KHz	Plot I1-I2
GPRS 1900MHz	512	1850.2	318KHz	246KHz	Plot J1-J2
	661	1880.0	318KHz	248KHz	Plot K1-K2
	810	1909.8	320KHz	244KHz	Plot L1-L2


2. Test Plots:

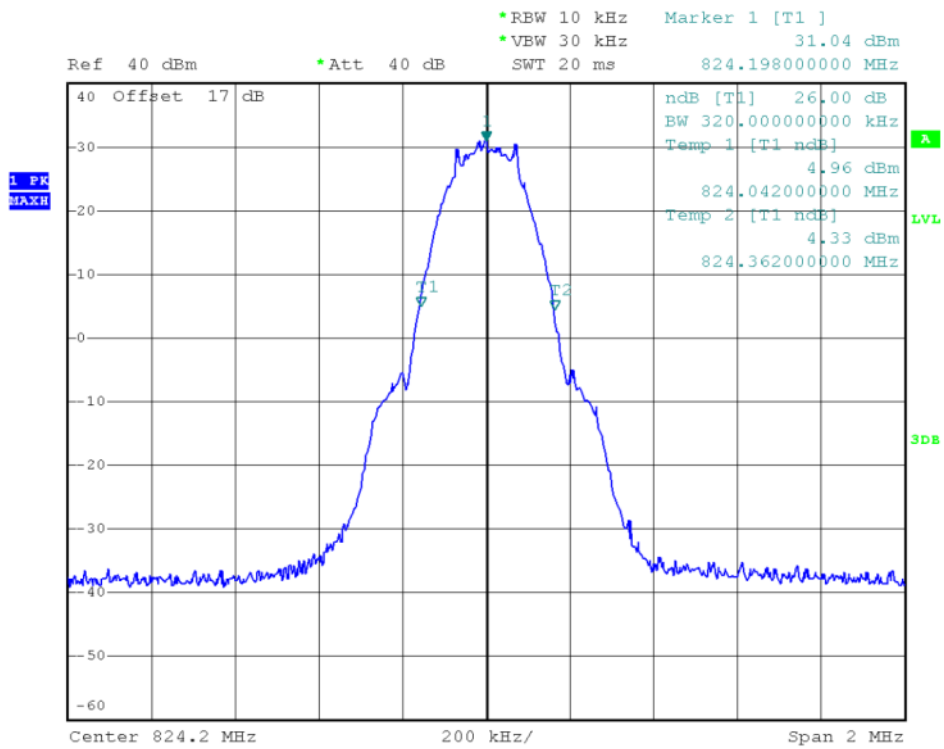


(Plot A1: GSM 850MHz Channel = 128)

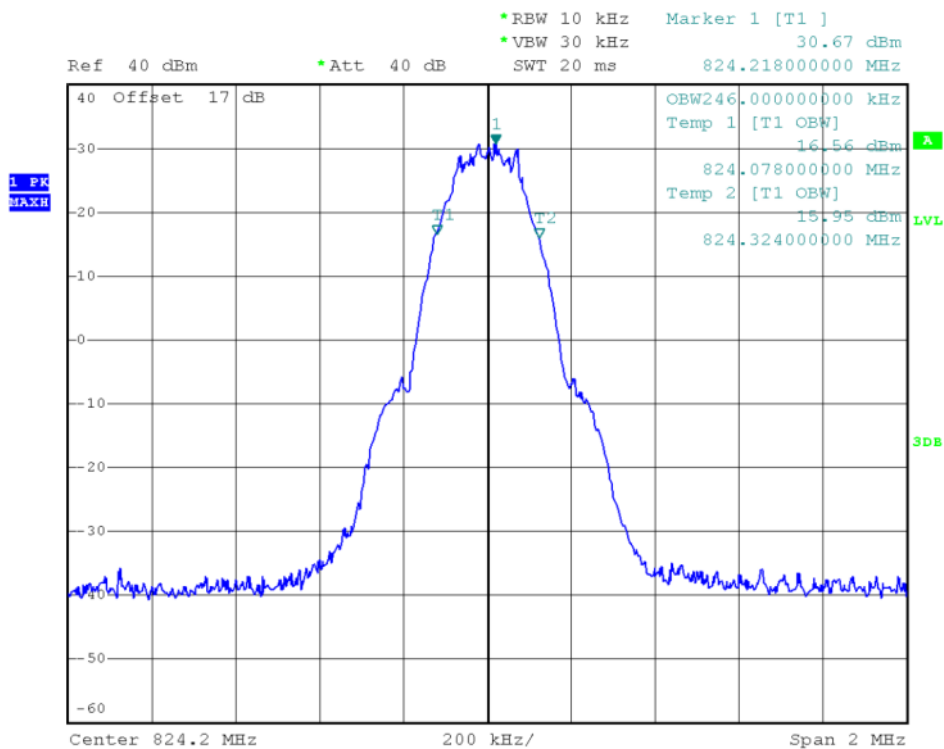


(Plot A2: GSM 850MHz Channel = 128)

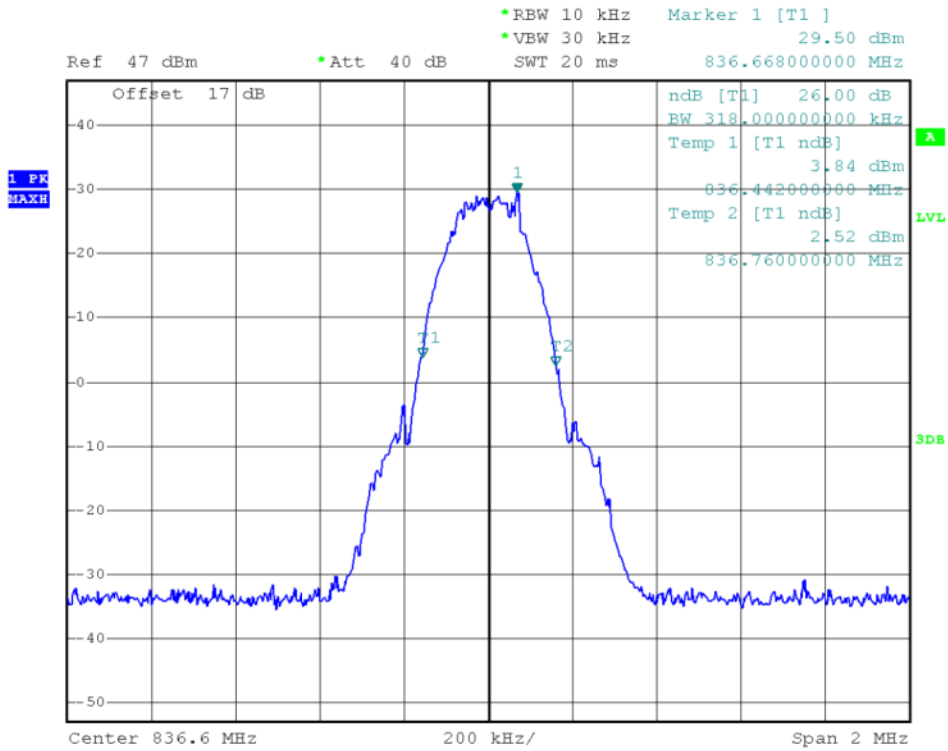


(Plot B1: GSM 850MHz Channel = 190)

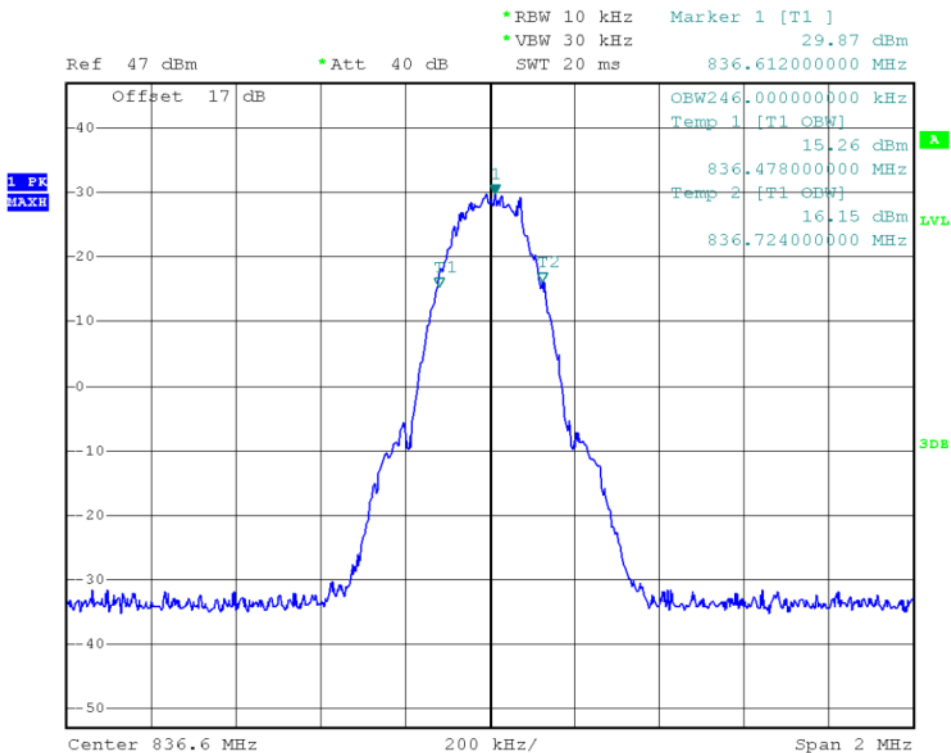


(Plot B2: GSM 850MHz Channel = 190)

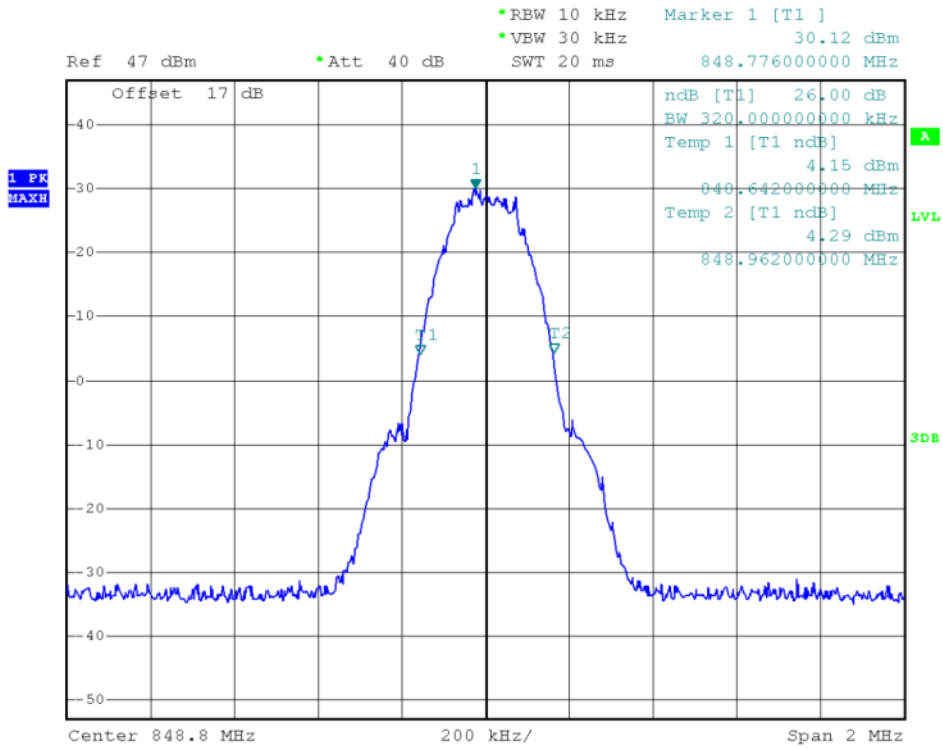


(Plot C1: GSM 850MHz Channel = 251)

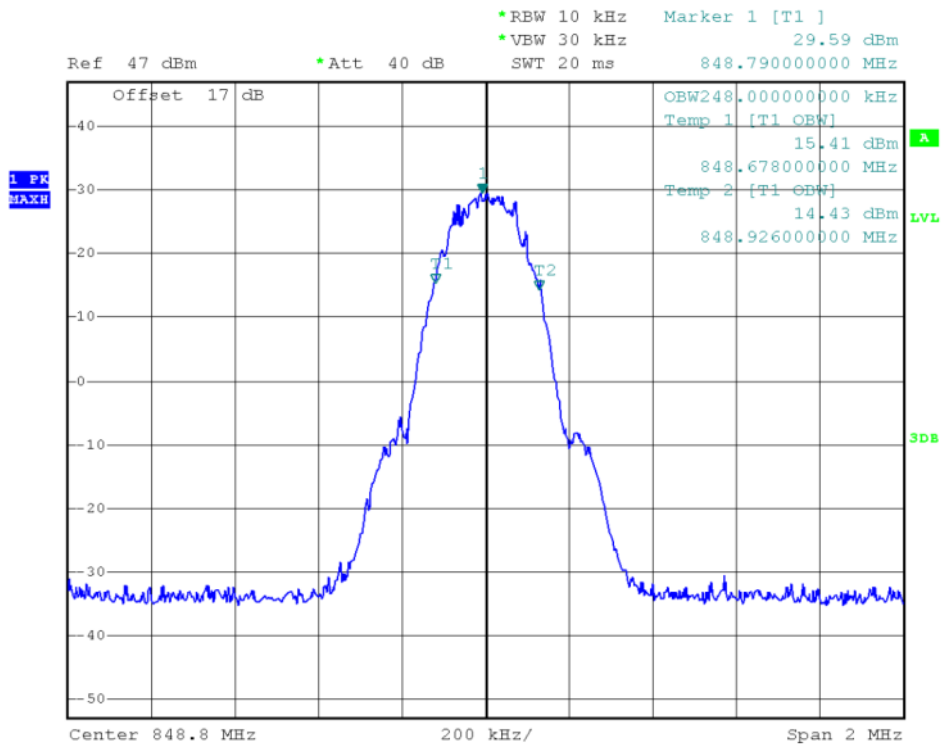


(Plot C2: GSM 850MHz Channel = 251)

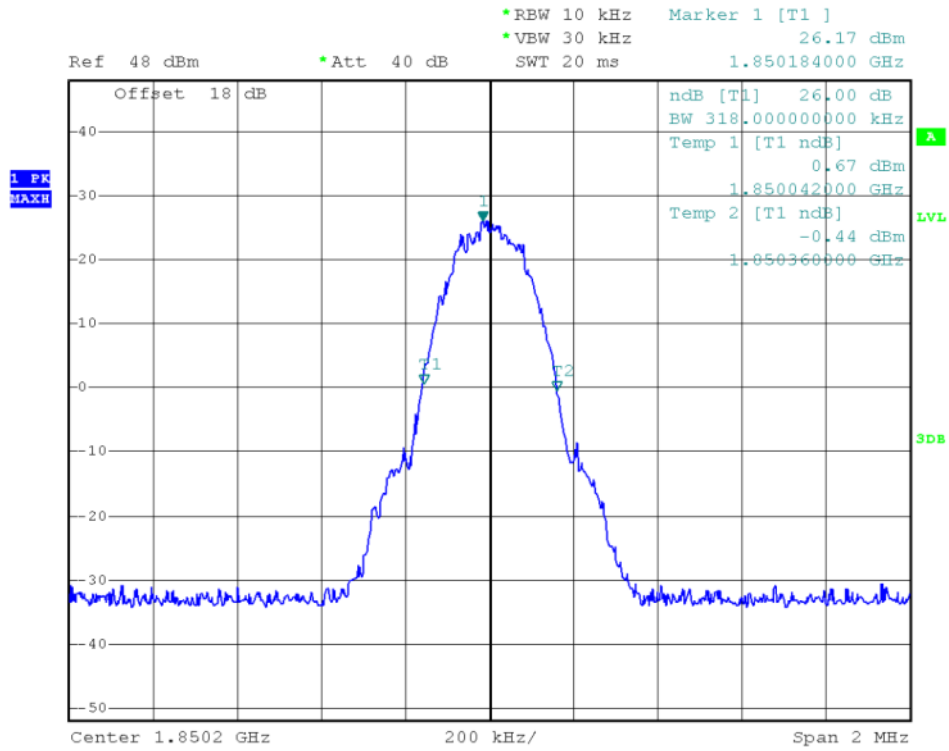


(Plot D1: GSM 1900MHz Channel = 512)

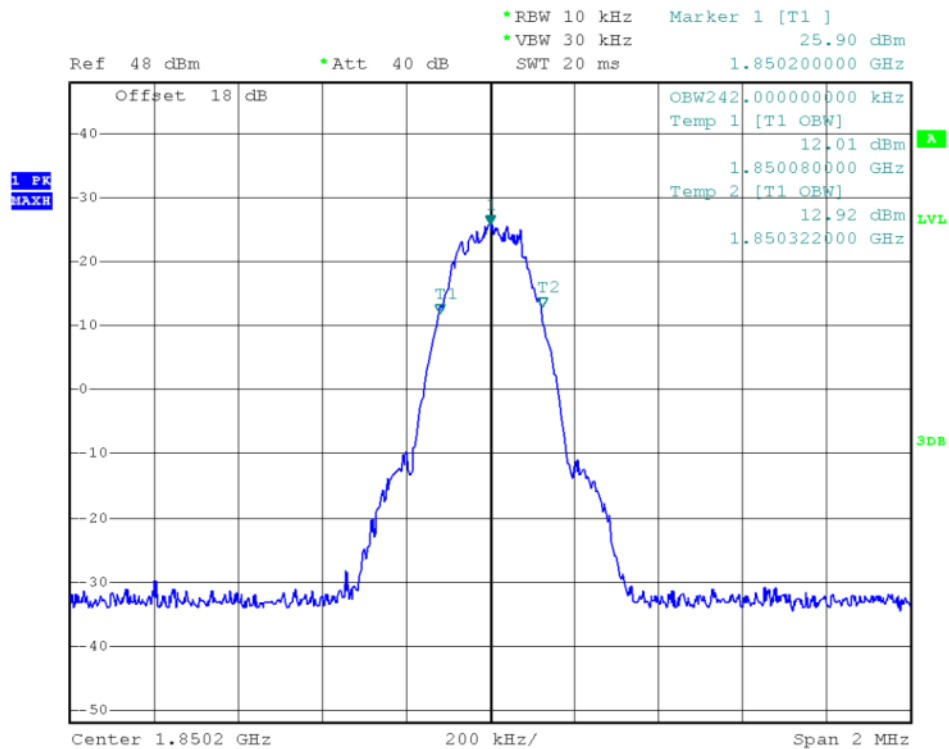


(Plot D2: GSM 1900MHz Channel = 512)

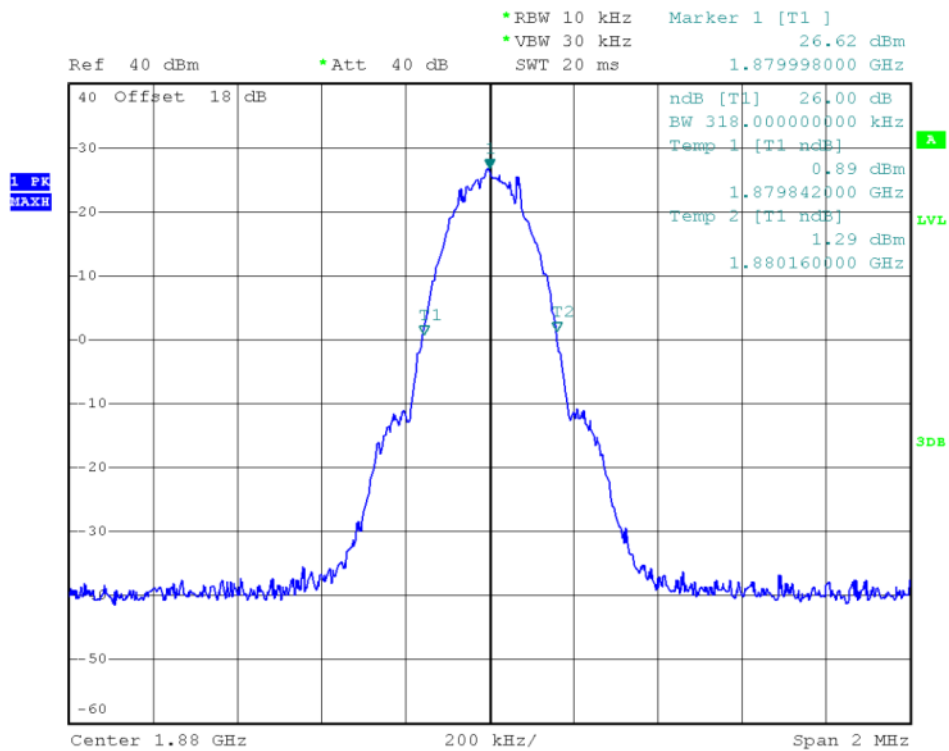


(Plot E1: GSM 1900MHz Channel = 661)

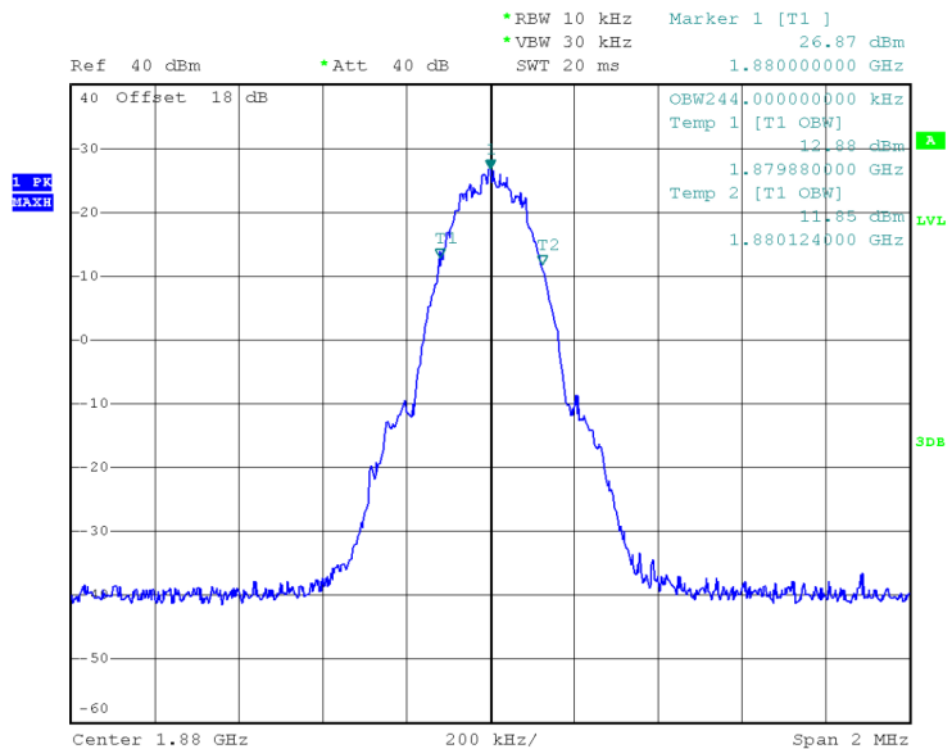


(Plot E2: GSM 1900MHz Channel = 661)

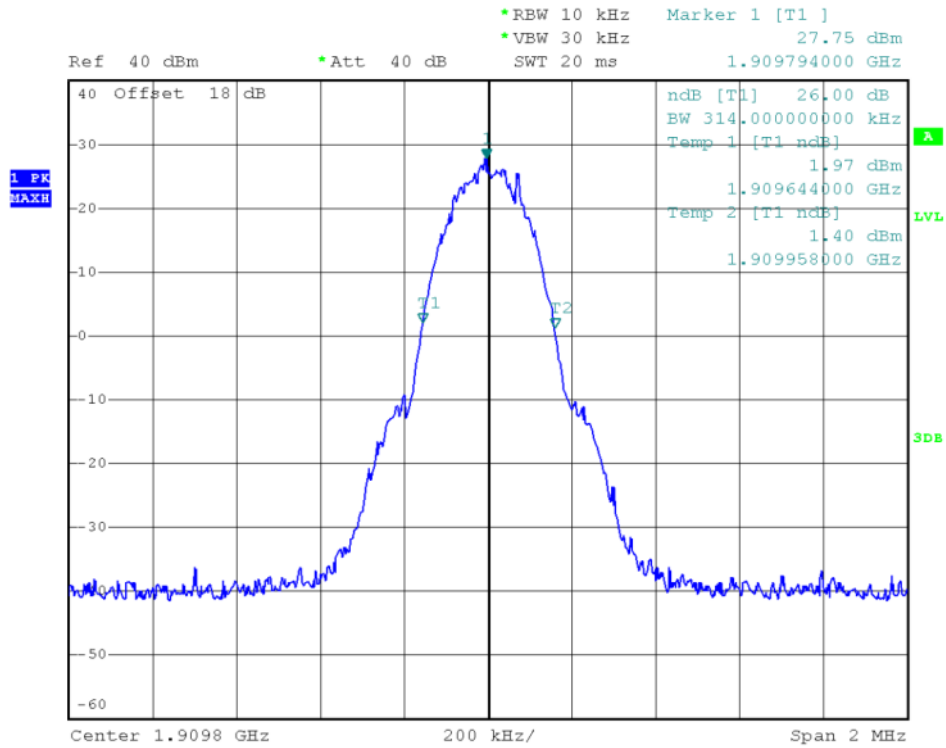


(Plot F1: GSM 1900MHz Channel = 810)

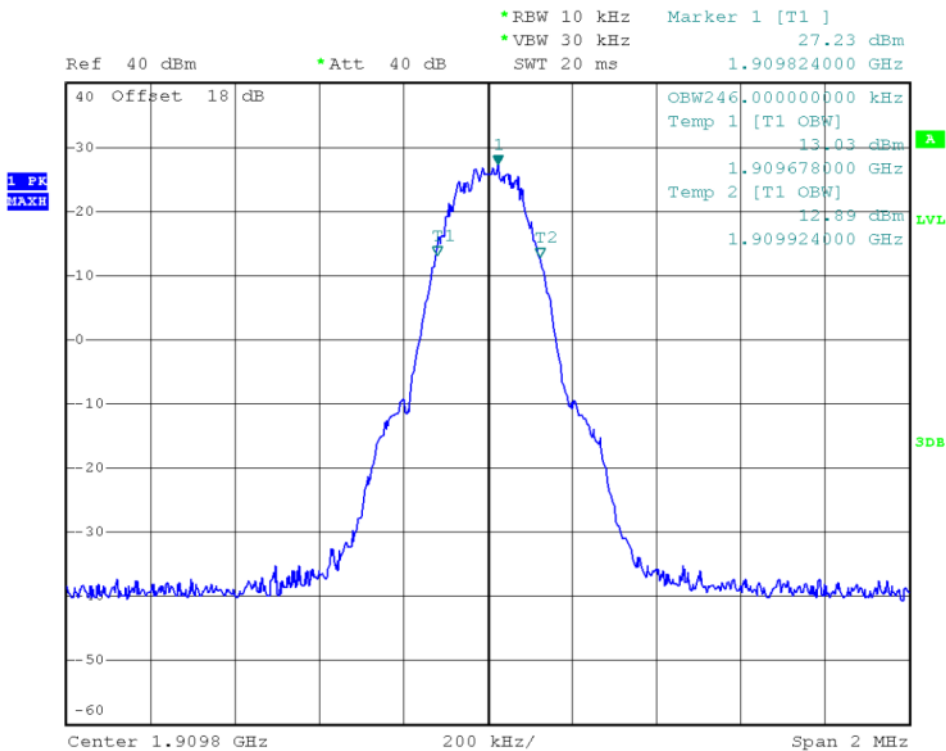


(Plot F2: GSM 1900MHz Channel = 810)

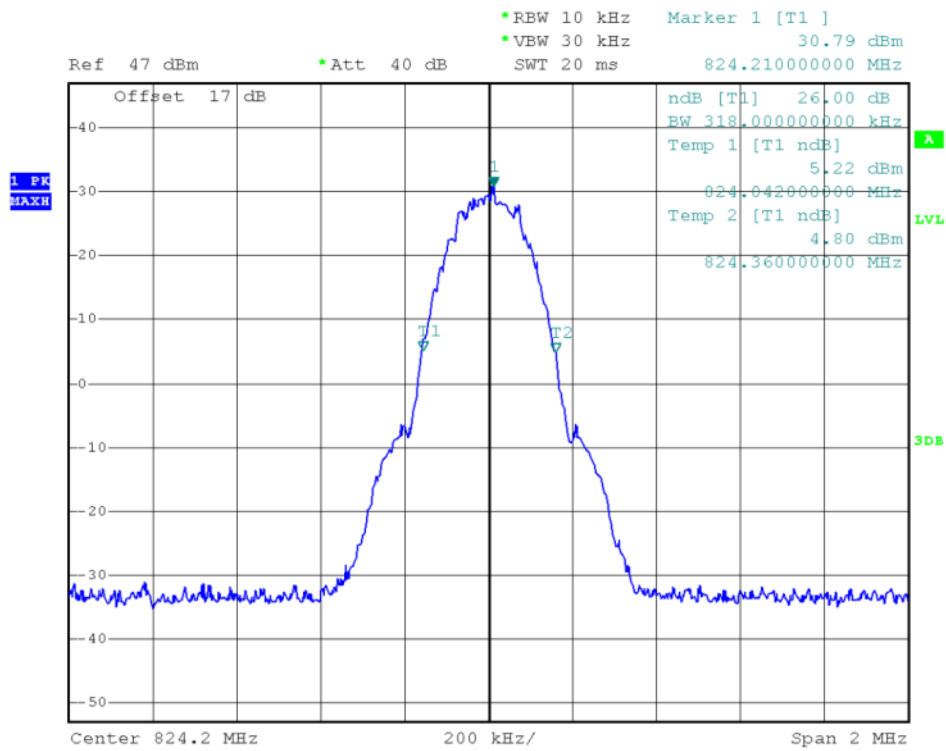


(Plot G1: GPRS 850MHz Channel = 128)

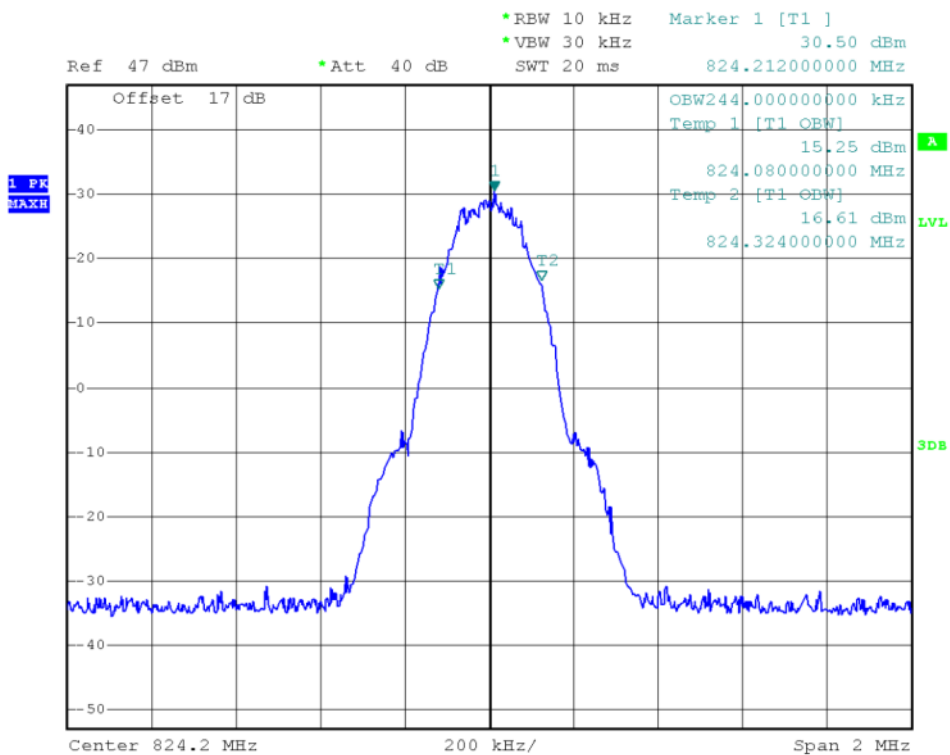


(Plot G2: GPRS 850MHz Channel = 128)

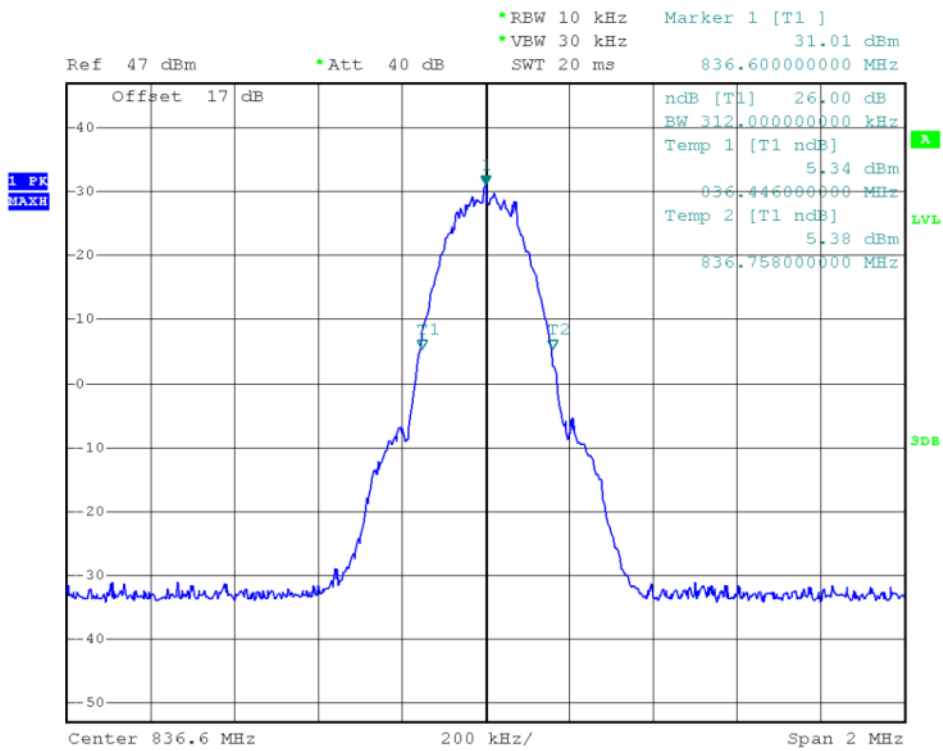


(Plot H1: GPRS 850MHz Channel = 190)

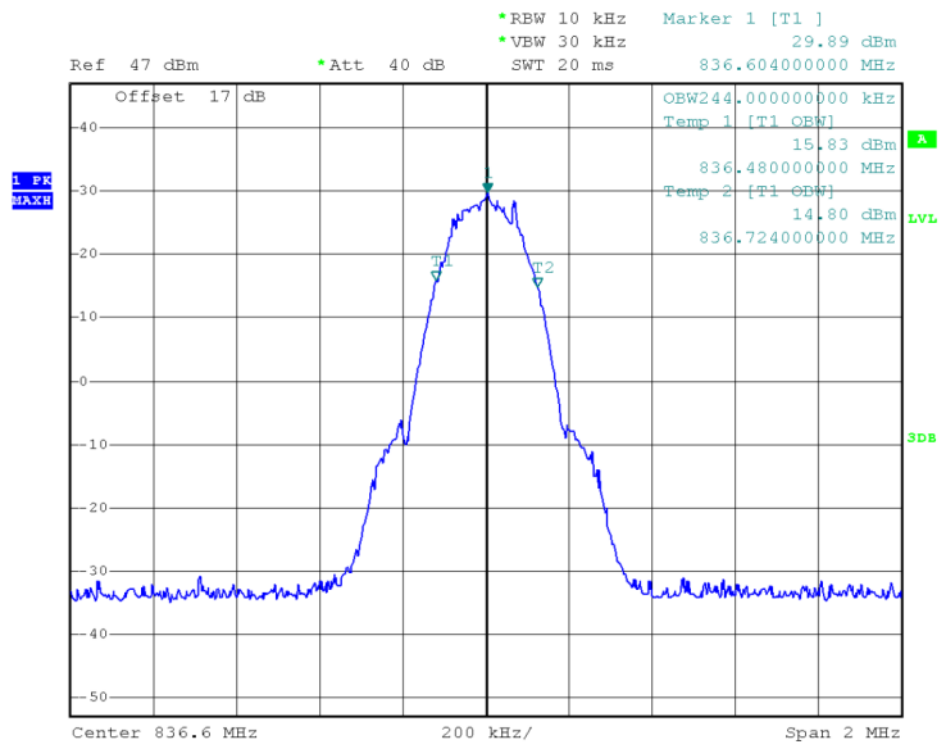


(Plot H2: GPRS 850MHz Channel = 190)

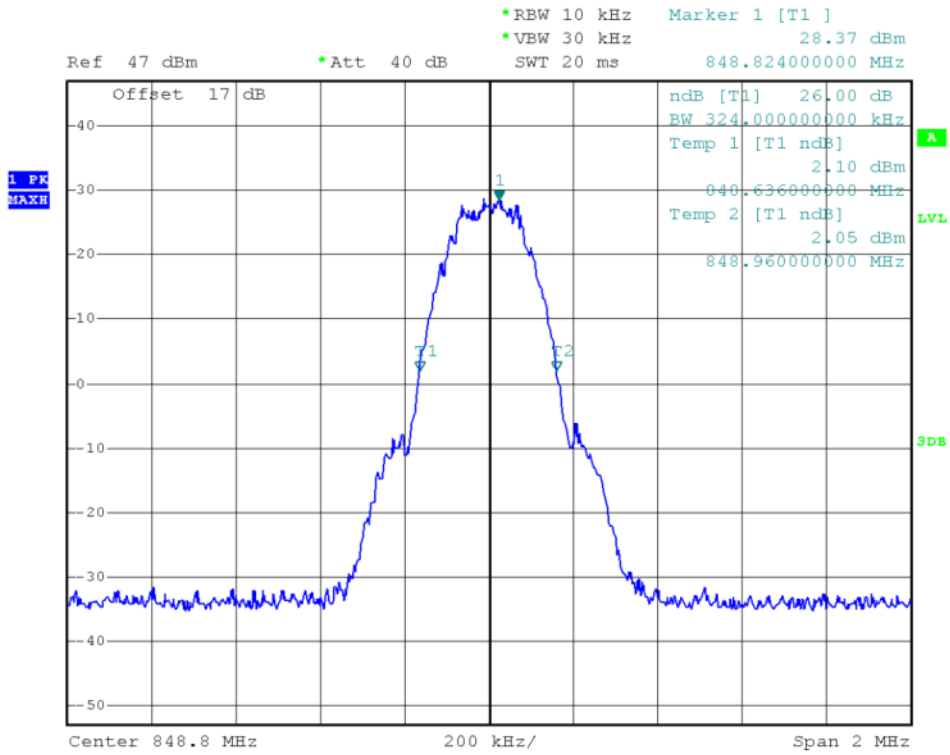


(Plot I1: GPRS850MHz Channel = 251)

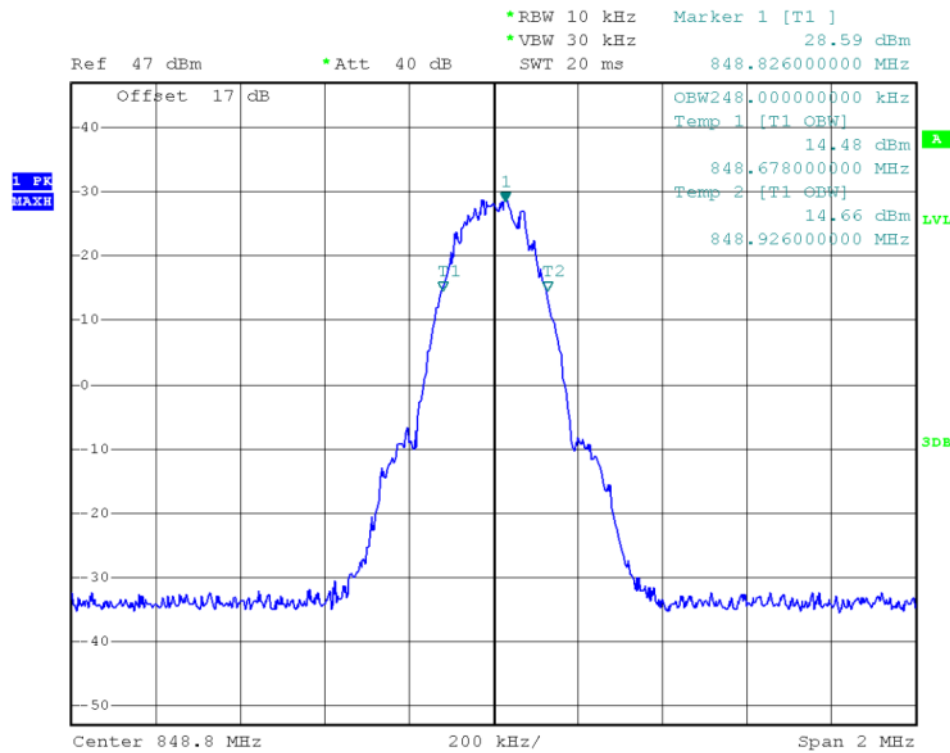


(Plot I2: GPRS850MHz Channel = 251)

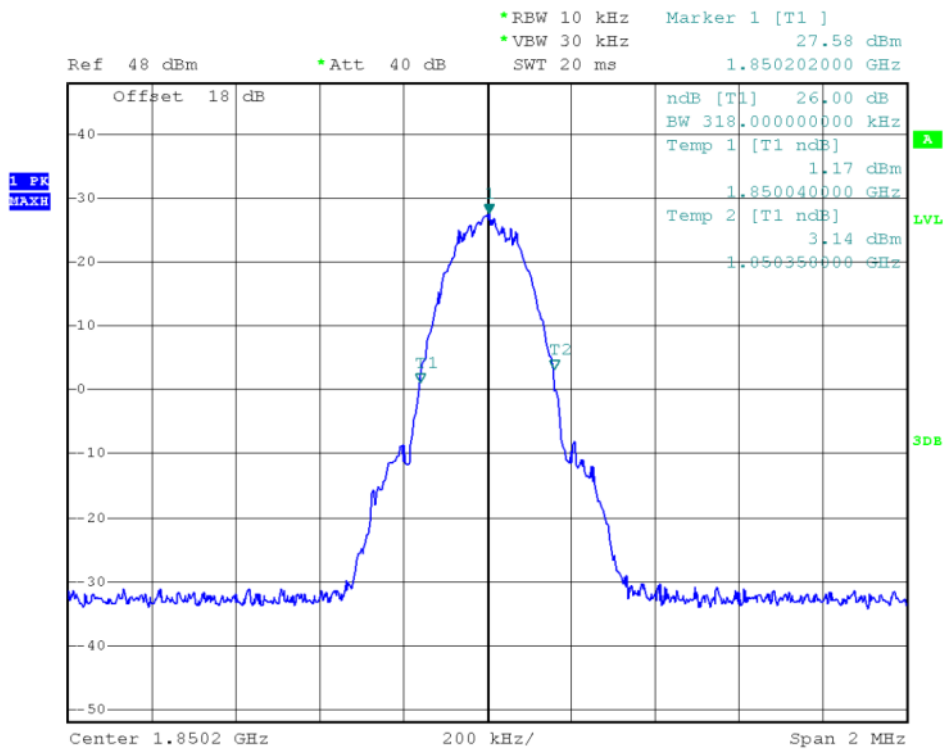


(Plot J1: GPRS 1900MHz Channel = 512)

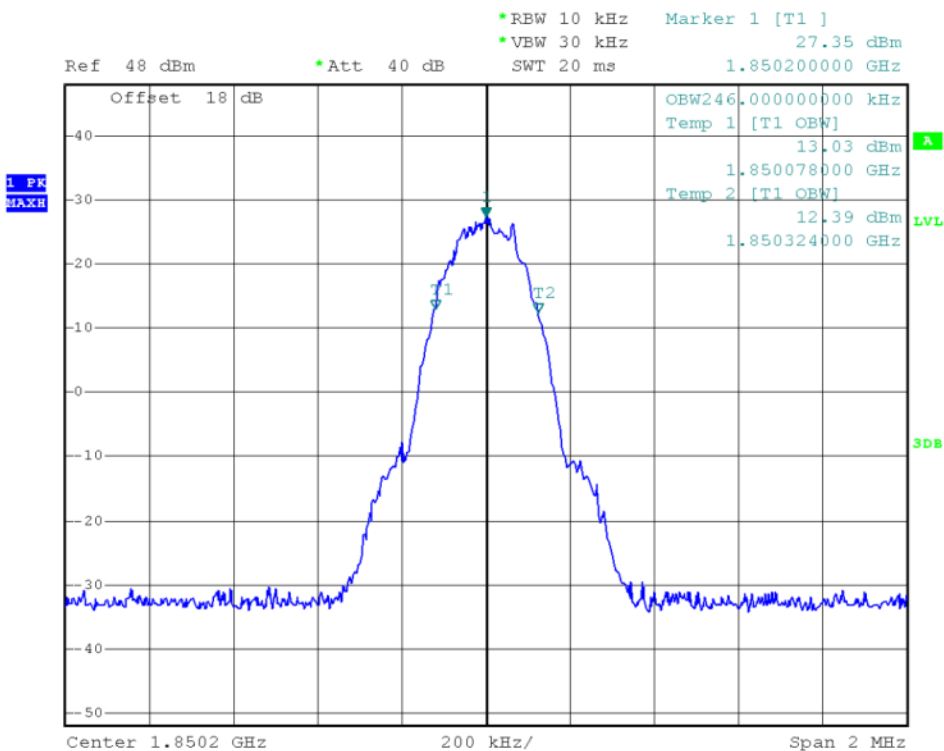


(Plot J2: GPRS 1900MHz Channel = 512)

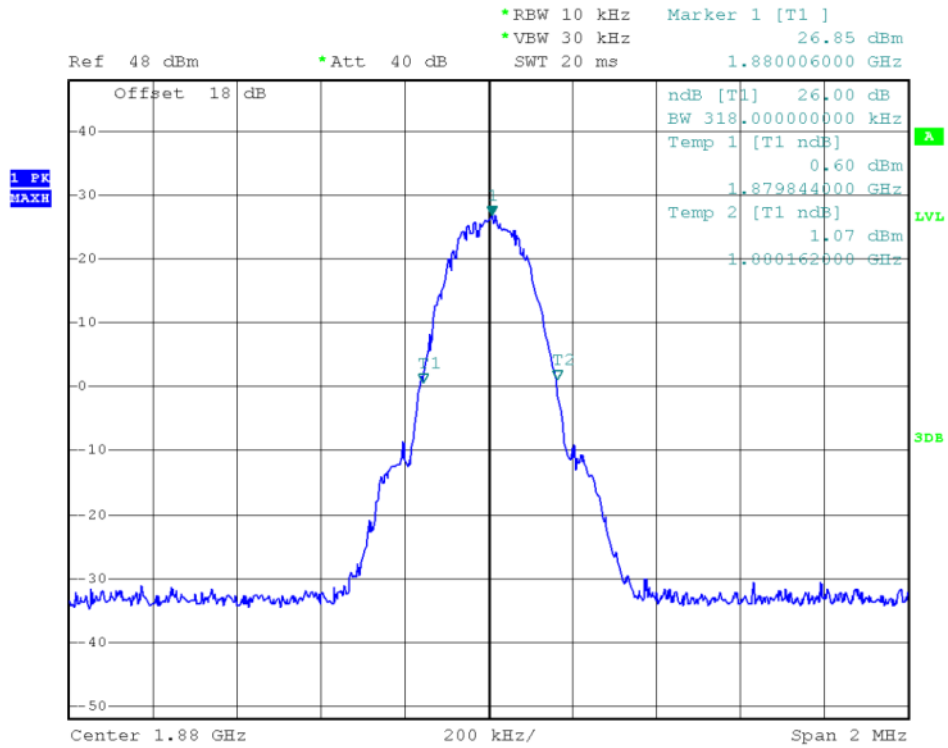


(Plot K1: GPRS 1900MHz Channel = 661)

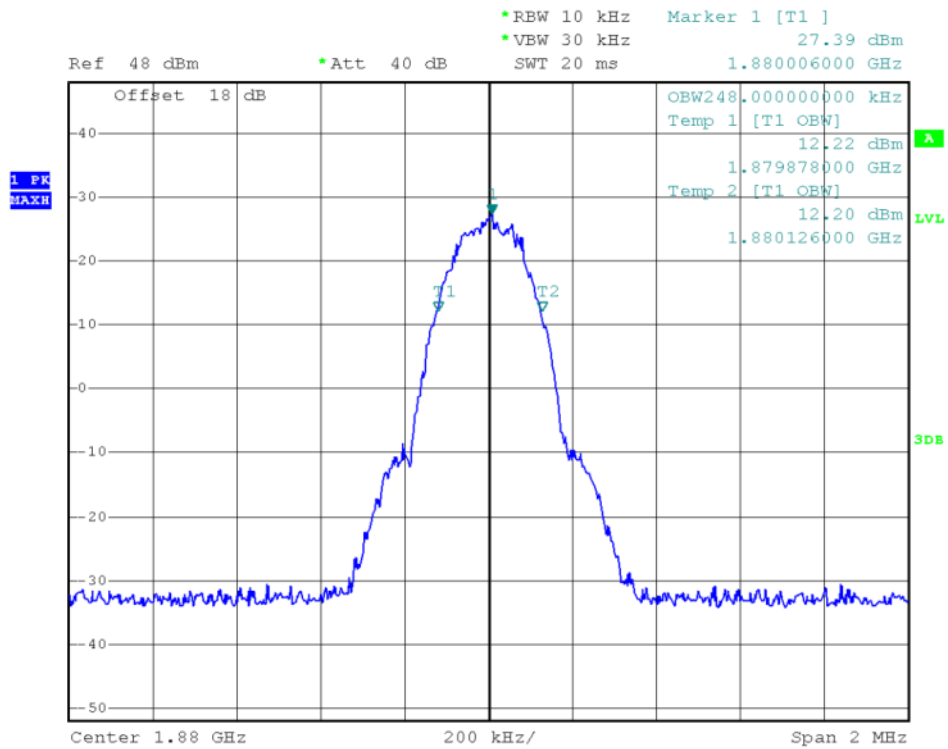

(Plot K2: GPRS 1900MHz Channel = 661)

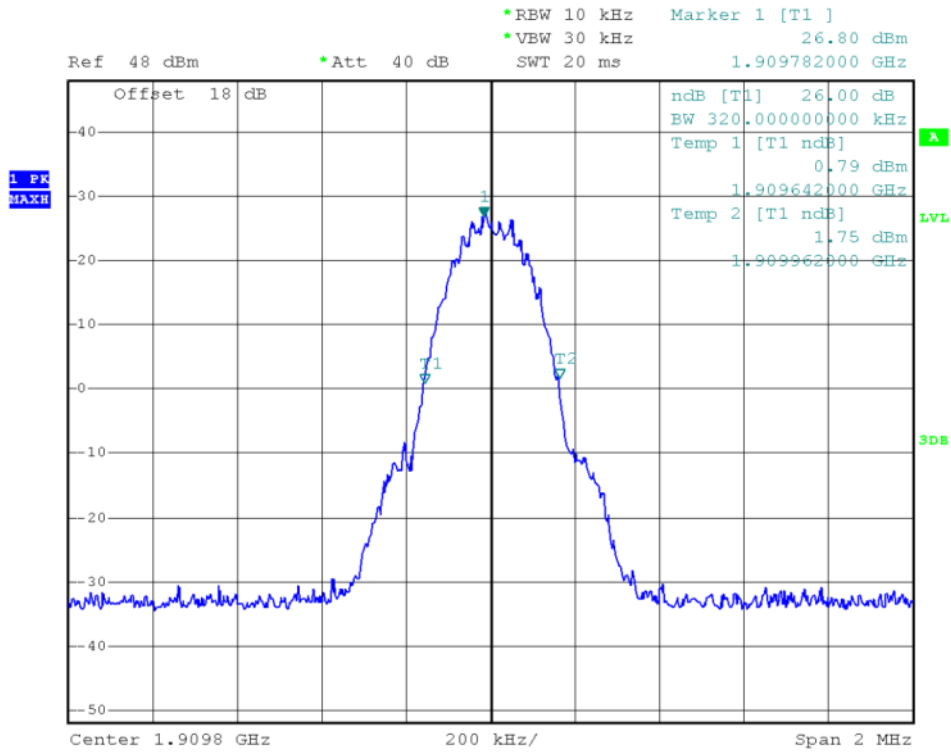

(Plot L1: GPRS 1900MHz Channel = 810)

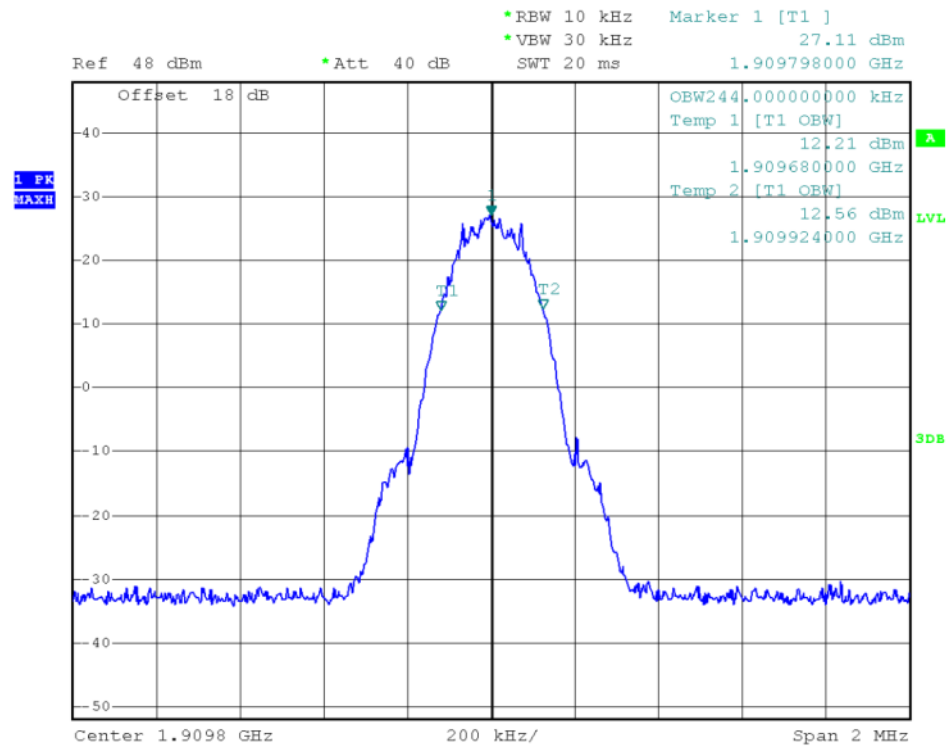

(Plot L2: GPRS 1900MHz Channel = 810)

2.4 Frequency Stability


2.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from $-30\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ at intervals of not more than $10\text{ }^{\circ}\text{C}$.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Test Description

1. Test Setup:

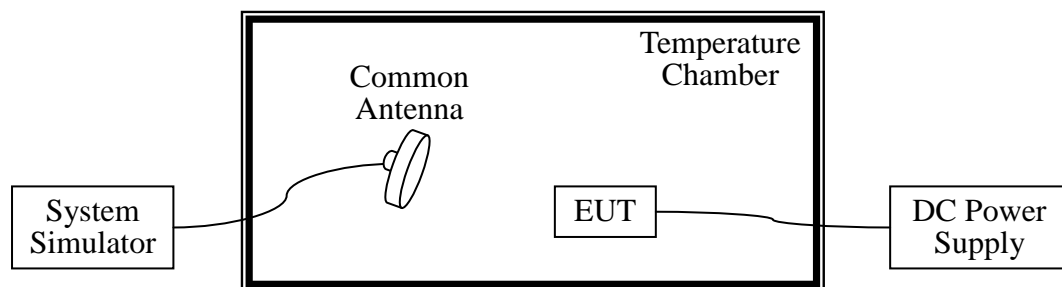

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Due Data
System Simulator	Agilent	E5515C	GB43130131	2014.06.10
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.06.10
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.06.10

2.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.2VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is $25\text{ }^{\circ}\text{C}$. The frequency



deviation limit of 850MHz band is ± 2.5 ppm, and 1900MHz is ± 1 ppm

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-21.55	± 2060.5	24.88	± 2091.5	12.88	± 2122	PASS
	-20	19.15		21.62		-16.38		
	-10	-2.15		-22.92		20.58		
	0	30.16		30.44		8.72		
	+10	21.99		-30.69		8.68		
	+20	-19.16		-14.25		7.58		
	+30	35.26		15.37		-9.22		
	+40	42.63		24.52		-6.99		
+50	35.28	15.61	-6.33					
4.2	+25	-14.73	23.58	-46.21				
3.6	+25	-17.02	38.74	8.46				

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-5.15	± 1850.2	-10.71	± 1880.0	15.8	± 1909.8	PASS
	-20	16.14		24.63		-10.4		
	-10	18.81		19.95		-21.58		
	0	2.98		28.59		17.65		
	+10	-6.86		-34.87		19.65		
	+20	27.68		22.27		33.2		
	+30	17.44		-23.26		-33.2		
	+40	-17.4		31.17		24.21		
+50	37.28	12.31	-25.93					
4.2	+25	4.78	-21.65	20.92				
3.6	+25	13.36	26.97	26.62				



2.5 Conducted Out of Band Emissions

2.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-27.40	Plot A1toA1.1	-13	PASS
	190	836.6	-27.01	Plot A2toA2.1		PASS
	251	848.8	-27.32	Plot A3toA3.1		PASS
GSM 1900MHz	512	1850.2	-18.24	Plot B1toB1.1	-13	PASS
	661	1880.0	-18.39	Plot B2toB2.1		PASS
	810	1909.8	-17.63	Plot B3toB3.1		PASS
	4183	836.6	-27.32	Plot G2toG2.1		PASS
	4233	846.6	-27.93	Plot G3toG3.1		PASS

2. Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

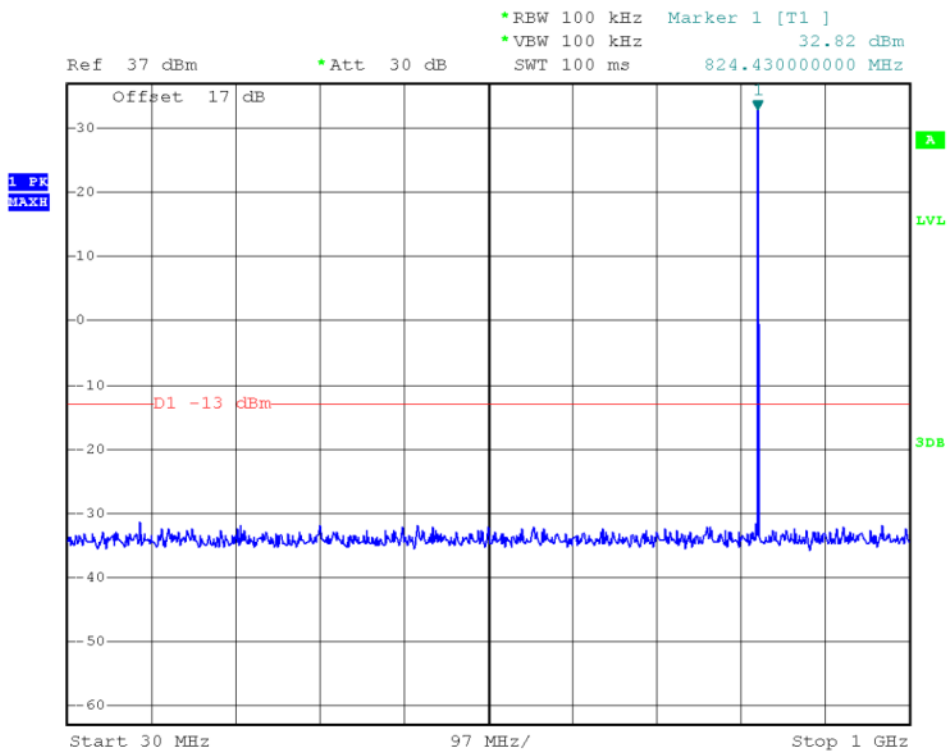


(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)

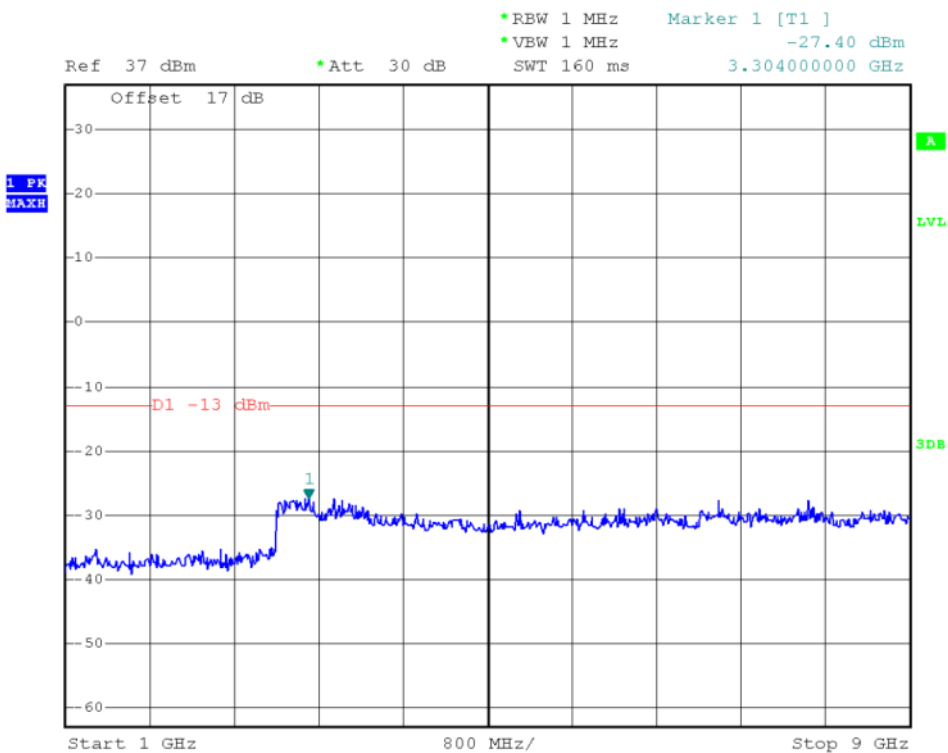


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

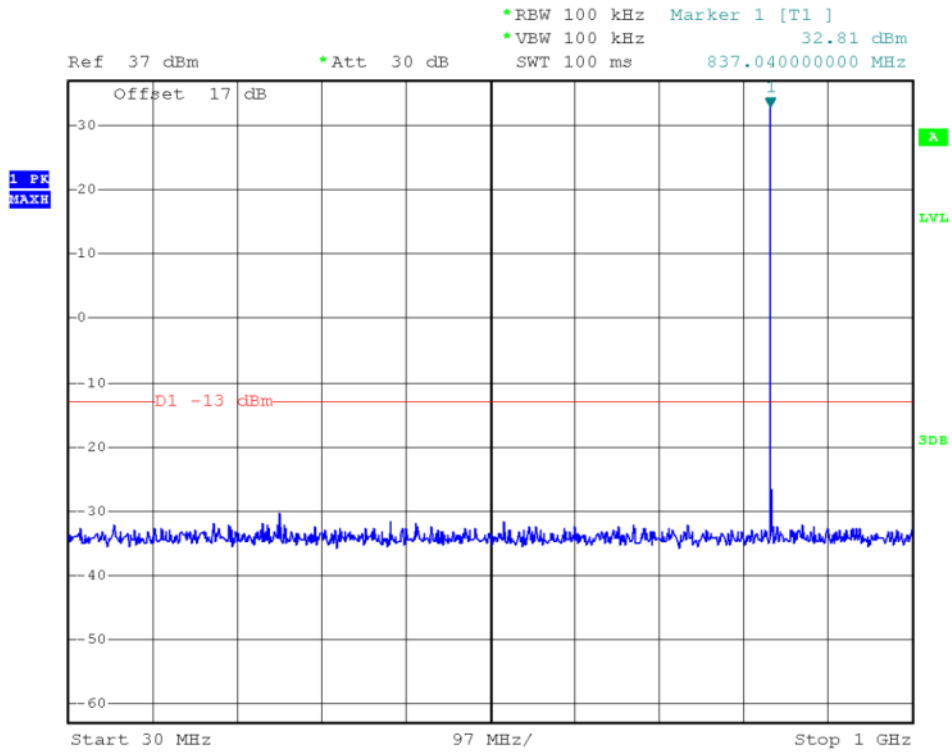


(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

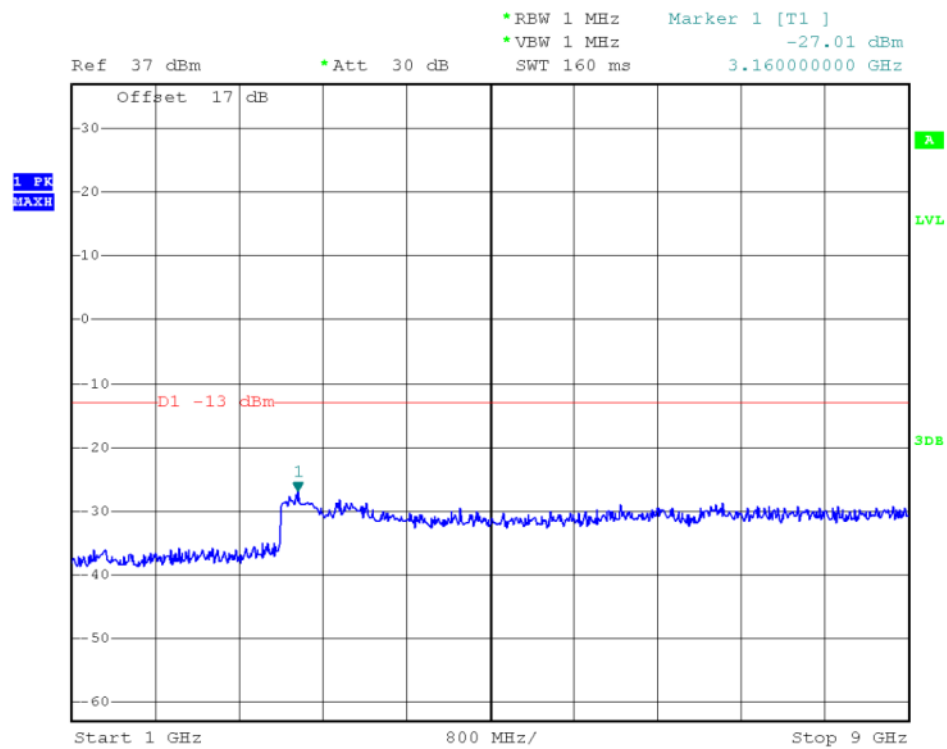


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)

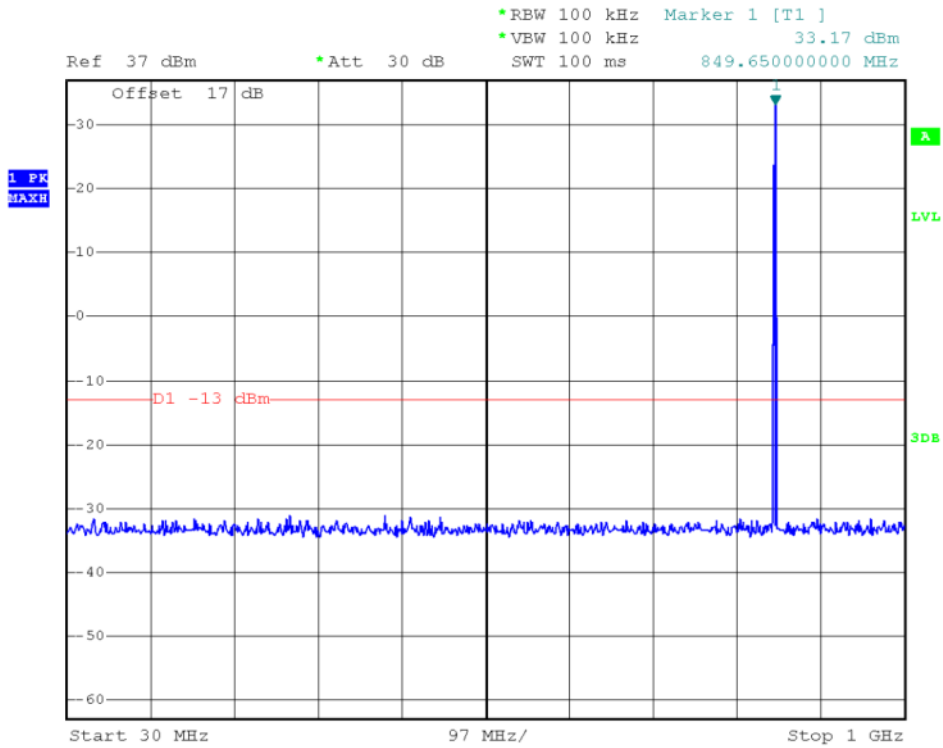


(Plot A3: GSM 850MHz Channel = 251, 30MHz to 1GHz)

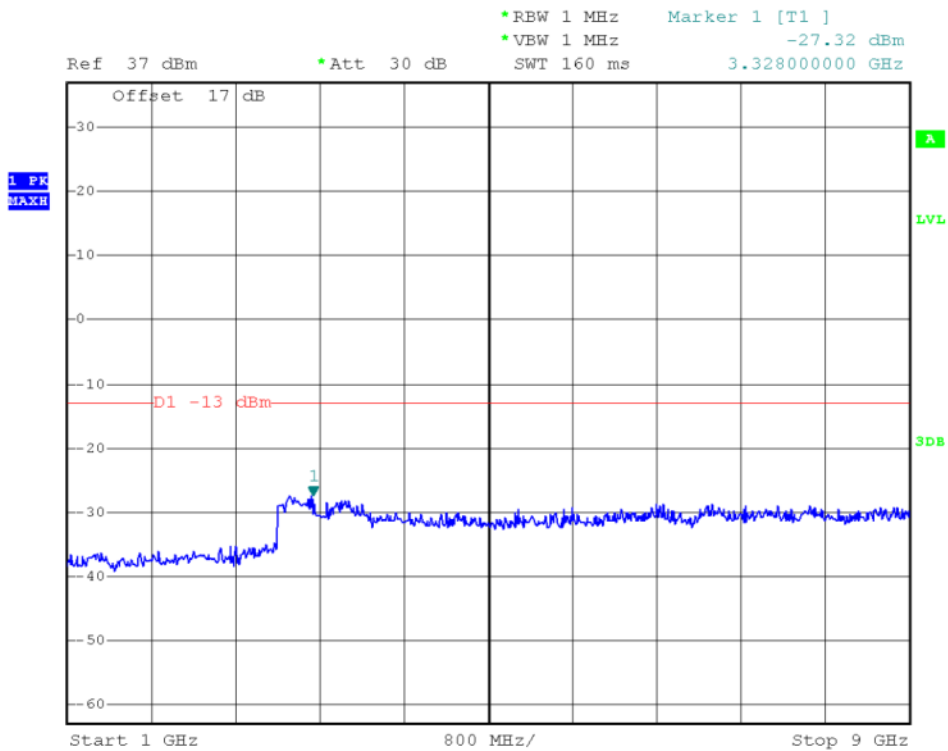


(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)

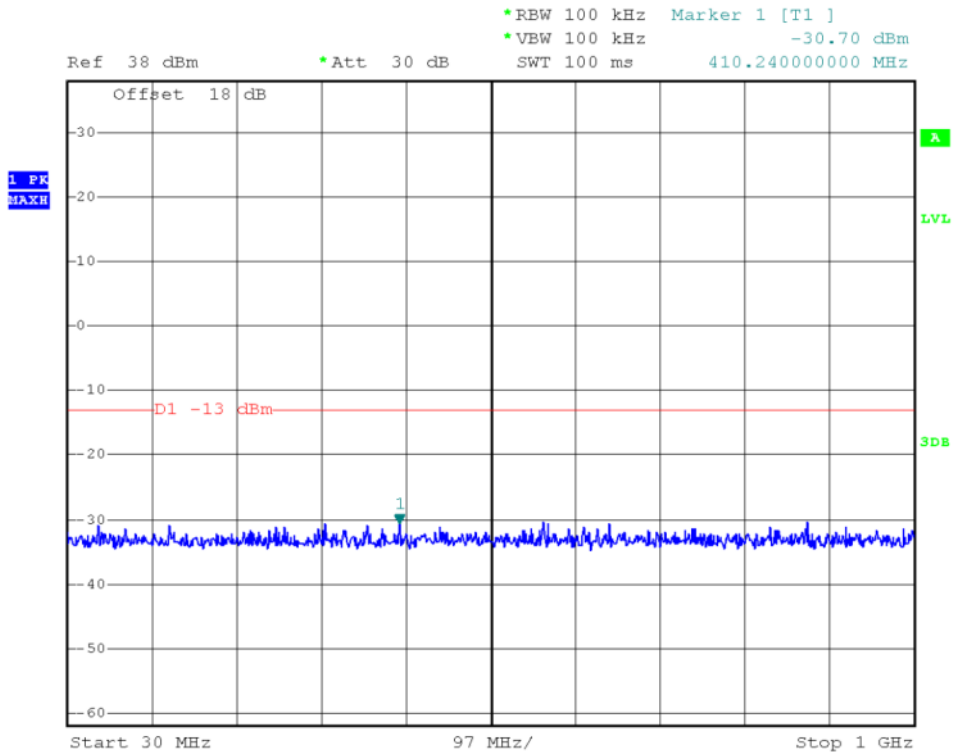


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

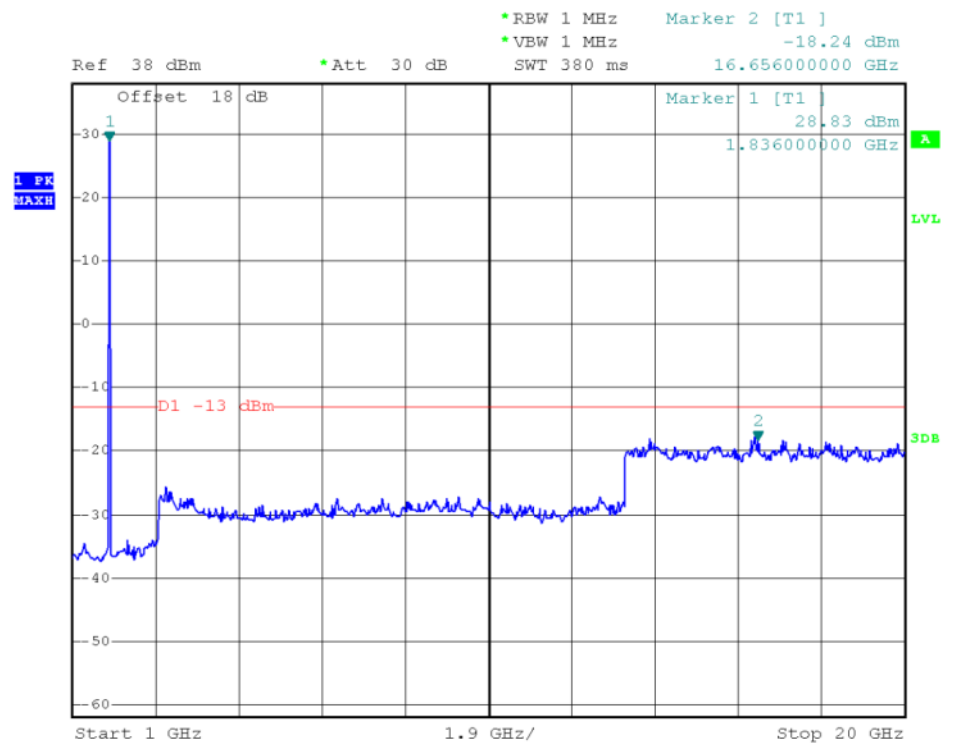


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

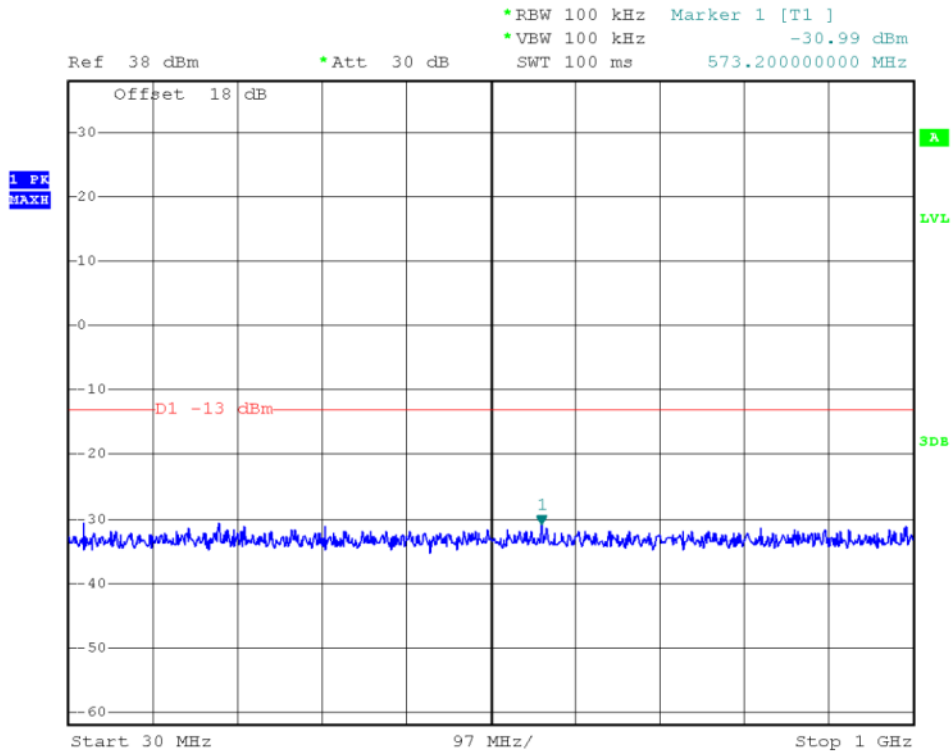


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

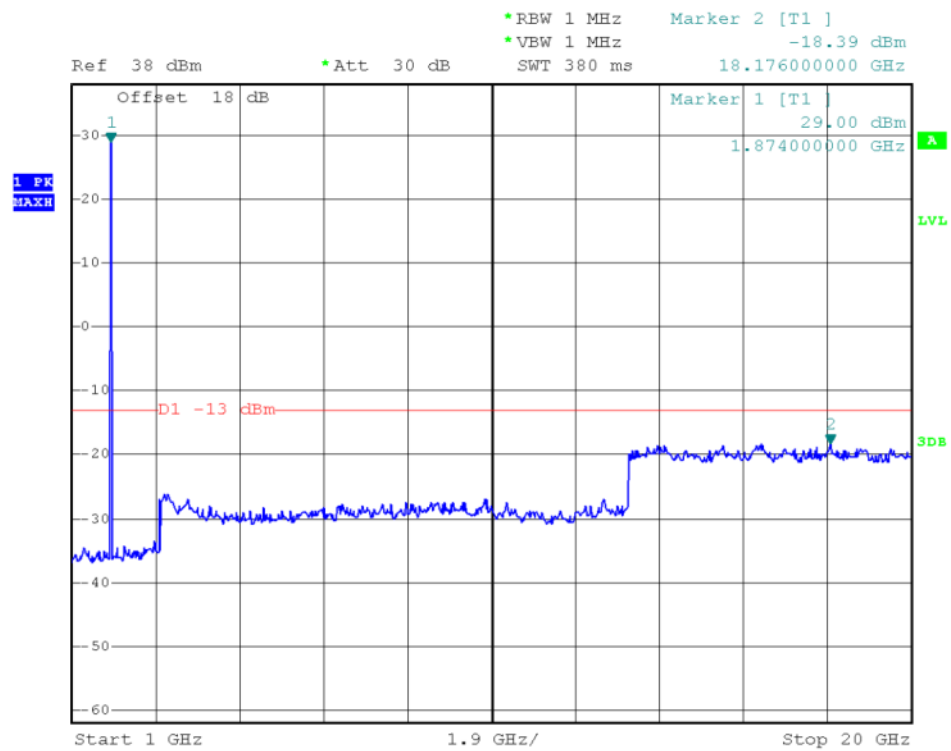

(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

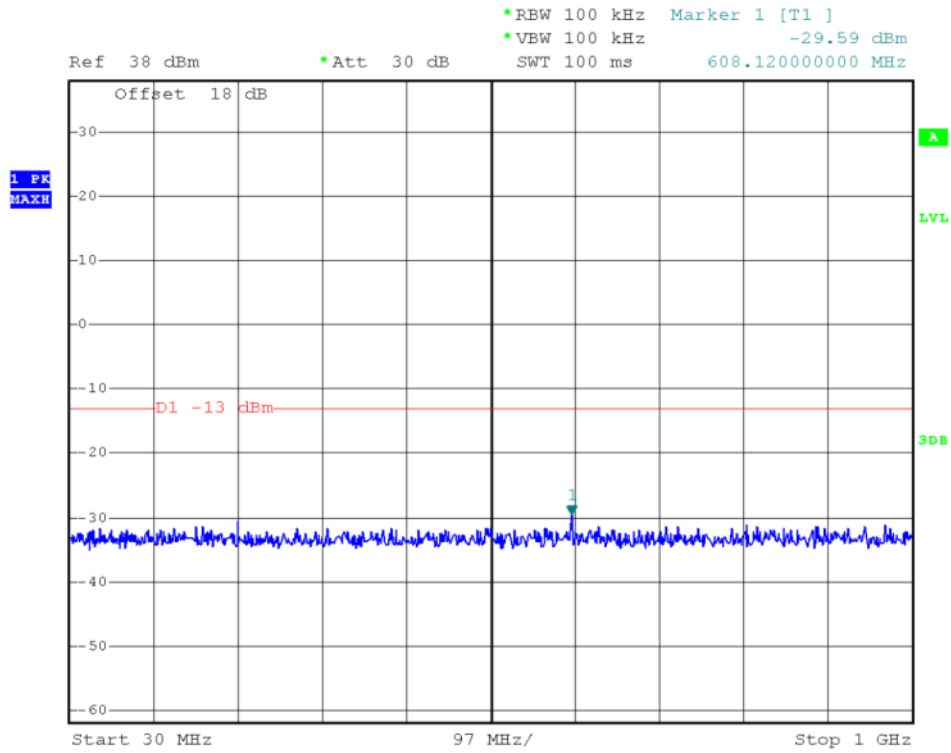

(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

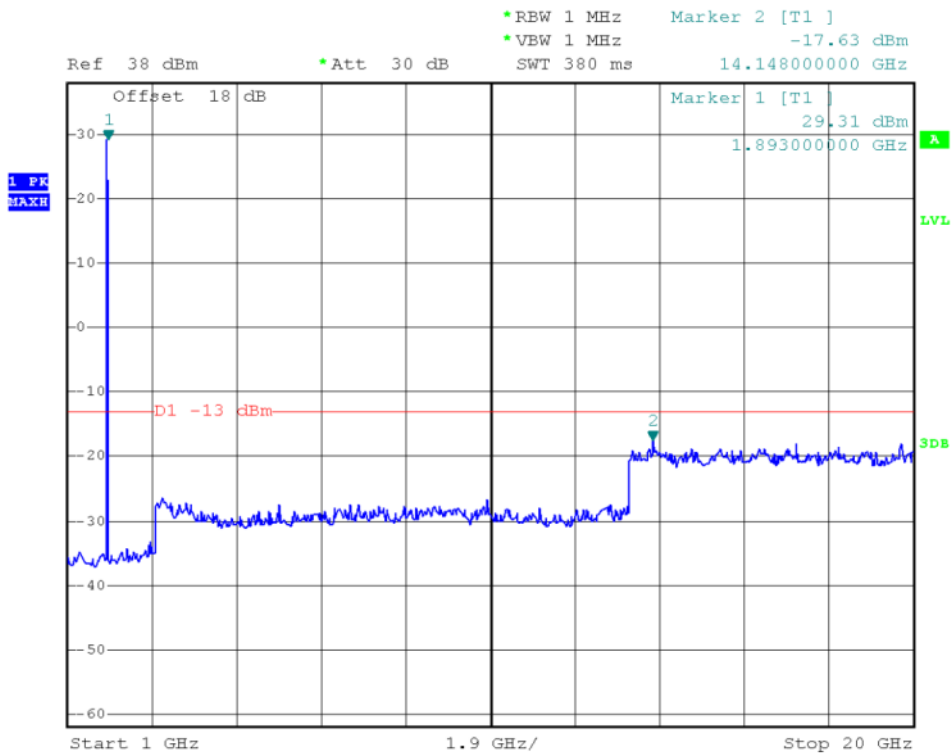

(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)



2.6 Band Edge

2.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.6.2 Test Description

See section 2.1.2 of this report.

2.6.3 Test Result


The lowest and highest channels are tested to verify the band edge emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-14.67	Plat A	-13	PASS
	251	848.8	-13.85	Plot B		PASS
GSM 1900MHz	512	1850.2	-15.27	Plat C	-13	PASS
	810	1909.8	-14.43	Plot D		PASS




2. Test Plots:

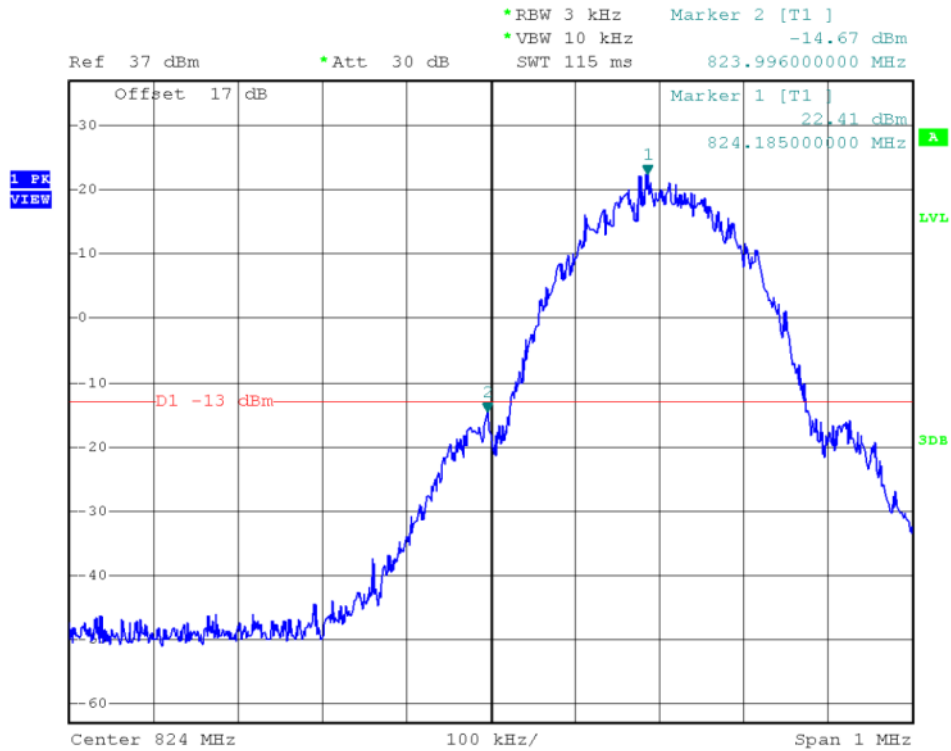


(Plot A: GSM 850 Channel = 128)

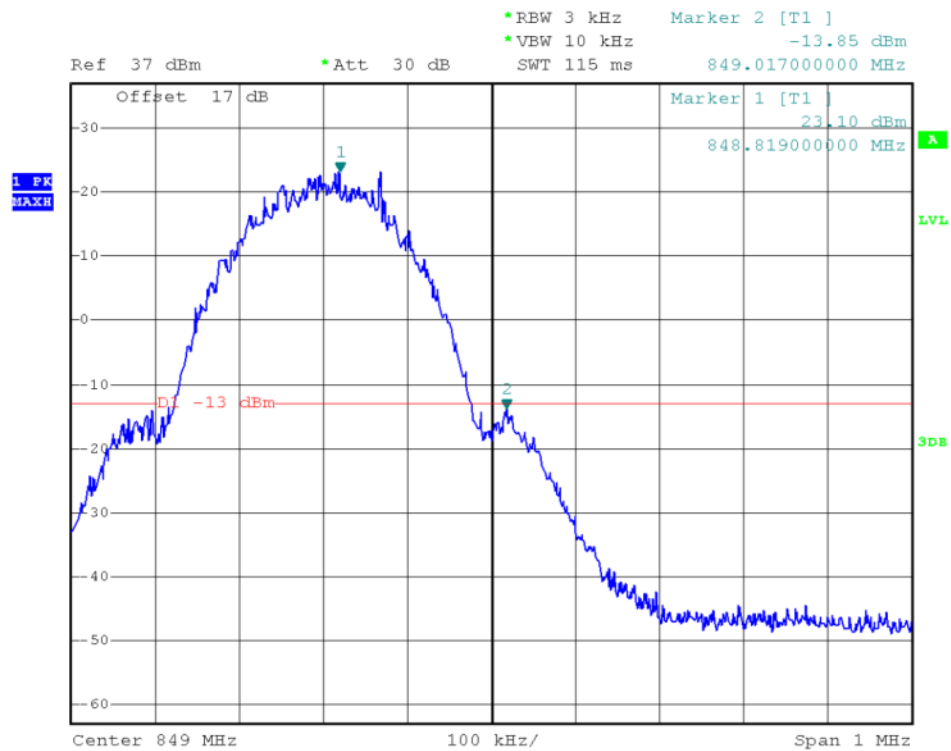

(Plot B: GSM 850 Channel = 251)

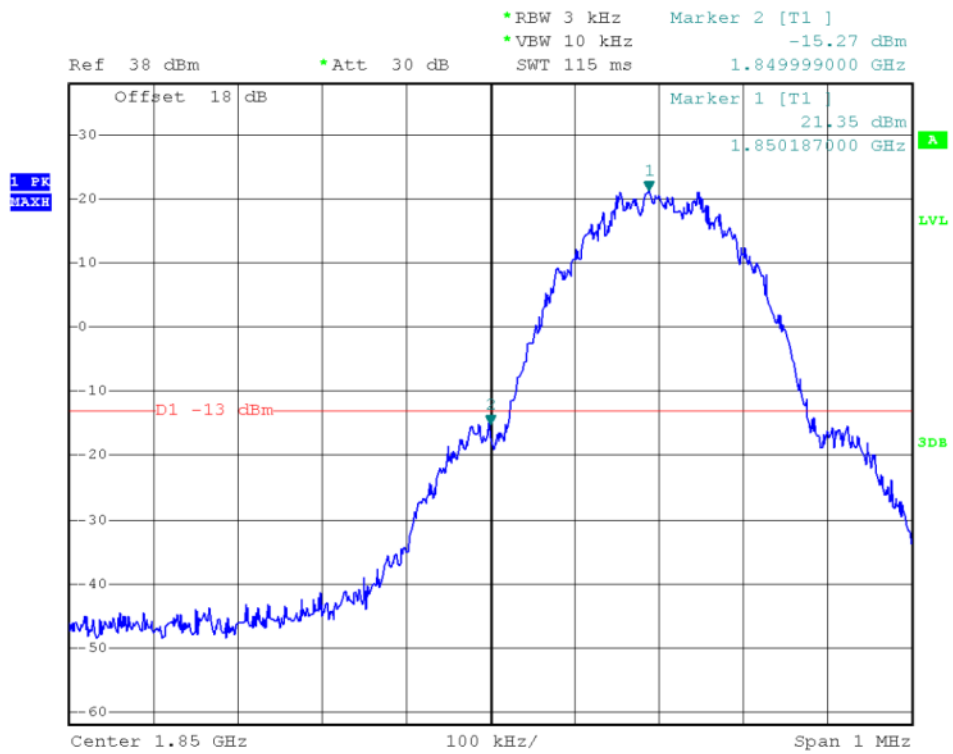

(Plot C: GSM 1900 Channel = 512)

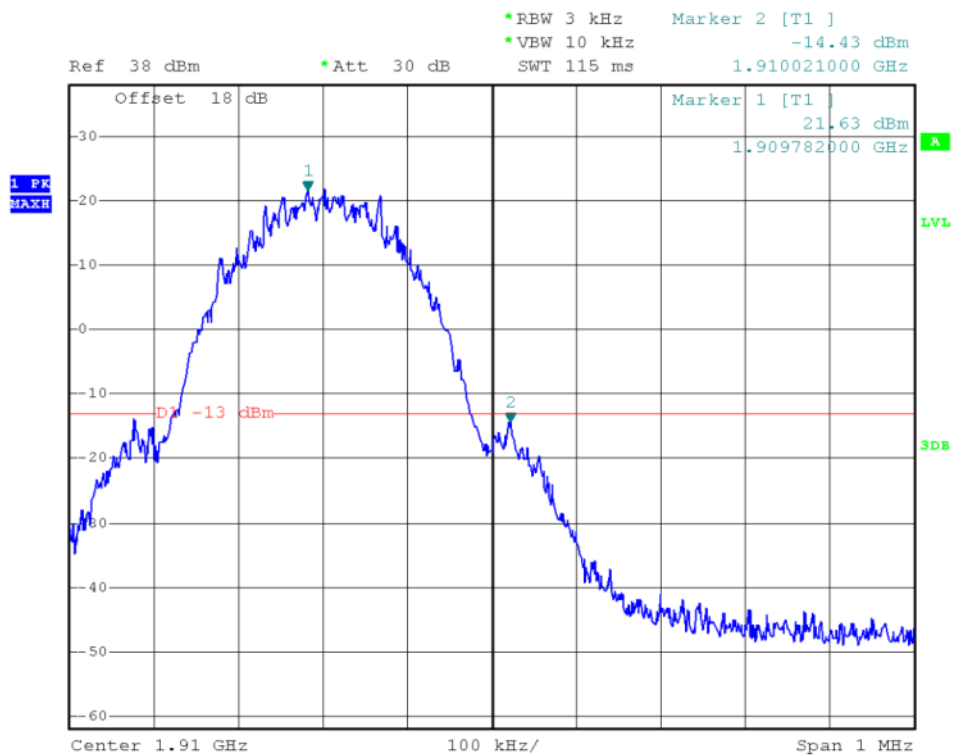

(Plot D: GSM 1900 Channel = 810)


2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

2.7.2 Test Description

1. Test Setup:

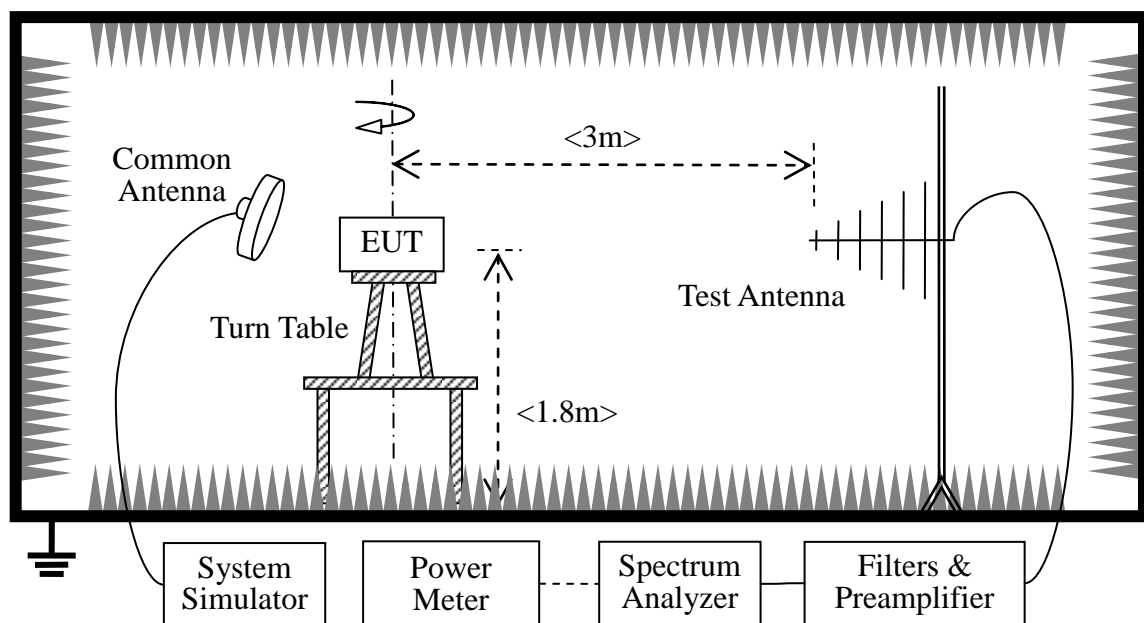

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded.

- GSM Maximum RF output power: GSM 850 32.24dBm, GSM 1900 29.82dBm, Please refer to section 2.1.3 of this report.

- Step size (dB): 3dB

- Minimum RF power: GSM 850 3.1dBm, GSM 1900 0.3dBm, The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height



as the EUT. The Filters consists of Notch Filters and High Pass Filter.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.06.10
Power Meter	Agilent	E4418B	GB43318055	2014.06.10
Full-Anechoic Chamber	Albatross~ Projects	12.8m*6.8m* 6.4m	A0412372	2014.01.14
Double ridge horn antenna	R&S	HF906	A0304225	2014.06.07
Ultra-wideband antenna	R&S	HL562	A0304224	2014.06.05
Loop antenna	R&S	HFH2-Z2	A0304226	2014.06.05

2.7.3 Test Result

The Turn Table is actuated to turn from 0 ° to 360 °, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT} .




1. GSM Model Test Verdict:


Band	Channel	Frequency (MHz)	polarizations	PCL	Measured ERP			Limit		Verdict
					dBm	W	Refer to Plot	dBm	W	
GSM 850MHz	128	824.20	vertical	5	32.94	1.968	Plot A	38.5	7	PASS
	190	836.60	vertical	5	32.72	1.871				PASS
	251	848.80	vertical	5	32.99	1.991				PASS
GPRS 850MHz	128	824.20	vertical	5	31.18	1.312	PlotB Note 1	38.5	7	PASS
	190	836.60	vertical	5	30.39	1.094				PASS
	251	848.80	vertical	5	30.99	1.256				PASS
Note 1:	All the slots were tested and just the worst data was record in this report.									

Band	Channel	Frequency (MHz)	polarizations	PCL	Measured EIRP			Limit		Verdict
					dBm	W	Refer to Plot	dBm	W	
GSM 1900MHz	512	1850.2	vertical	0	29.92	0.982	Plot C	33	2	PASS
	661	1880.0	vertical	0	30.63	1.156				PASS
	810	1909.8	vertical	0	30.22	1.052				PASS
GPRS 1900MHz	512	1850.2	vertical	0	28.99	0.793	Plot D Note 1	33	2	PASS
	661	1880.0	vertical	0	28.97	0.789				PASS
	810	1909.8	vertical	0	28.86	0.769				PASS
Note 1:	All the slots were tested and just the worst data was record in this report.									


2. Test Plots:

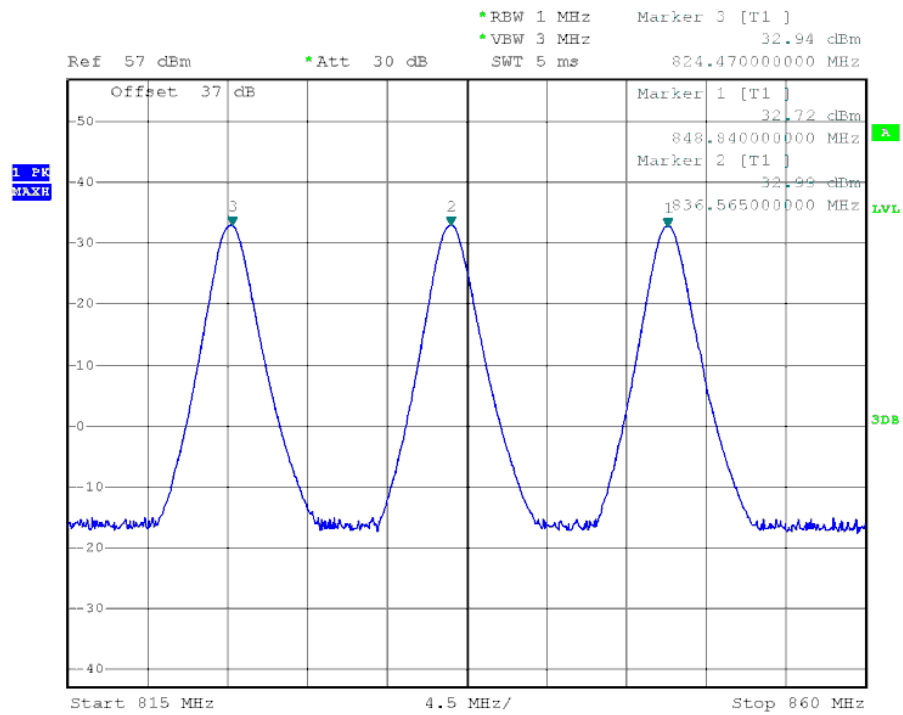


(Plot A: GSM 850MHz Channel = 128, 190, 251)

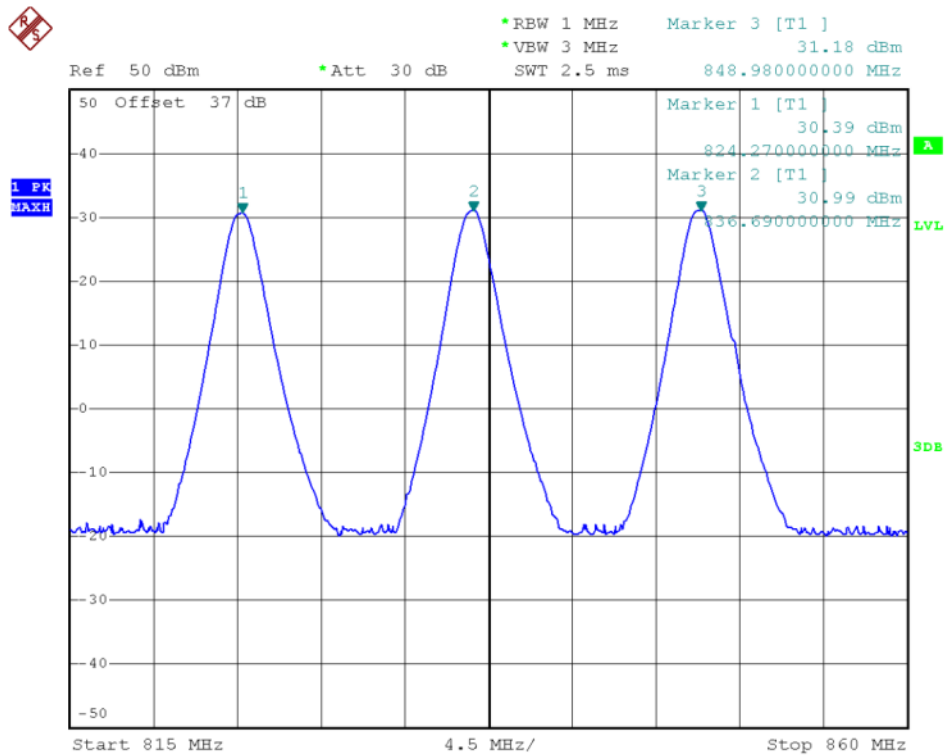

(Plot B: GPRS 850MHz Channel = 128, 190, 251)

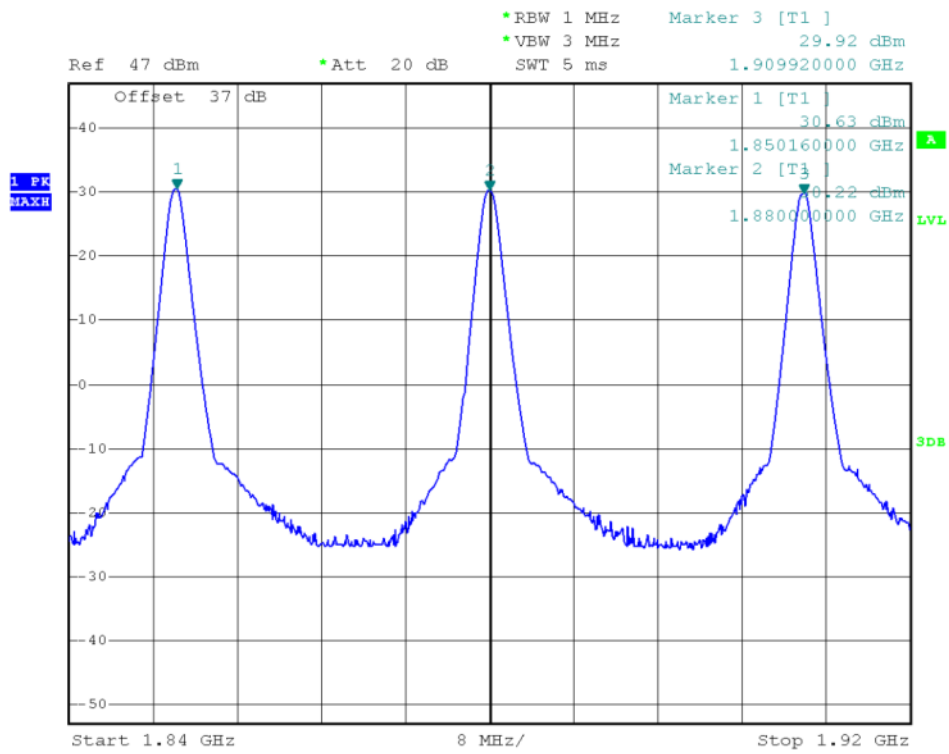

(Plot C: GSM1900MHz Channel = 512, 661, 810)

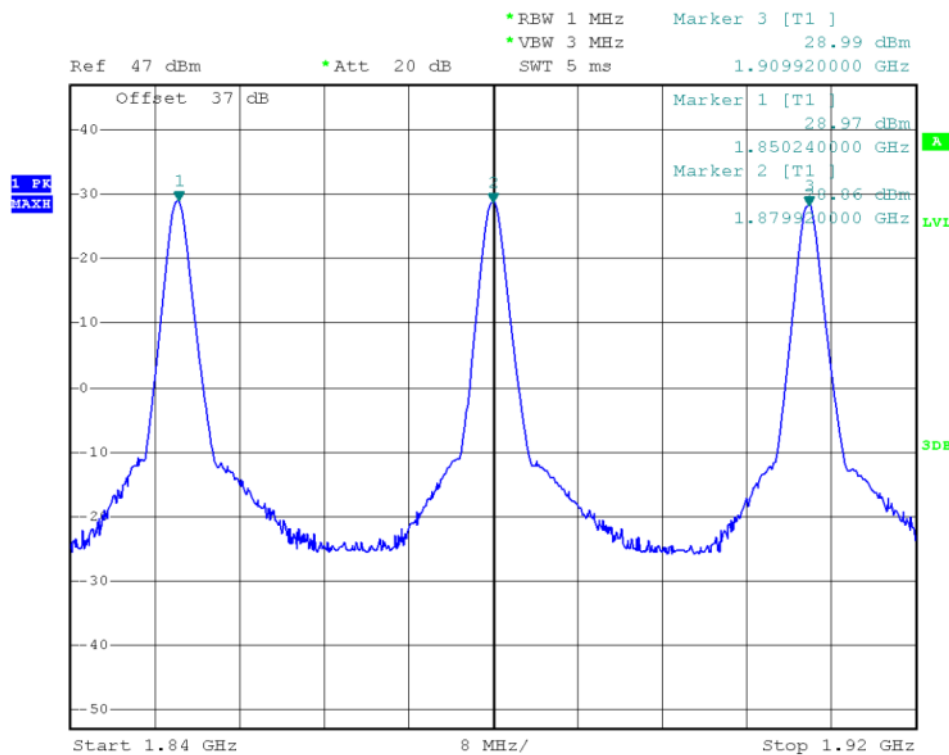

(Plot D: GPRS 1900MHz Channel = 512, 661, 810)



2.8 Radiated Out of Band Emissions

2.8.1 Requirement

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.8.2 Test Description

See section 2.7.2 of this report.

Equipment List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.06.10
Power Meter	Agilent	E4418B	GB43318055	2014.06.10
Full-Anechoic Chamber	Albatross~ Projects	12.8m*6.8m* 6.4m	A0412372	2014.01.14
Double ridge horn antenna	R&S	HF906	A0304225	2014.06.07
Ultra-wideband antenna	R&S	HL562	A0304224	2014.06.05
Loop antenna	R&S	HFH2-Z2	A0304226	2014.06.05

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.




1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
GSM 850MHz	128	824.2	< -25	< -25	Plot A.1/A.2	-13	PASS
	190	836.6	< -25	< -25	Plot A.3/A.4		PASS
	251	848.8	< -25	< -25	Plot A.5/A.6		PASS
GSM 1900MHz	512	1850.2	< -25	< -25	Plot B.1/B.2	-13	PASS
	661	1880.0	< -25	< -25	Plot B.3/B.4		PASS
	810	1909.8	< -25	< -25	Plot B.5/B.6		PASS
GPRS850	128	824.2	< -25	< -25	Plot C.1/C.2	-13	PASS
	190	836.6	< -25	< -25	Plot C.3/C.4		PASS
	251	848.8	< -25	< -25	Plot C.5/C.6		PASS
GPRS1900	512	1850.2	< -25	< -25	Plot D.1/D.2	-13	PASS
	661	1880	< -25	< -25	Plot D.3/D.4		PASS
	810	1909.8	< -25	< -25	Plot D.5/D.6		PASS


2. Test Plots for the Whole Measurement Frequency Range:

Note1: the power of the EUT transmitting frequency should be ignored.


Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

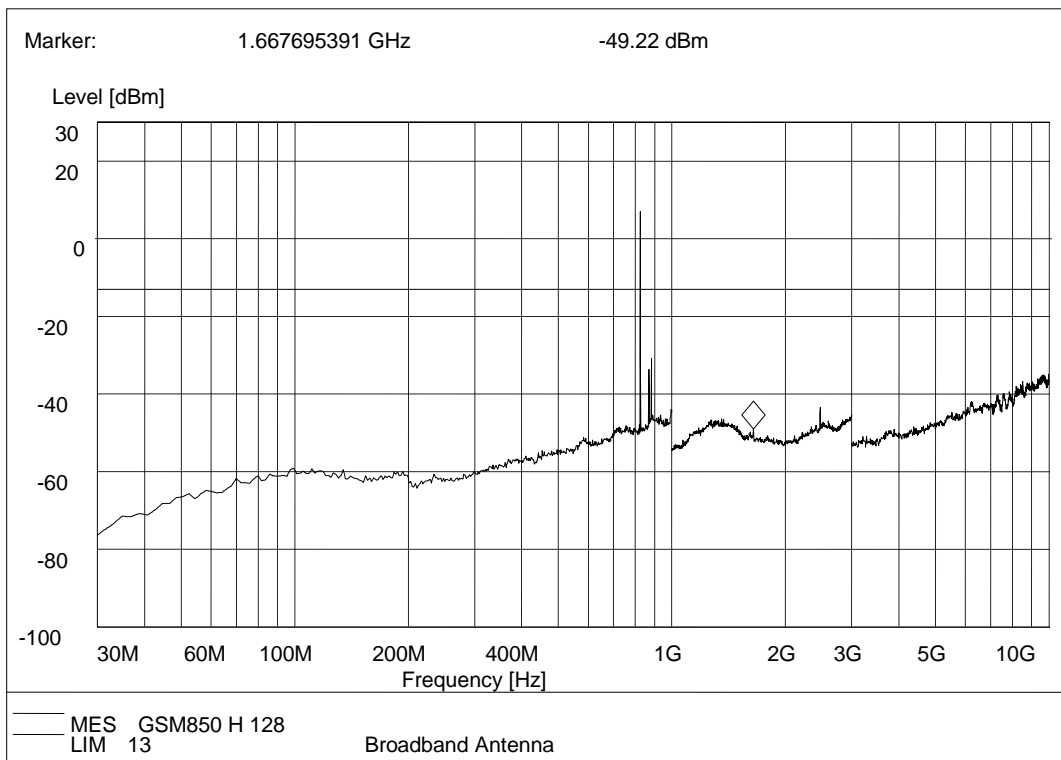


(Plot A.1: GSM 850MHz Channel = 128, Test Antenna Horizontal)

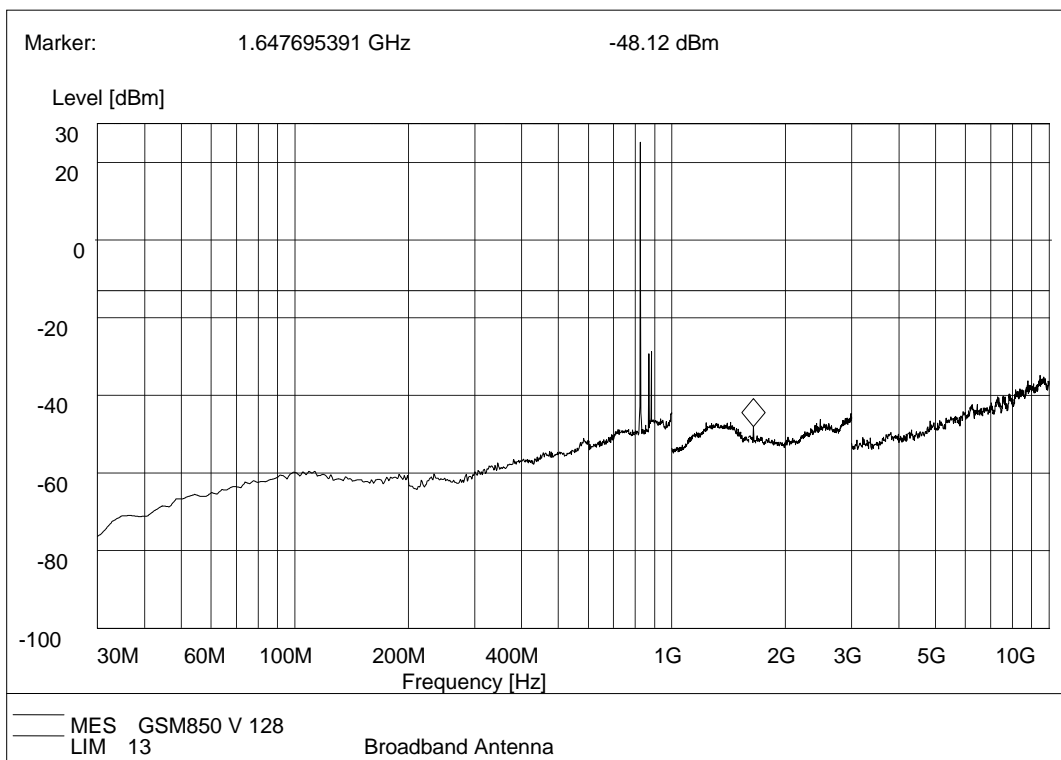


(Plot A.2: GSM 850MHz Channel = 128, Test Antenna Vertical)

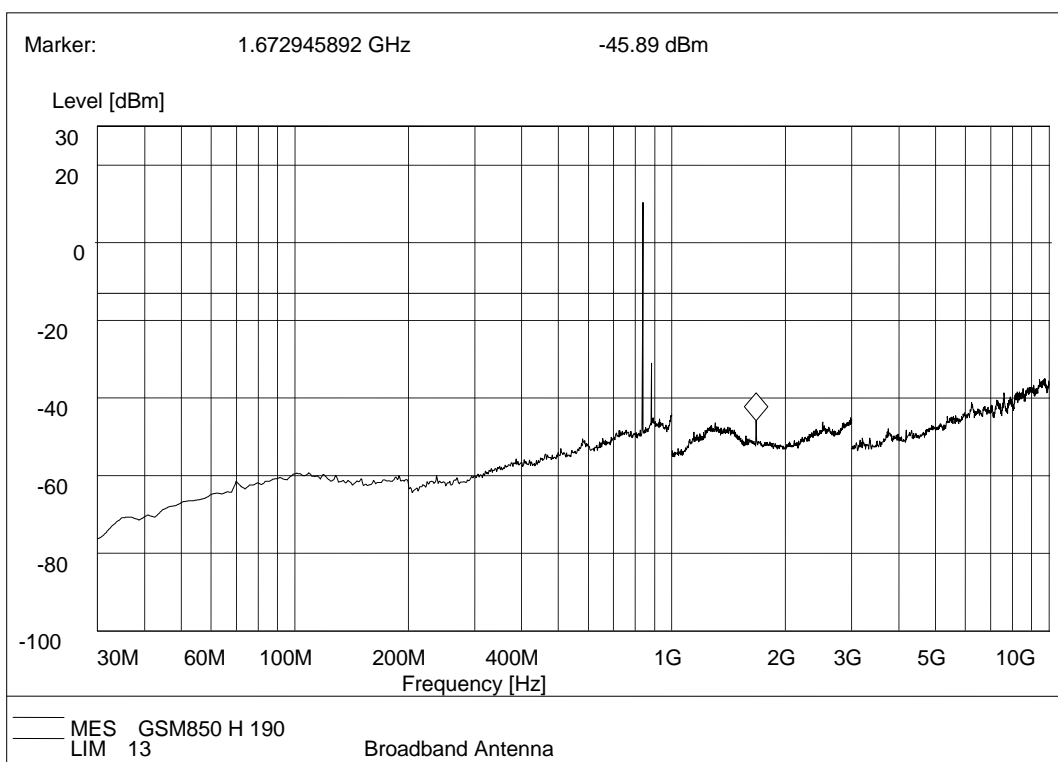


(Plot A.3: GSM 850MHz Channel = 190, Test Antenna Horizontal)

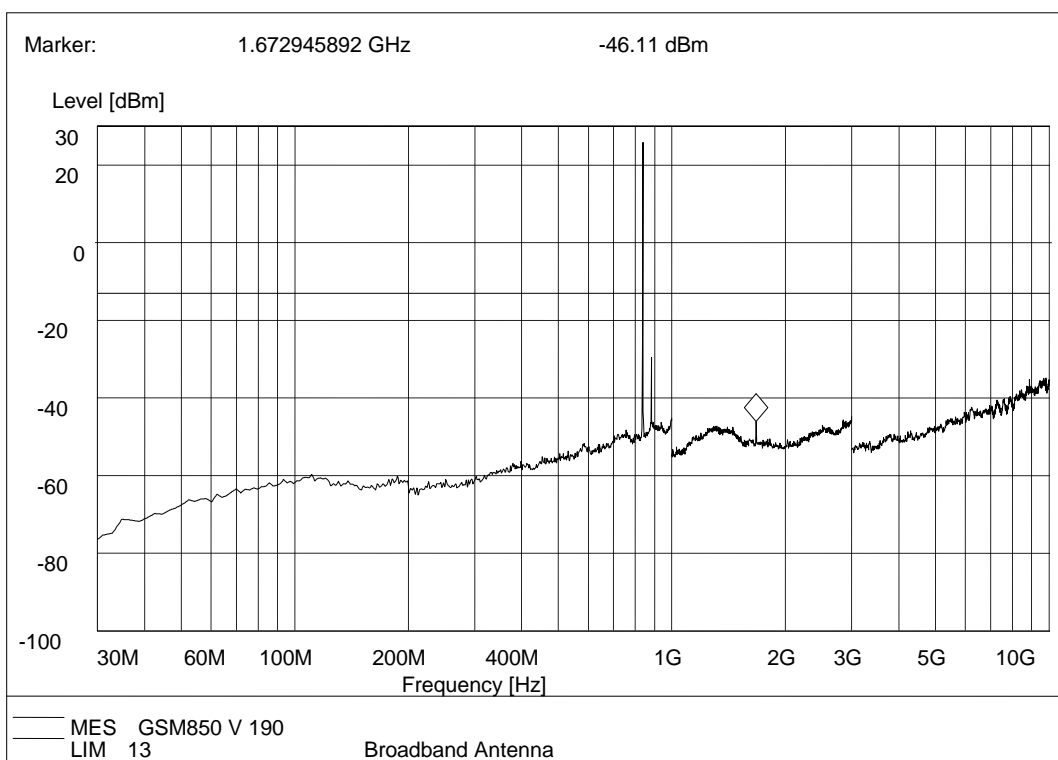


(Plot A.4: GSM 850MHz Channel = 190, Test Antenna Vertical)

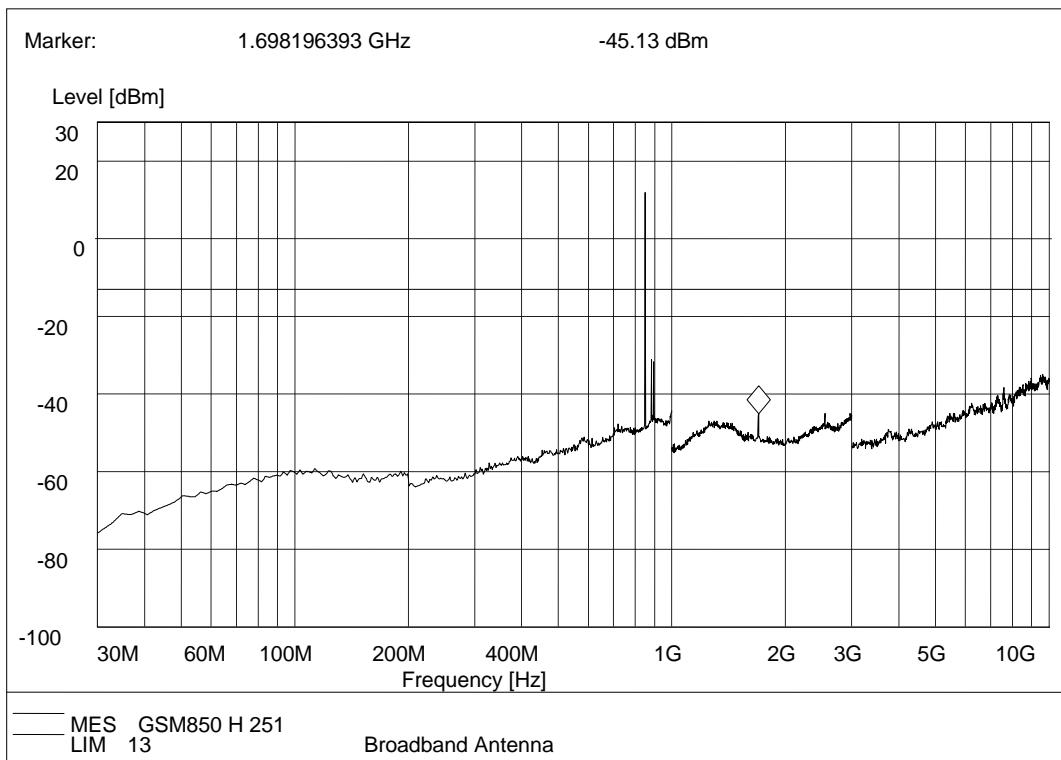


(Plot A.5: GSM 850MHz Channel = 251, Test Antenna Horizontal)

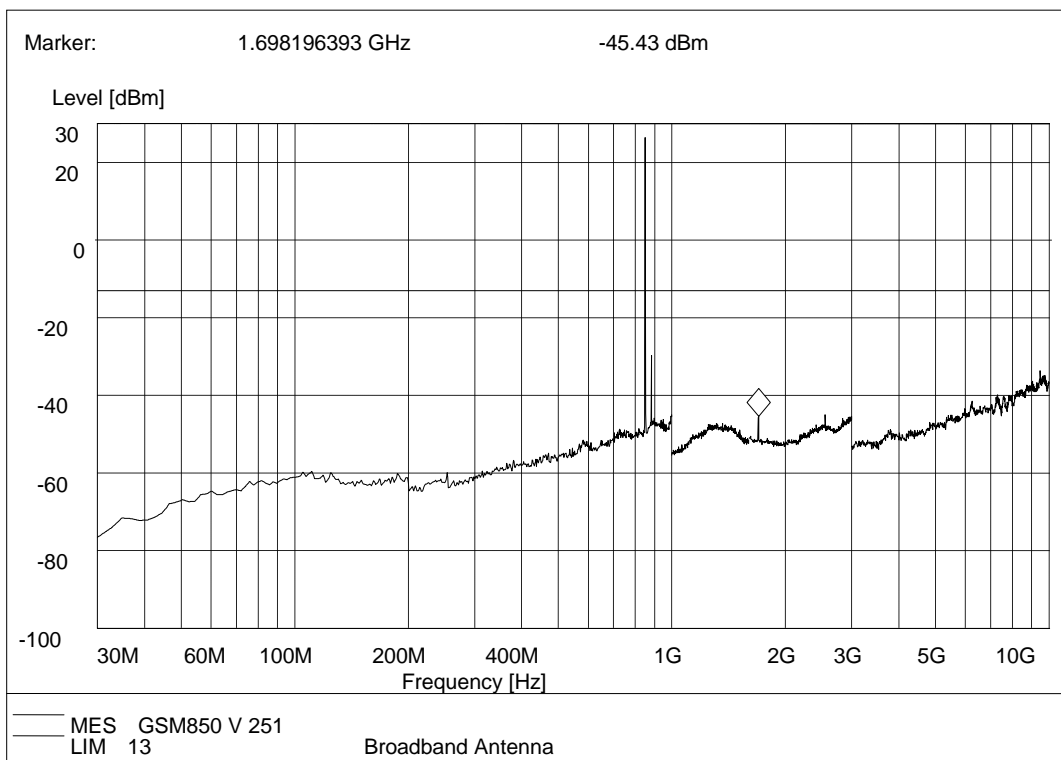


(Plot A.6: GSM 850MHz Channel = 251, Test Antenna Vertical)

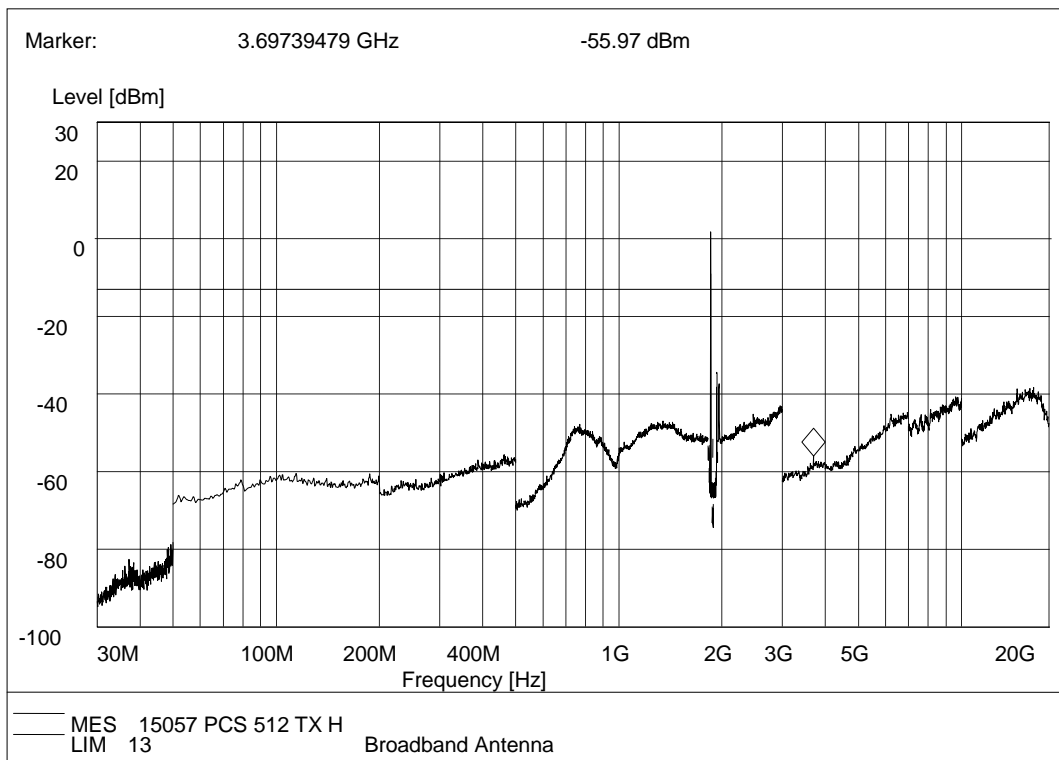


(Plot B.1: GSM 1900MHz Channel = 512, Test Antenna Horizontal)

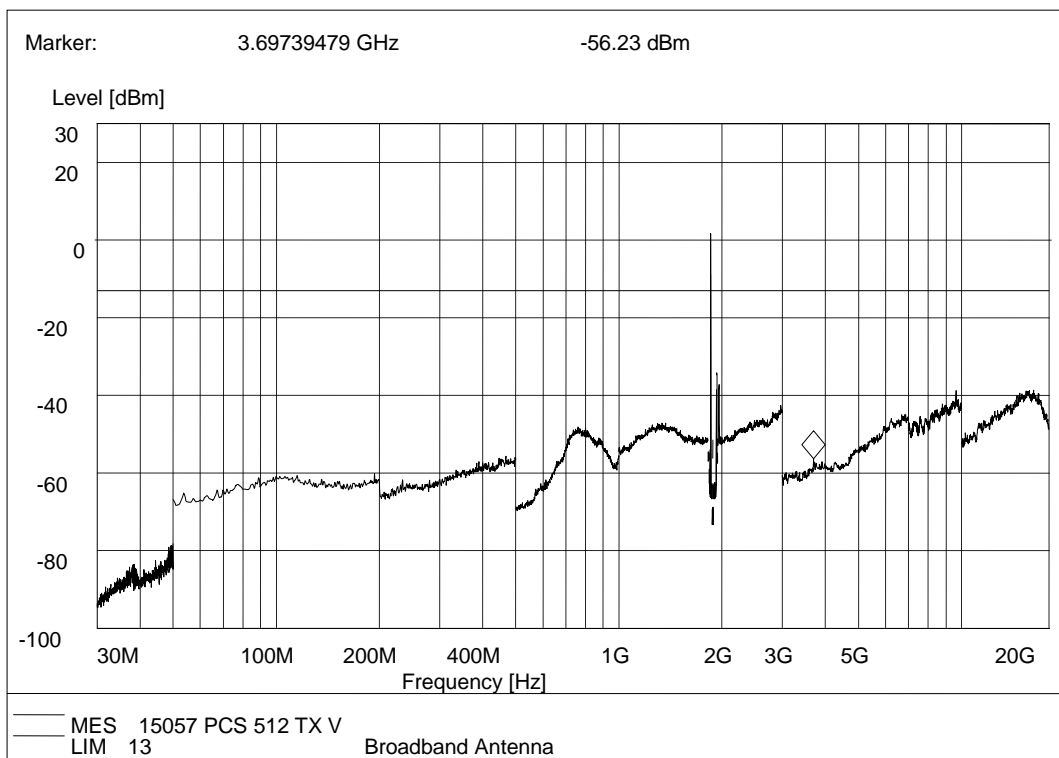


(Plot B.2: GSM 1900MHz Channel = 512, Test Antenna Vertical)

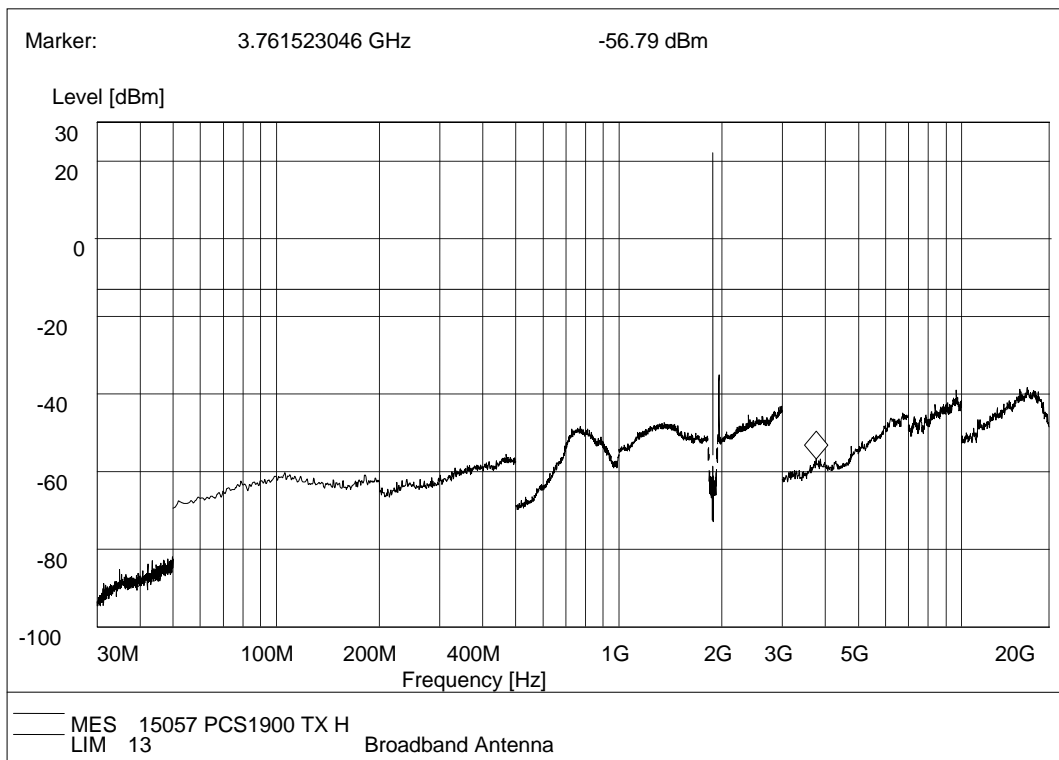


(Plot B.3: GSM 1900MHz Channel = 661, Test Antenna Horizontal)

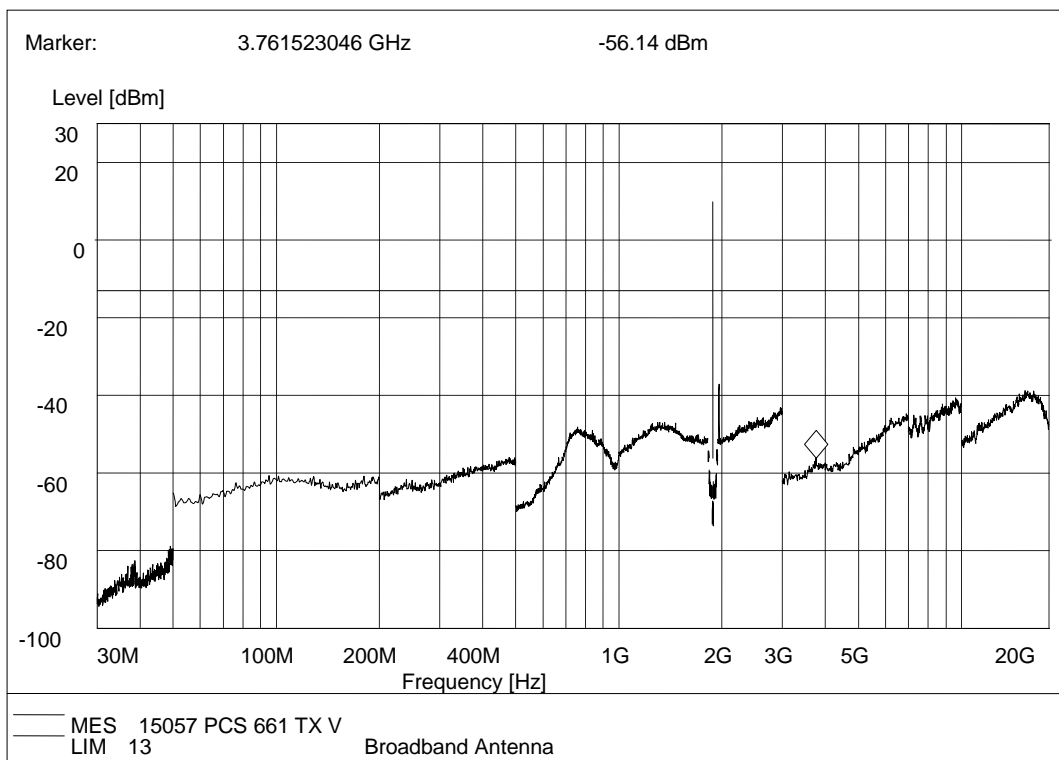


(Plot B.4: GSM 1900MHz Channel = 661, Test Antenna Vertical)

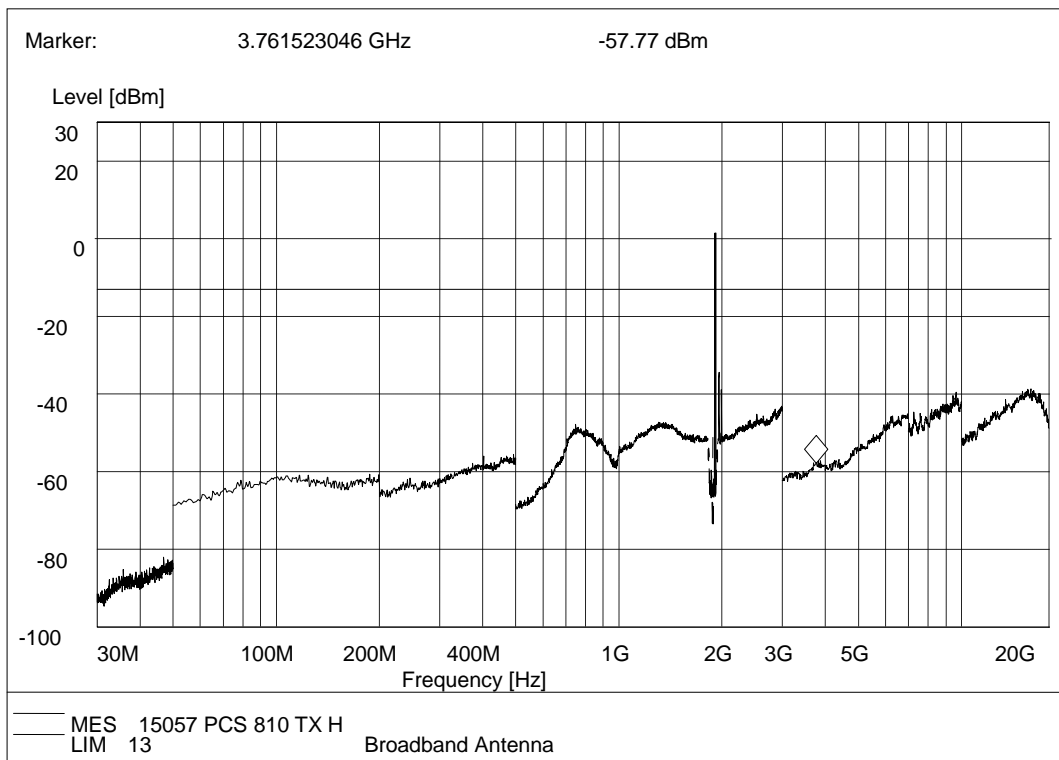


(Plot B.5: GSM 1900MHz Channel = 810, Test Antenna Horizontal)

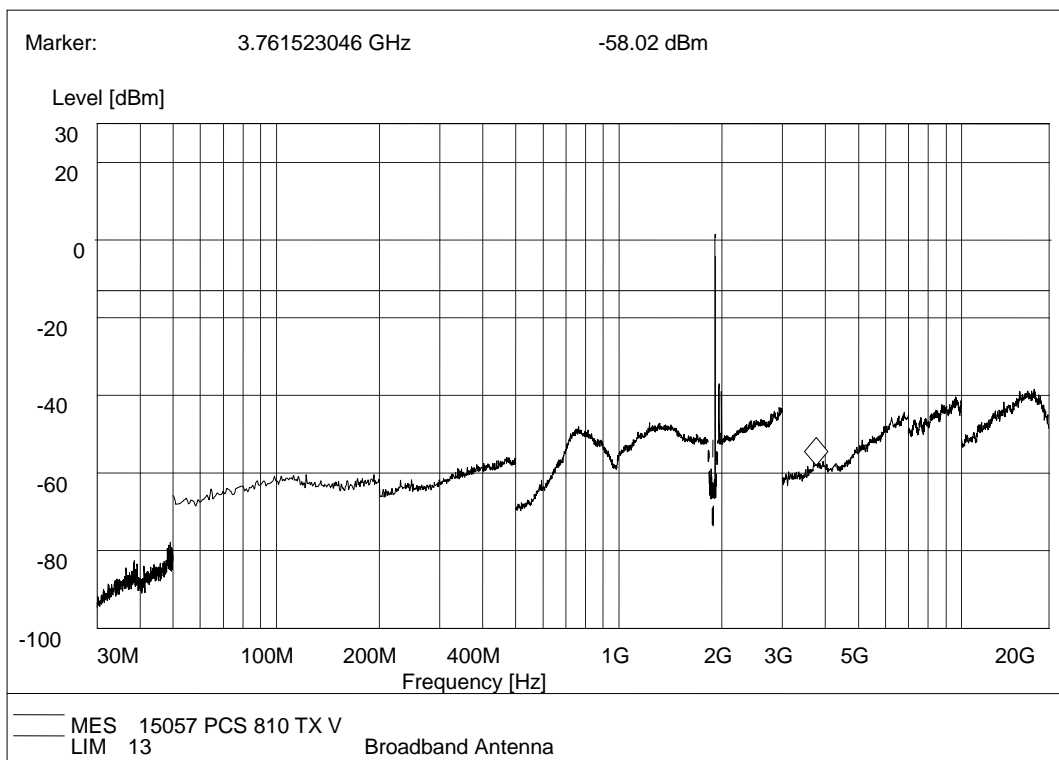


(Plot B.6: GSM 1900MHz Channel = 810, Test Antenna Vertical)

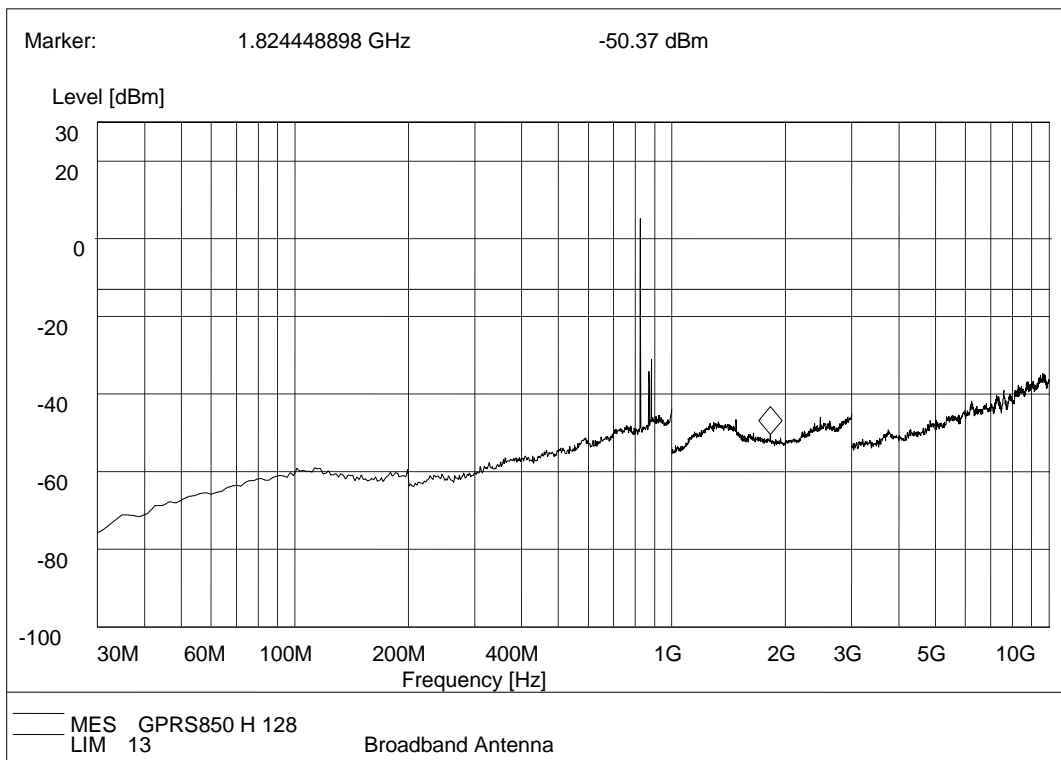


(Plot C.1: GPRS850MHz Channel = 128, Test Antenna Horizontal)

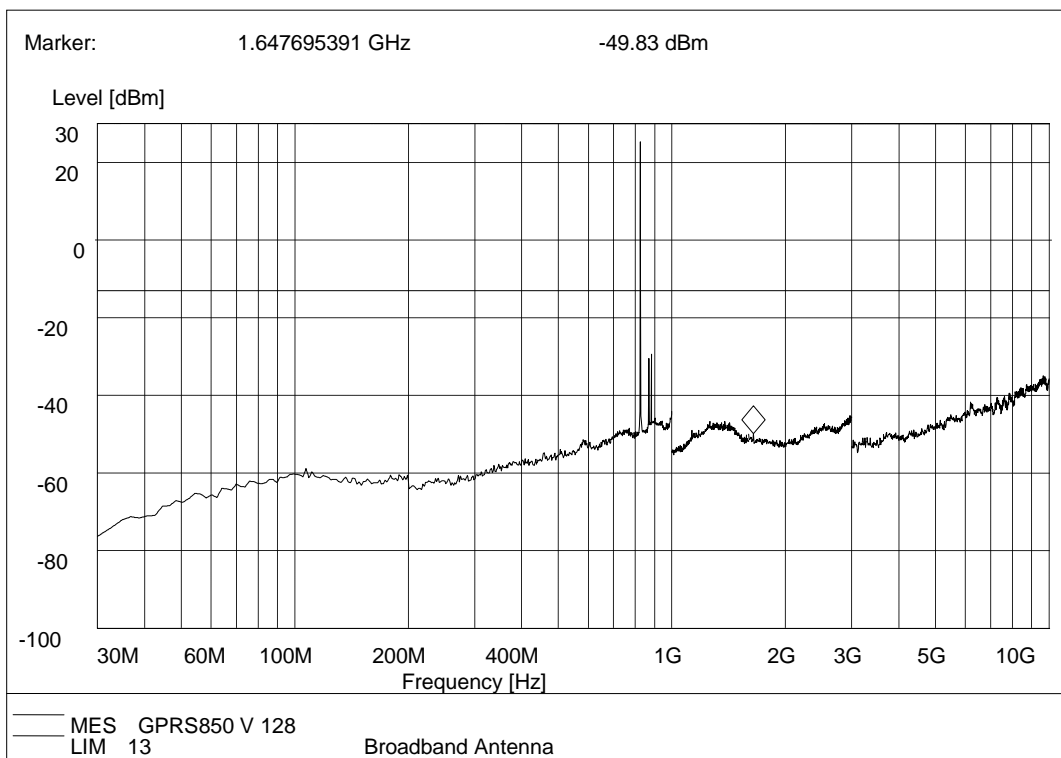


(Plot C.2: GPRS850 MHz Channel = 128, Test Antenna Vertical)

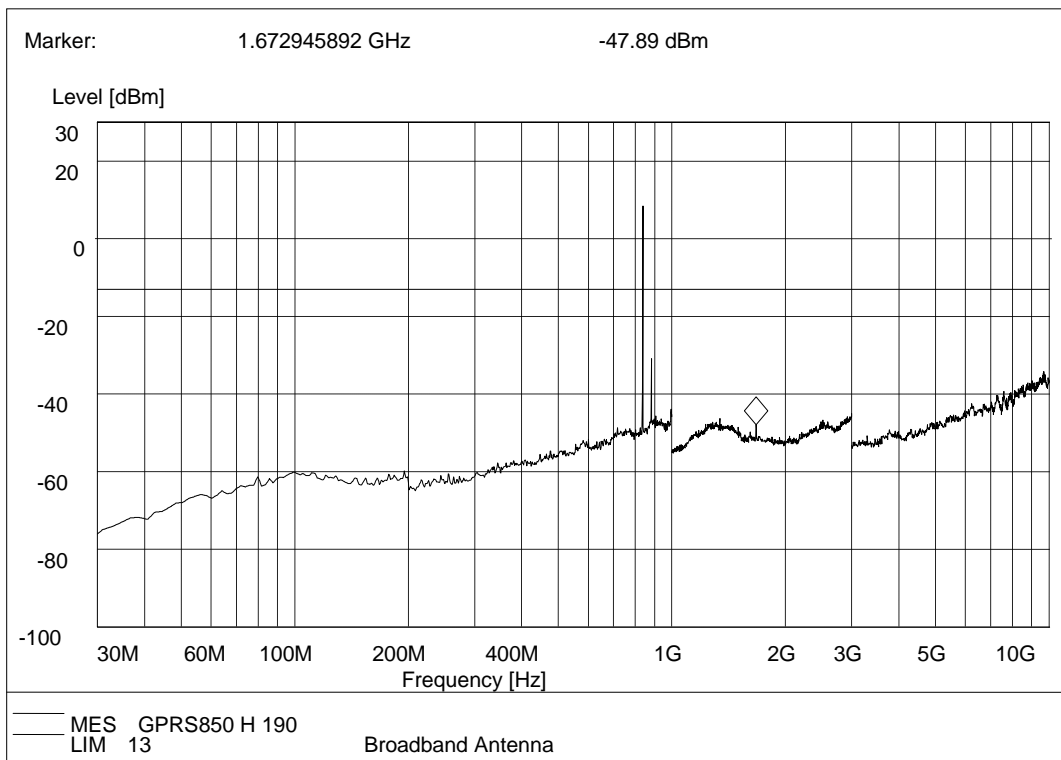


(Plot C.3: GPRS850MHz Channel = 190, Test Antenna Horizontal)

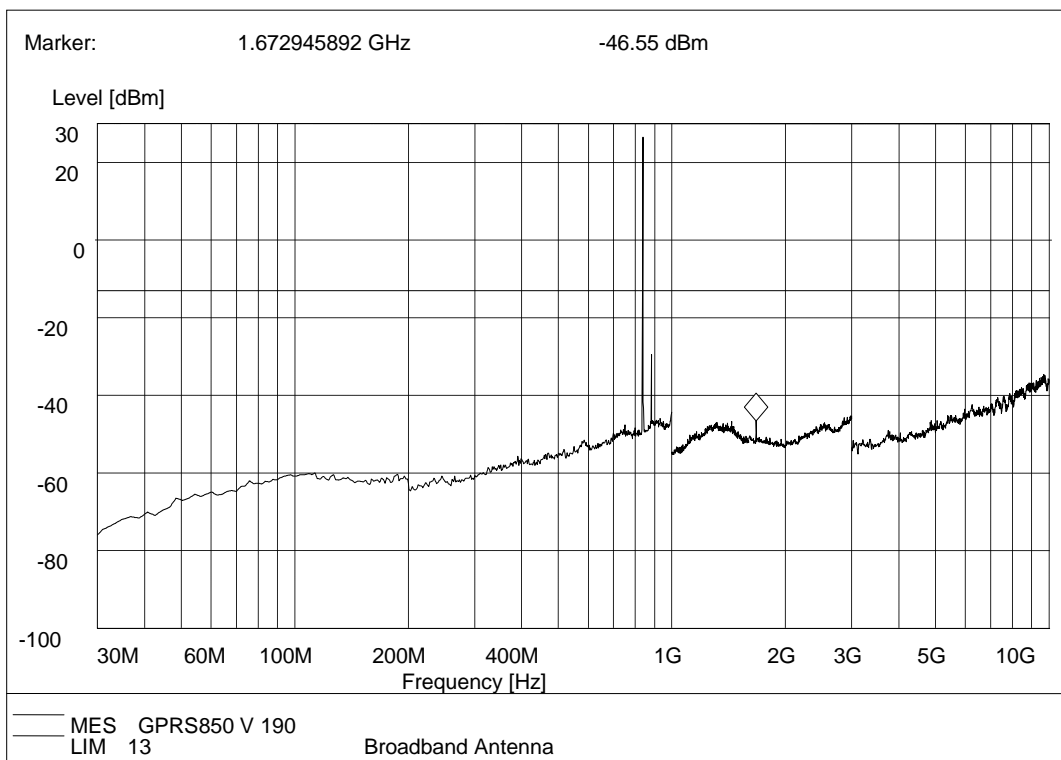


(Plot C.4: GPRS850MHz Channel = 190, Test Antenna Vertical)

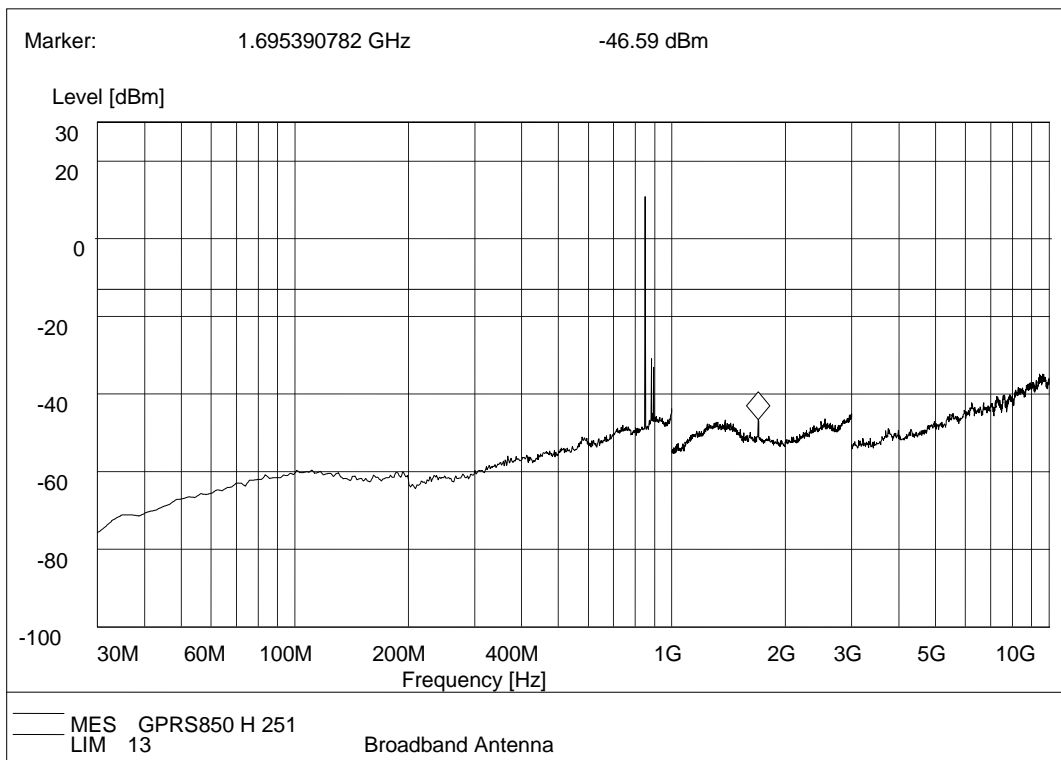


(Plot C.5: GPRS850MHz Channel = 251, Test Antenna Horizontal)

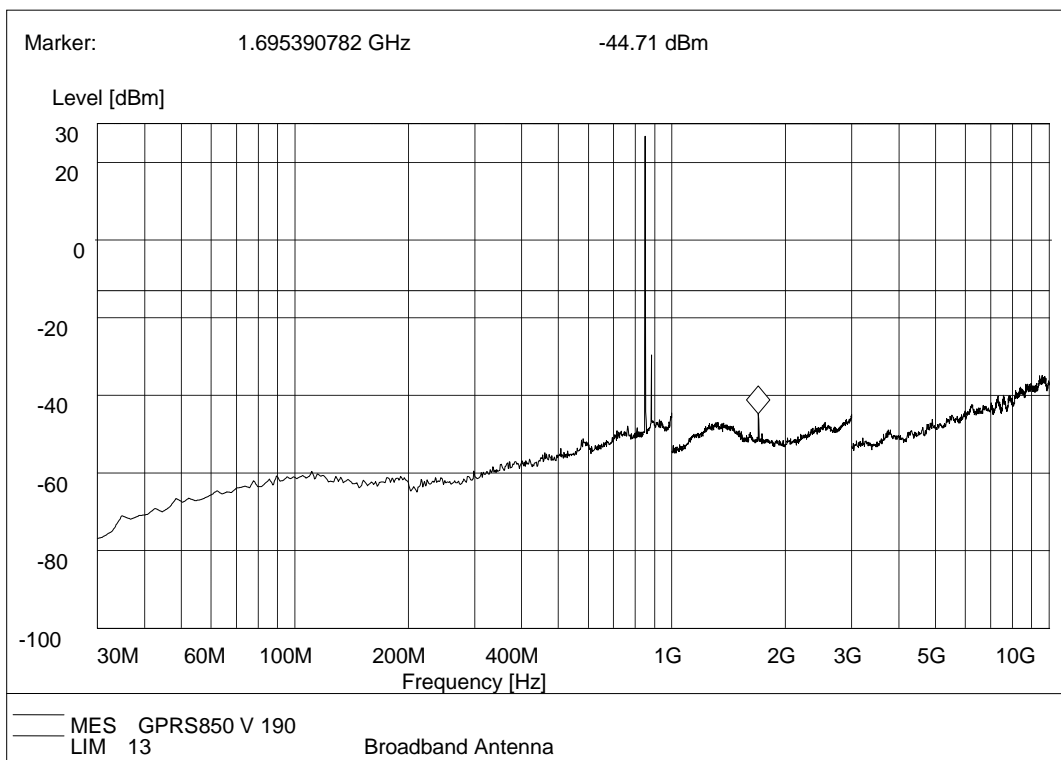


(Plot C.6: GPRS850MHz Channel = 251, Test Antenna Vertical)

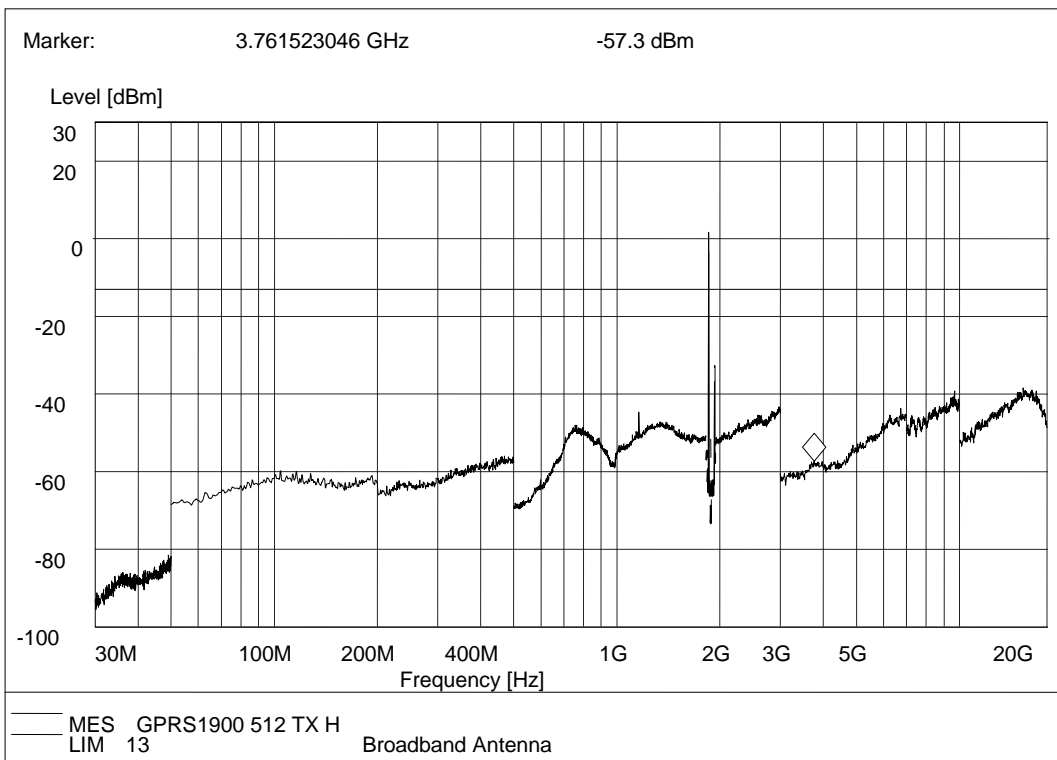


(Plot D.1: GPRS1900 MHz Channel = 512, Test Antenna Horizontal)

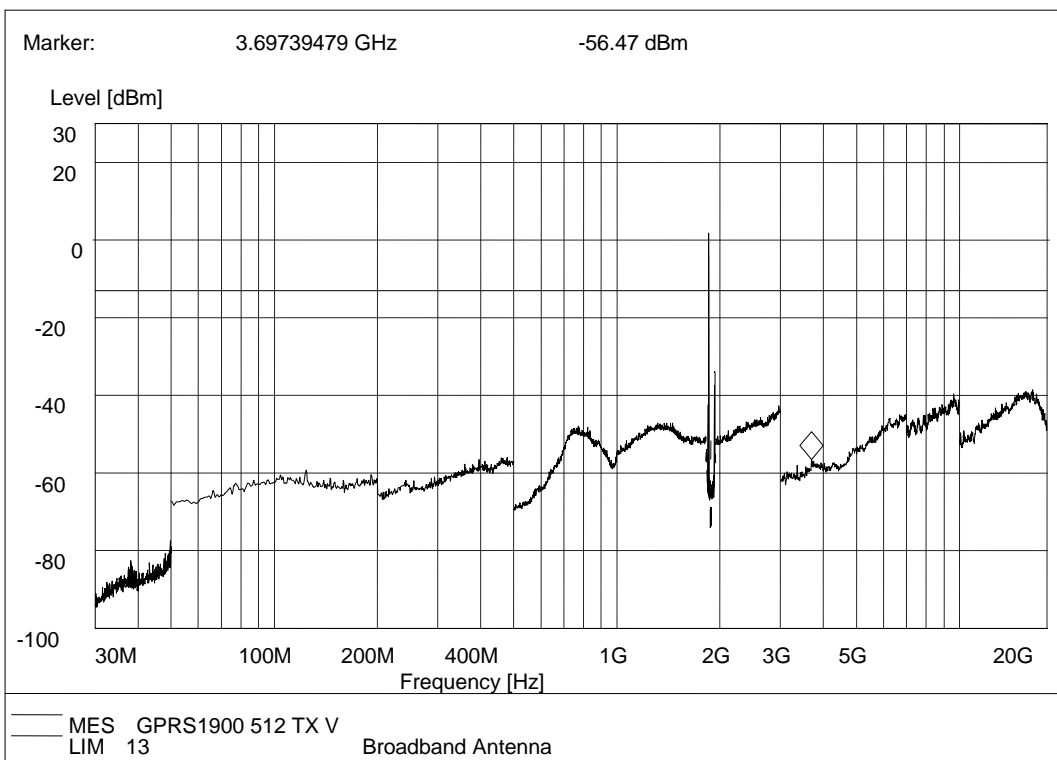


(Plot D.2: GPRS1900 MHz Channel = 512, Test Antenna Vertical)

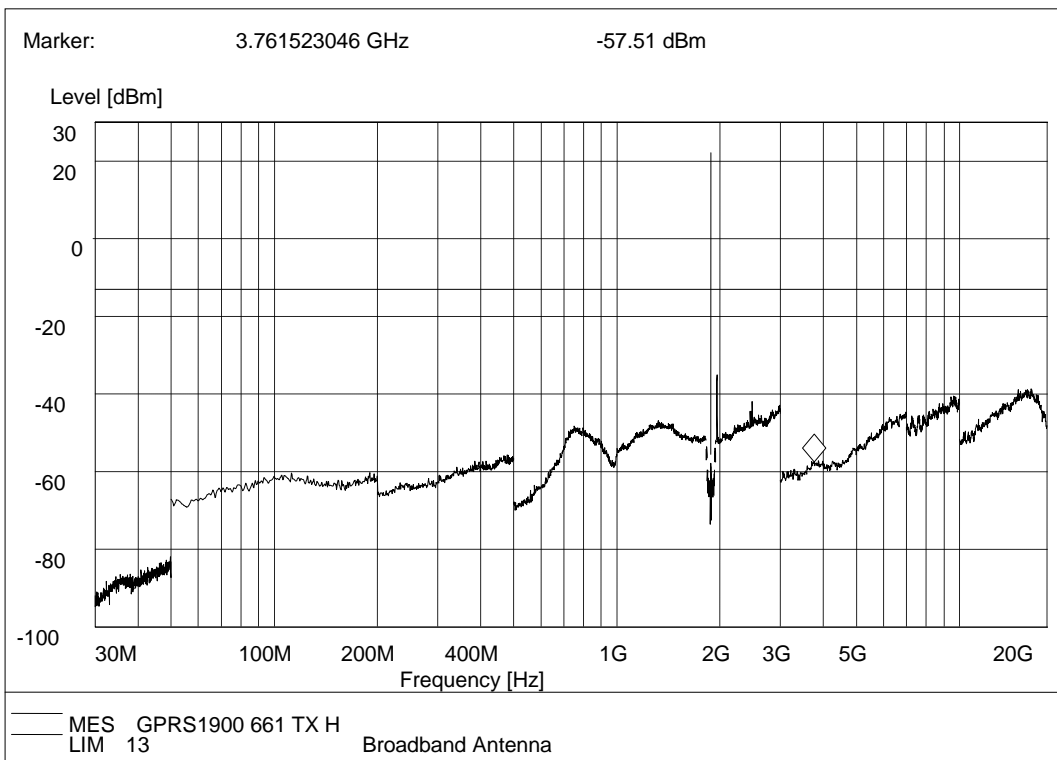


(Plot D.3: GPRS1900 MHz Channel = 661, Test Antenna Horizontal)

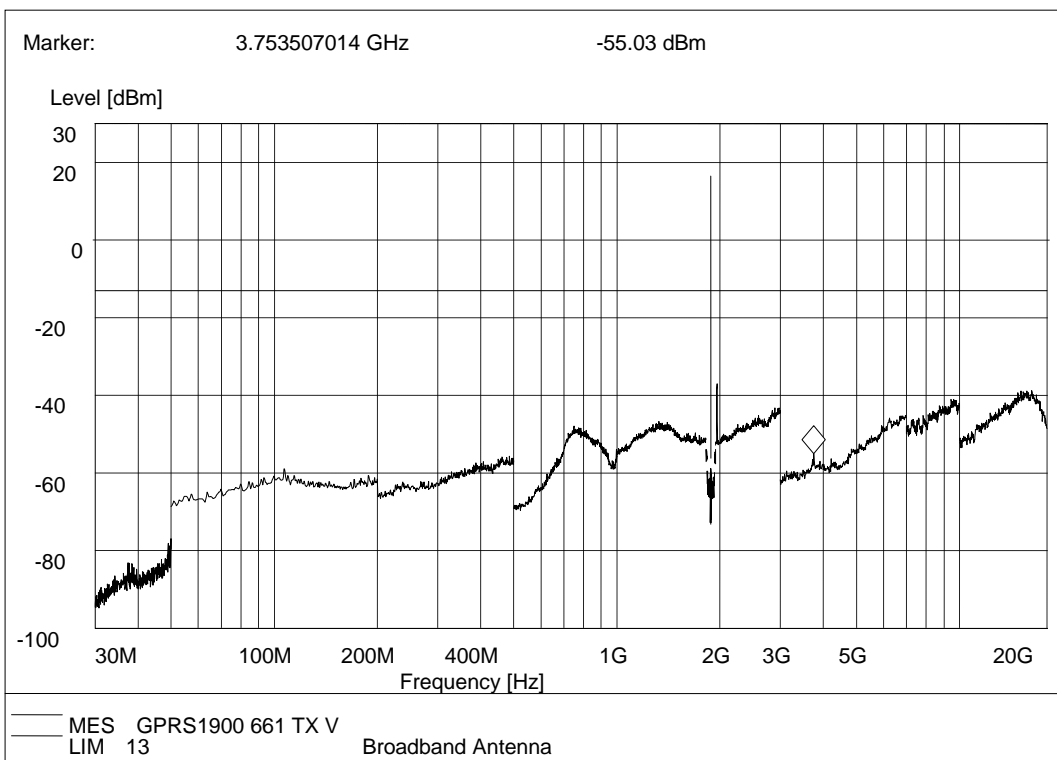

(Plot D.4: GPRS1900 MHz Channel = 661, Test Antenna Vertical)

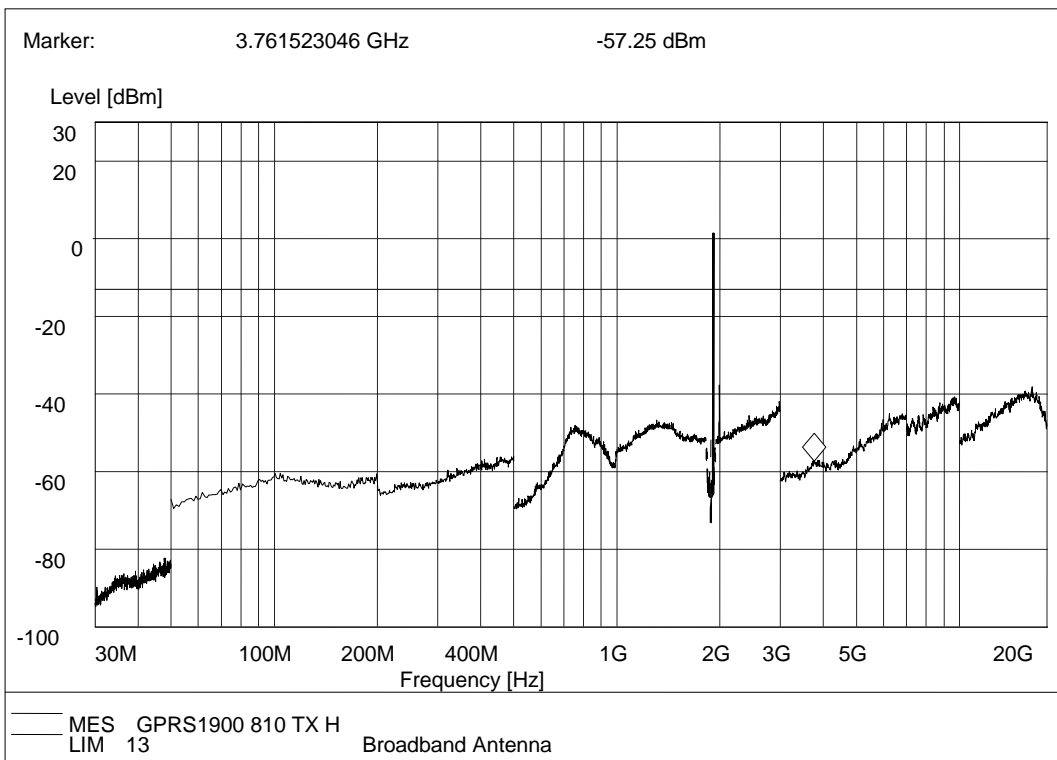

(Plot D.5: GPRS1900 MHz Channel = 810, Test Antenna Horizontal)

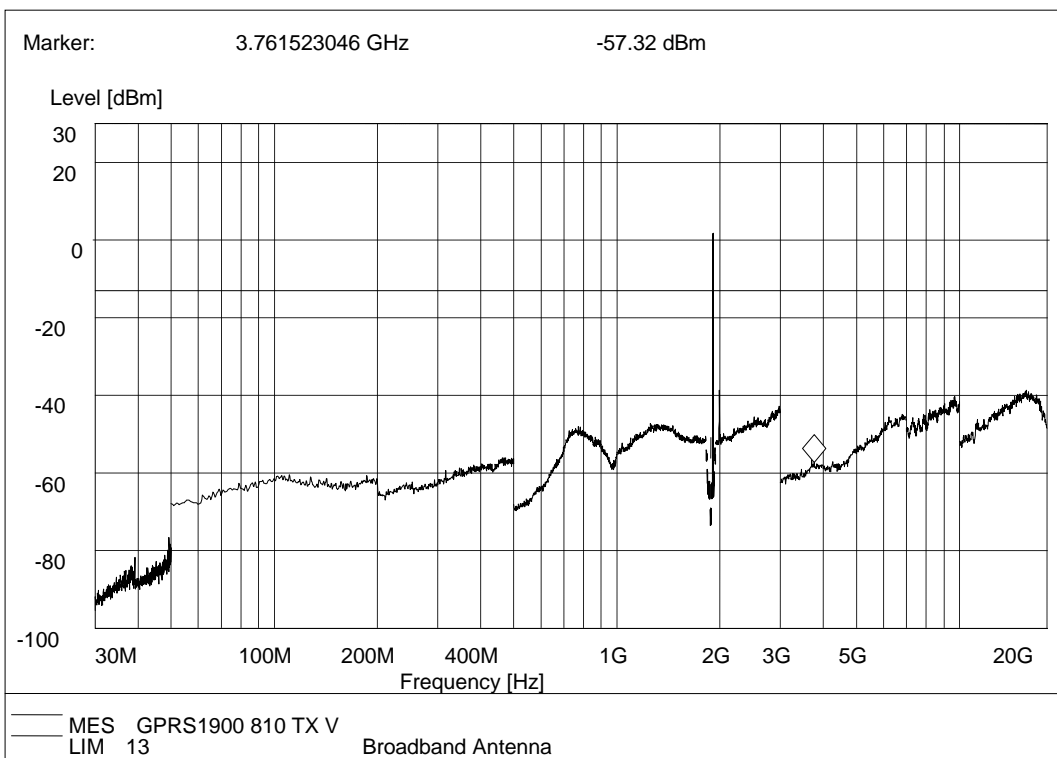

(Plot D.6: GPRS1900 MHz Channel = 810, Test Antenna Vertical)

Annex A Accreditation Certificate

 
China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(Registration No. CNAS L1659)
CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. <u>Building 28/29, Shigudong, Xili Industrial Area, Xili Street,</u> <u>Nanshan District, Shenzhen, Guangdong, China</u>
<i>is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.</i>
<i>The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.</i>
Date of Issue: 2012-09-29 Date of Expiry: 2015-09-28 Date of Initial Accreditation: 1999-08-03 Date of Update: 2012-09-29

Signed on behalf of China National Accreditation Service for Conformity Assessment
<small>China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation scheme for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).</small>
No. CNAS AL 2 0005210

Annex B PHOTOGRAPHS OF THE EUT




Annex C PHOTOGRAPHS OF THE TEST SETUP


1. Conducted Measurement Setup



2. Radiated Measurement Setup

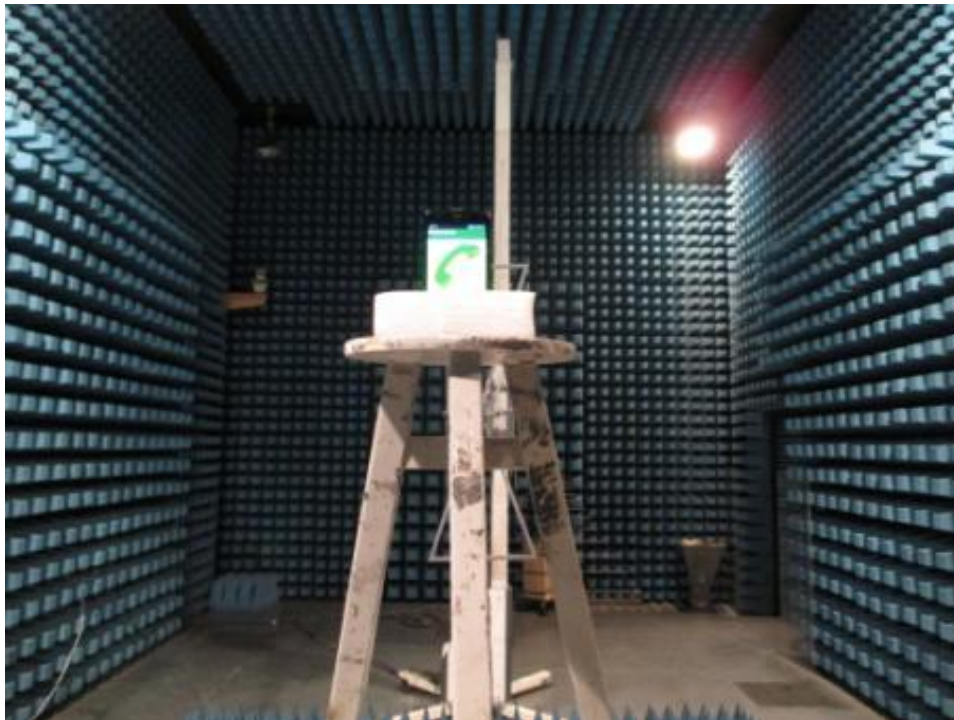

30M~18G

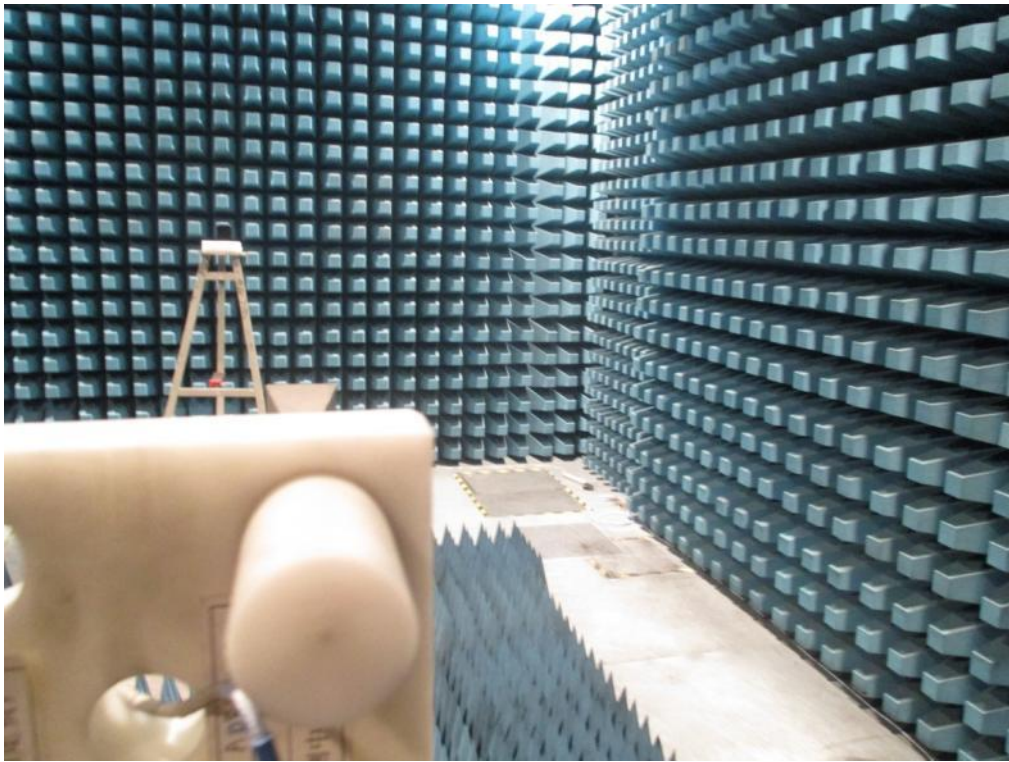

18G~20G

** END OF REPORT **