



# RF TEST REPORT

**Report No.:** SET2014-01426

**Product Name:** GSM/WCDMA MOBILE PHONE

**FCC ID:** CLNSS4040

**Model No. :** M4 SS 4040

**Applicant:** MFOURTEL MEXICO S.A. DE C.V.

**Address:** Homero No. 136 – 101 Col. Chapultepec Morales, C.P. 11570,  
Delegación Miguel Hidalgo

**Issued by:** CCIC-SET

**Lab Location:** Electronic Testing Building, Shahe Road, Xili, Nanshan District,  
Shenzhen, 518055, P. R. China

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of 85 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



### Test Report

**Product Name** ..... : GSM/WCDMA MOBILE PHONE

**Brand Name** ..... : N/A

**Trade Name** ..... : M4

**Applicant** ..... : MFOURTEL MEXICO S.A. DE C.V.


**Applicant Address** ..... : Homero 136 -101 Col. Chapultepec Morales, C.P. 11570,  
Delegacion Miguel Hidalgo

**Manufacturer** ..... : CK Telecom Limited


**Manufacturer Address** ..... : Technology Road.High-Tech Development Zone.  
Heyuan, Guangdong,P.R.China.

**Test Standards** ..... : 47 CFR Part 15 Subpart C: Radio Frequency Devices  
ANSI C63.10:2009: American National Standard for  
Testing Unlicensed Wireless Devices  
KDB558074 D01 DTS Meas Guidance v03r01

**Test Result** ..... : PASS

**Tested by** ..... :  2014-02-27  
\_\_\_\_\_  
Lu Lei, Test Engineer

**Reviewed by** ..... :  2014-02-27  
\_\_\_\_\_  
Shuangwen Zhang, Senior Eginer

**Approved by** ..... :  2014-02-27  
\_\_\_\_\_  
Wu Li'an, Manager



## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
<b>1.1</b>	<b>EUT Description .....</b>	<b>5</b>
<b>1.2</b>	<b>Test Standards and Results .....</b>	<b>6</b>
<b>1.3</b>	<b>Facilities and Accreditations .....</b>	<b>7</b>
1.3.1	Facilities .....	7
1.3.2	Test Environment Conditions.....	7
<b>2.</b>	<b>47 CFR PART 15C REQUIREMENTS.....</b>	<b>8</b>
<b>2.1</b>	<b>Antenna requirement .....</b>	<b>8</b>
2.1.1	Applicable Standard .....	8
2.1.2	Antenna Information .....	8
2.1.3	Result: comply .....	8
<b>2.2</b>	<b>Peak Output Power .....</b>	<b>9</b>
2.2.1	Requirement .....	9
2.2.2	Test Description .....	9
2.2.3	Test Result.....	10
<b>2.3</b>	<b>Bandwidth .....</b>	<b>18</b>
2.3.1	Requirement .....	18
2.3.2	Test Description .....	18
2.3.3	Test Result.....	18
<b>2.4</b>	<b>Conducted Spurious Emissions .....</b>	<b>27</b>
2.4.1	Requirement .....	27
2.4.2	Test Description .....	27
2.4.3	Test Result.....	27
<b>2.5</b>	<b>Power spectral density (PSD) .....</b>	<b>36</b>
2.5.1	Requirement .....	36
2.5.2	Test Description .....	36
2.5.3	Test Result.....	37
<b>2.6</b>	<b>Band Edge .....</b>	<b>45</b>
2.6.1	Requirement .....	45
2.6.2	Test Description .....	45



2.6.3 Test Result .....46

**2.7 Conducted Emission .....63**

2.7.1 Requirement .....63

2.7.2 Test Description .....63

2.7.3 Test Result.....64

**2.8 Radiated Emission .....67**

2.8.1 Requirement .....67

2.8.2 Test Description .....68

2.8.3 Test Result.....70

**ANNEX A ACCREDITATION CERTIFICATE.....81**

**ANNEX B PHOTOGRAPHS OF THE EUT.....82**

**ANNEX C PHOTOGRAPHS OF THE TEST SETUP.....83**

**1. CONDUCTED MEASUREMENT SETUP .....83**

**2. RADIATED MEASUREMENT SETUP.....84**

Change History		
Issue	Date	Reason for change
1.0	2014-02-27	First edition



# 1. GENERAL INFORMATION

## 1.1 EUT Description

EUT Type ..... : GSM/WCDMA MOBILE PHONE  
Serial No. .... : (n.a, marked #1 by test site)  
FCC ID ..... : CLNSS4040  
Hardware Version..... : SLFQPLUS-V1.0  
Software Version ..... : M4\_SS4040\_S10\_Ver200  
Frequency Range..... : 802.11b/g/n-20MHz: 2.412GHz - 2.462GHz  
802.11n-40MHz: 2.422GHz - 2.452GHz  
Channel Number ..... : 802.11b/g/n-20MHz: 11  
802.11n-40MHz: 7  
Modulation Type ..... : DSSS (802.11b), OFDM (802.11g/n)  
Antenna Type ..... : PIFA Antenna  
Antenna Gain ..... : -1dBi

Note 1: The EUT is GSM/WCDMA MOBILE PHONE, it contains WIFI operating at 2.4GHz ISM band; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

Note 2: The frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 * (n - 1)$  ( $1 \leq n \leq 11$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Wi-Fi, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C 2012	Radio Frequency Devices
2	ANSI C63.10 2009	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.203	Antenna Requirement	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	Bandwidth	PASS
4	15.247(d)	Conducted Spurious Emission	PASS
5	15.247(d)	Band Edge	PASS
6	15.207	Conducted Emission	PASS
7	15.209 ,15.247(c)	Radiated Emission	PASS
8	15.247(e)	Power spectral density (PSD)	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2009.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Peak Conducted Output Power	11b/DSSS	11 Mbps	1/6/11
Power Spectral Density	11g/OFDM	54 Mbps	1/6/11
6dB Bandwidth	11n(20MHz)/OFDM	72Mbps	1/6/11
Spurious RF conducted emission	11n(40MHz)/OFDM	150 Mbps	3/6/9
Radiated Emission 9kHz~1GHz&			
Radiated Emission 1GHz~10th Harmonic			
Band Edge	11b/DSSS	11 Mbps	1/11
	11g/OFDM	54 Mbps	1/11
	11n(20MHz)/OFDM	72Mbps	1/11
	11n(40MHz)/OFDM	150 Mbps	3/9



## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

#### **CNAS-Lab Code: L1659**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8\*6.8\*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

#### **FCC-Registration No.: 406086**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, Renewal date Nov. 19, 2011, valid time is until Nov. 18, 2014.

#### **IC-Registration No.: 11185A-1**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on July. 15, 2013, valid time is until July. 15, 2016.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	15 °C - 35 °C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa



## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1 Antenna requirement

#### 2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 2.1.2 Antenna Information

**Antenna Category:** External antenna

An External antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

**Antenna General Information:**

No.	EUT Model	Ant. Cat.	Ant. Type	Gain(dBi)
1	GSM/WCDMA MOBILE PHONE	External	PIFA	-1

#### 2.1.3 Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.




## 2.2 Peak Output Power

### 2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.2.2 Test Description

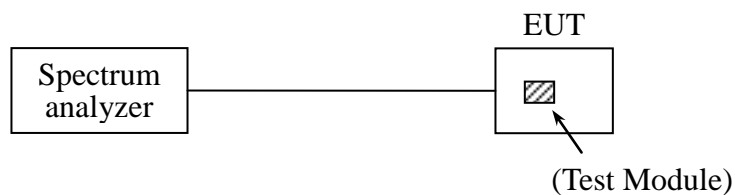

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

#### A. Test Setup:

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

#### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10



### 2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

#### 2.2.3.1 802.11b Test mode

##### Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power(dBm)	Refer to Plot	Limits (dBm)	Result
1	2412	17.48	Plot 2.2 A	30	PASS
6	2437	17.58	Plot 2.2 B	30	PASS
11	2462	17.73	Plot 2.2 C	30	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 11Mbps.  
2. The test results including the cable lose.

#### 2.2.3.2 802.11g Test mode

##### Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Refer to Plot	Limits (dBm)	Result
1	2412	16.52	Plot 2.2 D	30	PASS
6	2437	16.54	Plot 2.2 E	30	PASS
11	2462	16.60	Plot 2.2 F	30	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 54Mbps.  
2. The test results including the cable lose.



### 2.2.3.3 802.11n-20MHz Test mode

#### Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power(dBm)	Refer to Plot	Limits (dBm)	Result
1	2412	15.53	Plot 2.2 G	30	PASS
6	2437	15.52	Plot 2.2 H	30	PASS
11	2462	15.68	Plot 2.2 I	30	PASS


Note: 1. For 802.11n-20 mode at final test to get the worst-case emission at 72Mbps.  
 2. The test results including the cable lose.

### 2.2.3.4 802.11n-40MHz Test mode


#### Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power(dBm)	Refer to Plot	Limits (dBm)	Result
3	2422	14.39	Plot 2.2 J	30	PASS
6	2437	14.29	Plot 2.2 K	30	PASS
9	2452	14.14	Plot 2.2 L	30	PASS


Note: 1. For 802.11n-40 mode at final test to get the worst-case emission at 72Mbps.  
 2. The test results including the cable lose.

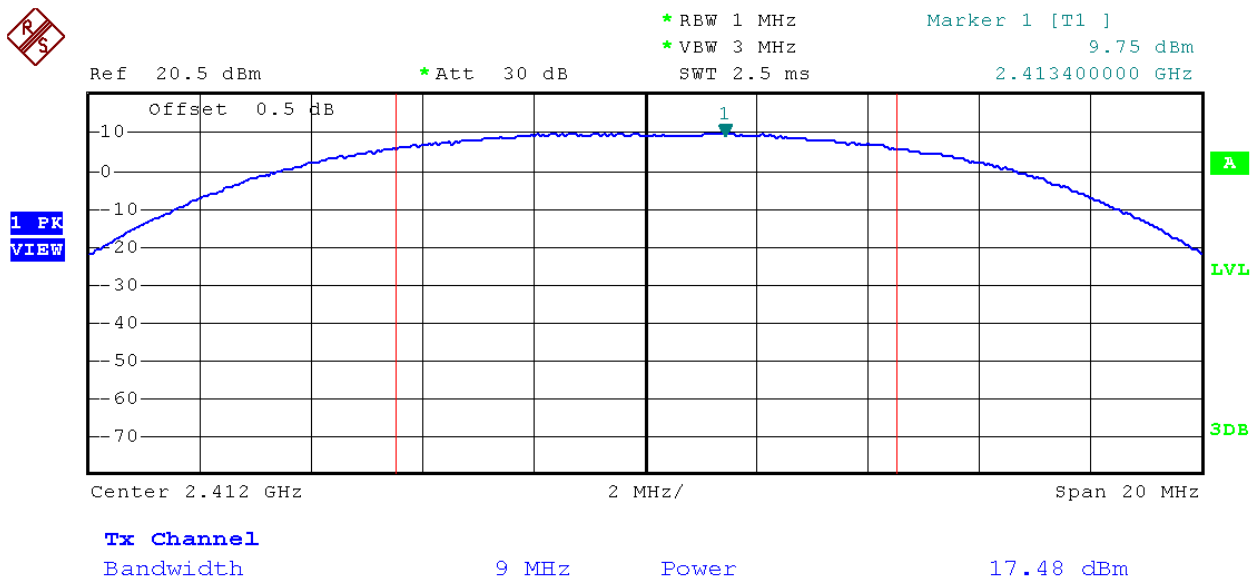


(Plot 2.2 A: Channel 1: 2412MHz @ 802.11b)

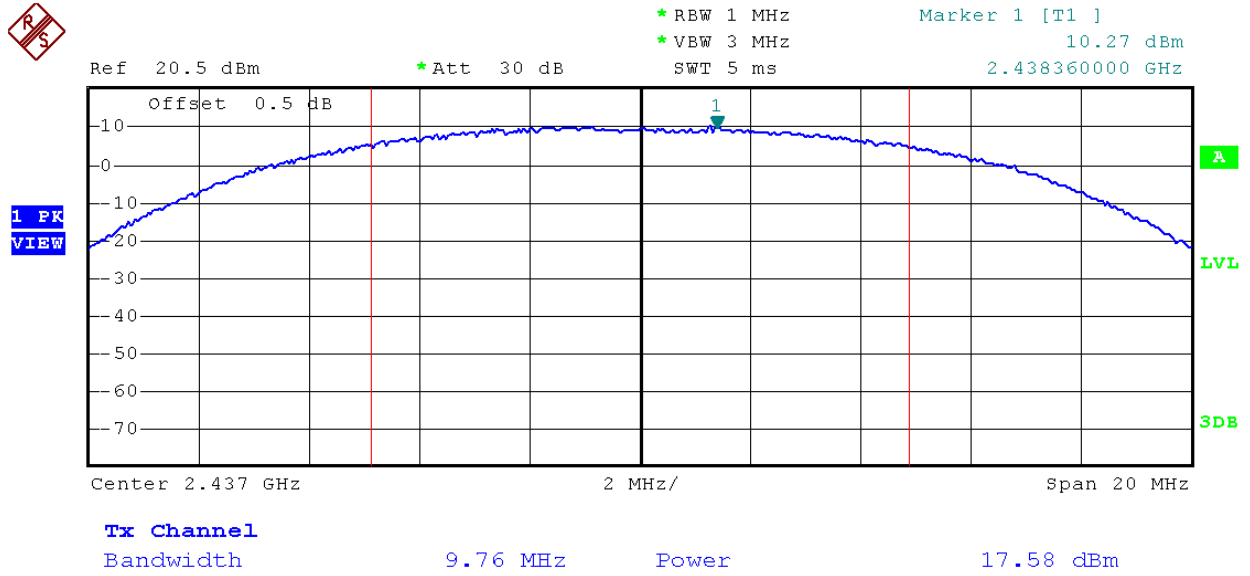


(Plot 2.2 B: Channel 6: 2437MHz @ 802.11b)

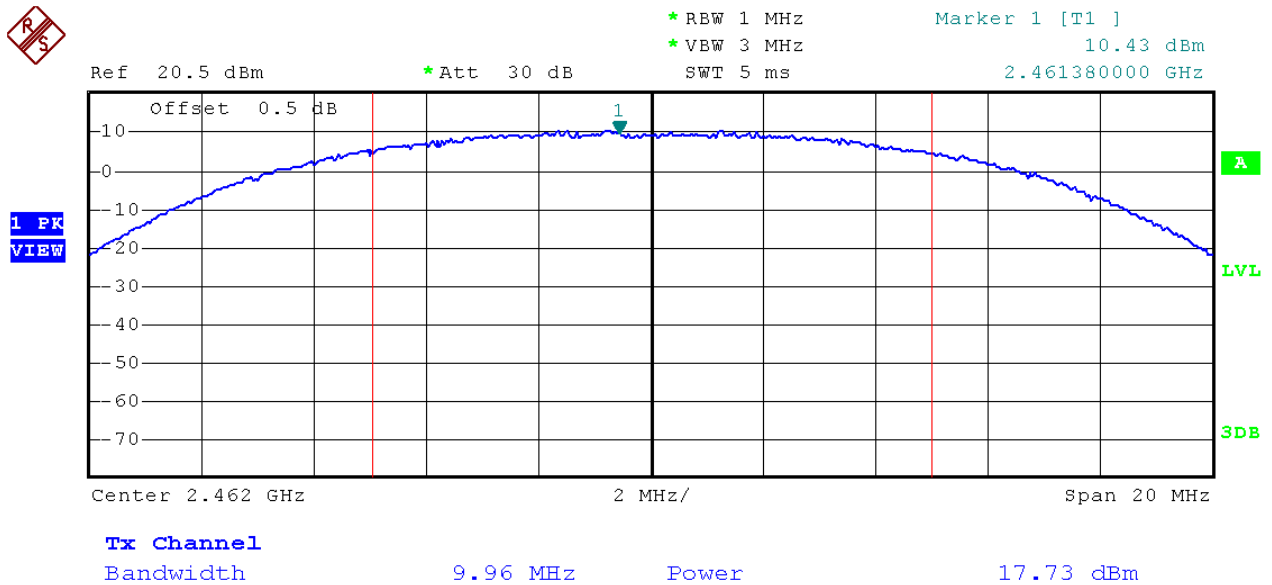

(Plot 2.2 C: Channel 11: 2462MHz @ 802.11b)

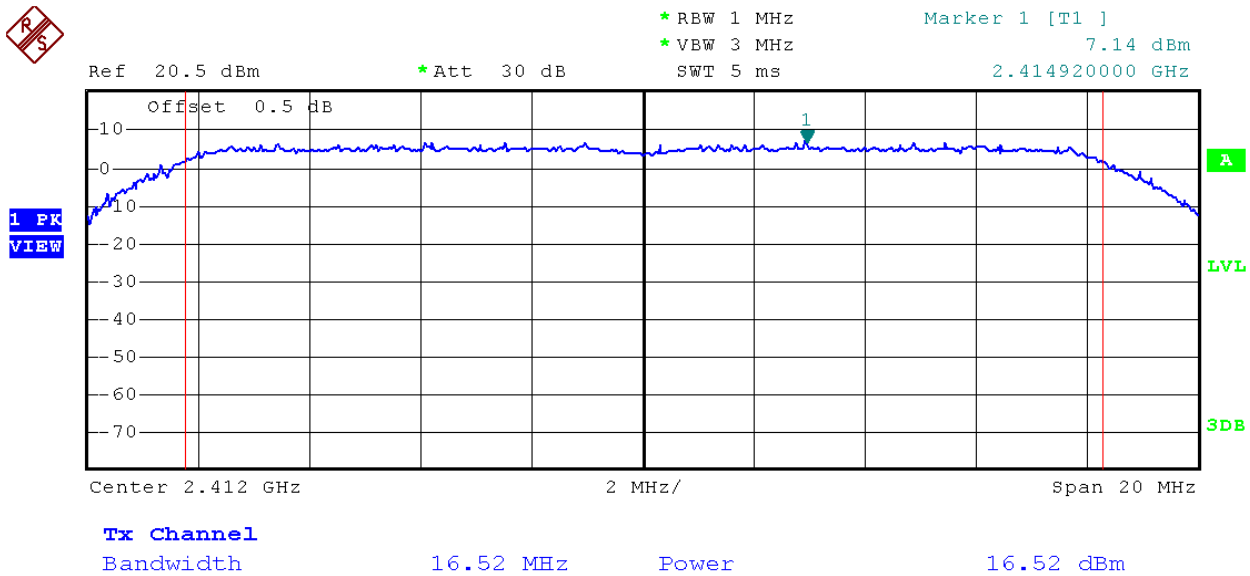


(Plot 2.2 D: Channel 1: 2412MHz @ 802.11g)

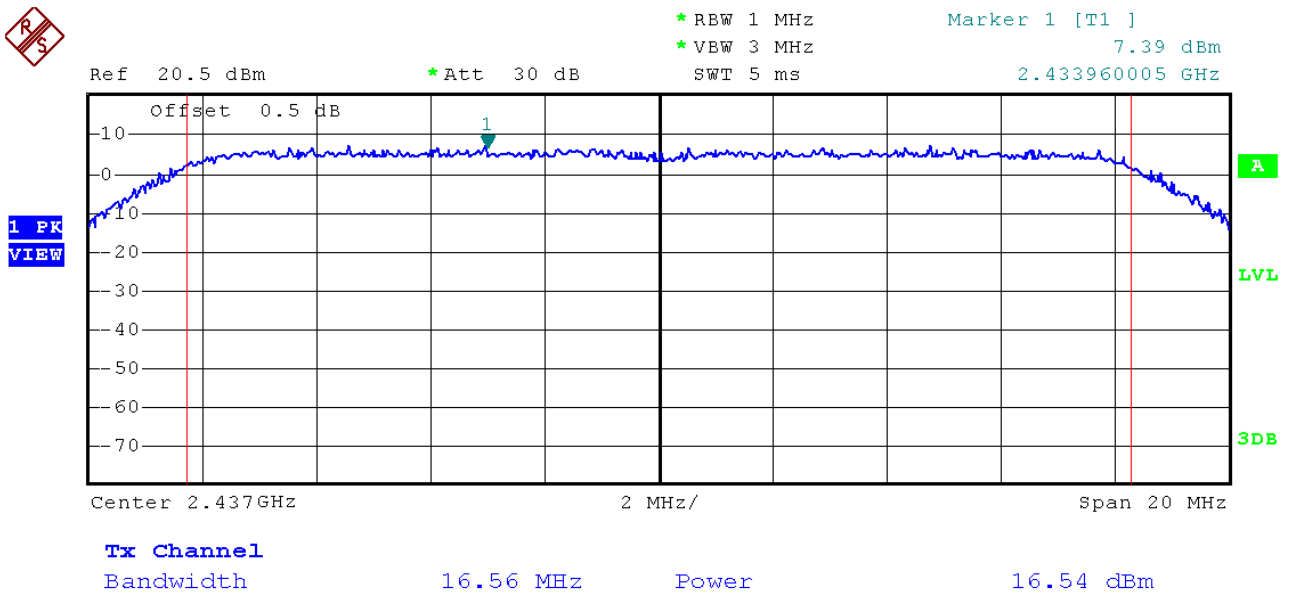

(Plot 2.2 E: Channel 6: 2437MHz @ 802.11g)



1 PK  
VIEW

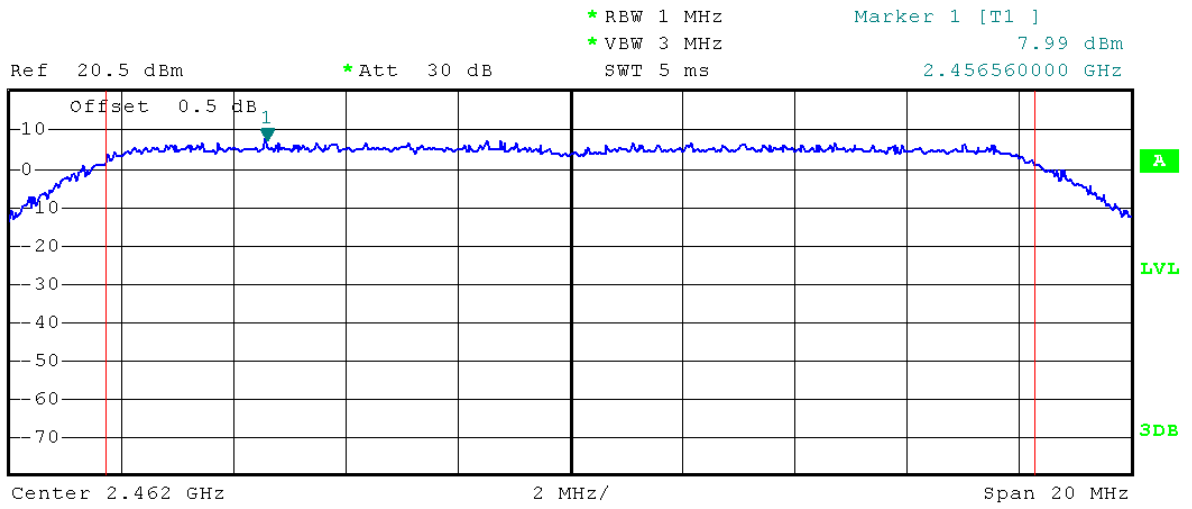


**Tx Channel**  
 Bandwidth 16.56 MHz Power 16.60 dBm

(Plot 2.2 F: Channel 11: 2462MHz @ 802.11g)




1 PK  
VIEW

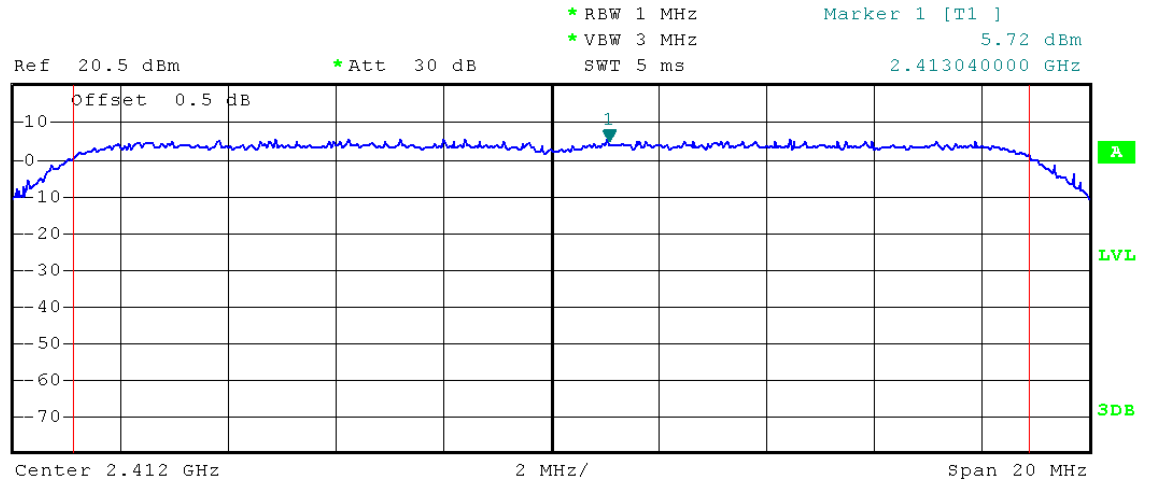


**Tx Channel**  
 Bandwidth 17.76 MHz Power 15.53 dBm


(Plot 2.2 G: Channel 1: 2412MHz @ 802.11n20)

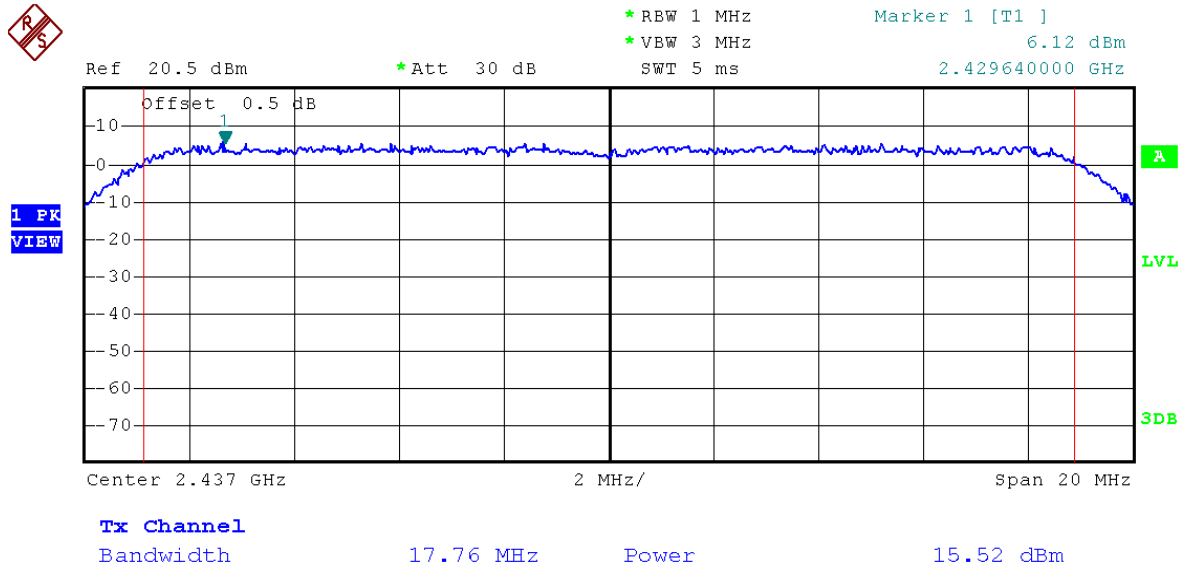


(Plot 2.2 H: Channel 6: 2437MHz @ 802.11n20)

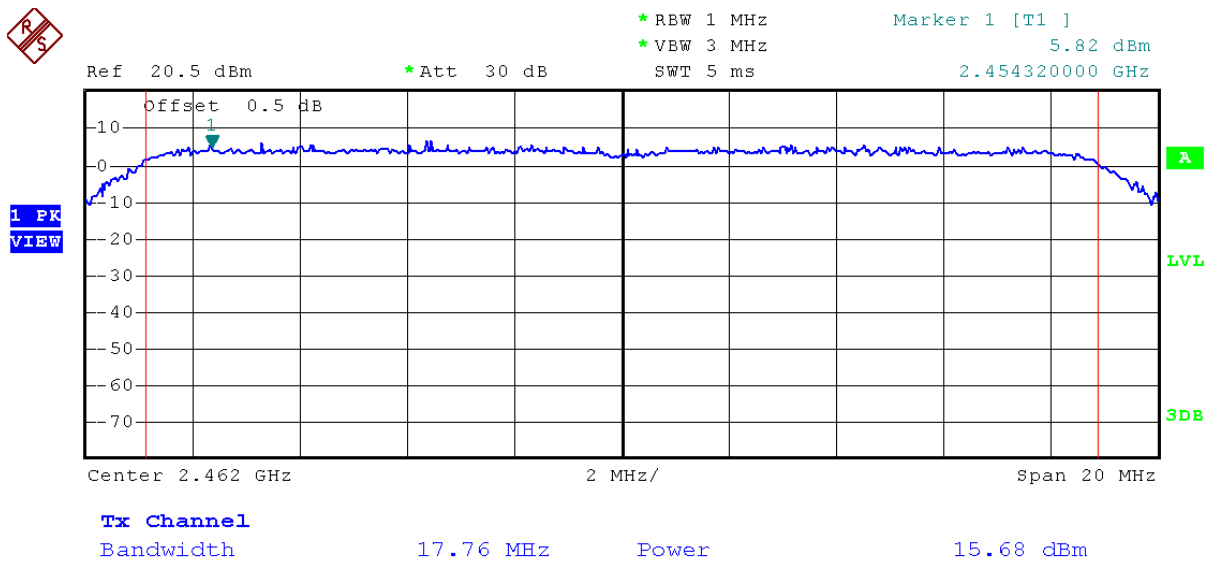

(Plot 2.2 I: Channel 11: 2462MHz @ 802.11n20)

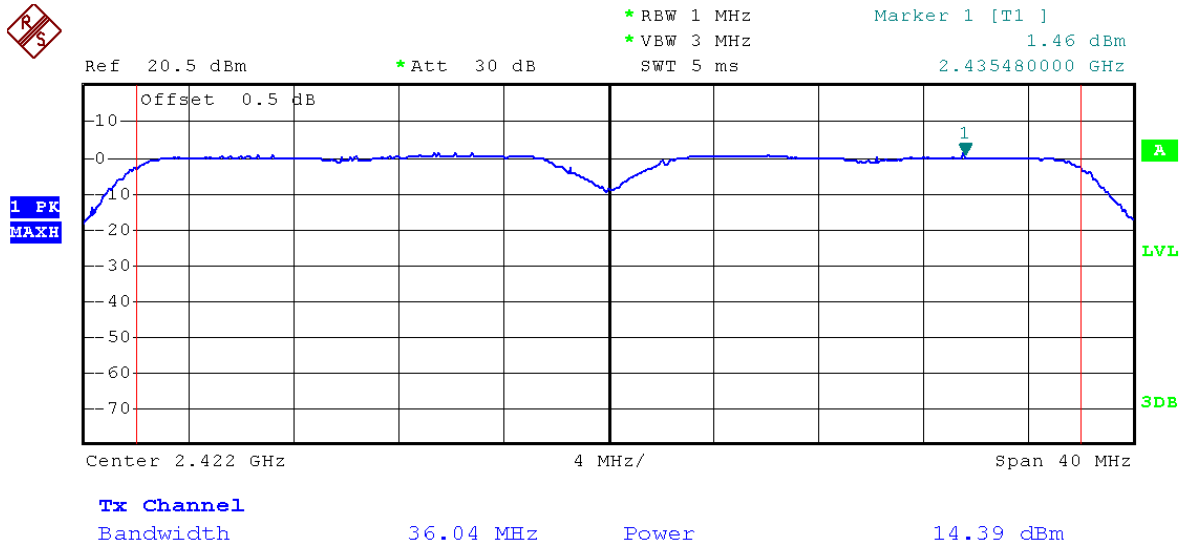


(Plot 2.2 J: Channel 3: 2422MHz @ 802.11n40)

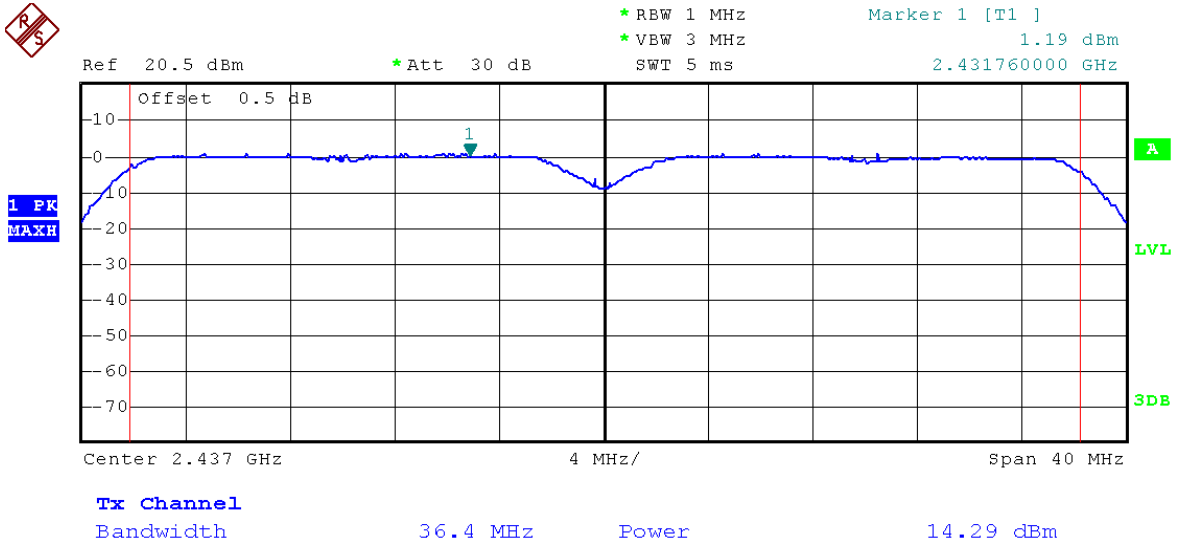

(Plot 2.2 K: Channel 6: 2437MHz @ 802.11n40)



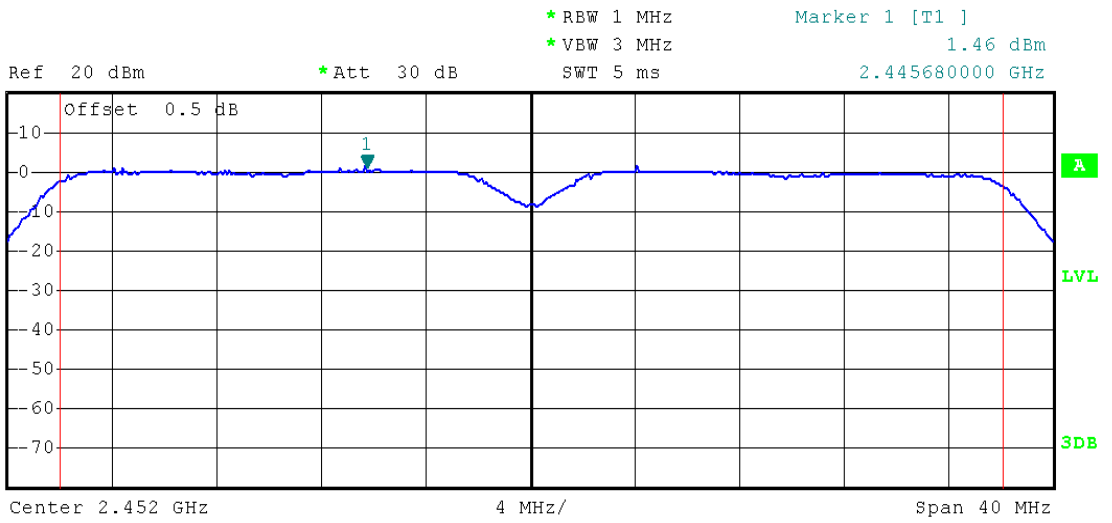

**Tx Channel**  
Bandwidth                      36.08 MHz      Power                      14.14 dBm

(Plot 2.2 L: Channel 9: 2452MHz @ 802.11n40)


## 2.3 Bandwidth

### 2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2 Test Description

#### A. Test Set:

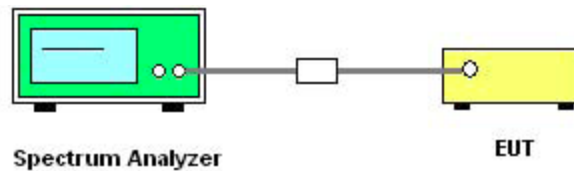

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss and Atten as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10

### 2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.




### 2.3.3.1 802.11b Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
1	2412	9.60	Plot 2.3 A	≥500	PASS
6	2437	9.76	Plot 2.3 B	≥500	PASS
11	2462	9.96	Plot 2.3 C	≥500	PASS


#### B. Test Plots:

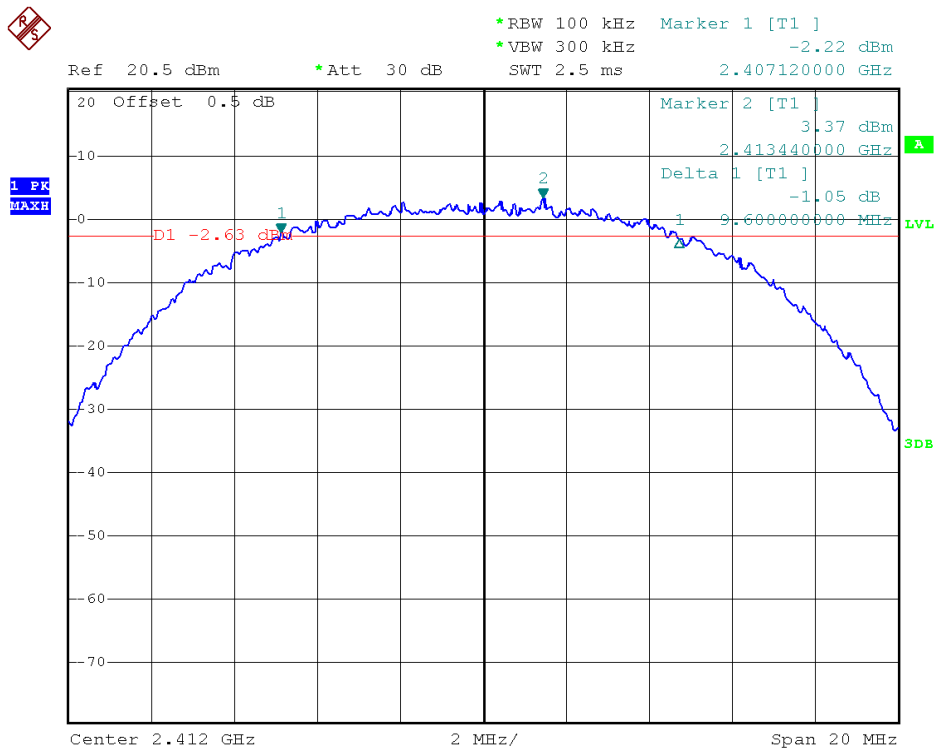

(Plot 2.3 A: Channel 1: 2412MHz @ 802.11b)

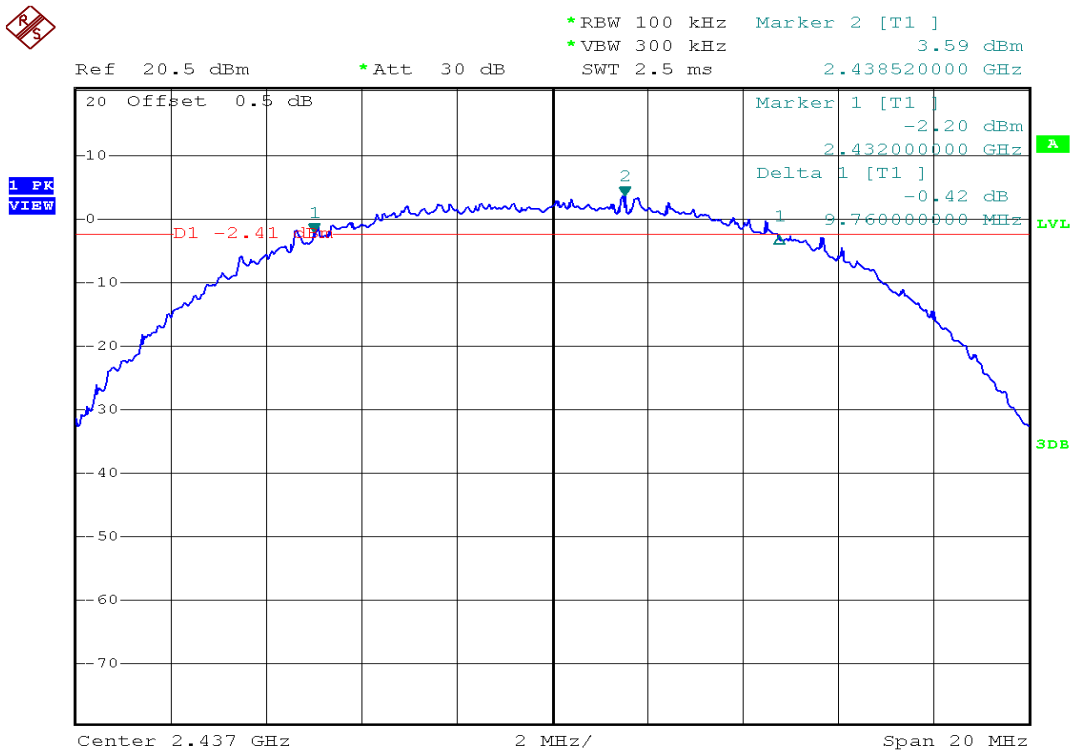

(Plot 2.3 B: Channel 6: 2437 MHz @ 802.11b)

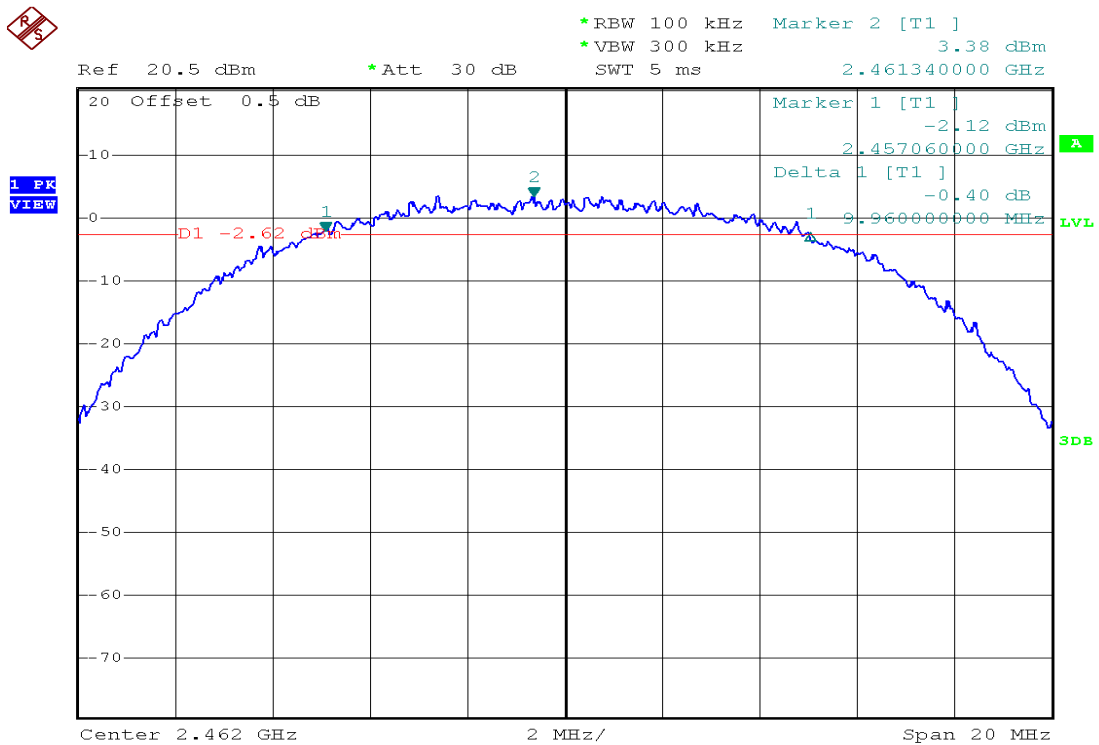

(Plot 2.3 C: Channel 11: 2462MHz @ 802.11b)




### 2.3.3.2 802.11g Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
1	2412	16.52	Plot 2.3 D	≥500	PASS
6	2437	16.56	Plot 2.3 E	≥500	PASS
11	2462	16.56	Plot 2.3 F	≥500	PASS


#### B. Test Plots:

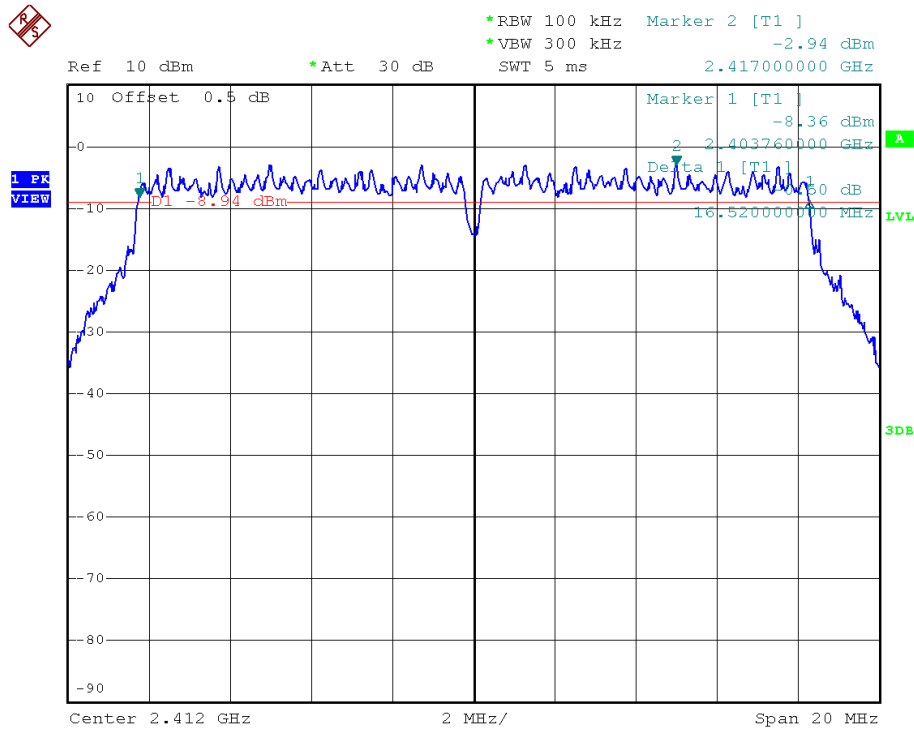

(Plot 2.3 D: Channel 1: 2412MHz @ 802.11g)

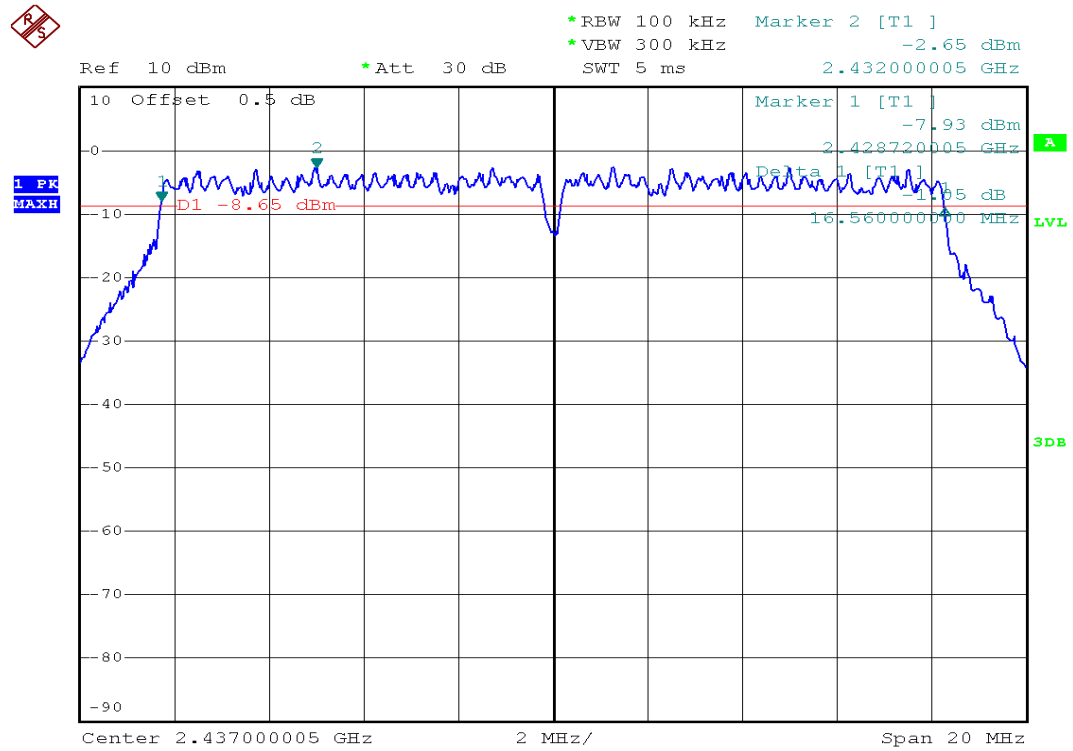

(Plot 2.3 E: Channel 6: 2437MHz @ 802.11g)

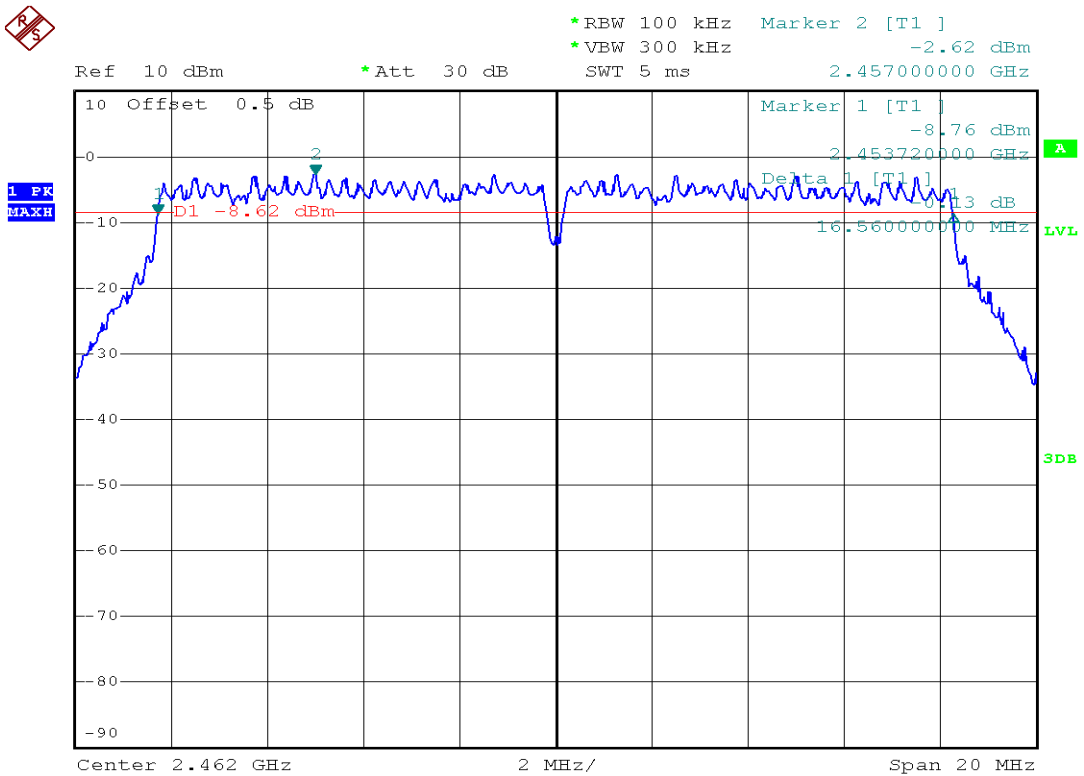

(Plot 2.3 F: Channel 11: 2462MHz @ 802.11g)




### 2.3.3.3 802.11n-20 Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
1	2412	17.76	Plot 2.3 G	≥500	PASS
6	2437	17.76	Plot 2.3 H	≥500	PASS
11	2462	17.76	Plot 2.3 I	≥500	PASS


#### B. Test Plots:

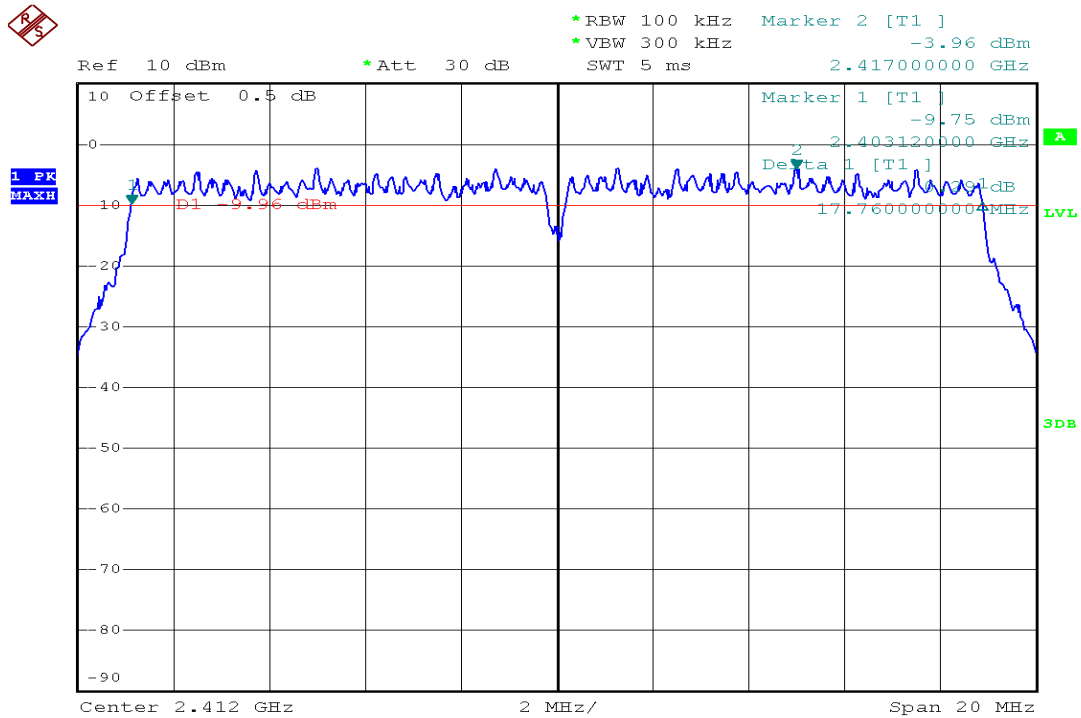

(Plot 2.3 G: Channel 1: 2412MHz @ 802.11n-20)

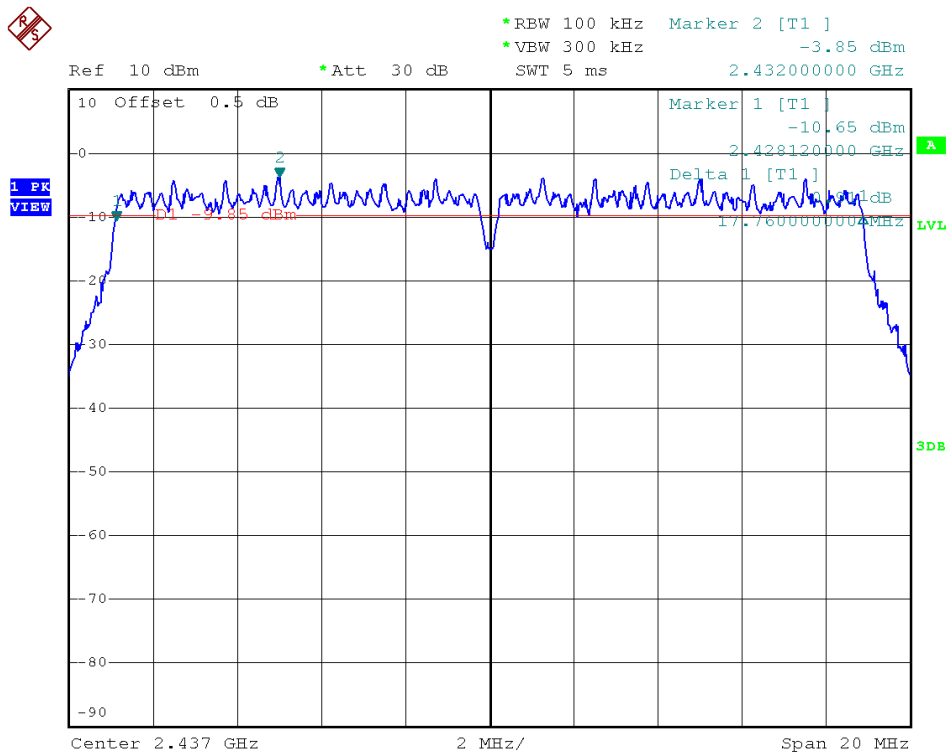

(Plot 2.3 H: Channel 6: 2437MHz @ 802.11n-20)

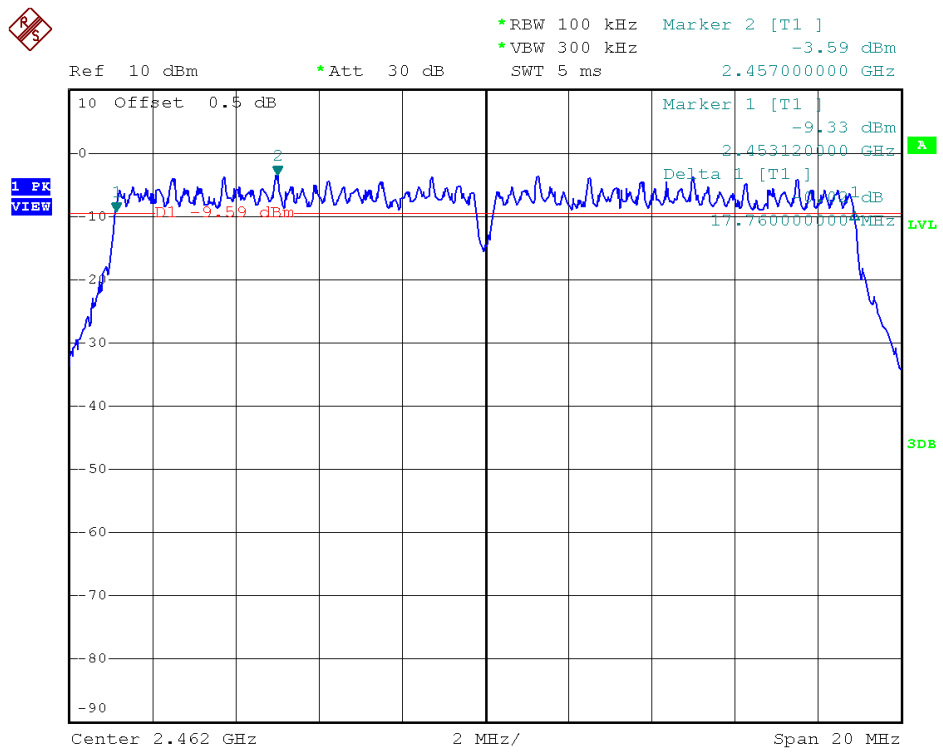

(Plot 2.3 I: Channel 11: 2462MHz @ 802.11n-20)




### 2.3.3.4 802.11n-40 Test mode


#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
3	2422	36.04	Plot 2.3 J	≥500	PASS
6	2437	36.40	Plot 2.3 K	≥500	PASS
9	2452	36.08	Plot 2.3 L	≥500	PASS


#### B. Test Plots:

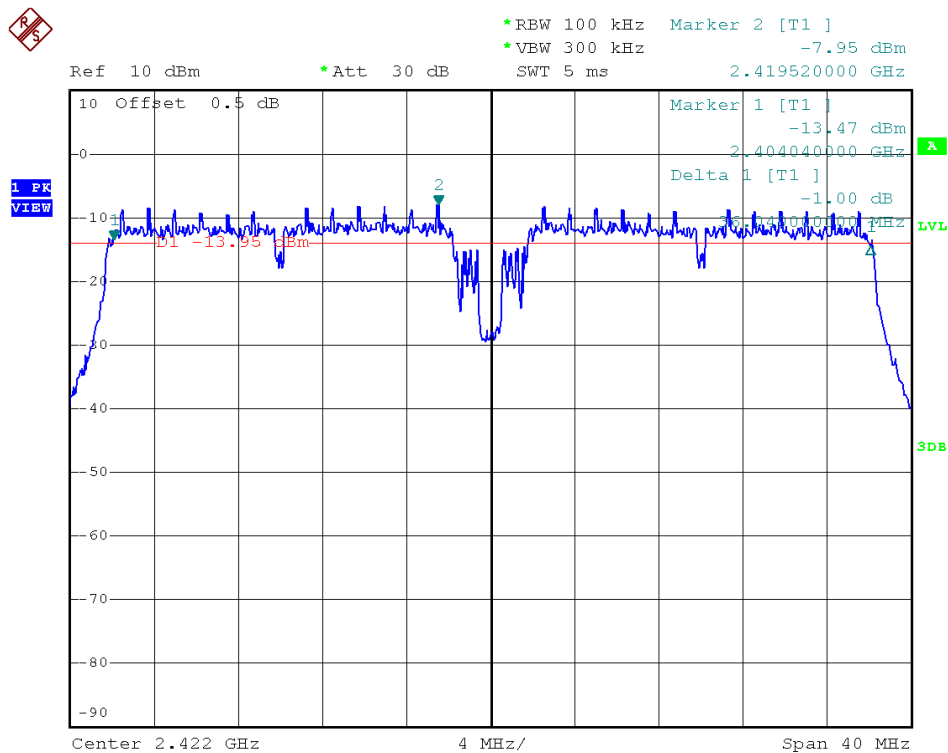

(Plot 2.3 J: Channel 3: 2422MHz @ 802.11n-40)

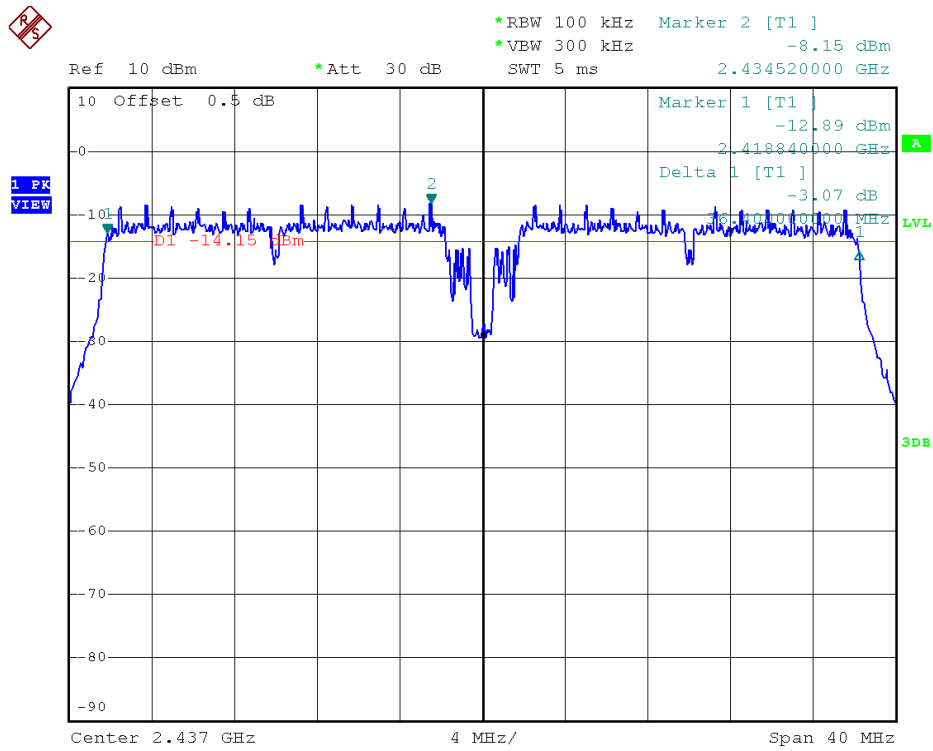

(Plot 2.3 K: Channel 6: 2437MHz @ 802.11n-40)

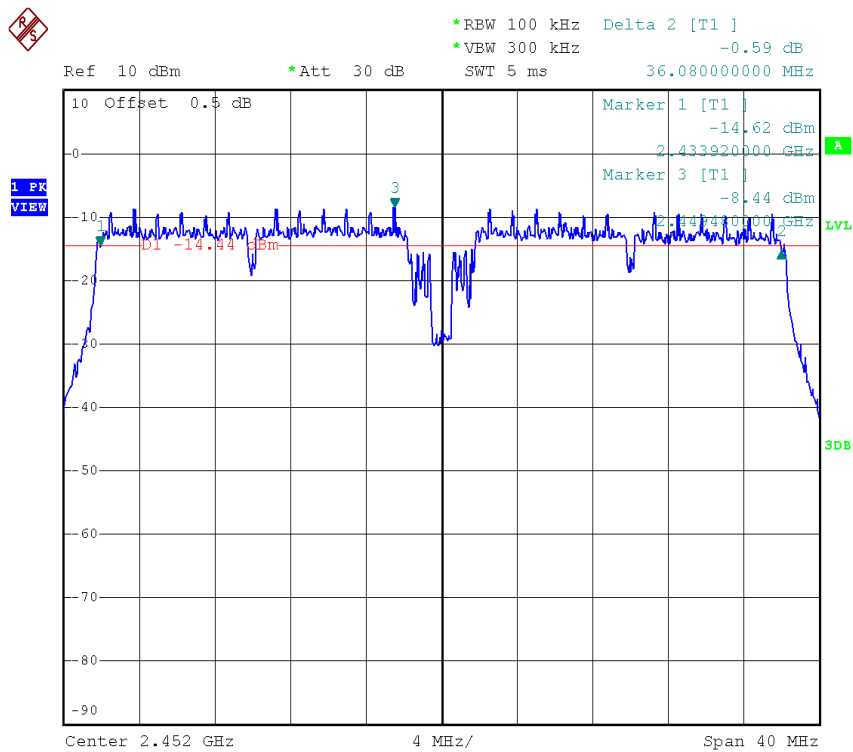

(Plot 2.3 L: Channel 9: 2452MHz @ 802.11n-40)


## 2.4 Conducted Spurious Emissions

### 2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2 Test Description

#### A. Test Set:

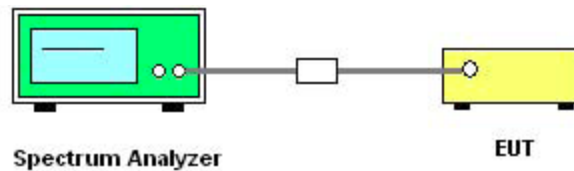

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss and Atten as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10

### 2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

#### 2.4.3.1 802.11b Test mode


#### A. Test Verdict:




Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
1	2412	Plot 2.4 A	-20	PASS
6	2437	Plot 2.4 B	-20	PASS
11	2462	Plot 2.4 C	-20	PASS

**B. Test Plots:**


Note: the power of the Module transmitting frequency should be ignored.

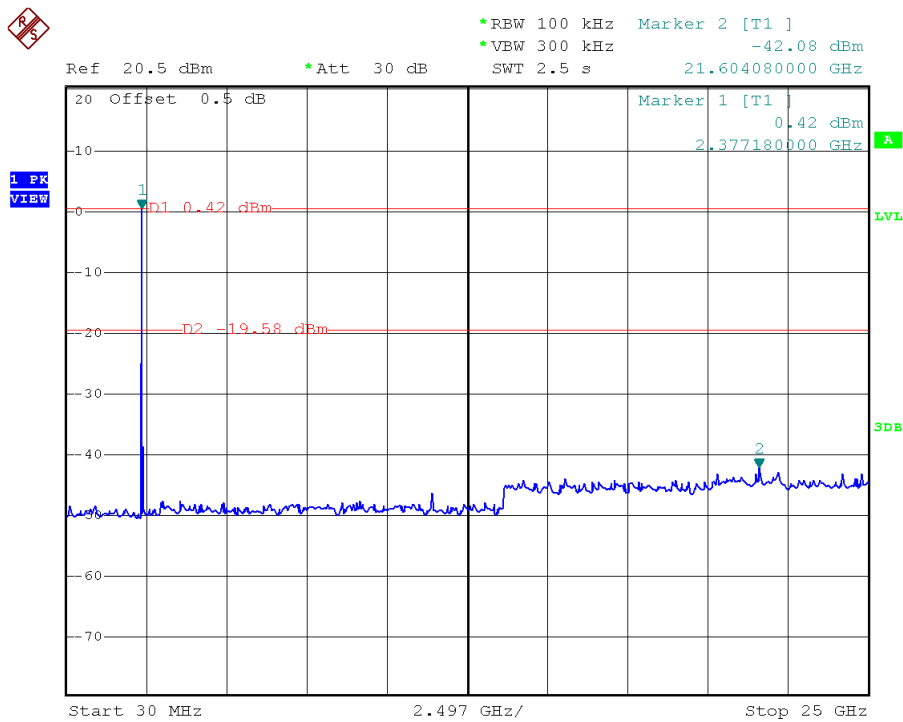

(Plot 2.4 A: Channel = 1, 30MHz to 25GHz@ 802.11b)

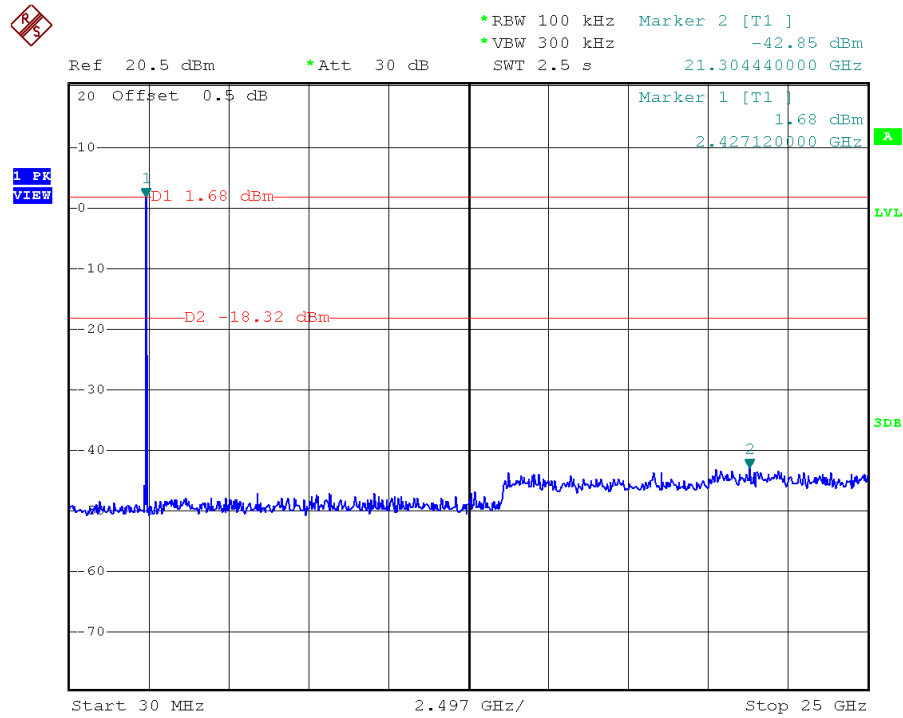

(Plot 2.4 B: Channel = 6, 30MHz to 25GHz@ 802.11b)

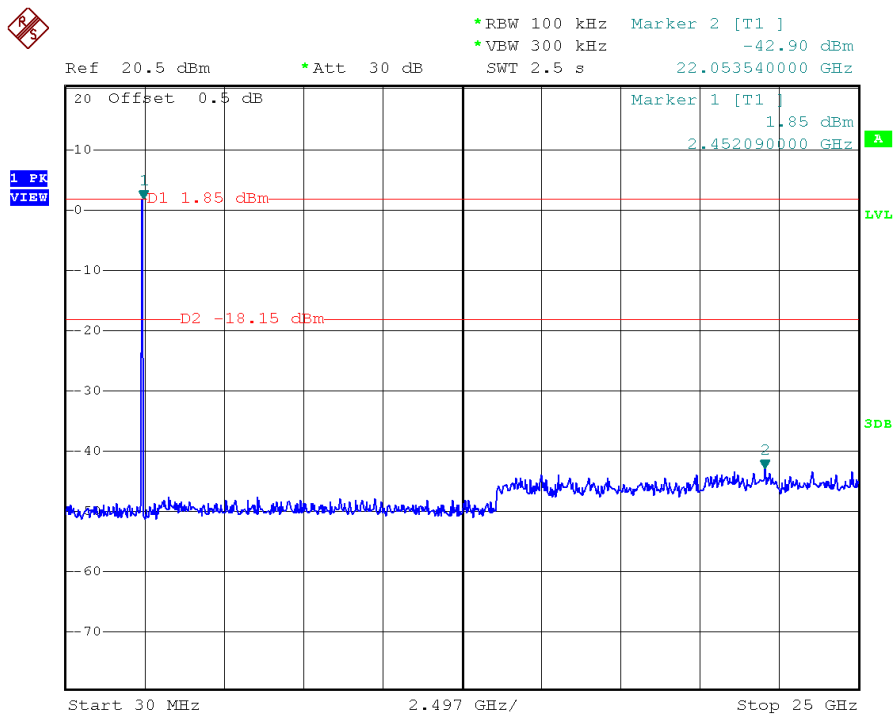

(Plot 2.4 C: Channel = 11, 30MHz to 25GHz@ 802.11b)


### 2.4.3.2 802.11g Test mode

#### A. Test Verdict:


Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
1	2412	Plot 2.4 D	-20	PASS
6	2437	Plot 2.4 E	-20	PASS
11	2462	Plot 2.4 F	-20	PASS

#### B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

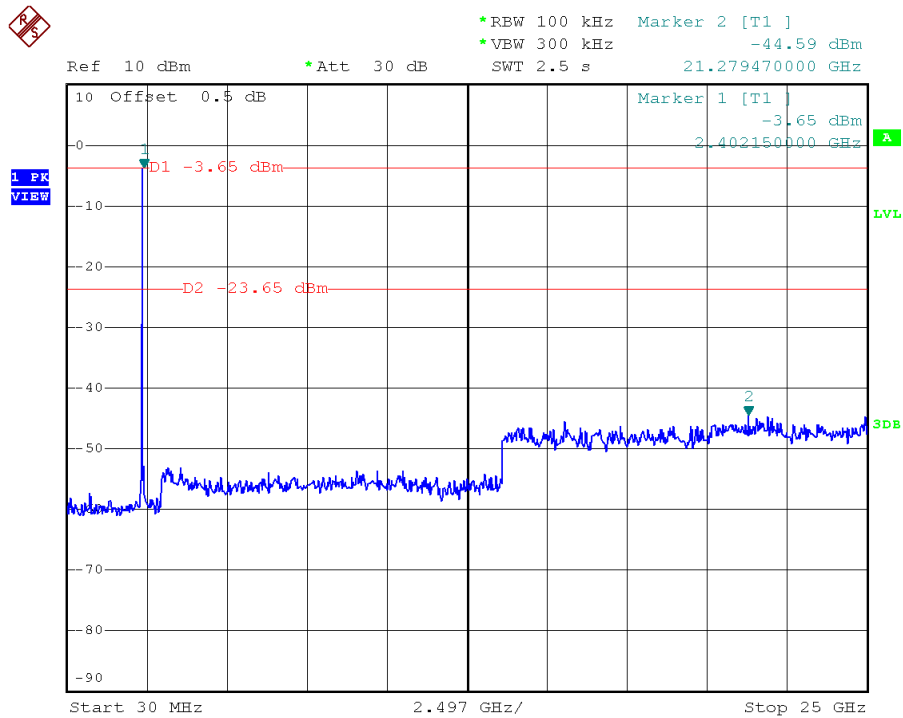

(Plot 2.4 D: Channel = 1, 30MHz to 25GHz@ 802.11g)

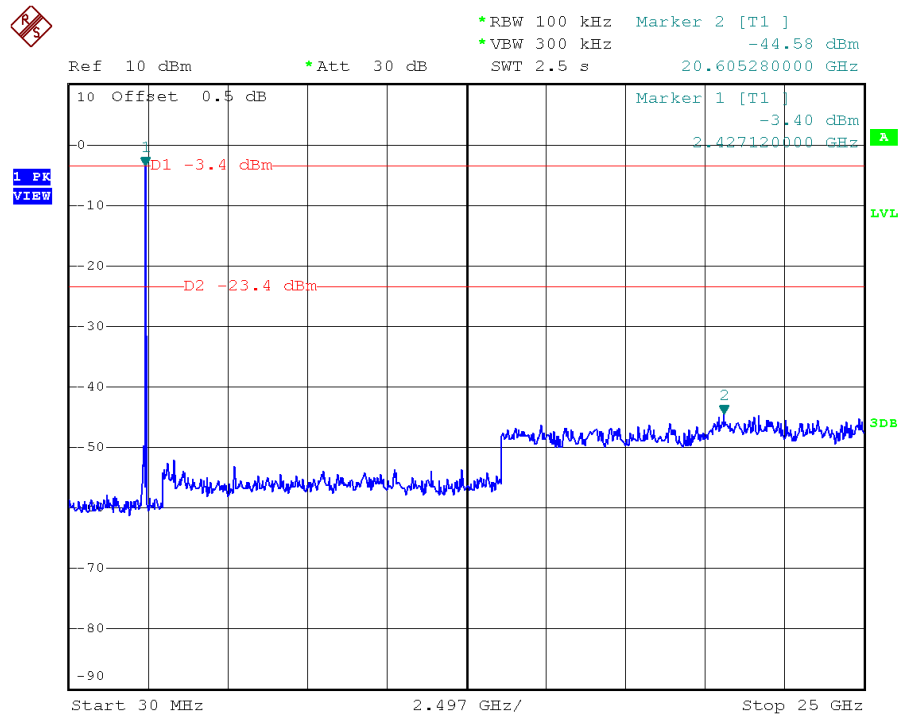

(Plot 2.4 E: Channel = 6, 30MHz to 25GHz@ 802.11g)

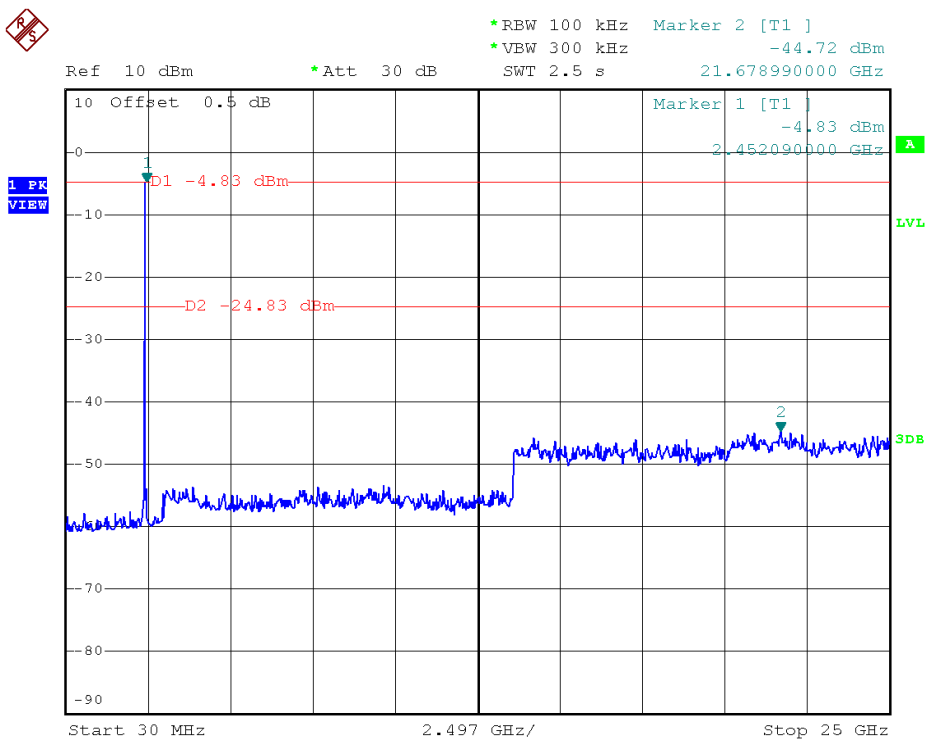

(Plot 2.4 F: Channel = 11, 30MHz to 25GHz@ 802.11g)


### 2.4.3.3 802.11n -20MHz Test mode

#### A. Test Verdict:

Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
1	2412	Plot 2.4 G	-20	PASS
6	2437	Plot 2.4 H	-20	PASS
11	2462	Plot 2.4 I	-20	PASS


#### B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

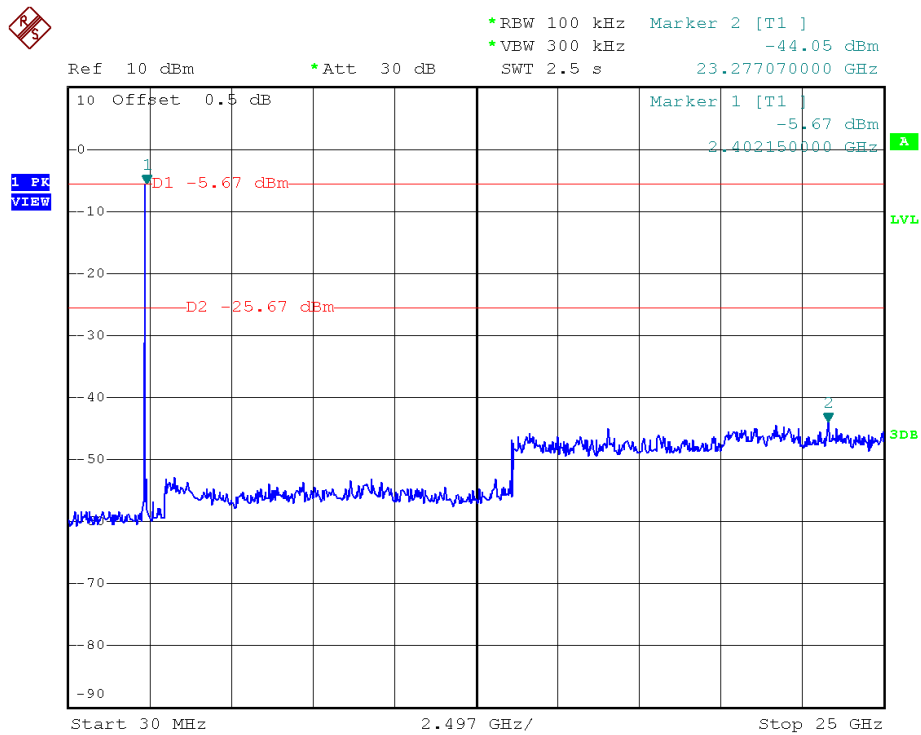


(Plot 2.4 G: Channel = 1, 30MHz to 25GHz@ 802.11n-20)



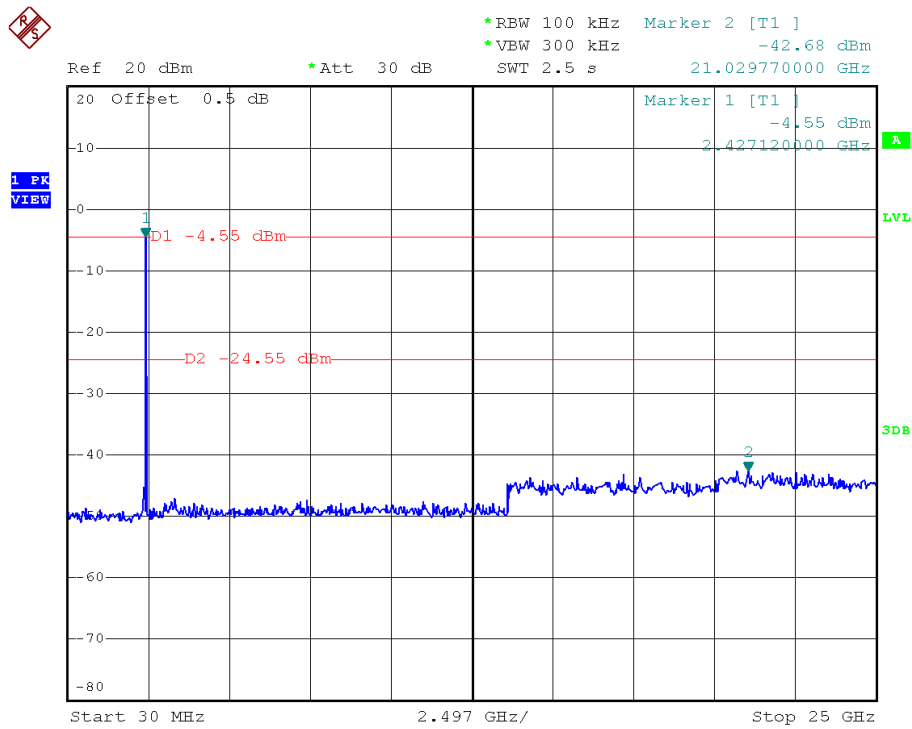

(Plot 2.4 H: Channel = 6, 30MHz to 25GHz@ 802.11n-20)

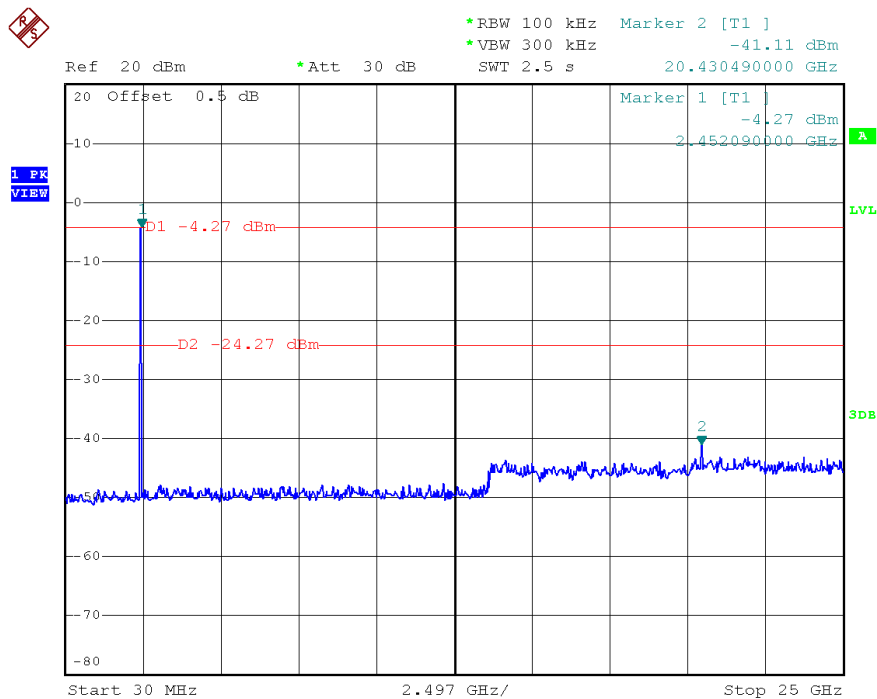

(Plot 2.4 I: Channel = 11, 30MHz to 25GHz@ 802.11n-20)


### 2.4.3.4 802.11n -40MHz Test mode

#### A. Test Verdict:


Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
3	2422	Plot 2.4 J	-20	PASS
6	2437	Plot 2.4 K	-20	PASS
9	2452	Plot 2.4 L	-20	PASS

#### B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

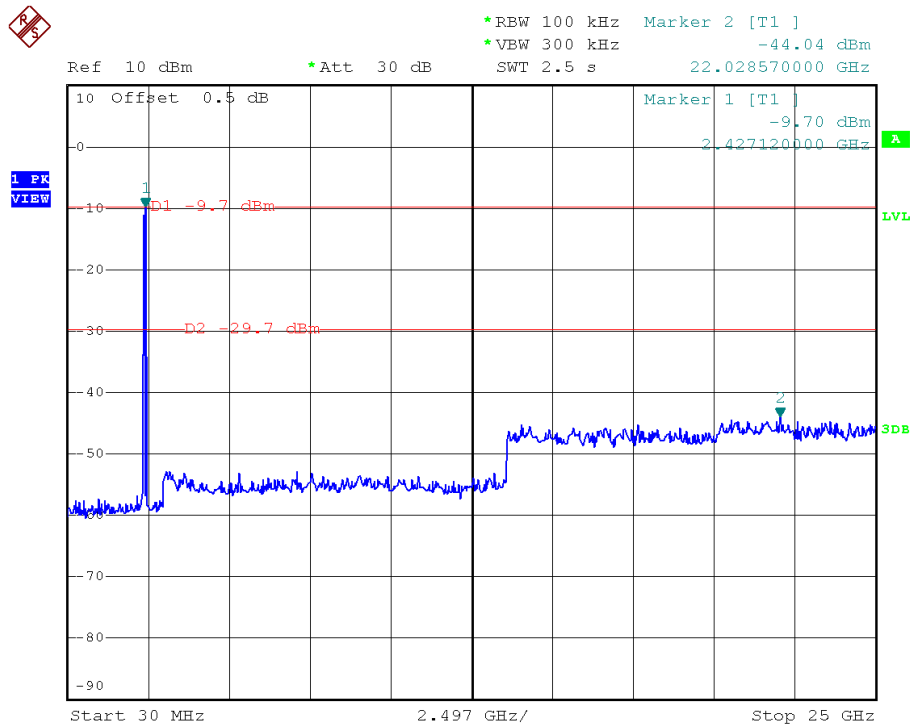

(Plot 2.4 J: Channel = 3, 30MHz to 25GHz@ 802.11n-40)

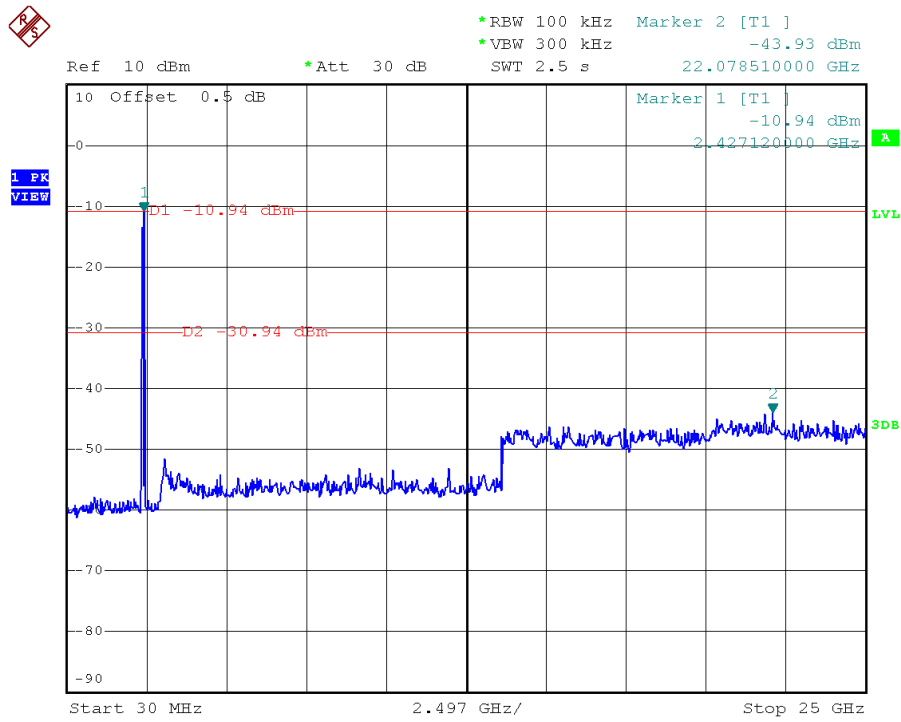

(Plot 2.4 K: Channel = 6, 30MHz to 25GHz@ 802.11n-40)

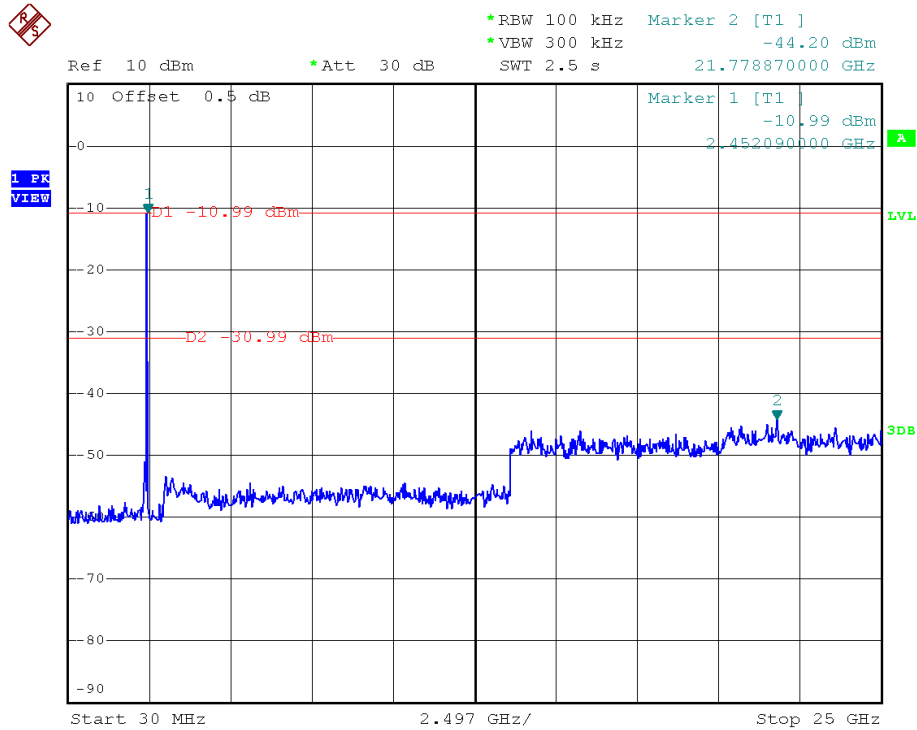

(Plot 2.4 L: Channel = 9, 30MHz to 25GHz@ 802.11n-40)


## 2.5 Power spectral density (PSD)

### 2.5.1 Requirement

According to FCC section 15.247(d), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 2.5.2 Test Description

#### A. Test Set:

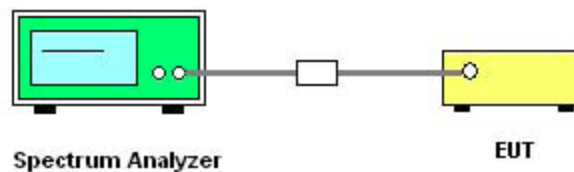

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss and Atten as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### B. Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW  $\geq$  3 kHz.
4. Set the VBW  $\geq$  3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### C. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10



### 2.5.3 Test Result

The lowest, middle and highest channels are tested to verify the band edge emissions.

#### 2.5.3.1 802.11b Test mode


##### A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	3.13	Plot 2.5 A	8	PASS
6	2437	3.26	Plot 2.5 B	8	PASS
11	2462	3.42	Plot 2.5 C	8	PASS


Measurement uncertainty:  $\pm 1.3$ dB

Note: 1. For 802.11b mode at final test to get the worst-case emission at 11Mbps.  
 2. The test results including the cable lose.


##### B. Test Plots:

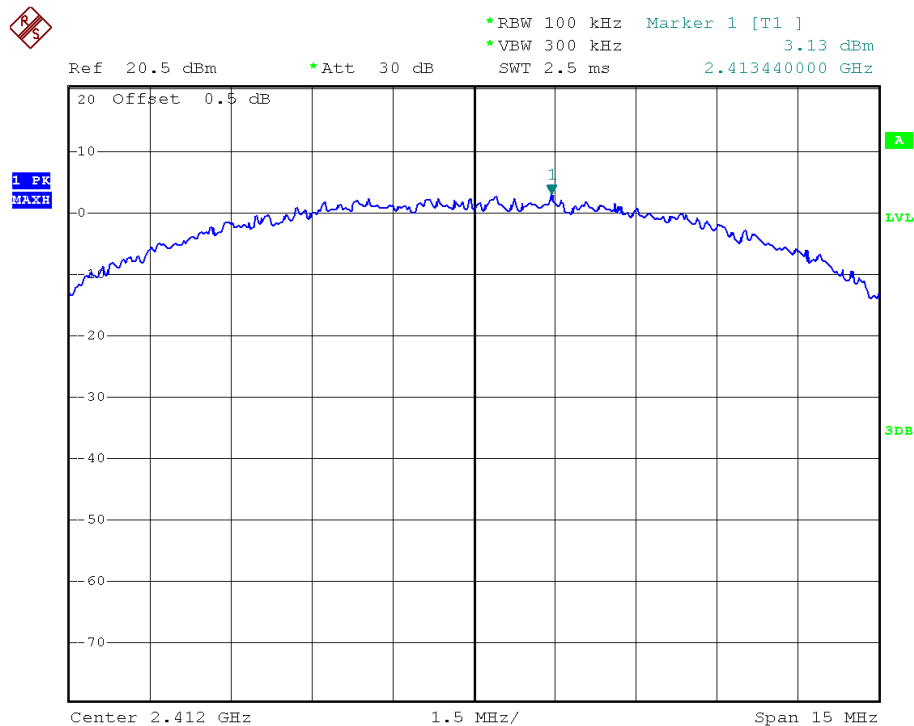

(Plot 2.5 A: Channel = 1 @ 802.11b)

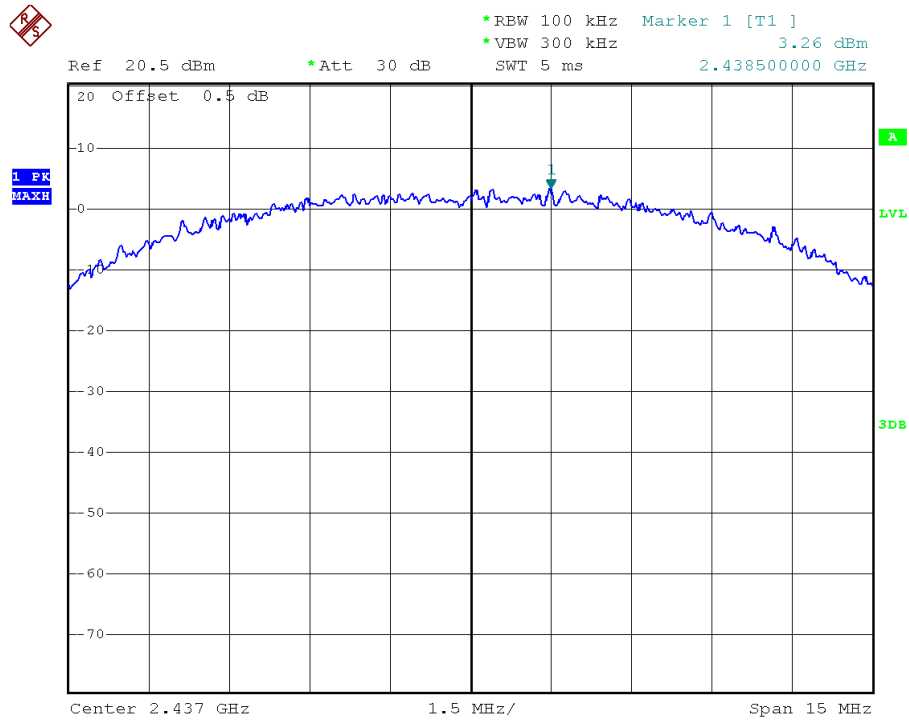

(Plot 2.5 B: Channel = 6 @ 802.11b)

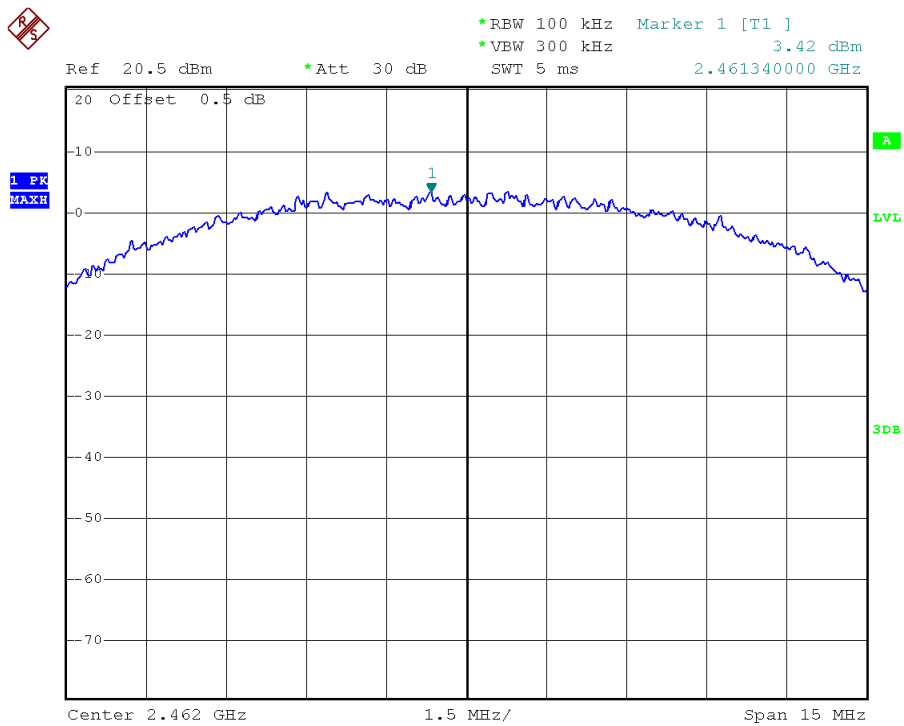

(Plot 2.5 C: Channel = 11 @ 802.11b)



### 2.5.3.2 802.11g Test mode


#### A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-3.20	Plot 2.5 D	8	PASS
6	2437	-2.70	Plot 2.5 E	8	PASS
11	2462	-2.65	Plot 2.5 F	8	PASS


Measurement uncertainty:  $\pm 1.3\text{dB}$

Note: 1. For 802.11g mode at final test to get the worst-case emission at 54 Mbps.  
 2. The test results including the cable lose.


#### B. Test Plots:

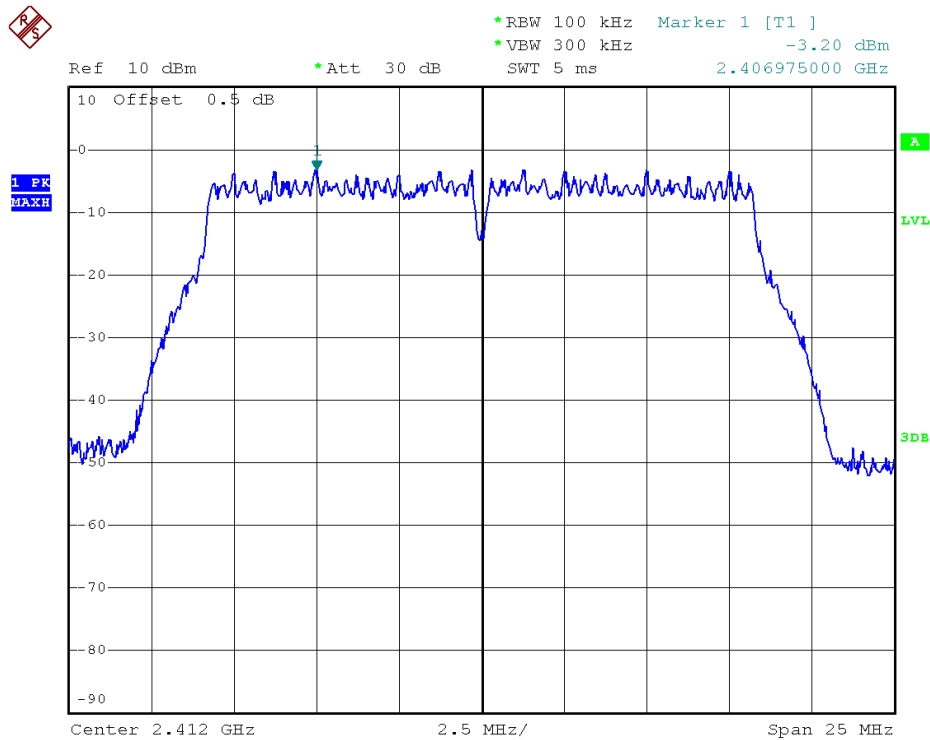

(Plot 2.5 D: Channel = 1 @ 802.11g)

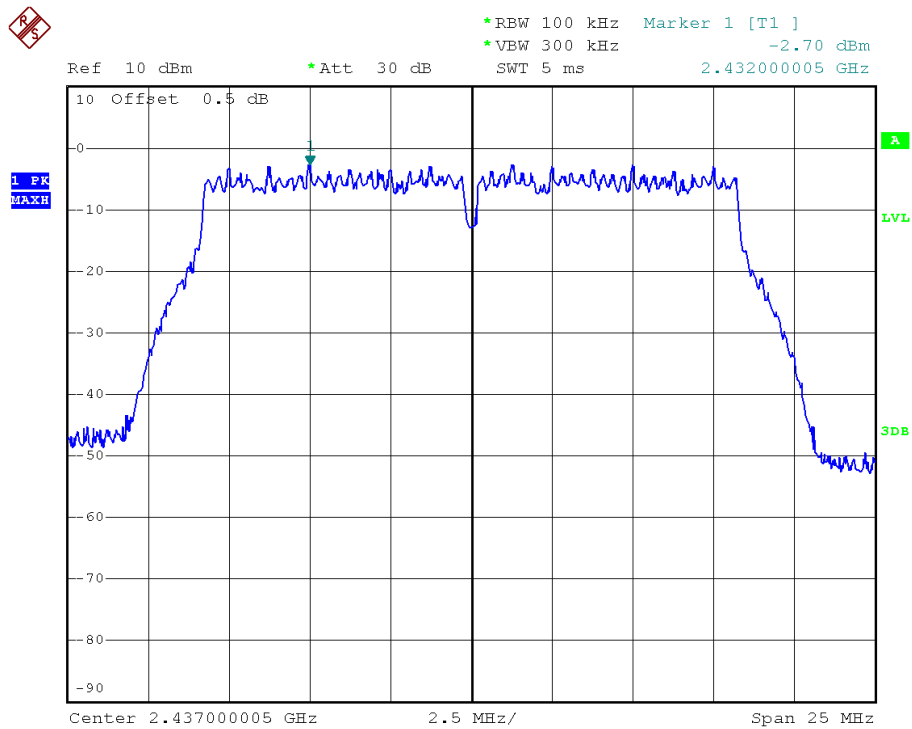

(Plot 2.5 E: Channel = 6 @ 802.11g)

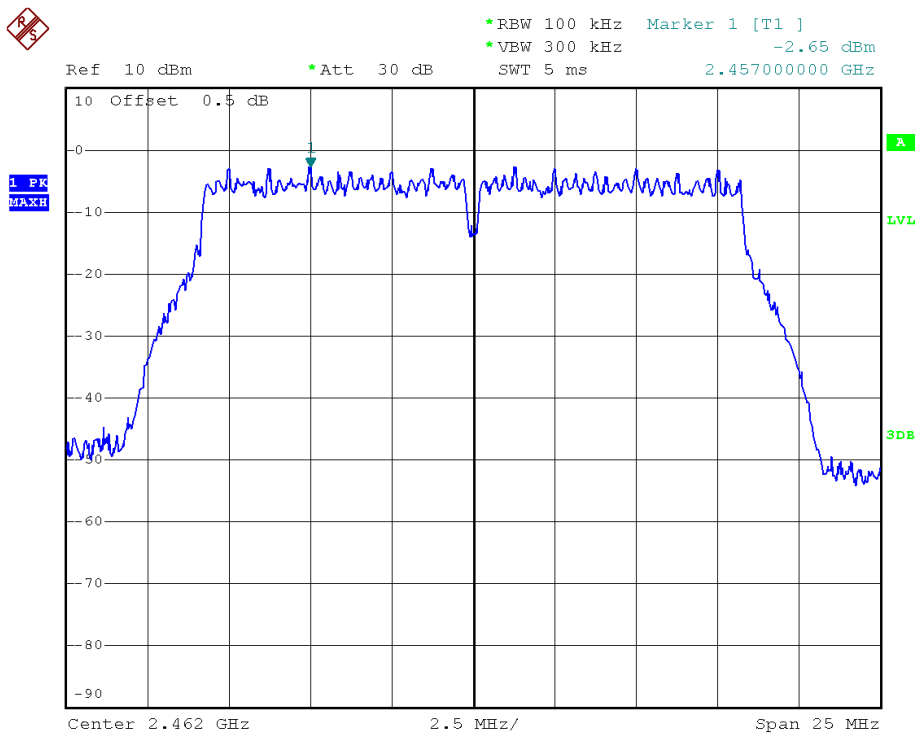

(Plot 2.5 F: Channel = 11 @ 802.11g)



### 2.5.3.3 802.11n-20 Test mode


#### A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-3.98	Plot2.5 G	8	PASS
6	2437	-3.62	Plot2.5 H	8	PASS
11	2462	-3.61	Plot2.5 I	8	PASS


Measurement uncertainty:  $\pm 1.3\text{dB}$

- Note:
1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 72 Mbps.
  2. The test results including the cable lose.


#### B. Test Plots:

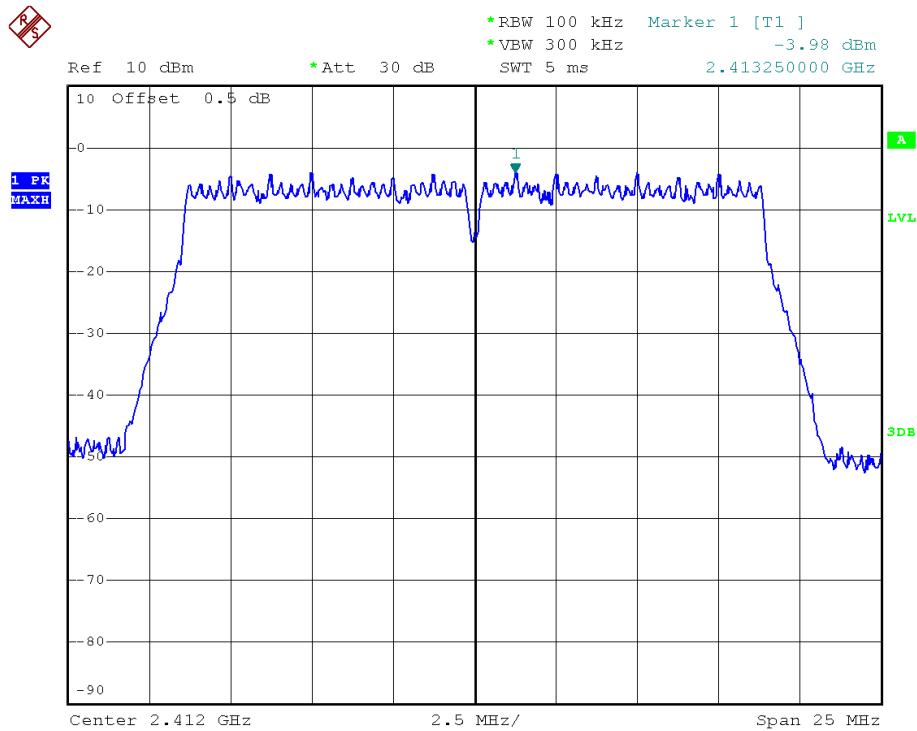

(Plot 2.5 G: Channel = 1 @ 802.11n-20)

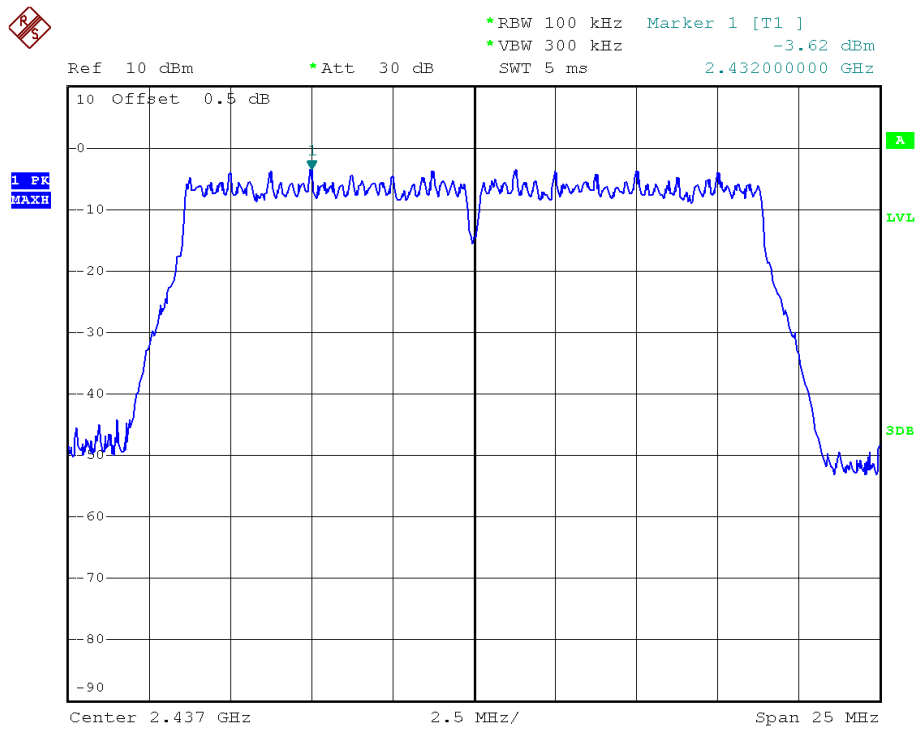

(Plot 2.5 H: Channel = 6 @ 802.11n-20)

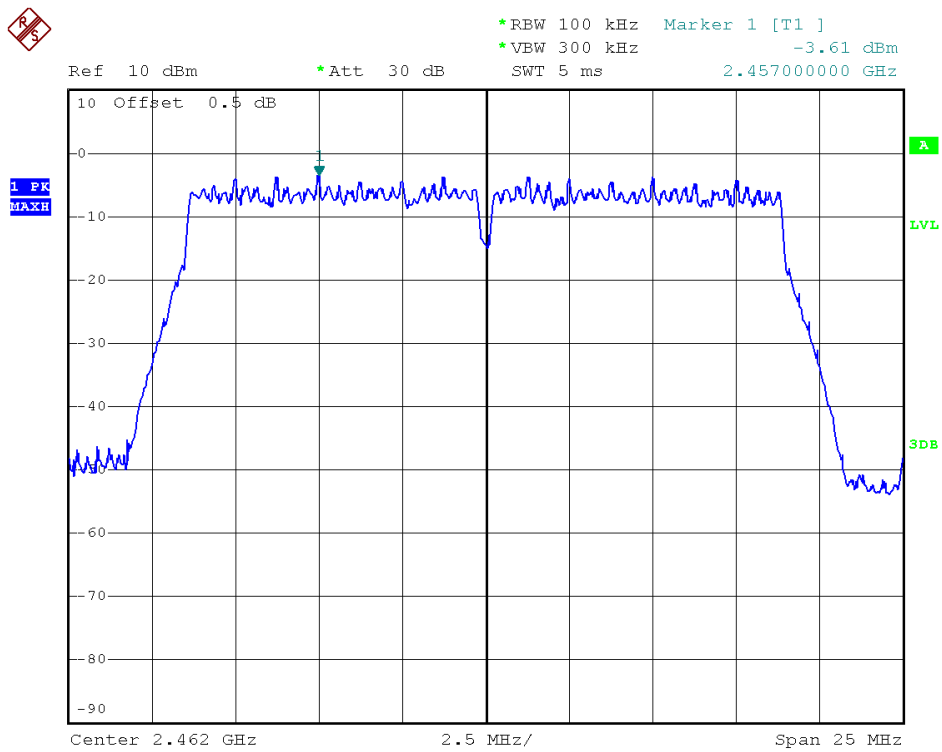

(Plot 2.5 I: Channel = 11 @ 802.11n-20)



### 2.5.3.4 802.11n-40 Test mode


#### A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
3	2422	-8.19	Plot 2.5 J	8	PASS
6	2437	-8.15	Plot 2.5 K	8	PASS
9	2452	-8.34	Plot 2.5 L	8	PASS


Measurement uncertainty:  $\pm 1.3$ dB

- Note:
1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 72 Mbps.
  2. The test results including the cable lose.


#### B. Test Plots:

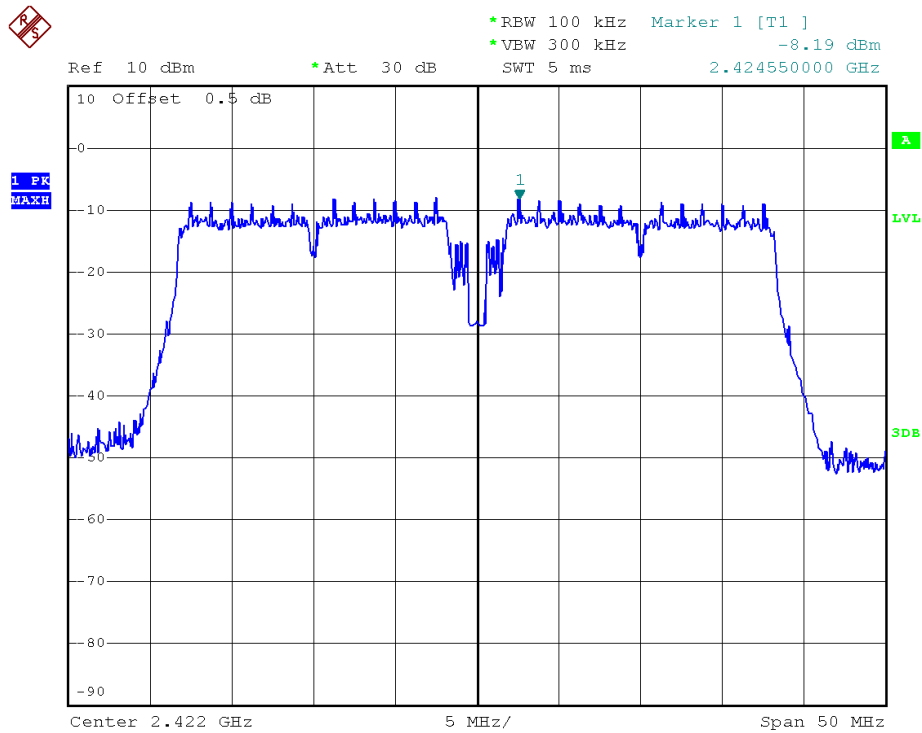

(Plot 2.5 J: Channel = 3 @ 802.11n-40)

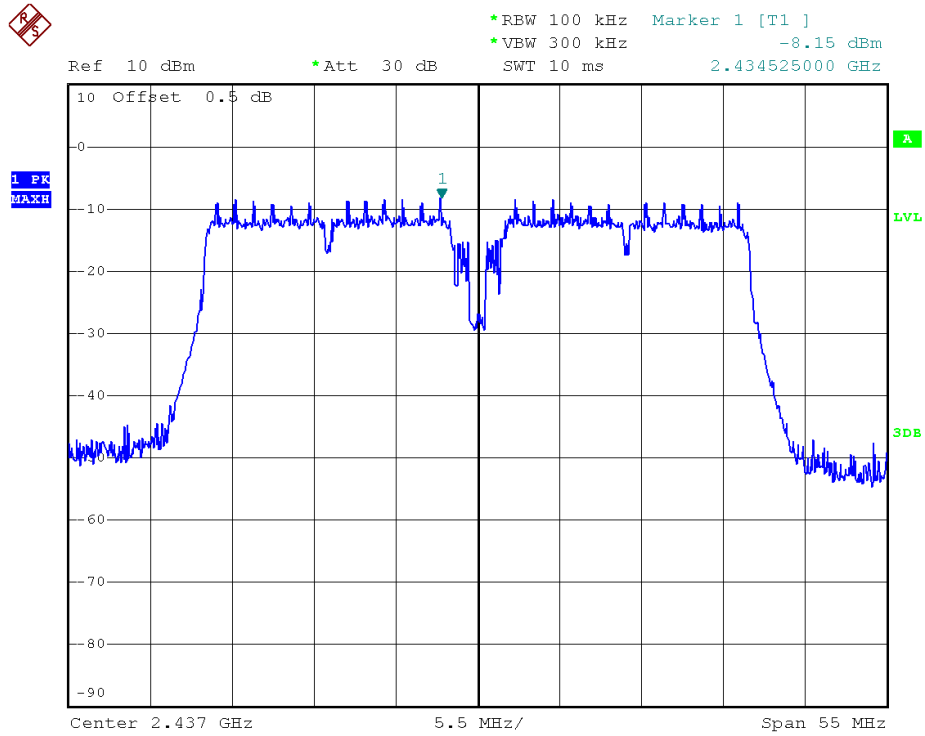

(Plot 2.5 K: Channel = 6 @ 802.11n-40)

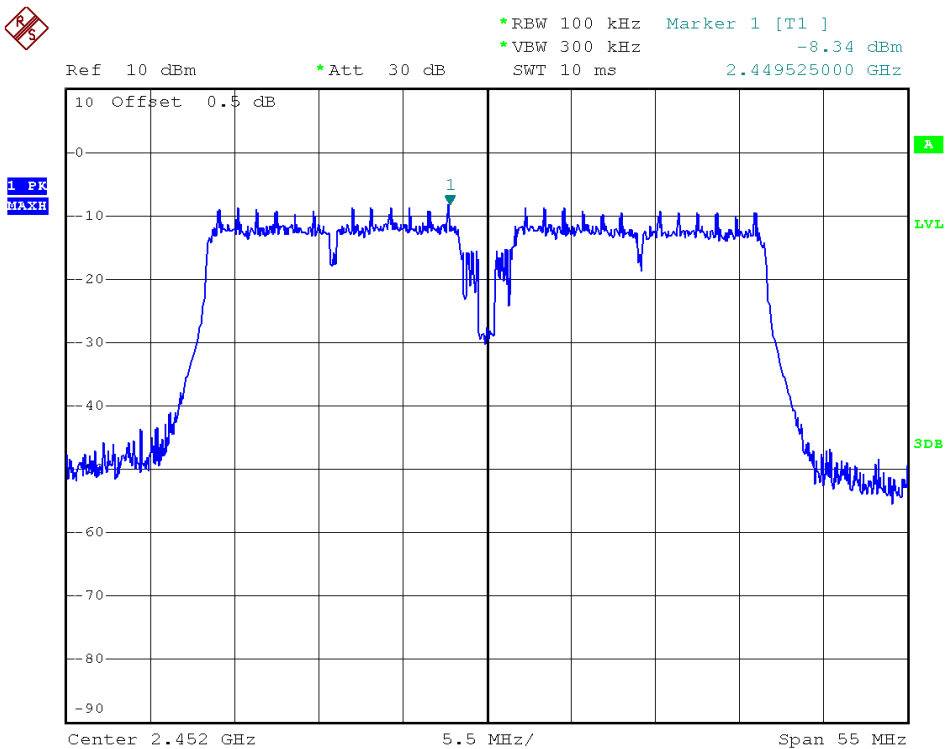

(Plot 2.5 L: Channel = 9 @ 802.11n-40)


## 2.6 Band Edge

### 2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.6.2 Test Description

#### A. Test Setup

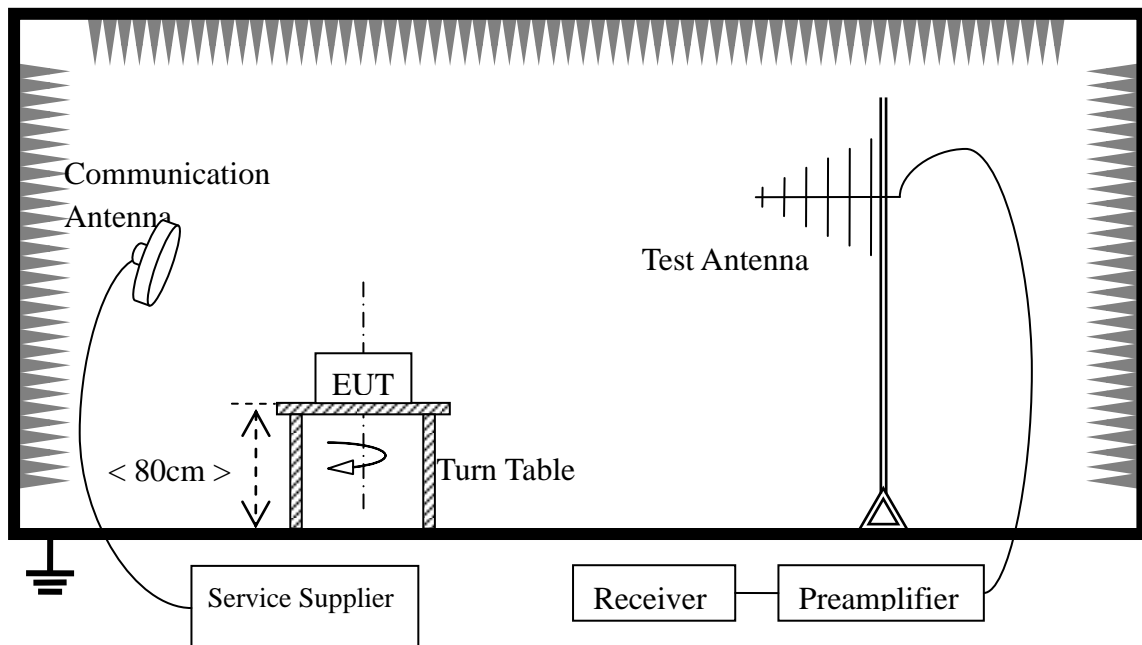

The Module of the EUT is powered by the Battery charged with the AC Adapter. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Description	Manufacturer	Model	Serial No.	Cal. Due Date
Receiver	R&S	ESIB26	A0304218	2014.06.07
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2014.06.07
Double ridge horn antenna	R&S	HF906	100150	2014.06.10
Ultra-wideband antenna	R&S	HL562	100089	2014.06.10
Ampilier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2014.06.05

**2.6.3 Test Result**

Band edge were measurement for 802.11b,802.11g, 802.11n(20MHz) and 802.11n(40MHz) mode at difference date, recording worst case in test report.

**Radiated band edge Measurement:**

The lowest and highest channels are tested to verify the band edge emissions.

The measurement results are obtained as below:

$$E \text{ [dB}\mu \text{ V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

NOTE 1: The red vertical lines “F1” in the following charts is to indicate the frequencies 2400MHz and 2483.5MHz respectively

NOTE 2: Both horizontal and vertical polarity direction of the test antenna has been performed, only the worst case recorded in this report.




**802.11b**


**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μV/m)	Limit (dB μV/m)	Verdict
		PK/ AV						
1	2399.004	PK	61.36	-31.7	28.3	57.96	74	Pass
1	2396.239	AV	52.22	-31.7	28.3	48.82	54	Pass
11	2494.975	PK	58.92	-29.45	29.2	58.67	74	Pass
11	2490.981	AV	47.73	-29.45	29.2	47.48	54	Pass


**B. Test Plots:**

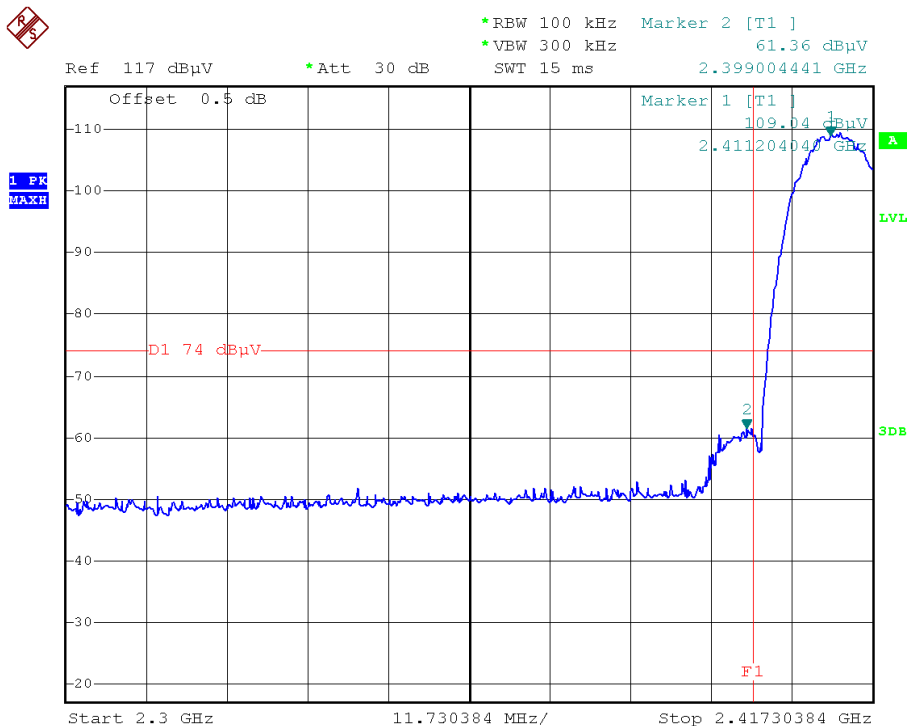

(Plot 2.6 A1: Channel = 1 Peak @ 802.11b)

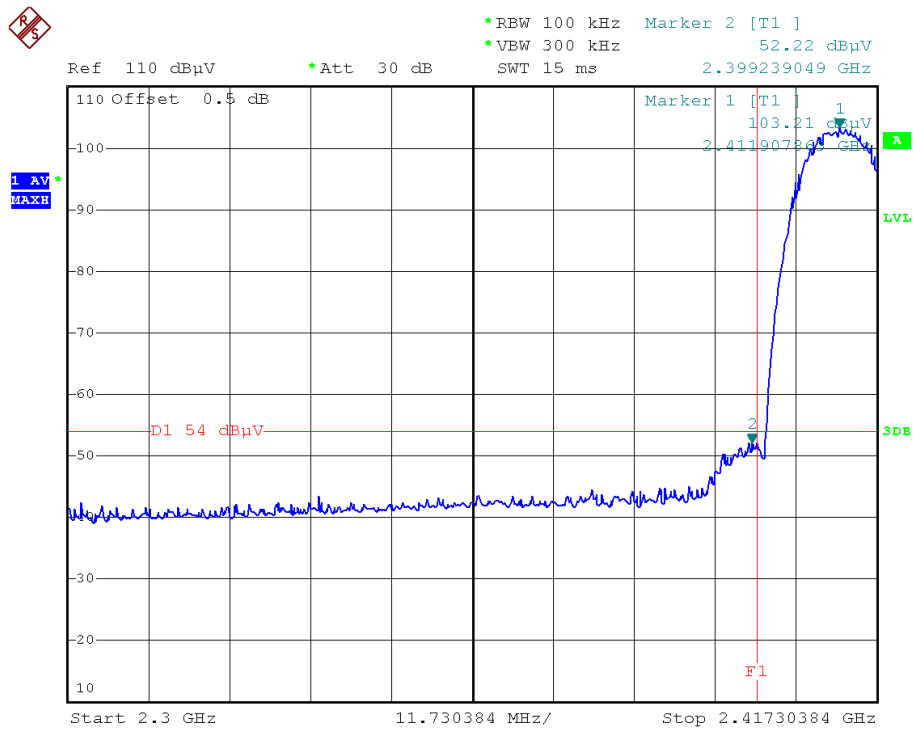


(Plot 2.6 A2: Channel = 1 AVG @ 802.11b)

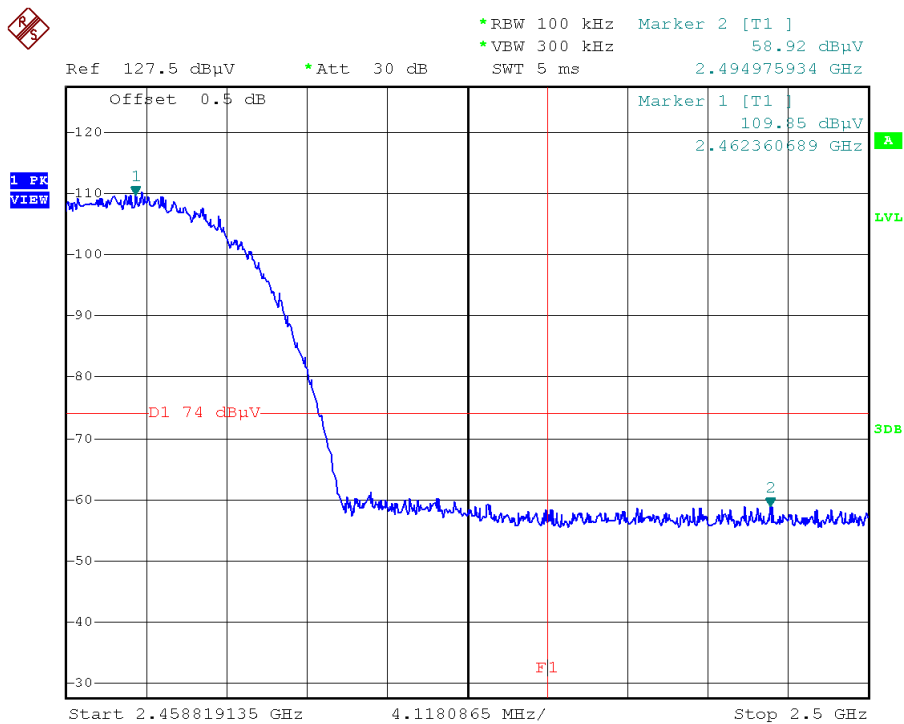

(Plot 2.6 A3: Channel = 11 Peak @ 802.11b)



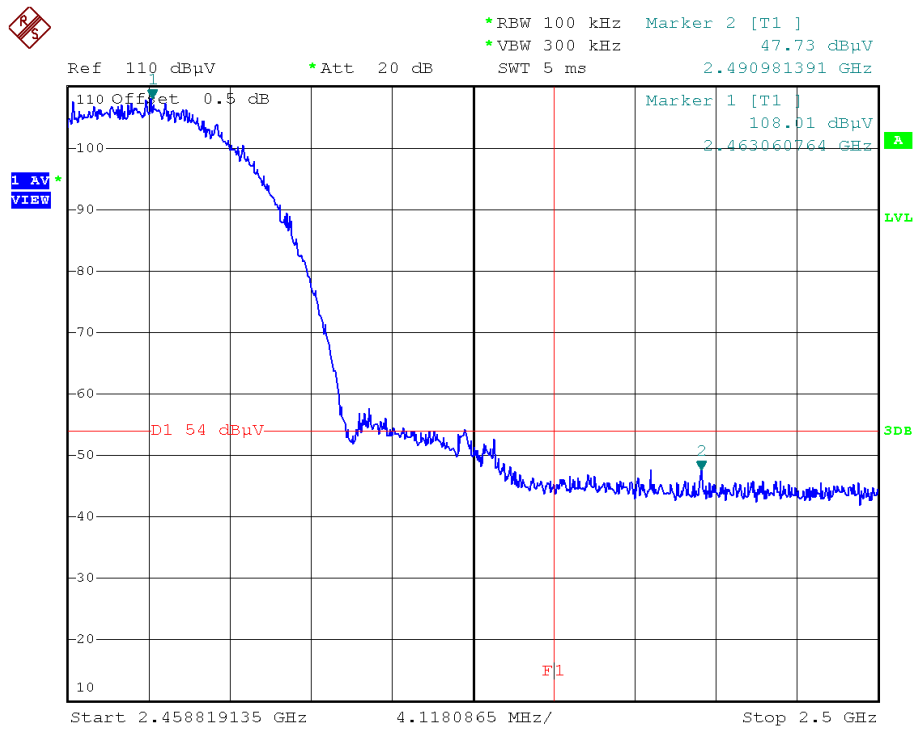

(Plot 2.6 A4: Channel = 11 AVG @ 802.11b)


**802.11g**

**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μV/m)	Limit (dB μV/m)	Verdict
		PK/ AV						
1	2397.063	PK	61.36	-31.7	28.3	57.96	74	Pass
1	2398.890	AV	51.49	-31.7	28.3	48.09	54	Pass
11	2488.284	PK	56.00	-29.45	29.2	55.75	74	Pass
11	2488.284	AV	52.21	-29.45	29.2	51.96	54	Pass




### B. Test Plots:

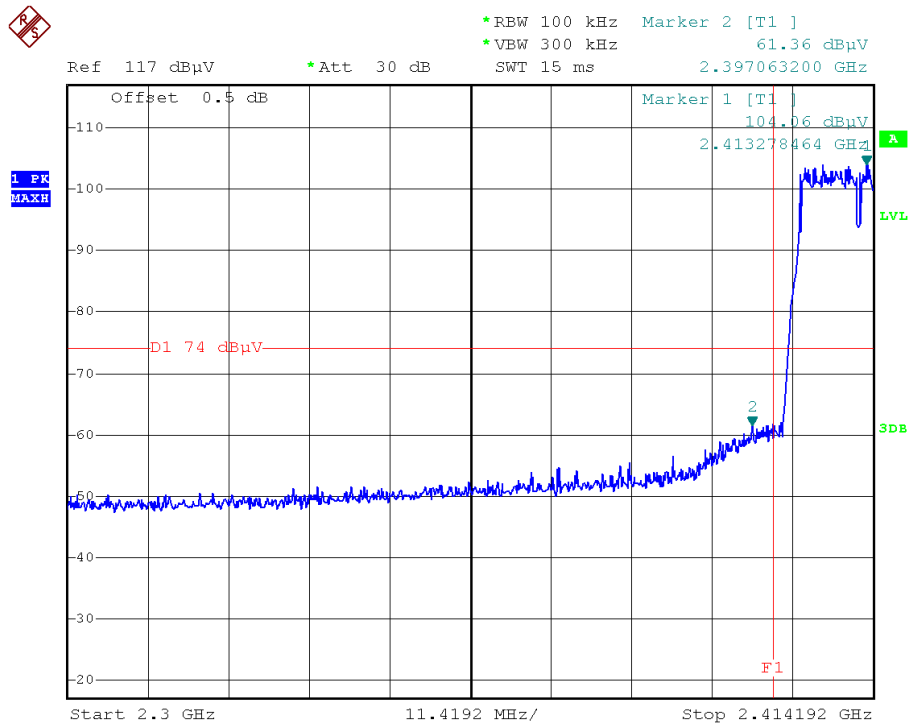


(Plot 2.6 B1: Channel = 1 Peak @ 802.11g)

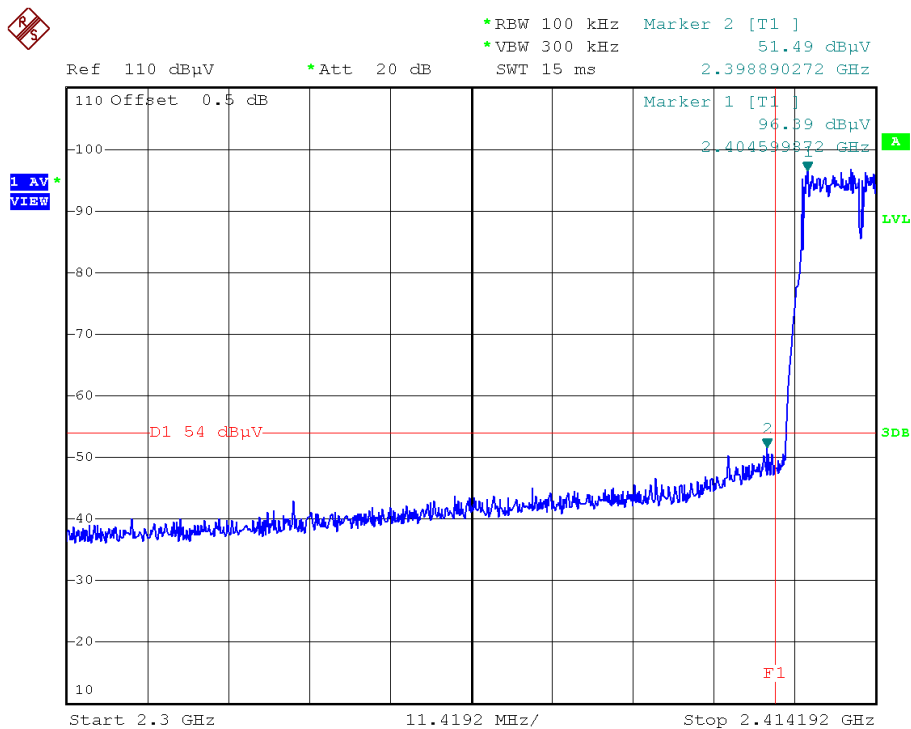

(Plot 2.6 B2: Channel = 1 AVG @ 802.11g)

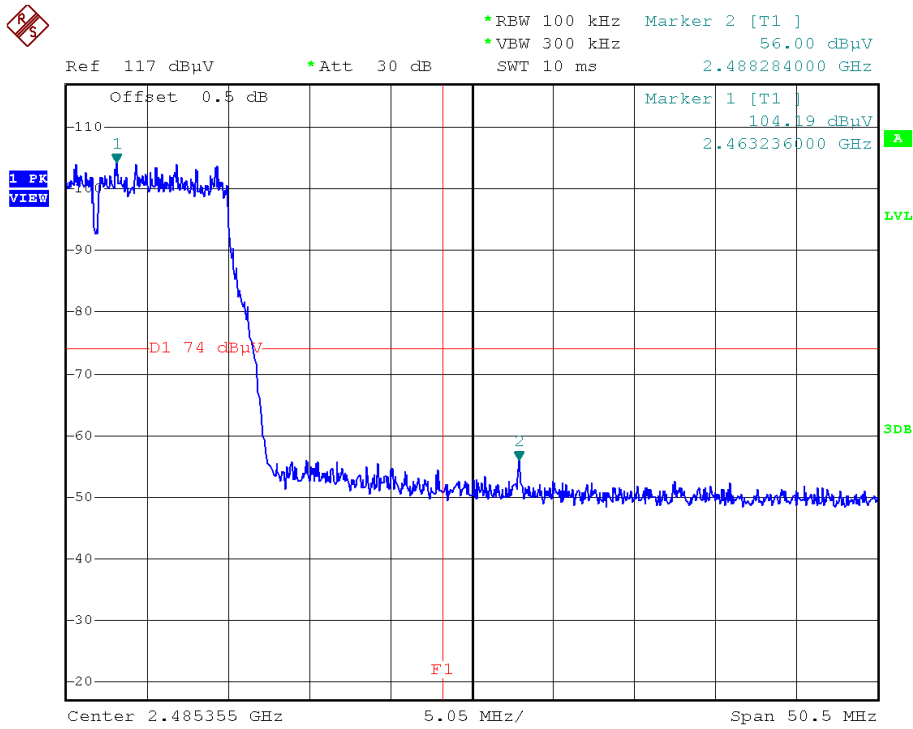

(Plot 2.6 B3: Channel = 11 Peak @ 802.11g)

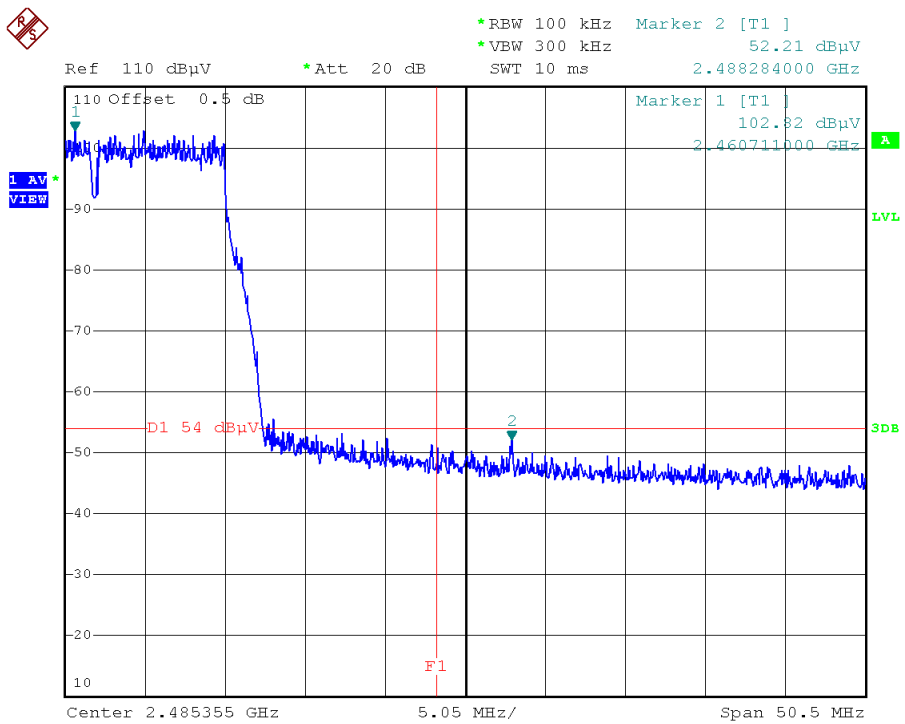

(Plot 2.6 B4: Channel = 11 AVG @ 802.11g)




**802.11n-20**


**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μV/m)	Limit (dB μV/m)	Verdict
		PK/ AV						
1	2397.099	PK	60.31	-31.7	28.3	56.91	74	Pass
1	2395.434	AV	51.22	-31.7	28.3	47.82	54	Pass
11	2502.046	PK	52.69	-29.45	29.2	52.44	74	Pass
11	2490.764	AV	50.68	-29.45	29.2	50.43	54	Pass


**B. Test Plots:**

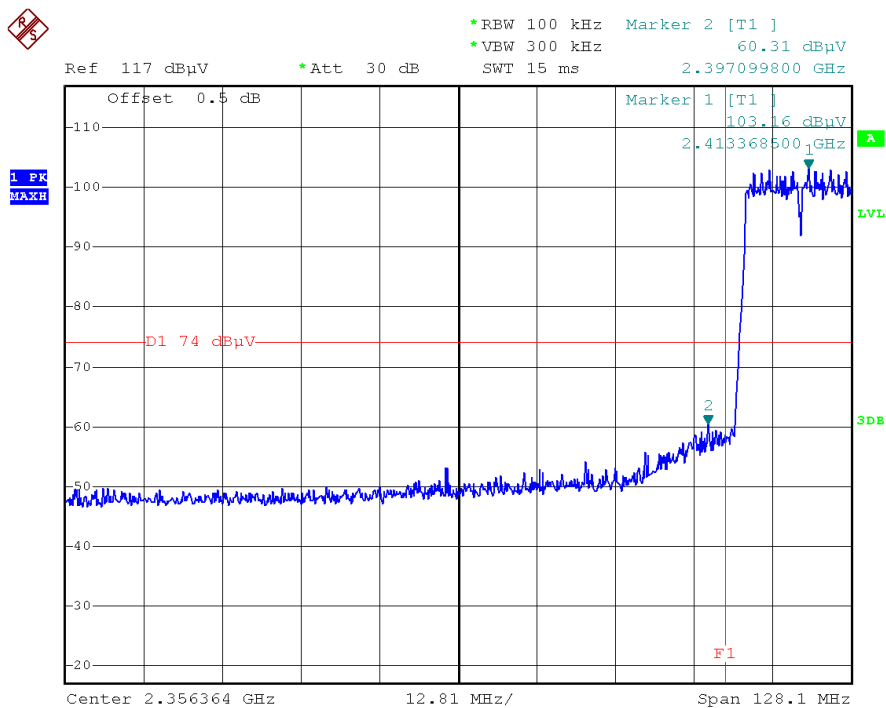


(Plot 2.6 C1: Channel = 1 Peak @ 802.11n-20)

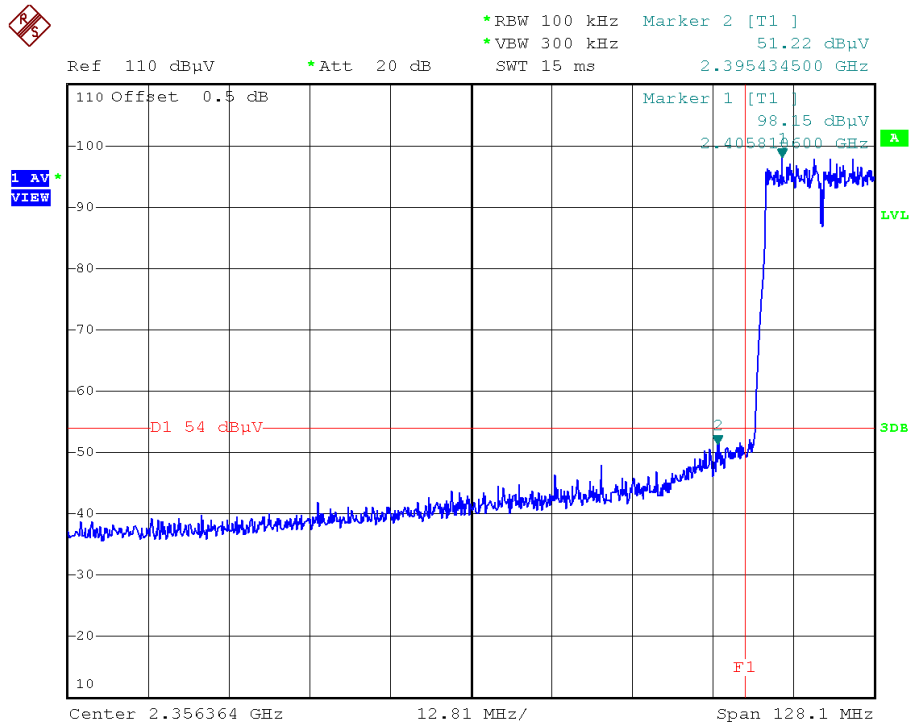

(Plot 2.6 C2: Channel = 1 AVG @ 802.11n-20)

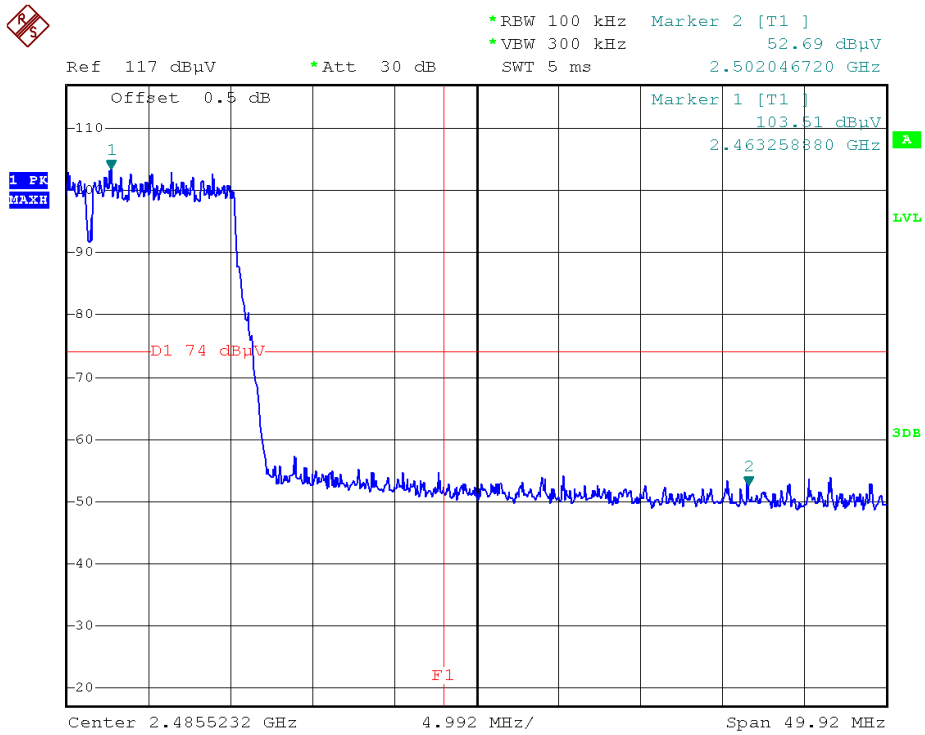

(Plot 2.6 C3: Channel = 11 Peak @ 802.11n-20)

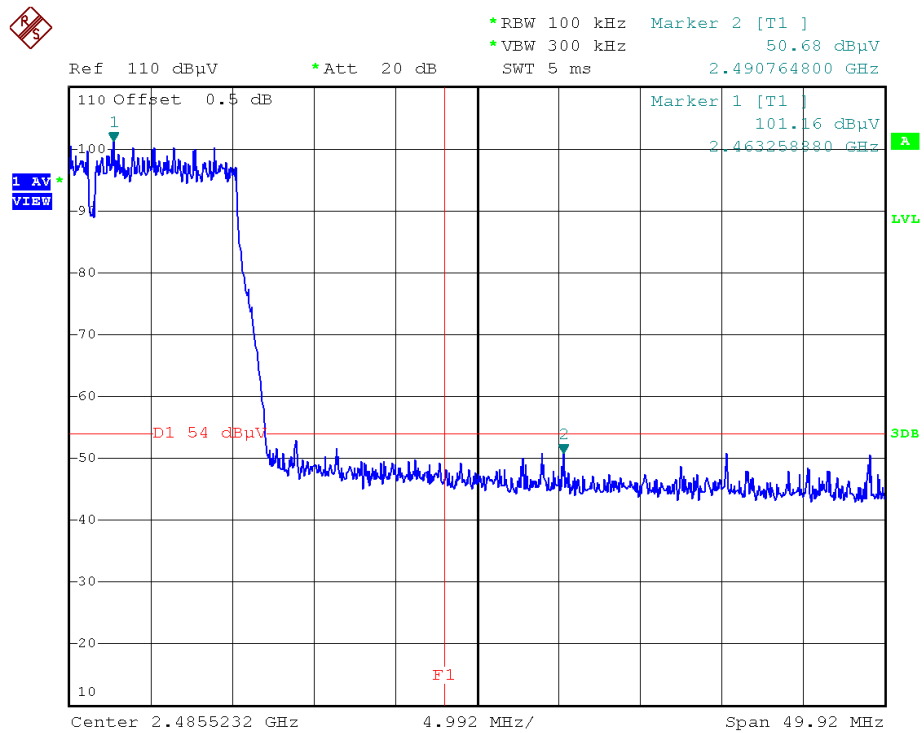

(Plot 2.6 C4: Channel = 11 AVG @ 802.11n-20)


**802.11n-40**

**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBµV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB µV/m)	Limit (dB µV/m)	Verdict
		PK/ AV						
3	2399.028	PK	61.39	-31.7	28.3	57.99	74	Pass
3	2399.535	AV	52.04	-31.7	28.3	48.64	54	Pass
9	2484.494	PK	57.84	-29.45	29.2	57.59	74	Pass
9	2456.987	AV	49.65	-29.45	29.2	49.40	54	Pass




**B. Test Plots:**

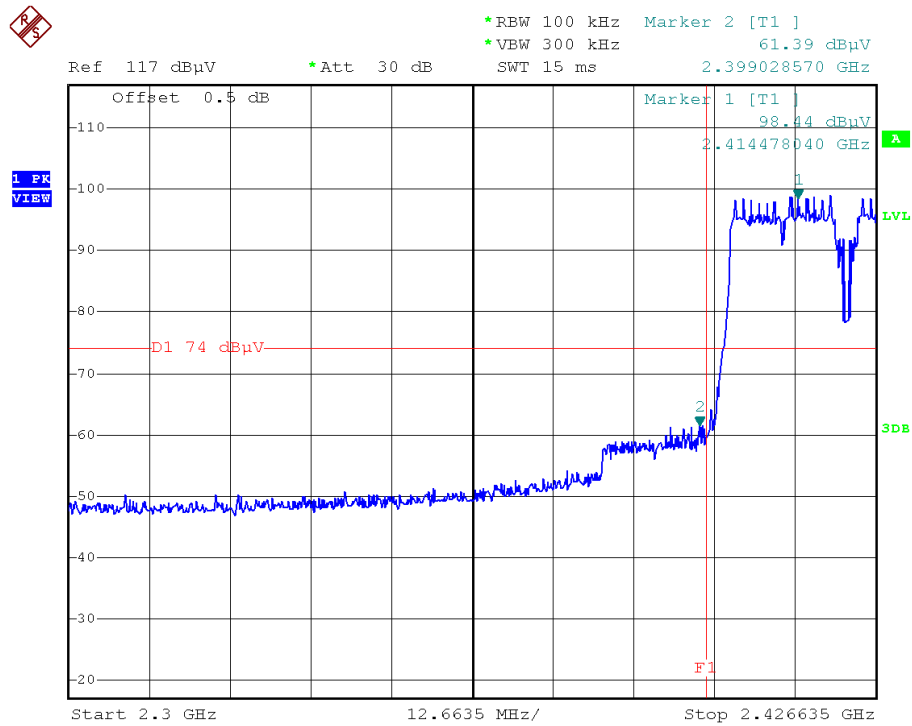


(Plot 2.6 D1: Channel = 3 Peak @ 802.11n-40)

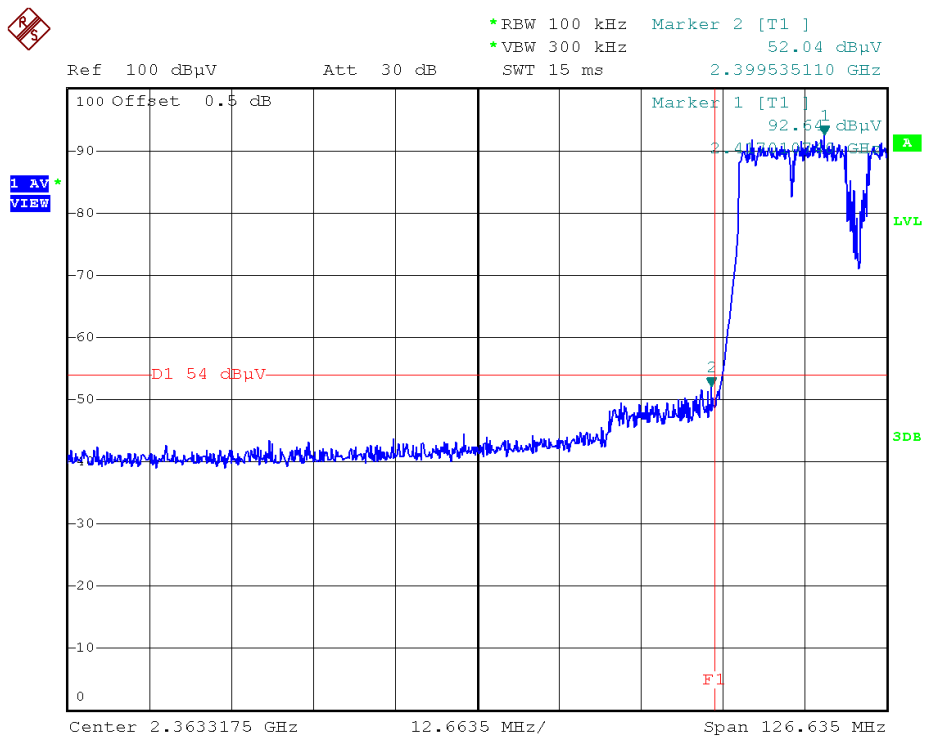

(Plot 2.6 D2: Channel = 3 AVG @ 802.11n-40)

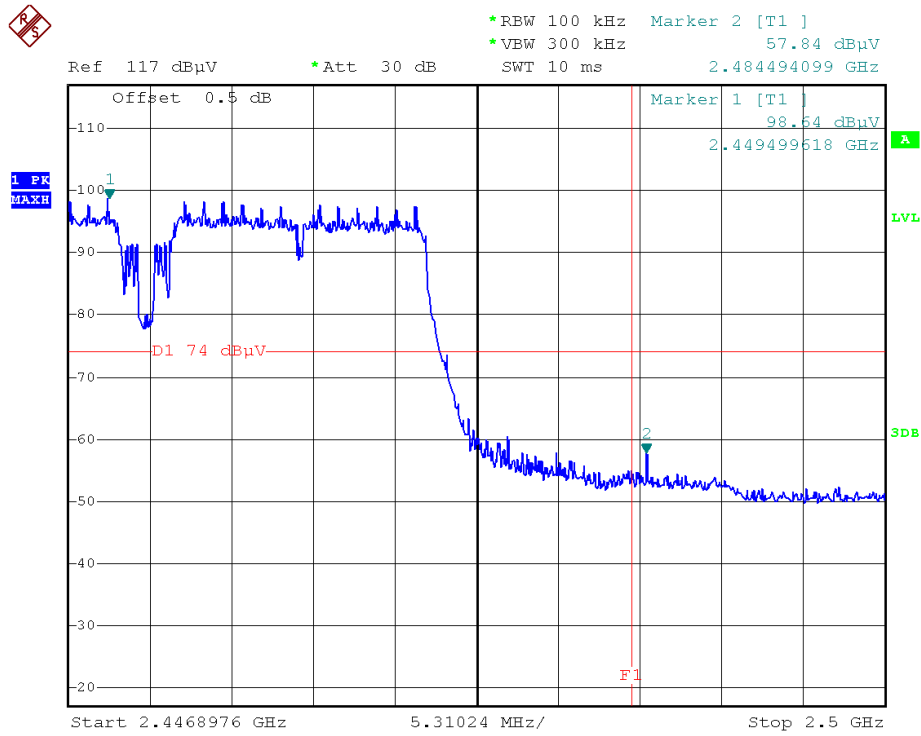

(Plot 2.6 D3: Channel = 9 Peak @ 802.11n-40)

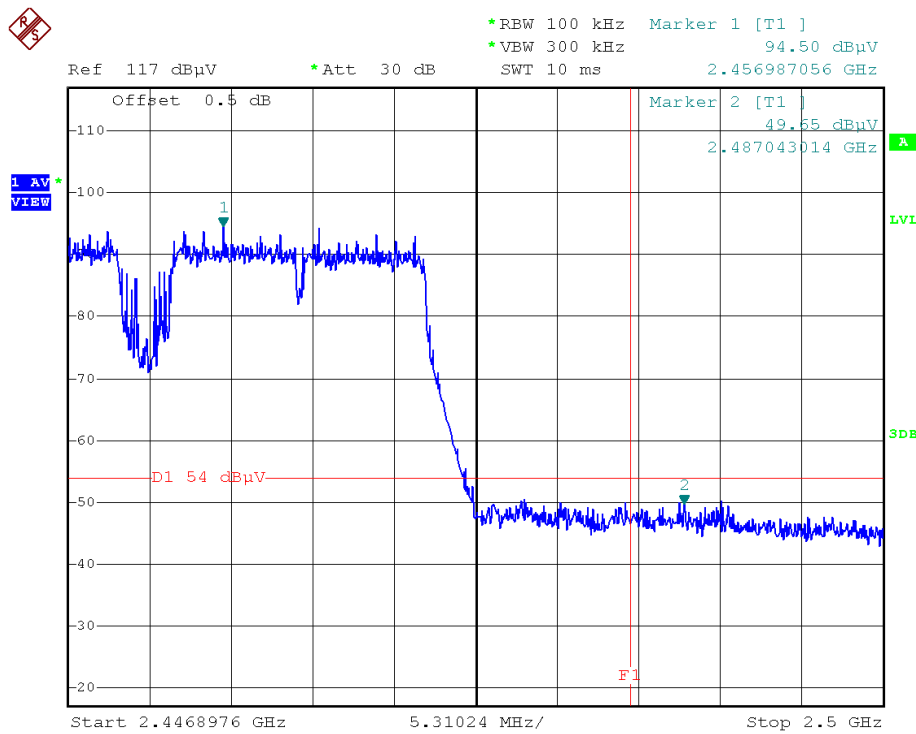

(Plot 2.6 D4: Channel = 9 AVG @ 802.11n-40)






**Conducted Band Edge Measurement**

**802.11b Test mode**


**A. Test Verdict:**

Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
Out of left side band					
2399.506	-48.42	PK	-20.00	Plot 2.6 E1	Pass
Out of right side band					
2487.843	-52.42	PK	-20.00	Plot 2.6 E2	Pass

**B. Test Plots:**

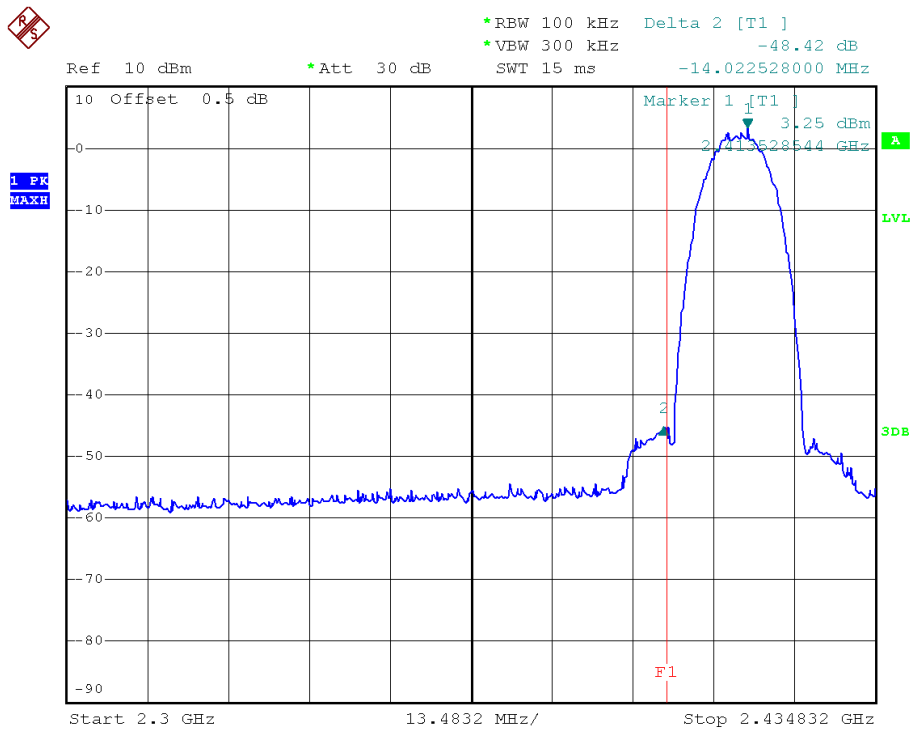

(Plot 2.6 E1: Channel =1 2412MHz @ 802.11b)

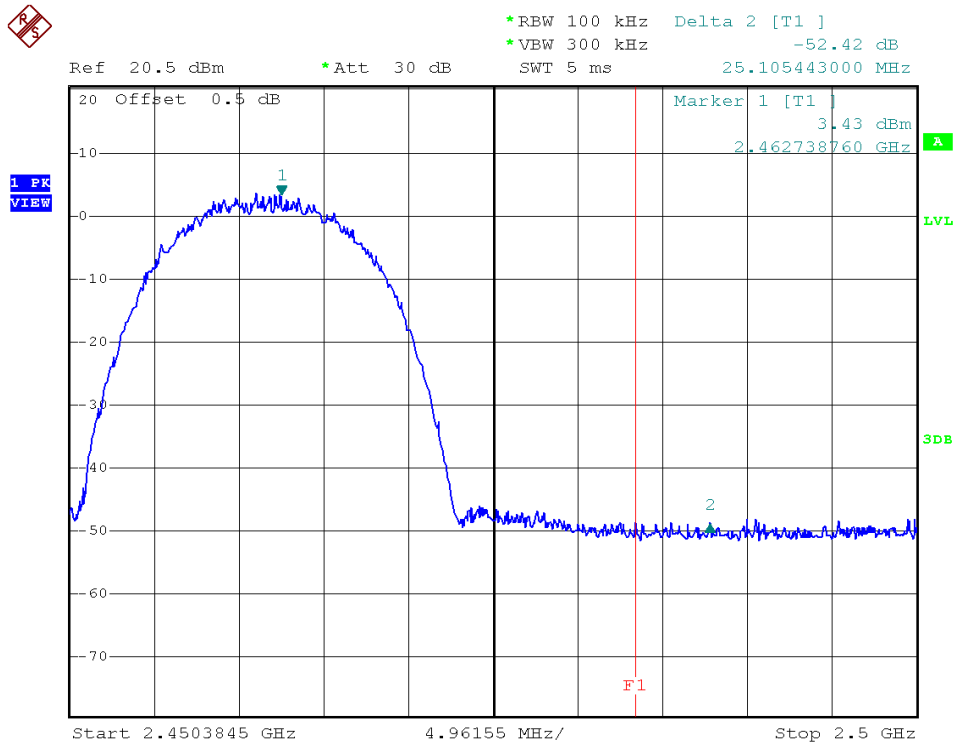

(Plot 2.6 E2: Channel =11 2462MHz @ 802.11b)


**802.11g Test mode**

The lowest and highest channels are tested to verify the band edge emissions.


**A. Test Verdict:**

Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
Out of left side band					
2397.317	-43.46	PK	-20.00	Plot 2.6 F1	Pass
Out of right side band					
2488.284	-48.43	PK	-20.00	Plot 2.6 F2	Pass

**B. Test Plots:**

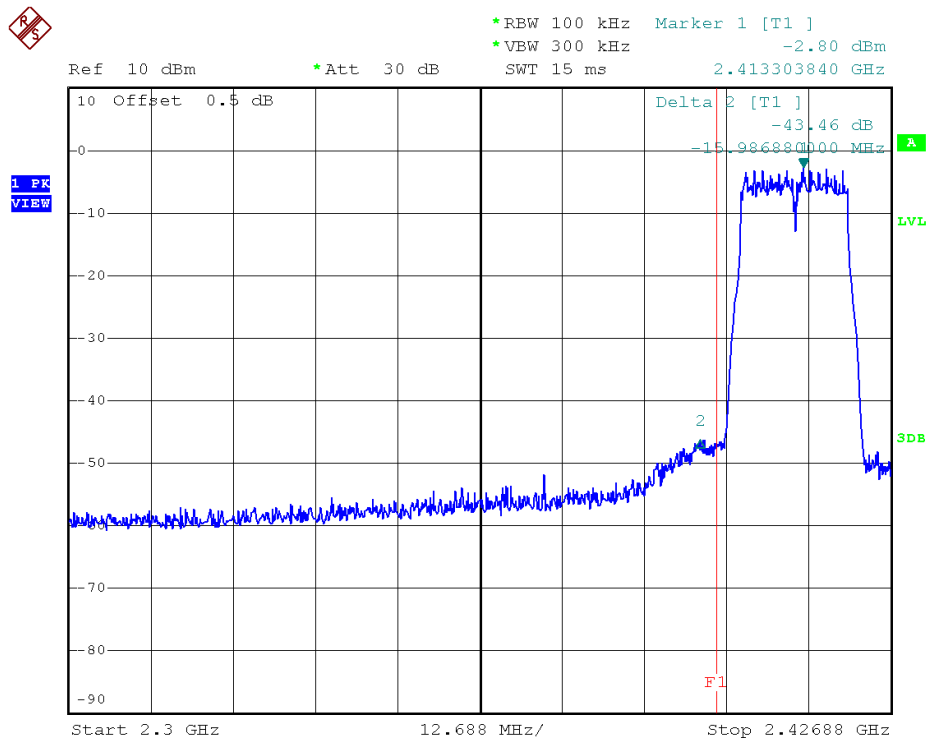

(Plot 2.5.2 F1: Channel =1 2412MHz @ 802.11g)

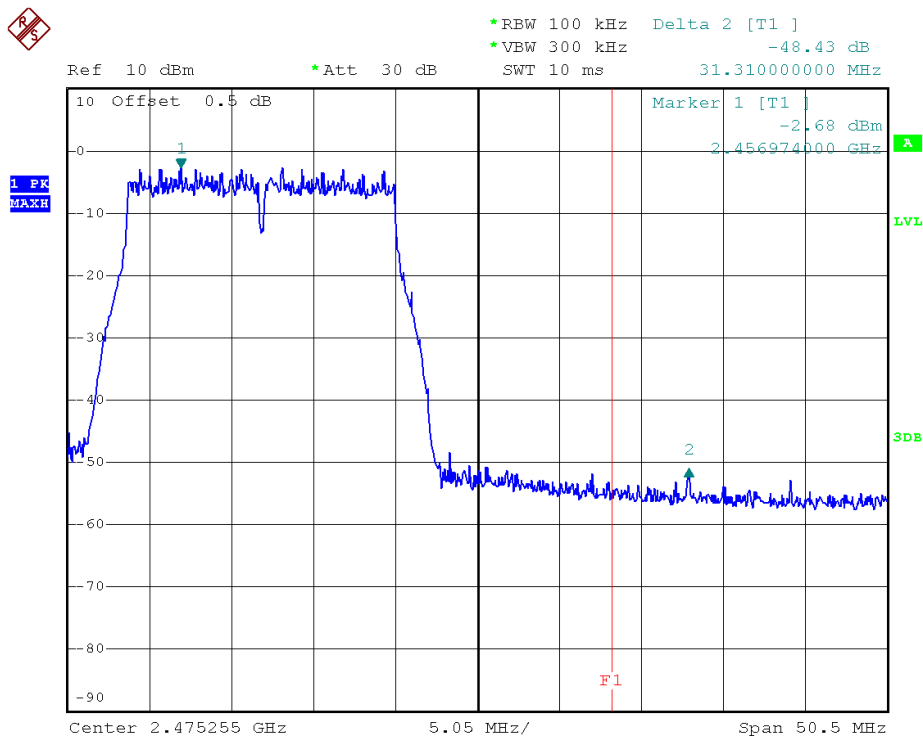

(Plot 2.6 F2: Channel =11 2462MHz @ 802.11g)




### 802.11n-20 Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### A. Test Verdict:

Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
Out of left side band					
2396.075	-43.94	PK	-20.00	Plot 2.6 G1	Pass
Out of right side band					
2487.019	-49.18	PK	-20.00	Plot 2.6 G2	Pass

#### B. Test Plots:

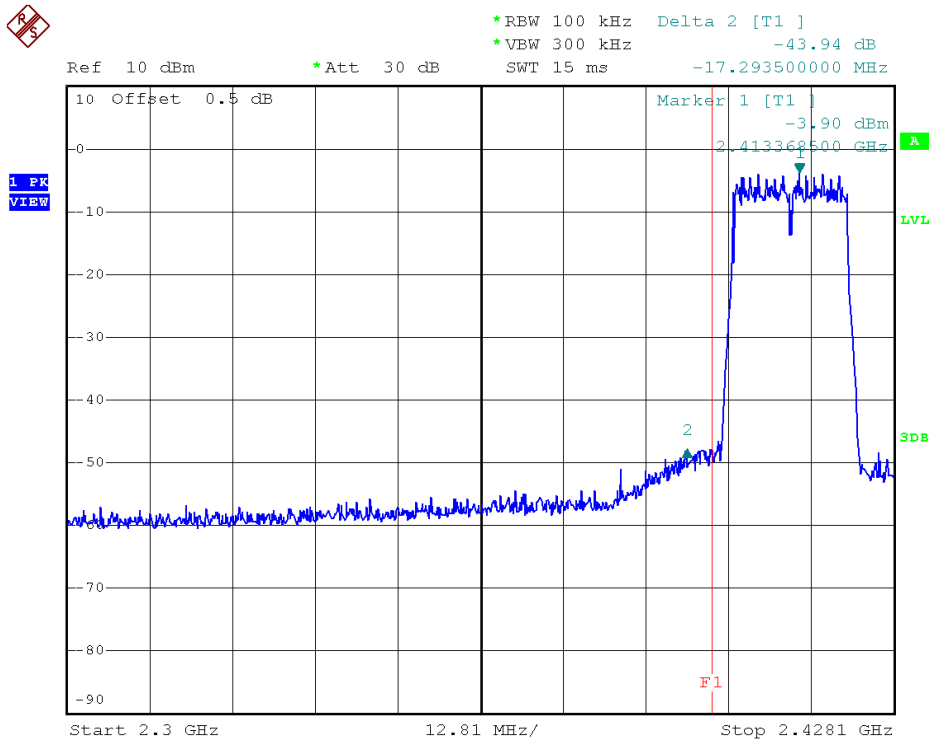

(Plot 2.6 G1: Channel =1 2412MHz @ 802.11n-20)

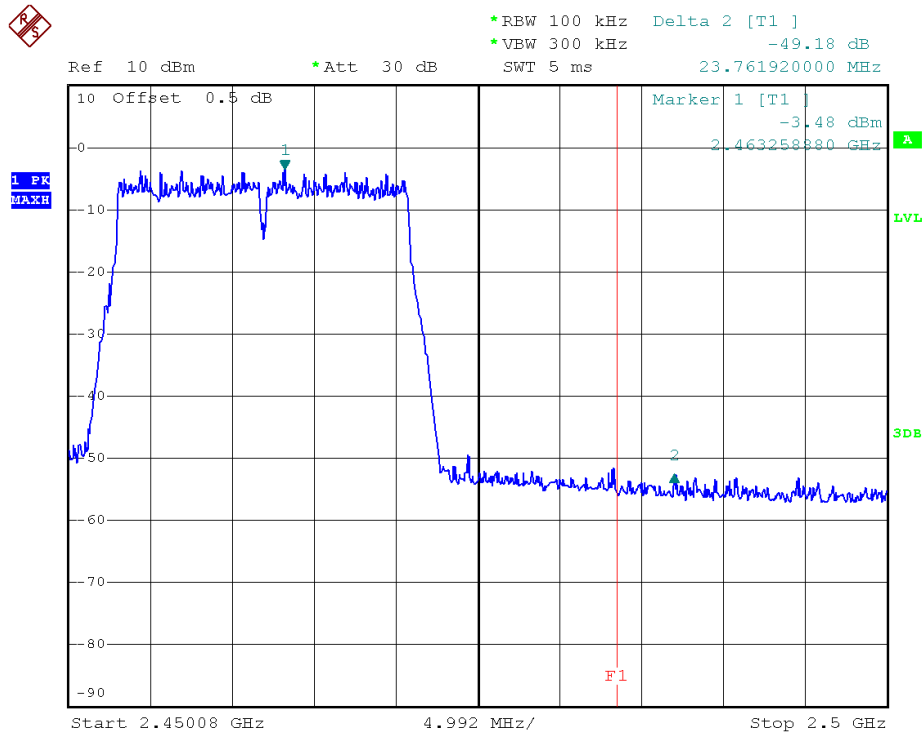

(Plot 2.6 G2: Channel =11 2462MHz @ 802.11n-20)


**802.11n-40 Test mode**

The lowest and highest channels are tested to verify the band edge emissions.


**A. Test Verdict:**

Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
Out of left side band					
2395.567	-39.61	PK	-20.00	Plot 2.6 H1	Pass
Out of right side band					
2484.53	-38.87	PK	-20.00	Plot 2.6 H2	Pass

**B. Test Plots:**

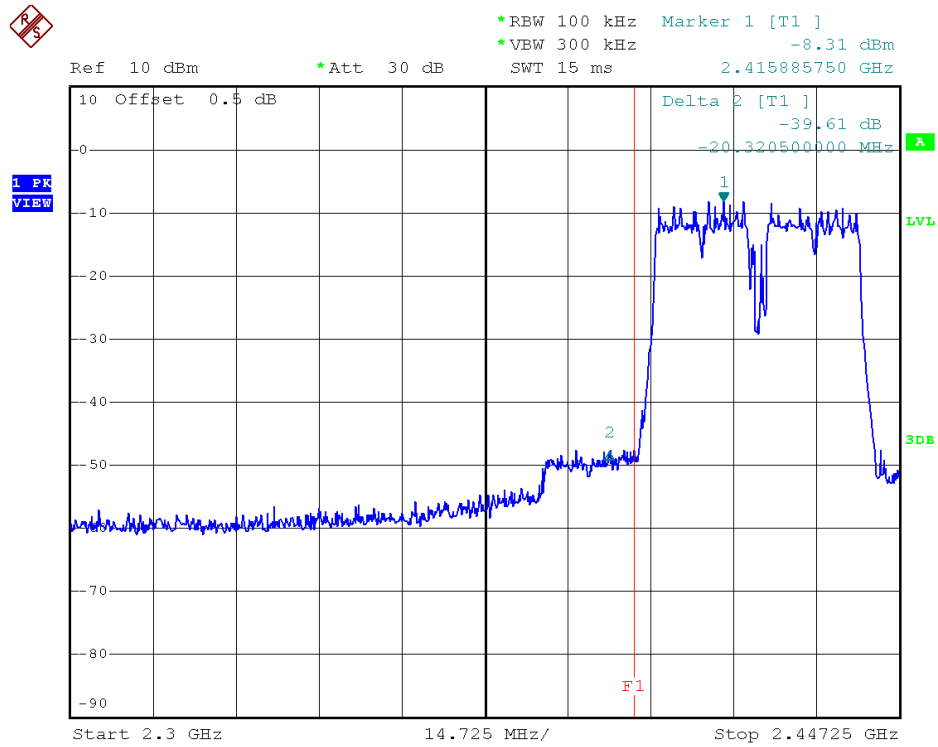

(Plot 2.6 H1: Channel =3 2422MHz @ 802.11n-40)

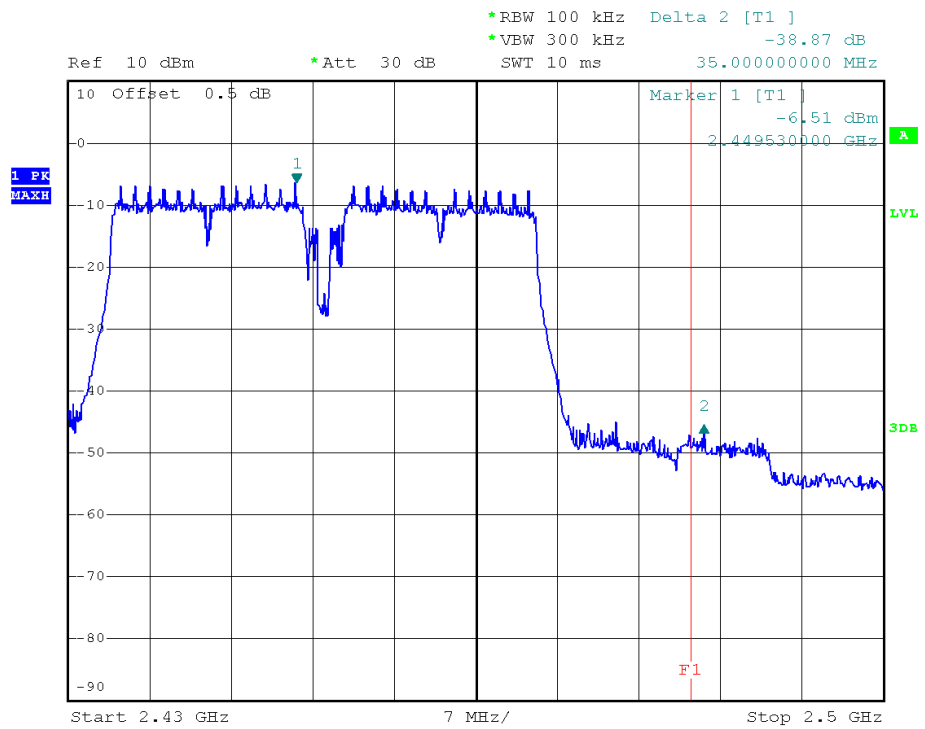

(Plot 2.6 H2: Channel =9 2452MHz @ 802.11n-40)

## 2.7 Conducted Emission

### 2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2 Test Description

#### A. Test Setup:

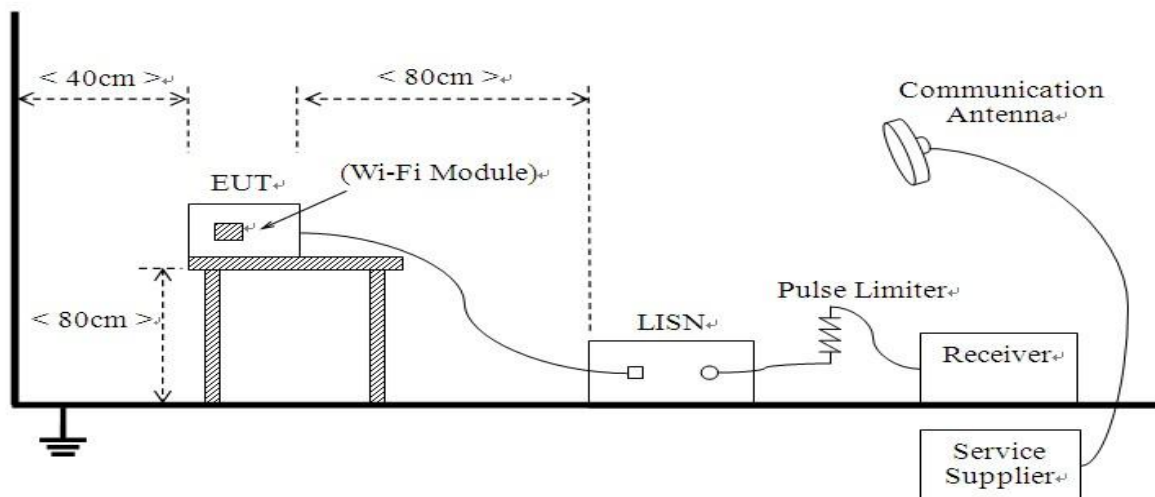

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

The EUT is powered by a PC. The factors of the site are calibrated to correct the reading. During the measurement, the EUT is activated and controlled by the Wi-Fi Service Supplier (SS) via a Common Antenna.



**B. Equipments List:**

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Test Receiver	ROHDE&SCHWARZ	ESCS30	A0304260	2014.06.10
LISN	ROHDE&SCHWARZ	ESH2-Z5	A0304221	2014.06.10


**2.7.3 Test Result**

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**A. Test setup:**

The EUT configuration of the emission tests is EUT + PC.

**B. Test Plots:**

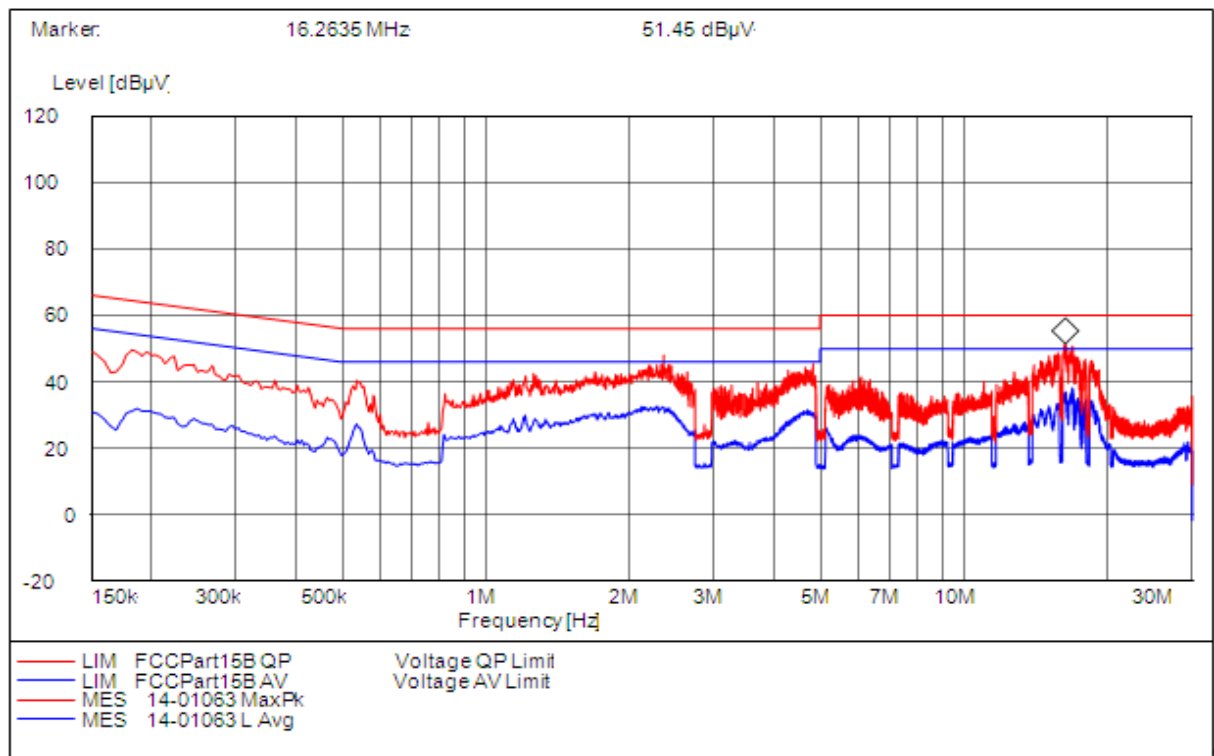






Conducted Disturbance at Mains Terminals							
L Test Data							
QP				AV			
Frequency (MHz)	Limits (dB $\mu$ V)	Measurement Value (dB $\mu$ V)	Margin (dB)	Frequency (MHz)	Limits (dB $\mu$ V)	Measurement Value (dB $\mu$ V)	Margin (dB)
0.1815	64.40	49.67	14.73	0.1815	54.40	31.27	23.13
2.3495	56	47.45	12.55	2.3495	46	32.22	13.78
16.2635	60	50.83	9.17	16.2635	50	38.23	11.77

L Test Curve

(Plot A: L Phase)

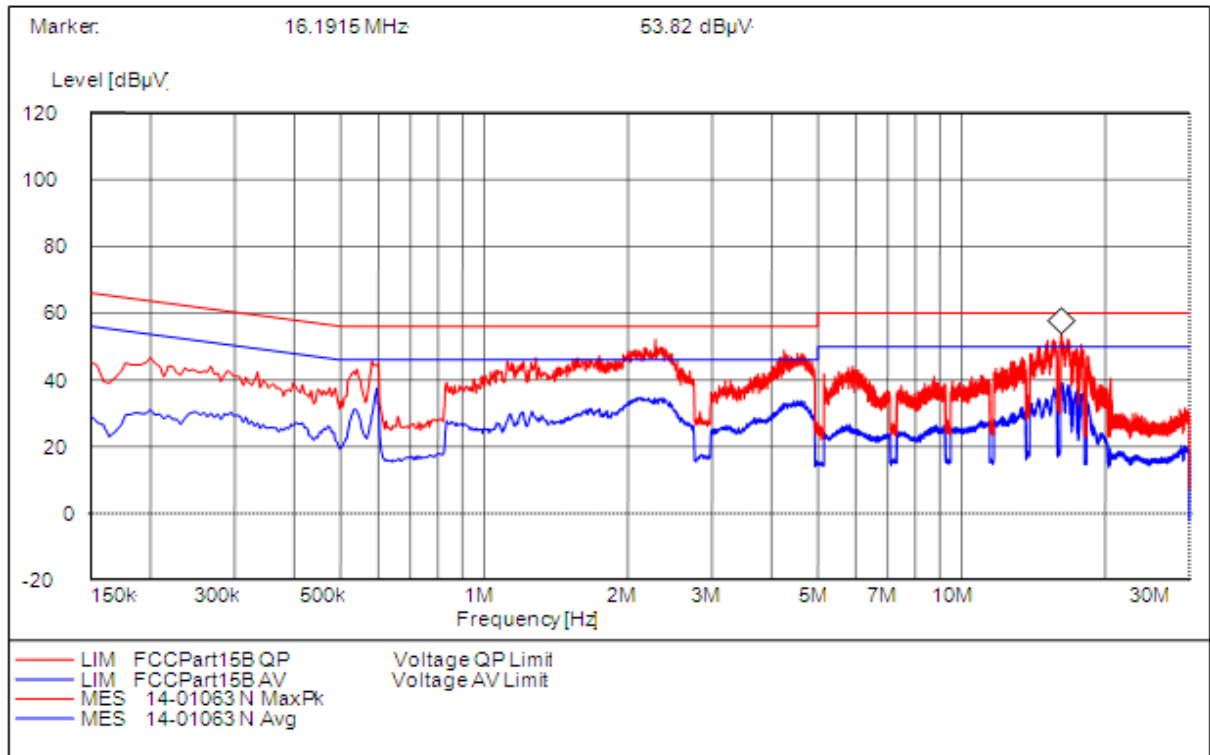



Conducted Disturbance at Mains Terminals							
N Test Data							
QP				AV			
Frequency (MHz)	Limits (dB $\mu$ V)	Measurement Value (dB $\mu$ V)	Margin (dB)	Frequency (MHz)	Limits (dB $\mu$ V)	Measurement Value (dB $\mu$ V)	Margin (dB)
0.1995	63.60	46.67	16.93	0.1995	53.60	31.03	22.57
2.2820	56	52.14	3.86	2.2820	46	33.95	12.05
16.1915	60	52.74	7.26	16.1915	50	38.73	11.27

**N Test Curve**

(Plot B: N Phase)

**Test Result: PASS**



## 2.8 Radiated Emission

### 2.8.1 Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB } \mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	$2400/\text{F}(\text{kHz})$	$20\log(2400/\text{F}(\text{kHz}))+80$	300
0.490 - 1.705	$24000/\text{F}(\text{kHz})$	$20\log(24000/\text{F}(\text{kHz}))+40$	30
1.705 - 30.0	30	$20\log(30)+40$	30
30 - 88	100	40.0	3
88 - 216	150	43.5	3
216 - 960	200	46.0	3
Above 960	500	54.0	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


## 2.8.2 Test Description

### A. Test Setup:


(1) For radiated emissions from 9kHz to 30MHz

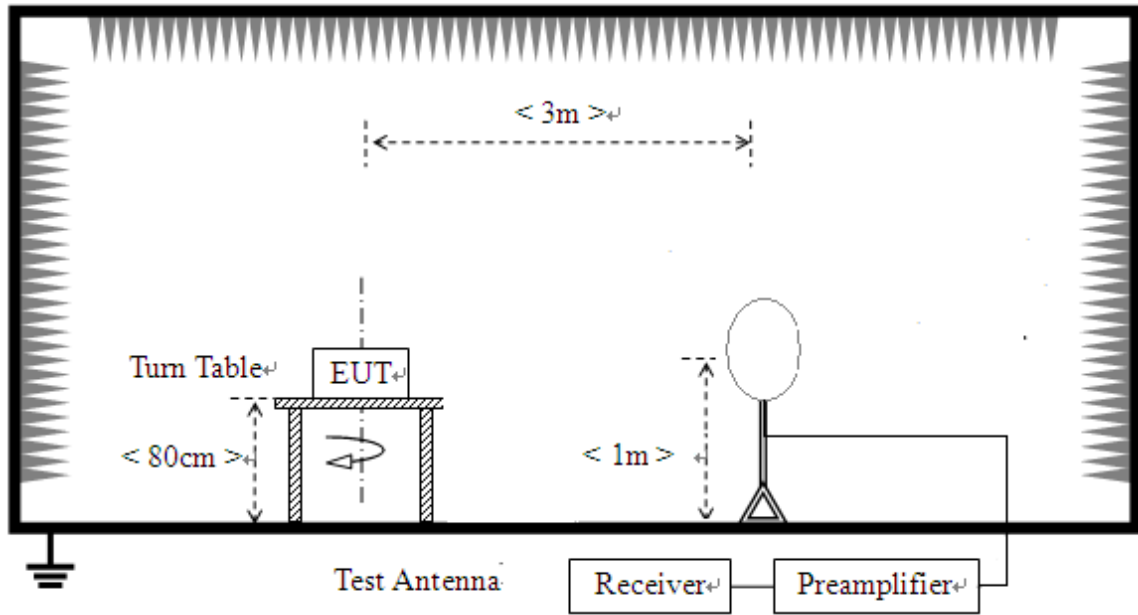

(2) For radiated emissions from 30MHz to 1GHz

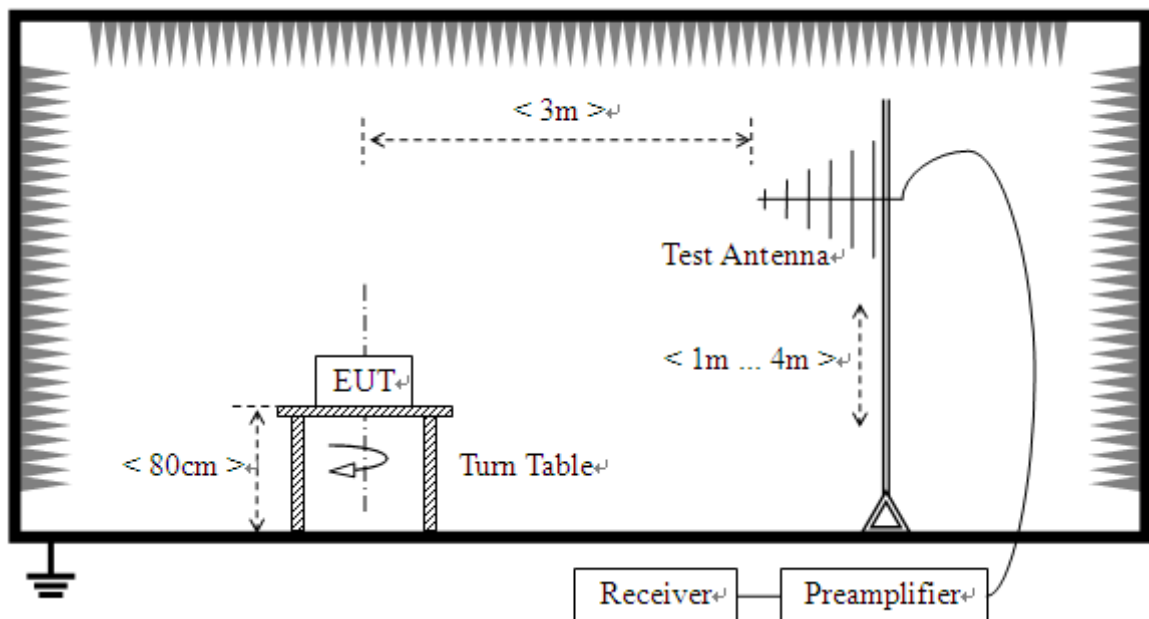

(3) For radiated emissions above 1GHz

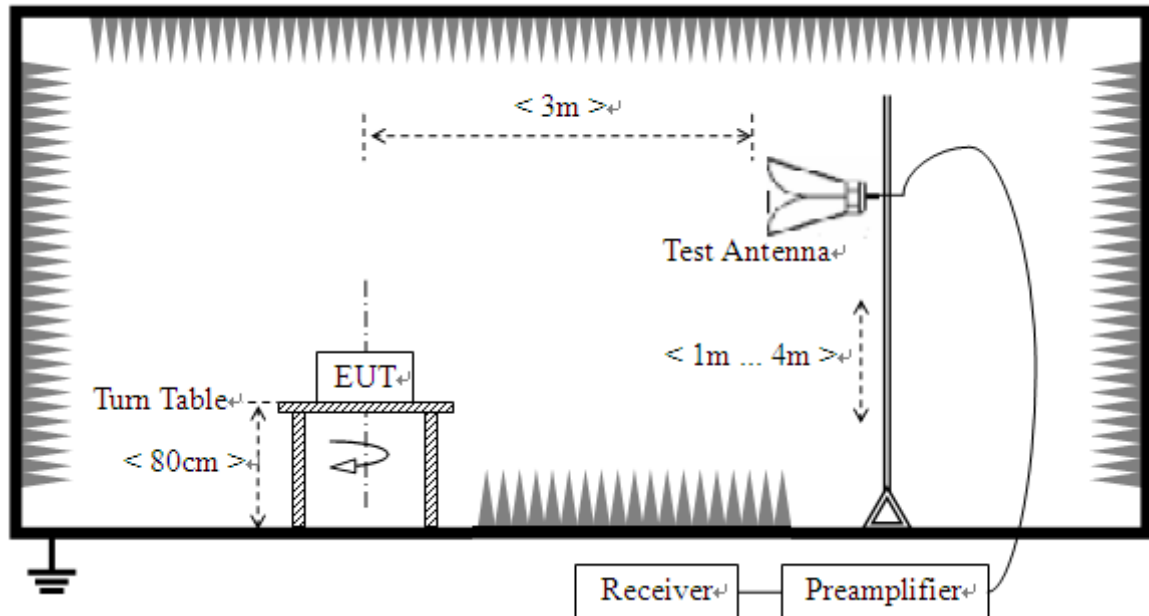

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT was powered by the PC. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, the EUT is activated and controlled by the PC, set to operate under WIFI test mode.

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**B. Equipments List:**

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Receiver	R&S	ESIB26	A0304218	2014.06.07
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2014.06.07
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.06.09
Test Antenna - Horn	R&S	BBHA 9120D	9120C-963	2014.06.09
Test Antenna - Horn	R&S	HF960	100150	2014.06.09
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902607	2014.06.05
Test Antenna -Loop	Schwarzbeck	HFH2-Z2	100047	2014.06.02
Ampilier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2014.06.05
Ampilier 18G~40GHz	R&S	JS42-18002600-28 -5A	12111.0980.0 0	2014.06.05
amplifier 20M~3GHz	R&S	PAP-0203H	22018	2014.06.10

**2.8.3 Test Result**

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{ V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

$L_{\text{Cable loss}}$ : Cable loss

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The minimum clock frequency was 24MHz, the radiated frequency range from 9KHz to 25GHz.

Note: 1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.

2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.

3. HORN ANTENNA for the radiation emission test above 1G.




Test plots for the whole measurement frequency range:

**For 9KHz to 30MHz**


The test has been performed, and the Radiated Emission level is too low to the limit.

**For 30MHz to 1000 MHz**

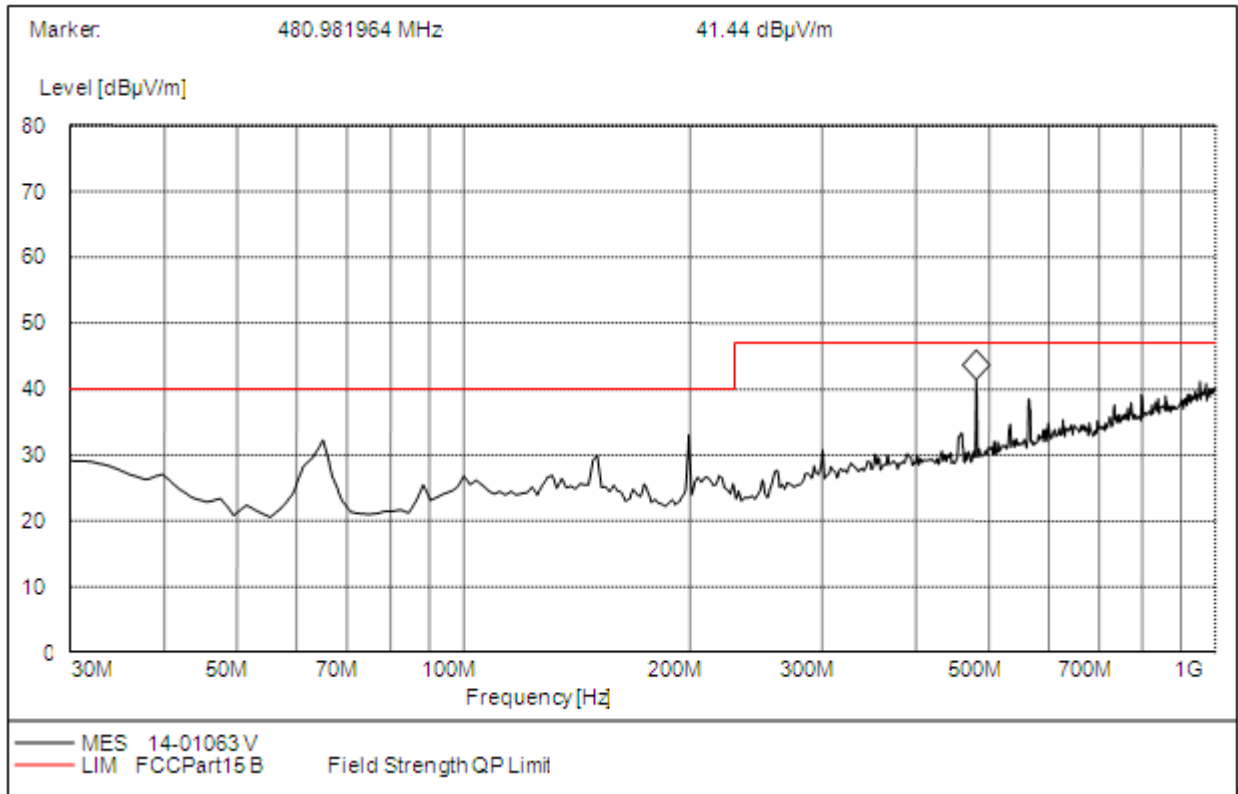

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Verdict
64.980000	32.26	120.000	100.0	40.00	17.74	Vertical	Pass
199.110000	33.08	120.000	100.0	43.50	10.42	Vertical	Pass
480.980000	41.44	120.000	100.0	46.00	4.56	Vertical	Pass

(Plot A: 30MHz to 1GHz, Antenna Vertical)

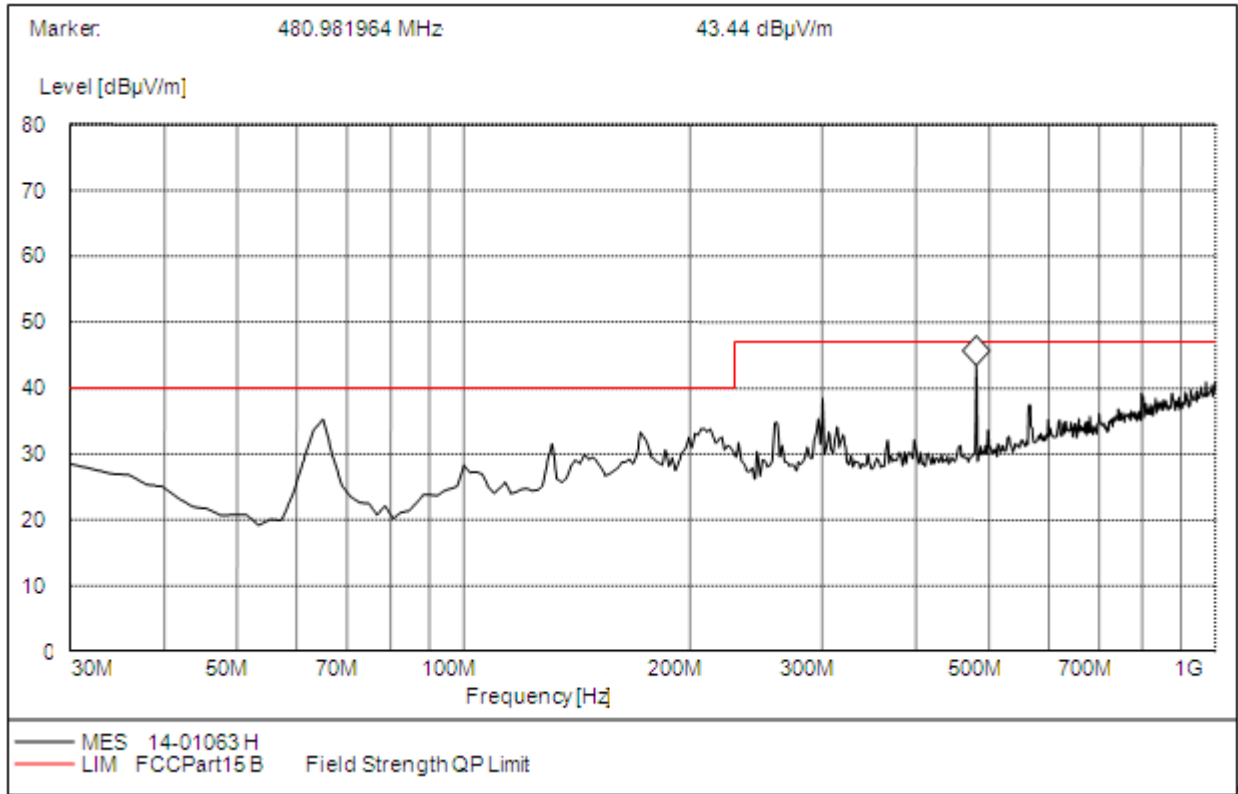

Frequency (MHz)	QuasiPeak (dBµ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµ V/m)	Margin (dB)	Antenna	Verdict
64.990000	35.28	120.000	100.0	40.00	4.72	Horizontal	Pass
206.890000	33.80	120.000	100.0	43.50	9.70	Horizontal	Pass
480.981964	43.44	120.000	100.0	46.00	2.56	Horizontal	Pass

(Plot B: 30MHz to 1GHz, Antenna Horizontal)





**For 1GHz to 25GHz**

802.11b Mode

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2412MHz)</b>											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2412.00	109.33	PK	/	/	1.00 H	118	112.73	28.3	4.90	-36.6
1	*2412.00	98.70	AV	/	/	1.00 H	118	102.1	28.3	4.90	-36.6
2	4824.00	52.34	PK	74.00	21.66	1.00 H	24	49.14	32.7	7.00	-36.5
2	4824.00	46.91	AV	54.00	7.09	1.00 H	24	43.71	32.7	7.00	-36.5
3	7236.00	51.33	PK	74.00	22.67	1.00 H	107	41.93	35.8	8.90	-35.3
3	7236.00	44.15	AV	54.00	9.85	1.00 H	107	34.75	35.8	8.90	-35.3
4	9648.00	50.92	PK	74.00	23.08	1.00 H	39	38.32	37.2	10.20	-34.8
4	9648.00	45.30	AV	54.00	8.70	1.00 H	39	32.7	37.2	10.20	-34.8

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M (802.11b--2412MHz)</b>											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2412.00	109.87	PK	/	/	1.00 V	109	113.27	28.3	4.90	-36.6
1	*2412.00	99.79	AV	/	/	1.00 V	109	103.19	28.3	4.90	-36.6
2	4824.00	52.79	PK	74.00	21.21	1.00 V	62	49.59	32.7	7.00	-36.5
2	4824.00	46.27	AV	54.00	7.73	1.00 V	62	43.07	32.7	7.00	-36.5
3	7236.00	51.70	PK	74.00	22.30	1.00 V	349	42.3	35.8	8.90	-35.3
3	7236.00	44.36	AV	54.00	9.64	1.00 V	349	34.96	35.8	8.90	-35.3
4	9648.00	55.29	PK	74.00	18.71	1.00 V	211	42.69	37.2	10.20	-34.8
4	9648.00	46.64	AV	54.00	7.36	1.00 V	211	34.04	37.2	10.20	-34.8

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2437MHz)</b>											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	107.66	PK	/	/	1.00 H	202	110.86	28.3	5.10	-36.6
1	*2437.00	100.02	AV	/	/	1.00 H	202	103.22	28.3	5.10	-36.6
2	4874.00	53.96	PK	74.00	20.04	1.00 H	187	50.56	32.3	7.60	-36.5
2	4874.00	48.27	AV	54.00	5.73	1.00 H	187	44.87	32.3	7.60	-36.5
3	7311.00	54.92	PK	74.00	19.08	1.00 H	107	45.52	36.1	8.60	-35.3
3	7311.00	48.84	AV	54.00	5.16	1.00 H	107	39.44	36.1	8.60	-35.3
4	9748.00	50.48	PK	74.00	23.52	1.00 H	144	37.88	37.2	10.20	-34.8
4	9748.00	43.59	AV	54.00	10.41	1.00 H	144	30.99	37.2	10.20	-34.8



**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2437MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	108.76	PK	/	/	1.00 V	104	111.96	28.3	5.10	-36.6
1	*2437.00	98.19	AV	/	/	1.00 V	104	101.39	28.3	5.10	-36.6
2	4874.00	51.95	PK	74.00	22.05	1.00 V	304	48.55	32.3	7.60	-36.5
2	4874.00	48.12	AV	54.00	5.88	1.00 V	304	44.72	32.3	7.60	-36.5
3	7311.00	49.97	PK	74.00	24.03	1.00 V	203	40.57	36.1	8.60	-35.3
3	7311.00	47.46	AV	54.00	6.54	1.00 V	203	38.06	36.1	8.60	-35.3
4	9748.00	49.59	PK	74.00	24.41	1.00 V	172	36.99	37.2	10.20	-34.8
4	9748.00	44.71	AV	54.00	9.29	1.00 V	172	32.11	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2462MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2462.00	111.29	PK	/	/	1.00 H	325	114.59	28.6	4.70	-36.6
1	*2462.00	100.40	AV	/	/	1.00 H	325	103.7	28.6	4.70	-36.6
2	4924.00	52.67	PK	74.00	21.33	1.00 H	311	48.87	33	7.00	-36.2
2	4924.00	47.75	AV	54.00	6.25	1.00 H	311	43.95	33	7.00	-36.2
3	7386.00	50.72	PK	74.00	23.28	1.00 H	330	41.32	36.2	8.50	-35.3
3	7386.00	47.33	AV	54.00	6.67	1.00 H	330	37.93	36.2	8.50	-35.3
4	9848.00	52.24	PK	74.00	21.76	1.00 H	42	39.64	37.2	10.20	-34.8
4	9848.00	49.31	AV	54.00	4.69	1.00 H	42	36.71	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2462MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2462.00	112.93	PK	/	/	1.00 V	34	116.23	28.6	4.70	-36.6
1	*2462.00	100.27	AV	/	/	1.00 V	34	103.57	28.6	4.70	-36.6
2	4924.00	51.22	PK	74.00	22.78	1.00 V	55	47.42	33	7.00	-36.2
2	4924.00	44.32	AV	54.00	9.68	1.00 V	55	40.52	33	7.00	-36.2
3	7386.00	51.62	PK	74.00	22.38	1.00 V	258	42.22	36.2	8.50	-35.3
3	7386.00	48.48	AV	54.00	5.52	1.00 V	258	39.08	36.2	8.50	-35.3
4	9848.00	51.08	PK	74.00	22.92	1.00 V	254	38.48	37.2	10.20	-34.8
4	9848.00	48.73	AV	54.00	5.27	1.00 V	254	36.13	37.2	10.20	-34.8



802.11g Mode

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2412MHz)</b>											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2412.00	109.95	PK	/	/	1.00 H	19	113.25	28.3	5.00	-36.6
1	*2412.00	100.20	AV	/	/	1.00 H	19	103.5	28.3	5.00	-36.6
2	4824.00	53.04	PK	74.00	20.96	1.00 H	321	49.24	32.7	7.30	-36.2
2	4824.00	47.90	AV	54.00	6.10	1.00 H	321	44.1	32.7	7.30	-36.2
3	7236.00	51.84	PK	74.00	22.16	1.00 H	207	42.44	35.8	8.90	-35.3
3	7236.00	48.69	AV	54.00	5.31	1.00 H	207	39.29	35.8	8.90	-35.3
4	9648.00	51.48	PK	74.00	22.52	1.00 H	304	38.88	37.2	10.20	-34.8
4	9648.00	45.03	AV	54.00	8.97	1.00 H	304	32.43	37.2	10.20	-34.8

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M (802.11g--2412MHz)</b>											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2412.00	107.33	PK	/	/	1.00 V	174	110.63	28.3	5.00	-36.6
1	*2412.00	96.63	AV	/	/	1.00 V	174	99.93	28.3	5.00	-36.6
2	4824.00	54.05	PK	74.00	19.95	1.00 V	68	50.25	32.7	7.30	-36.2
2	4824.00	48.12	AV	54.00	5.88	1.00 V	68	44.32	32.7	7.30	-36.2
3	7236.00	52.72	PK	74.00	21.28	1.00 V	169	43.32	35.8	8.90	-35.3
3	7236.00	48.19	AV	54.00	5.81	1.00 V	169	38.79	35.8	8.90	-35.3
4	9648.00	50.81	PK	74.00	23.19	1.00 V	298	38.21	37.2	10.20	-34.8
4	9648.00	47.55	AV	54.00	6.45	1.00 V	298	34.95	37.2	10.20	-34.8

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2437MHz)</b>											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	108.63	PK	/	/	1.00 H	54	111.83	28.3	5.10	-36.6
1	*2437.00	98.07	AV	/	/	1.00 H	54	101.27	28.3	5.10	-36.6
2	4874.00	51.76	PK	74.00	22.24	1.00 H	117	48.36	32.8	7.10	-36.5
2	4874.00	47.54	AV	54.00	6.46	1.00 H	117	44.14	32.8	7.10	-36.5
3	7311.00	50.21	PK	74.00	23.79	1.00 H	328	40.81	36.1	8.60	-35.3
3	7311.00	45.47	AV	54.00	8.53	1.00 H	328	36.07	36.1	8.60	-35.3
4	9748.00	51.68	PK	74.00	22.32	1.00 H	19	39.08	37.2	10.20	-34.8
4	9748.00	45.62	AV	54.00	8.38	1.00 H	19	33.02	37.2	10.20	-34.8



**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2437MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	108.86	PK	/	/	1.00 V	122	112.06	28.3	5.10	-36.6
1	*2437.00	98.41	AV	/	/	1.00 V	122	101.61	28.3	5.10	-36.6
2	4874.00	52.21	PK	74.00	21.79	1.00 V	156	48.81	32.8	7.10	-36.5
2	4874.00	47.61	AV	54.00	6.39	1.00 V	156	44.21	32.8	7.10	-36.5
3	7311.00	50.65	PK	74.00	23.35	1.00 V	98	41.25	36.1	8.60	-35.3
3	7311.00	46.71	AV	54.00	7.29	1.00 V	98	37.31	36.1	8.60	-35.3
4	9748.00	50.20	PK	74.00	23.80	1.00 V	197	37.62	37.2	10.20	-34.8
4	9748.00	45.53	AV	54.00	8.47	1.00 V	197	32.93	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2462MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2462.00	107.47	PK	/	/	1.00 V	103	110.67	28.2	5.1	-36.6
1	*2462.00	100.29	AV	/	/	1.00 V	103	103.49	28.2	5.1	-36.6
2	4924.00	51.85	PK	74.00	22.15	1.00 V	342	48.05	33	7.0	-36.2
2	4924.00	45.02	AV	54.00	8.98	1.00 V	342	41.22	33	7.0	-36.2
3	7386.00	51.28	PK	74.00	22.72	1.00 V	179	41.88	36.2	8.5	-35.3
3	7386.00	46.48	AV	54.00	7.52	1.00 V	179	37.08	36.2	8.5	-35.3
4	9848.00	50.76	PK	74.00	23.24	1.00 V	293	38.16	37.3	10.1	-34.8
4	9848.00	46.36	AV	54.00	7.64	1.00 V	293	33.76	37.3	10.1	-34.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2462MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2462.00	108.18	PK	/	/	1.00 H	220	111.48	28.2	5.10	-36.6
1	*2462.00	98.69	AV	/	/	1.00 H	220	101.99	28.2	5.10	-36.6
2	4924.00	52.50	PK	74.00	21.50	1.00 H	343	48.7	33	7.00	-36.2
2	4924.00	47.65	AV	54.00	6.35	1.00 H	343	43.85	33	7.00	-36.2
3	7386.00	51.04	PK	74.00	22.96	1.00 H	135	41.64	36.2	8.50	-35.3
3	7386.00	47.28	AV	54.00	6.72	1.00 H	135	37.88	36.2	8.50	-35.3
4	9848.00	49.61	PK	74.00	24.39	1.00 H	177	37.01	37.3	10.10	-34.8
4	9848.00	44.62	AV	54.00	9.38	1.00 H	177	32.02	37.3	10.10	-34.8



802.11n-20 Mode

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n-20--2412MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2412.00	107.16	PK	/	/	1.00 H	71	110.46	28.3	5.00	-36.6
1	*2412.00	97.22	AV	/	/	1.00 H	71	100.52	28.3	5.00	-36.6
2	4824.00	52.04	PK	74.00	21.96	1.00 H	150	48.24	32.7	7.30	-36.2
2	4824.00	46.31	AV	54.00	7.69	1.00 H	150	42.51	32.7	7.30	-36.2
3	7236.00	51.44	PK	74.00	22.56	1.00 H	337	42.04	35.8	8.90	-35.3
3	7236.00	47.18	AV	54.00	6.82	1.00 H	337	37.78	35.8	8.90	-35.3
4	9648.00	50.71	PK	74.00	23.29	1.00 H	12	38.11	37.2	10.20	-34.8
4	9648.00	45.40	AV	54.00	8.60	1.00 H	12	32.58	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n-20--2412MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2412.00	109.88	PK	/	/	1.00 V	189	113.18	28.3	5.00	-36.6
1	*2412.00	99.00	AV	/	/	1.00 V	189	102.3	28.3	5.00	-36.6
2	4824.00	51.49	PK	74.00	22.51	1.00 V	96	47.69	32.7	7.30	-36.2
2	4824.00	45.39	AV	54.00	8.61	1.00 V	96	41.59	32.7	7.30	-36.2
3	7236.00	51.68	PK	74.00	22.32	1.00 V	233	42.28	35.8	8.90	-35.3
3	7236.00	48.70	AV	54.00	5.30	1.00 V	233	39.3	35.8	8.90	-35.3
4	9648.00	49.79	PK	74.00	24.21	1.00 V	304	37.19	37.2	10.20	-34.8
4	9648.00	46.02	AV	54.00	7.98	1.00 V	304	33.42	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n-20--2437MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	108.74	PK	/	/	1.00 H	349	111.94	28.3	5.10	-36.6
1	*2437.00	100.15	AV	/	/	1.00 H	349	103.35	28.3	5.10	-36.6
2	4874.00	52.90	PK	74.00	21.10	1.00 H	309	49.5	32.3	7.60	-36.5
2	4874.00	48.99	AV	54.00	5.01	1.00 H	309	45.59	32.3	7.60	-36.5
3	7311.00	52.11	PK	74.00	21.89	1.00 H	188	42.71	36.1	8.60	-35.3
3	7311.00	49.53	AV	54.00	4.47	1.00 H	188	40.13	36.1	8.60	-35.3
4	9748.00	51.20	PK	74.00	22.80	1.00 H	74	38.6	37.2	10.20	-34.8
4	9748.00	46.86	AV	54.00	7.14	1.00 H	74	34.26	37.2	10.20	-34.8



**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n-20--2437MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	109.60	PK	/	/	1.00 V	205	112.8	28.3	5.10	-36.6
1	*2437.00	99.36	AV	/	/	1.00 V	205	102.56	28.3	5.10	-36.6
2	4874.00	53.89	PK	74.00	20.11	1.00 V	262	50.49	32.3	7.60	-36.5
2	4874.00	49.75	AV	54.00	4.25	1.00 V	262	46.35	32.3	7.60	-36.5
3	7311.00	52.50	PK	74.00	21.50	1.00 V	338	43.11	36.1	8.60	-35.3
3	7311.00	46.74	AV	54.00	7.26	1.00 V	338	37.34	36.1	8.60	-35.3
4	9748.00	51.34	PK	74.00	22.66	1.00 V	152	38.74	37.2	10.20	-34.8
4	9748.00	43.35	AV	54.00	10.65	1.00 V	152	30.75	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n-20--2462MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2462.00	109.56	PK	/	/	1.00 H	235	112.86	28.2	5.10	-36.6
1	*2462.00	100.34	AV	/	/	1.00 H	235	103.64	28.2	5.10	-36.6
2	4924.00	52.78	PK	74.00	21.22	1.00 H	104	48.98	33	7.00	-36.2
2	4924.00	47.12	AV	54.00	6.88	1.00 H	104	43.32	33	7.00	-36.2
3	7386.00	52.02	PK	74.00	21.98	1.00 H	329	42.62	36.2	8.50	-35.3
3	7386.00	47.03	AV	54.00	6.97	1.00 H	329	37.63	36.2	8.50	-35.3
4	9848.00	53.11	PK	74.00	20.89	1.00 H	190	40.51	37.3	10.10	-34.8
4	9848.00	47.45	AV	54.00	6.55	1.00 H	190	34.85	37.3	10.10	-34.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n-20--2462MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2462.00	109.99	PK	/	/	1.00 V	176	113.29	28.2	5.10	-36.6
1	*2462.00	100.25	AV	/	/	1.00 V	176	103.55	28.2	5.10	-36.6
2	4924.00	50.84	PK	74.00	23.16	1.00 V	117	47.04	33	7.00	-36.2
2	4924.00	45.38	AV	54.00	8.62	1.00 V	117	41.58	33	7.00	-36.2
3	7386.00	52.32	PK	74.00	21.68	1.00 V	294	42.92	36.2	8.50	-35.3
3	7386.00	48.38	AV	54.00	5.62	1.00 V	294	38.98	36.2	8.50	-35.3
4	9848.00	50.40	PK	74.00	23.60	1.00 V	84	37.8	37.3	10.10	-34.8
4	9848.00	44.47	AV	54.00	9.53	1.00 V	84	31.87	37.3	10.10	-34.8



802.11n-40 Mode

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n-40--2422MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2422.00	106.93	PK	/	/	1.00 H	71	110.23	28.3	5.00	-36.6
1	*2422.00	96.97	AV	/	/	1.00 H	71	100.27	28.3	5.00	-36.6
2	4844.00	51.77	PK	74.00	22.23	1.00 H	150	47.97	32.7	7.30	-36.2
2	4844.00	46.07	AV	54.00	7.93	1.00 H	150	42.27	32.7	7.30	-36.2
3	7266.00	51.18	PK	74.00	22.82	1.00 H	337	41.78	35.8	8.90	-35.3
3	7266.00	46.95	AV	54.00	7.05	1.00 H	337	37.55	35.8	8.90	-35.3
4	9688.00	50.46	PK	74.00	23.54	1.00 H	12	37.86	37.2	10.20	-34.8
4	9688.00	45.15	AV	54.00	8.85	1.00 H	12	32.55	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n-40--2422MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2422.00	109.65	PK	/	/	1.00 V	189	112.95	28.3	5.00	-36.6
1	*2422.00	98.75	AV	/	/	1.00 V	189	102.05	28.3	5.00	-36.6
2	4844.00	51.66	PK	74.00	22.34	1.00 V	96	47.86	32.7	7.30	-36.2
2	4844.00	45.15	AV	54.00	8.85	1.00 V	96	41.35	32.7	7.30	-36.2
3	7266.00	51.42	PK	74.00	22.58	1.00 V	233	42.02	35.8	8.90	-35.3
3	7266.00	48.47	AV	54.00	5.53	1.00 V	233	39.07	35.8	8.90	-35.3
4	9688.00	49.02	PK	74.00	24.98	1.00 V	304	36.42	37.2	10.20	-34.8
4	9688.00	45.77	AV	54.00	8.23	1.00 V	304	33.17	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n-40--2437MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	108.51	PK	/	/	1.00 H	349	111.71	28.3	5.10	-36.6
1	*2437.00	99.86	AV	/	/	1.00 H	349	103.06	28.3	5.10	-36.6
2	4874.00	52.64	PK	74.00	21.36	1.00 H	309	49.24	32.3	7.60	-36.5
2	4874.00	48.75	AV	54.00	5.25	1.00 H	309	45.35	32.3	7.60	-36.5
3	7311.00	51.93	PK	74.00	22.07	1.00 H	188	42.53	36.1	8.60	-35.3
3	7311.00	49.30	AV	54.00	4.70	1.00 H	188	39.9	36.1	8.60	-35.3
4	9748.00	50.95	PK	74.00	23.05	1.00 H	74	38.35	37.2	10.20	-34.8
4	9748.00	46.61	AV	54.00	7.39	1.00 H	74	34.01	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n-40--2437MHz)**

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2437.00	109.37	PK	/	/	1.00 V	205	112.57	28.3	5.10	-36.6



1	*2437.00	99.11	AV	/	/	1.00 V	205	102.31	28.3	5.10	-36.6
2	4874.00	53.67	PK	74.00	20.33	1.00 V	262	50.27	32.3	7.60	-36.5
2	4874.00	49.51	AV	54.00	4.49	1.00 V	262	46.11	32.3	7.60	-36.5
3	7311.00	52.24	PK	74.00	21.76	1.00 V	338	42.84	36.1	8.60	-35.3
3	7311.00	46.51	AV	54.00	7.49	1.00 V	338	37.11	36.1	8.60	-35.3
4	9748.00	51.09	PK	74.00	22.91	1.00 V	152	38.49	37.2	10.20	-34.8
4	9748.00	43.10	AV	54.00	10.90	1.00 V	152	30.5	37.2	10.20	-34.8

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n-40--2452MHz)**

No.	Frequency (MHz)	Emission Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2452.00	109.33	PK	/	/	1.00 H	235	112.63	28.2	5.10	-36.6
1	*2452.00	100.09	AV	/	/	1.00 H	235	103.39	28.2	5.10	-36.6
2	4904.00	52.52	PK	74.00	21.48	1.00 H	104	48.72	33	7.00	-36.2
2	4904.00	46.88	AV	54.00	7.12	1.00 H	104	43.08	33	7.00	-36.2
3	7356.00	51.76	PK	74.00	22.24	1.00 H	329	42.36	36.2	8.50	-35.3
3	7356.00	46.80	AV	54.00	7.20	1.00 H	329	37.4	36.2	8.50	-35.3
4	9808.00	52.86	PK	74.00	21.14	1.00 H	190	40.26	37.3	10.10	-34.8
4	9808.00	47.20	AV	54.00	6.80	1.00 H	190	34.6	37.3	10.10	-34.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n-40--2452MHz)**


No.	Frequency (MHz)	Emission Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2452.00	109.76	PK	/	/	1.00 V	176	113.06	28.2	5.10	-36.6
1	*2452.00	100.00	AV	/	/	1.00 V	176	103.3	28.2	5.10	-36.6
2	4904.00	50.58	PK	74.00	23.42	1.00 V	117	46.78	33	7.00	-36.2
2	4904.00	45.21	AV	54.00	8.79	1.00 V	117	41.41	33	7.00	-36.2
3	7356.00	52.06	PK	74.00	21.94	1.00 V	294	42.66	36.2	8.50	-35.3
3	7356.00	48.15	AV	54.00	5.85	1.00 V	294	38.75	36.2	8.50	-35.3
4	9808.00	50.15	PK	74.00	23.85	1.00 V	84	37.55	37.3	10.10	-34.8
4	9808.00	44.22	AV	54.00	9.78	1.00 V	84	31.62	37.3	10.10	-34.8

- REMARKS:**
1. Emission level (dBuV/m) =Raw Value (dBuV) +Antenna Factor (dB/m) + Cable Factor (dB) +Pre-amplifier Factor
  2. The other emission levels were very low against the limit.
  3. The other emission levels were very low against the limit.
  4. Margin value = Limit value- Emission level.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency





# Annex A Accreditation Certificate

**China National Accreditation Service for Conformity Assessment**

**LABORATORY ACCREDITATION CERTIFICATE**


**(Registration No. CNAS L1659 )**

**CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.**  
Building 28/29, Shigudong, Xili Industrial Area, Xili Street,  
Nanshan District, Shenzhen, Guangdong, China

*is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.*

*The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.*

Date of Issue: 2012-09-29  
Date of Expiry: 2015-09-28  
Date of Initial Accreditation: 1999-08-03  
Date of Update: 2012-09-29




Signed on behalf of China National Accreditation Service  
for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).


No.CNAS AL 2
0005210

### Annex B PHOTOGRAPHS OF THE EUT

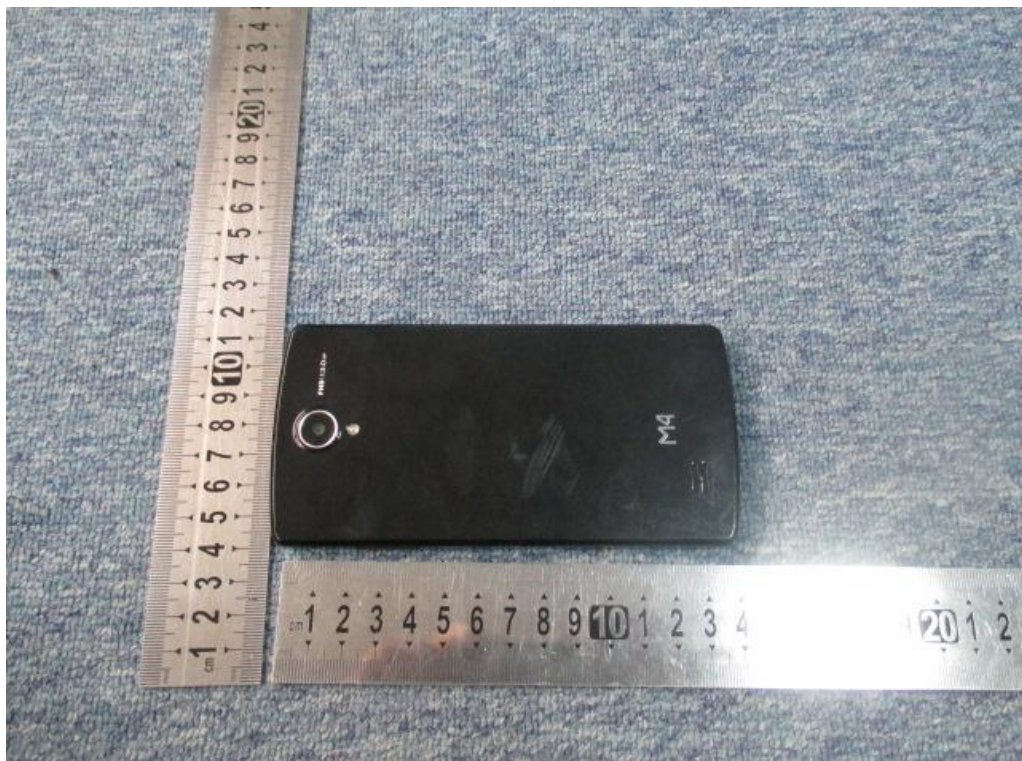


## Annex C PHOTOGRAPHS OF THE TEST SETUP

### 1. Conducted Measurement Setup

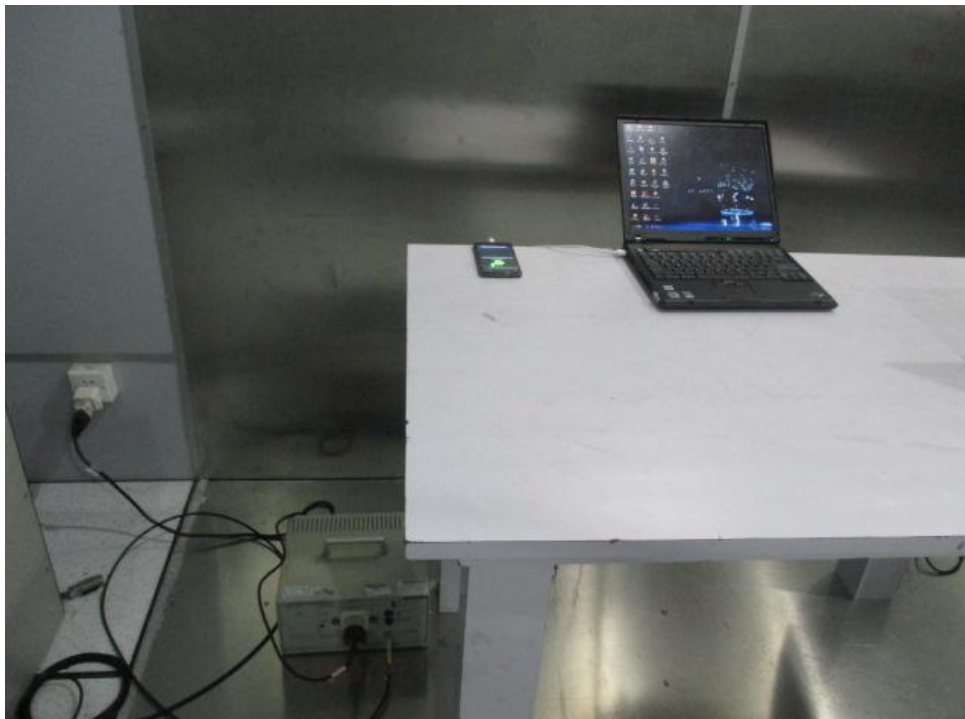


Conducted Emission


## 2. Radiated Measurement Setup

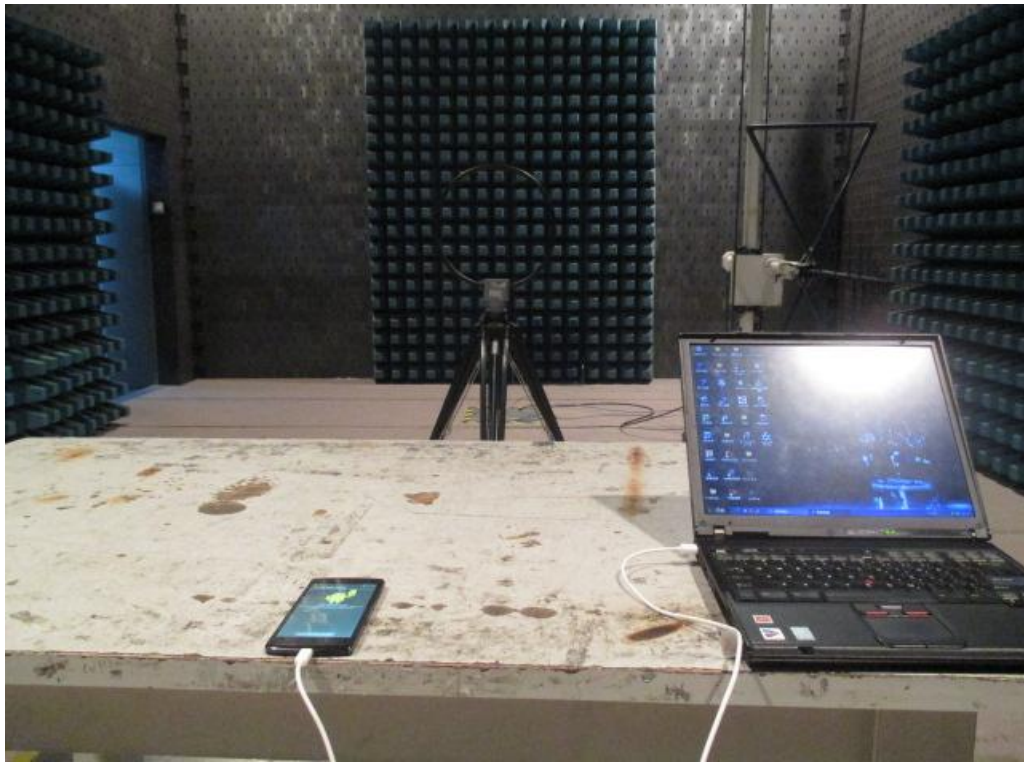

Radiated Emission of 9k-30M

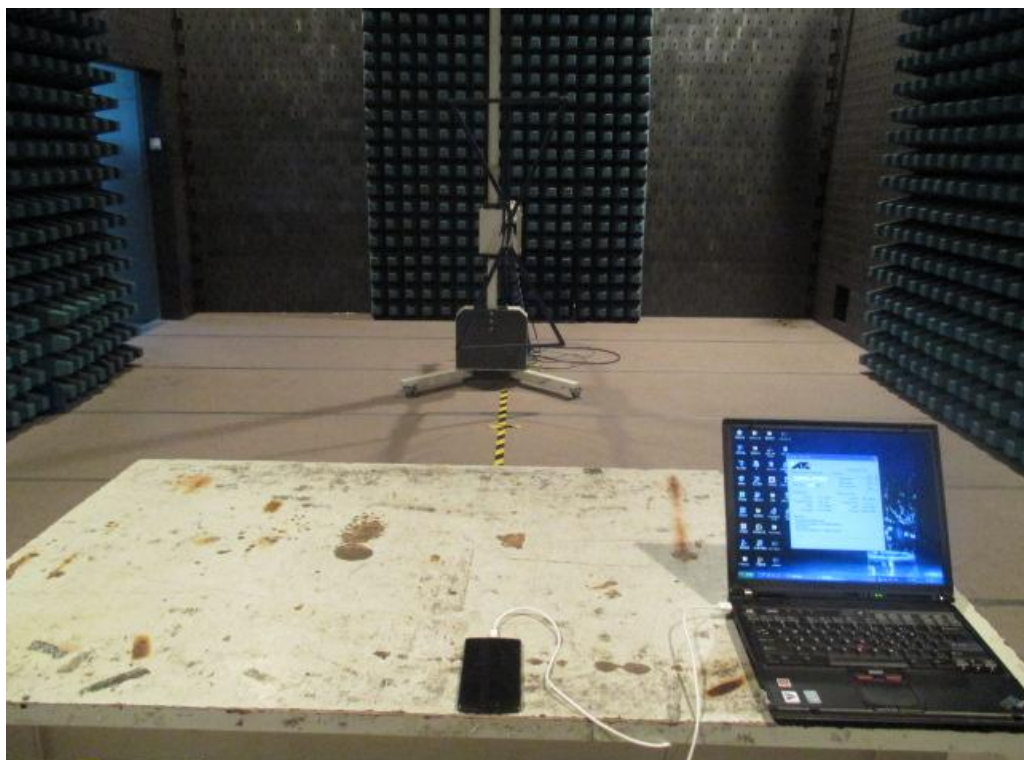

Radiated Emission of 30M-1G

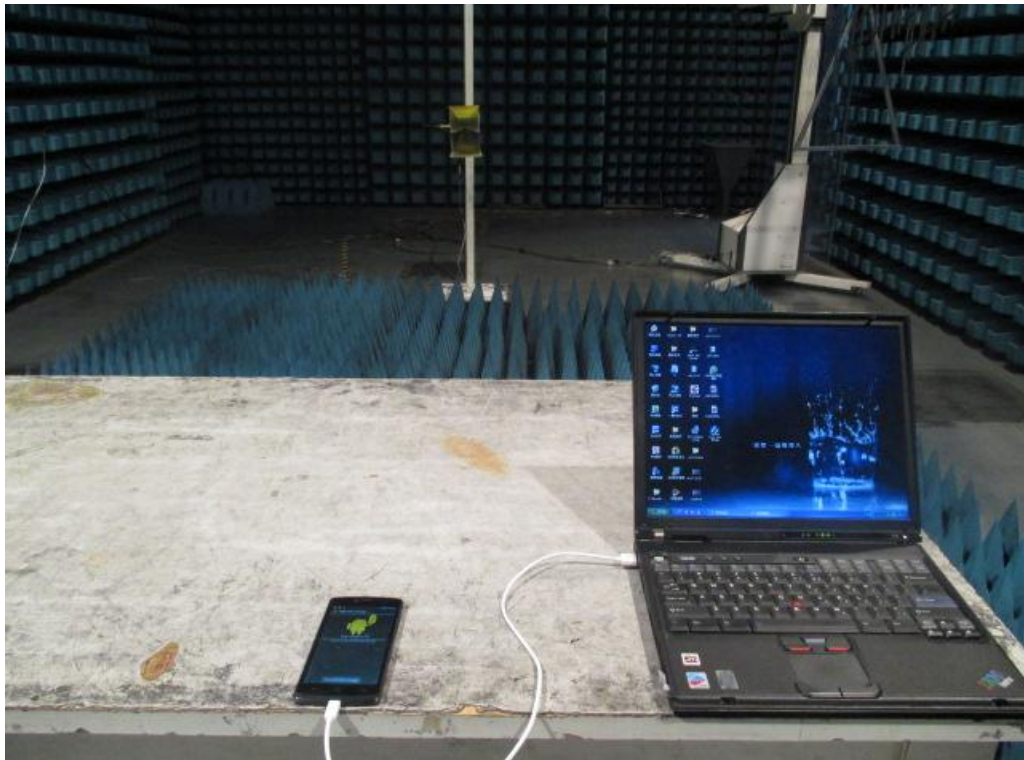

Radiated Emission of 1-18G



Radiated Emission of 18-26.5G

**\*\* END OF REPORT \*\***