



# EMC TEST REPORT

**Report No.:** SET2014-07358

**Product Name:** GSM/WCDMA MOBILE PHONE

**FCC ID:** CLNSS4045

**Model No. :** M4 SS4045

**Applicant:** MFOURTEL MEXICO S.A. DE C.V.

**Address:** Av. Ejercito Nacional 436 Piso 3 Chapultepec Morales Miguel Hidalgo D.F 11570

**Received Date:** 2014-07-08

**Tested Date:** 2014-07-10—2014-07-16

**Issued by:** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

**Lab Location:** Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of **22** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



### Test Report

**Product Name** ..... : GSM/WCDMA MOBILE PHONE

**Model No.** ..... : M4 SS4045

**Applicant**..... : MFOURTEL MEXICO S.A. DE C.V.

**Applicant Address**..... : Av. Ejercito Nacional 436 Piso 3 Chapultepec Morales  
Miguel Hidalgo D.F 11570

**Manufacturer**..... : CK Telecom Limited

**Manufacturer Address** ..... : Technology Road.High-Tech Development Zone.  
Heyuan, Guangdong,P.R.China.

**Test Standards**..... : 47 CFR Part 15 Subpart B: Radio Frequency Devices

**Test Result** ..... : PASS

**Tested by** ..... : Xiaolong Zhang 2014.07.21  
Xiaolong Zhang, Test Engineer

**Reviewed by**..... : Shuangwen Zhang 2014.07.21  
Shuangwen Zhang, Senior Engineer

**Approved by** ..... : Wu Li'an 2014.07.21  
Wu Li'an, Manager



### TABLE OF CONTENTS

- 1. GENERAL INFORMATION .....4**
- 1.1 EUT Description .....4**
- 1.2 Test Standards and Results .....5**
- 1.3 Facilities and Accreditations .....6**
  - 1.3.1 Facilities .....6
  - 1.3.2 Test Environment Conditions .....6
  - 1.3.3 Measurement Uncertainty .....6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Mode .....7**
- 2.2 Test Setup and Equipments List.....8**
  - 2.2.1 Conducted Emission.....8
  - 2.2.2 Radiated Emission.....8
- 3. 47 CFR PART 15B REQUIREMENTS ..... 11**
- 3.1 Conducted Emission ..... 11**
  - 3.1.1 Requirement ..... 11
  - 3.1.2 Test Description ..... 11
  - 3.1.3 Test Result ..... 11
- 3.2 Radiated Emission .....14**
  - 3.2.1 Requirement ..... 14
  - 3.2.2 Test Description ..... 15
  - 3.2.3 Test Result ..... 15
- 4. PHOTOGRAPHS OF THE EUT .....20**
- 5. PHOTOGRAPHS OF THE TEST SET-UP .....21**

Change History		
Issue	Date	Reason for change
1.0	2014.07.21	First edition





## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2012	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2009 and CISPR 22:2008.



### 1.3 Facilities and Accreditations

#### 1.3.1 Facilities

**CNAS-Lab Code: L1659**

CCIC-SET Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8\*6.8\*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

**FCC-Registration No.: 406086**

CCIC-SET Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, Renewal date Nov. 19, 2011, valid time is until Nov. 18, 2014.

#### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86kPa-106kPa

#### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)



## 2. TEST CONDITIONS SETTING

### 2.1 Test Mode

(1) The first test mode

The EUT configuration of the emission tests is TransFlash Card + EUT + Battery + PC.

In this test mode, the EUT with a TransFlash Card embedded is connected with a PC via a USB cable supplied by applicant. During the measurement, the data is transmitting between the PC and the TransFlash Card of the EUT.

(2) The second test mode

The EUT configuration of the emission tests is Internal memory+ EUT + Battery + PC.


In this test mode, the EUT with a Internal memory is connected with a PC via a USB cable supplied by applicant. During the measurement, the data is transmitting between the PC and the Internal memory of the EUT.

NOTE: All test modes are performed, only the worse case (the first test mode) is recorded in this report.

## 2.2 Test Setup and Equipments List

### 2.2.1 Conducted Emission

#### A. Test Setup:

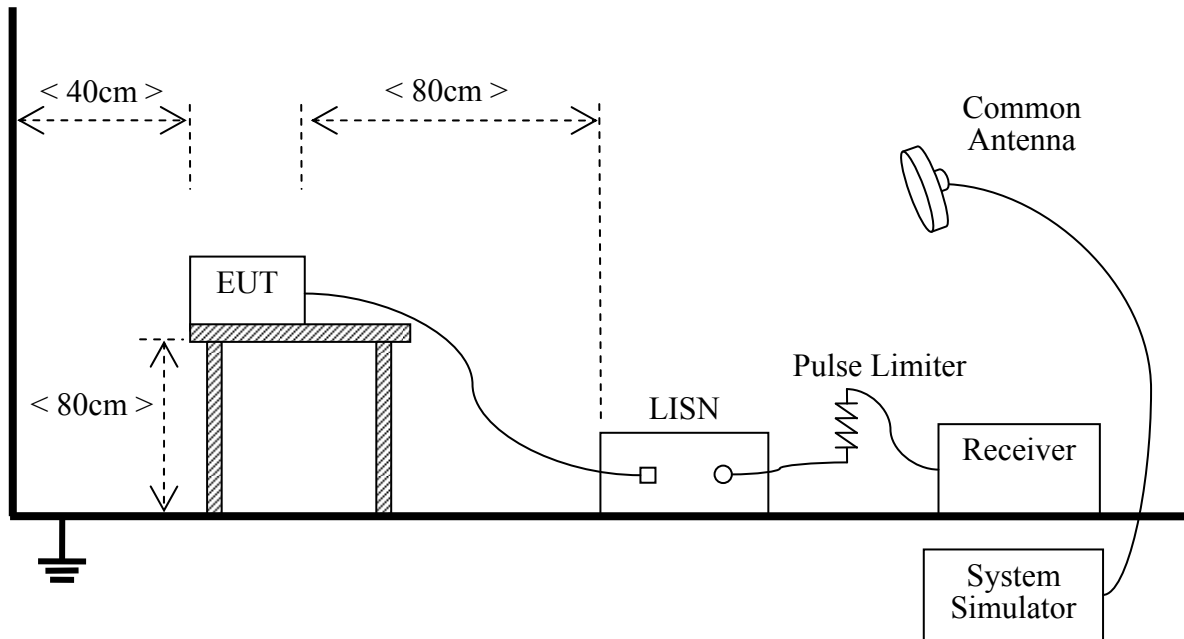

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

#### B. Equipments List:


Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESCI	A130901475	2013.09.09	2014.09.08
LISN	ROHDE&SCHWARZ	ENV216	/	2014.04.28	2015.04.27

### 2.2.2 Radiated Emission


#### A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz



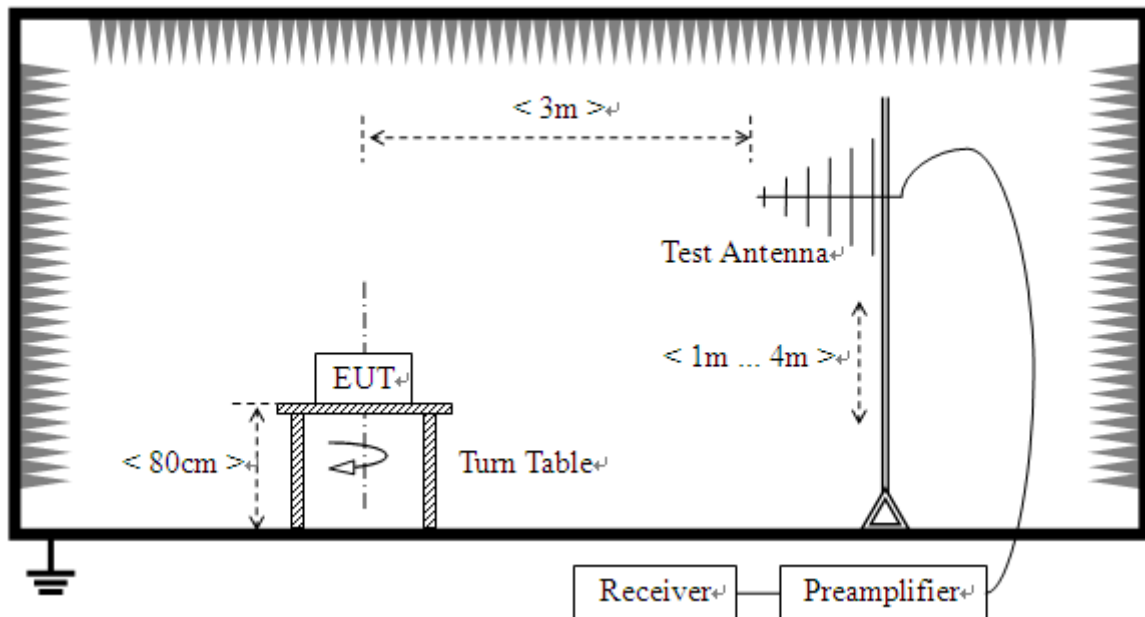

2) For radiated emissions above 1GHz

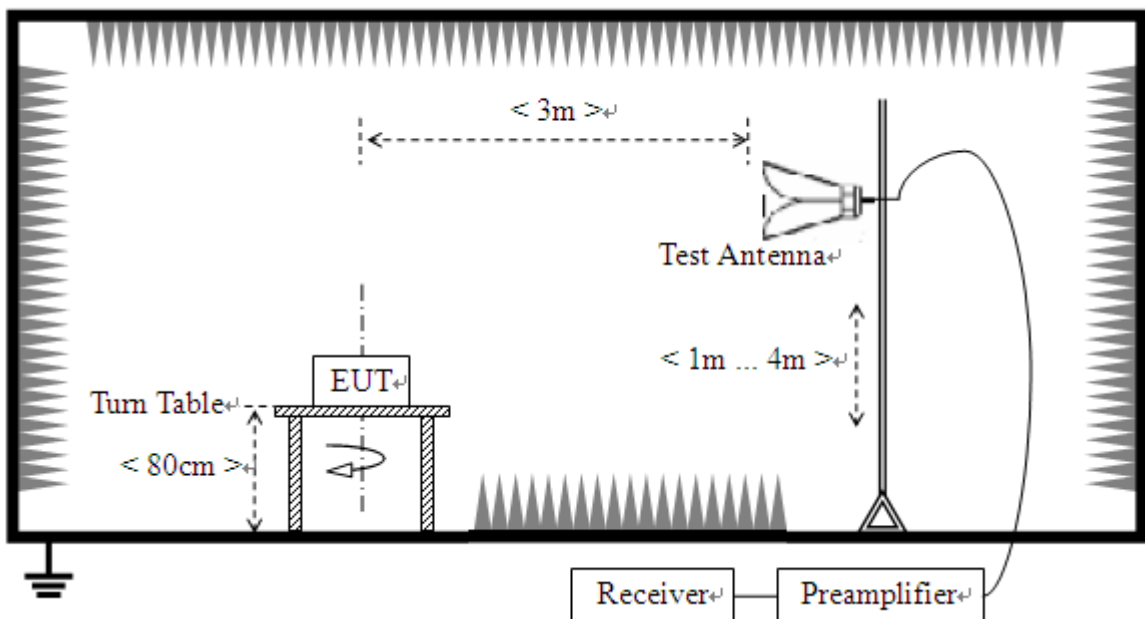

## B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.



For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**C. Equipments List:**

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2014.06.10	2015.06.09
Test Receiver	ROHDE&SCHWARZ	ESIB26	A0304218	2014.06.10	2015.06.09
Semi-Anechoic Chamber	Albatross	9m*6m*6m	A0412372	2015.01.04	2016.01.03
Test Antenna - Bi-Log	HP	CBL6111A	A9704202	2014.06.10	2015.06.09
Test Antenna – Horn	ROHDE&SCHWARZ	HF906	A0304225	2014.06.10	2015.06.09
Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2015.03.09	2016.03.08
Amplifier 1G~18GHz	ROHDE&SCHWARZ	MITEQ AFS42-001018 00	A0509366	2014.06.10	2015.06.09
Amplifier 20M~3GHz	Compliance Direction System	PAP-0203H	A0509377	2014.06.10	2015.06.09



### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Conducted Emission

##### 3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2 Test Description


See section 2.2.1 of this report.

##### 3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.




**A. Test Plot and Suspicious Points:**

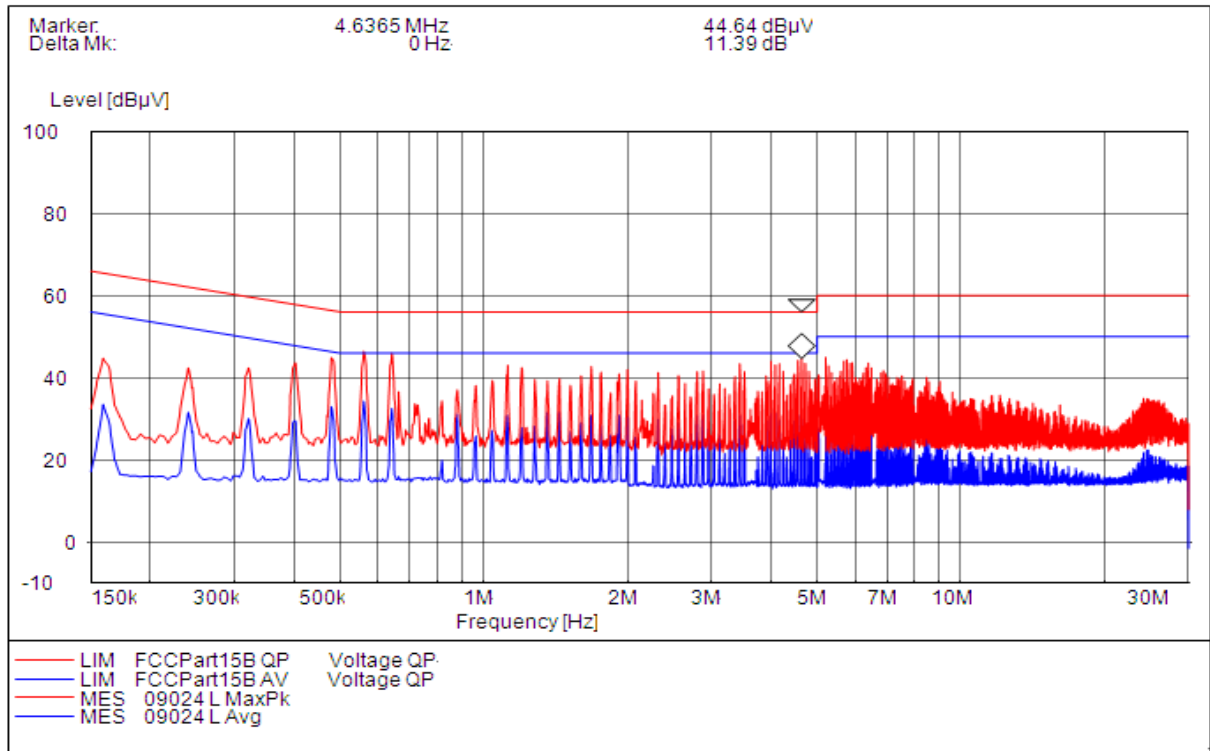

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals							
L Test Data							
QP				AV			
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)
0.1580	65.60	41.23	24.37	0.1580	55.60	30.21	15.39
0.5595	56	43.07	12.93	0.5595	46	31.09	14.91
0.6405	56	42.61	13.39	0.6405	46	28.56	17.44
4.6365	56	41.93	14.07	4.6365	46	20.14	25.86
5.1560	60	40.56	19.44	5.1560	50	25.32	24.68

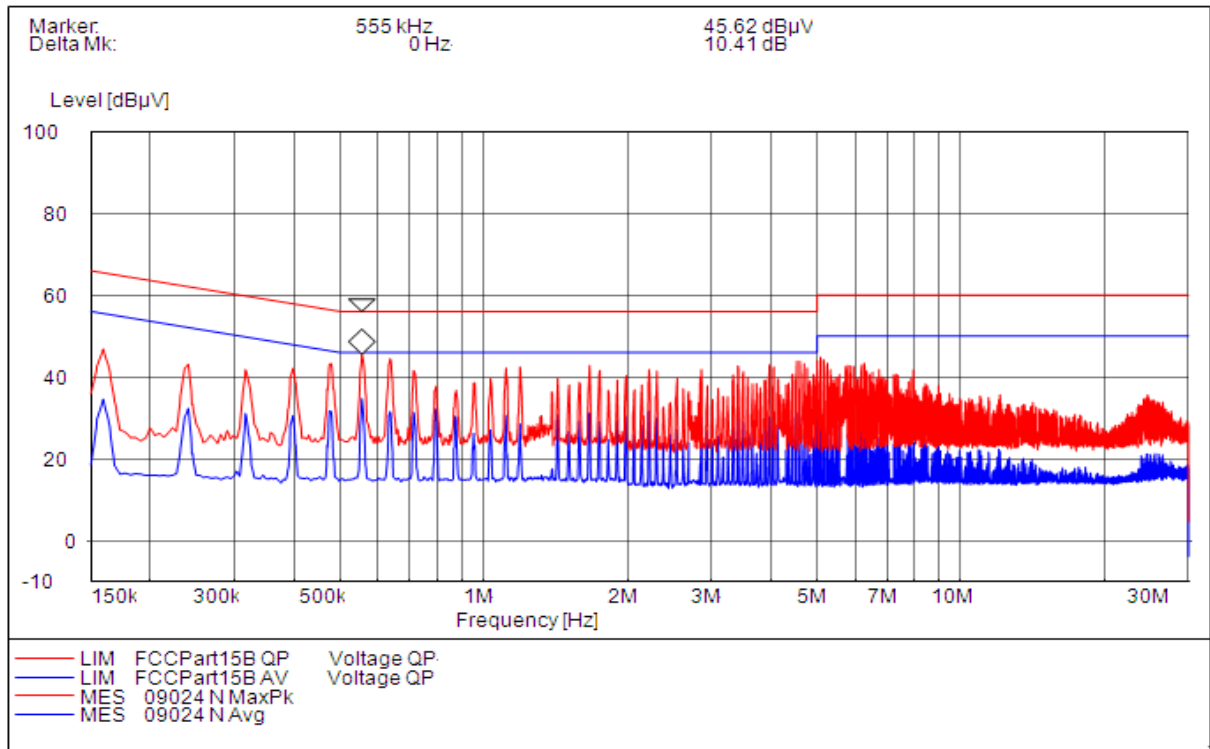

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals							
N Test Data							
QP				AV			
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)
0.1580	65.60	41.26	24.34	0.1580	55.60	30.24	15.38
0.5550	56	41.08	14.92	0.5550	46	31.45	14.55
1.6665	56	39.59	16.41	1.6665	46	28.15	17.85
4.6005	56	40.46	15.54	4.6005	46	26.35	19.65
5.1203	60	42.36	17.64	5.1203	50	20.13	29.87

**Test Result: PASS**

## 3.2 Radiated Emission

### 3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	( $\text{uV/m}$ )	( $\text{dBuV/m}$ )
0.009 - 0.490	2400/F(kHz)	300m	10000* 2400/F(kHz)	20log 2400/F(kHz) + 80
0.490 - 1.705	2400/F(kHz)	30m	100* 2400/F(kHz)	20log 2400/F(kHz) + 40
1.705 - 30.00	30	30m	100*30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;PK detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in  $\text{dBuV/m}$  is calculated by  $20\log \text{Emission Level}(\text{uV/m})$ .
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is  $30\text{uV/m}$ , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$

### 3.2.2 Test Description

See section 2.2.2 of this report.


### 3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


#### B. Test Plots and Suspicious Points:

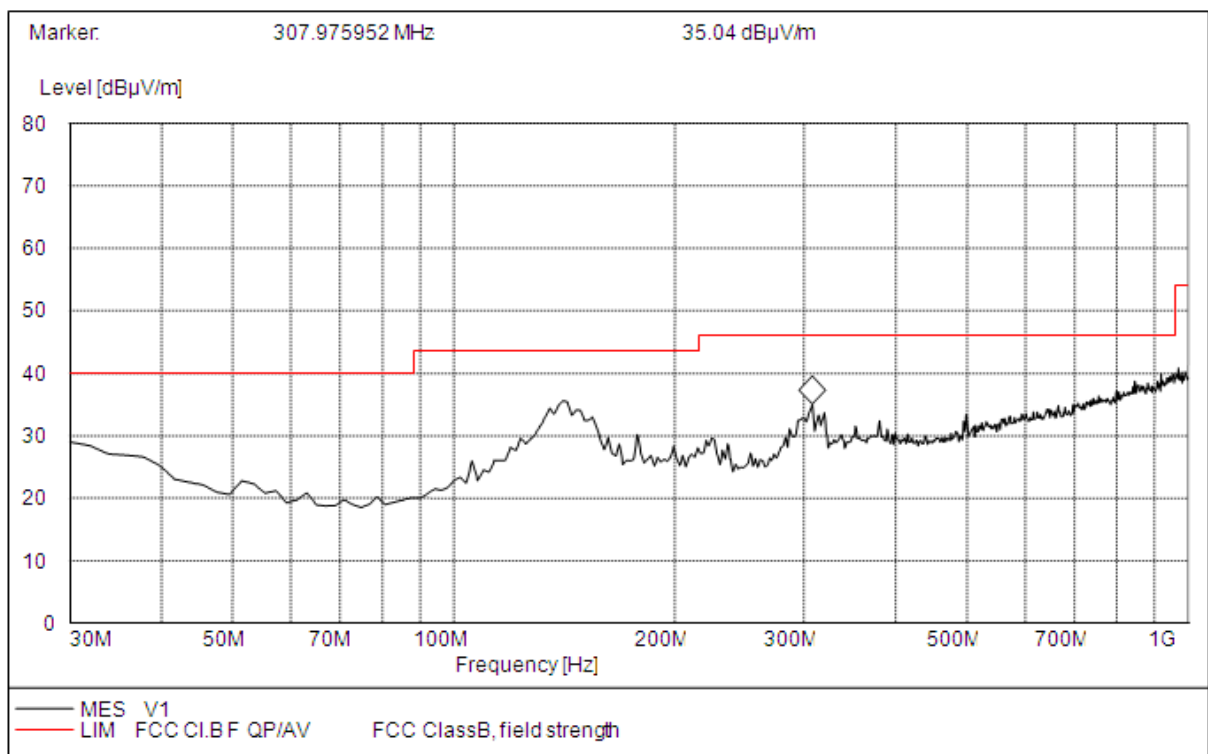

(Plot C: Test Antenna Vertical 30M - 1G)




Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Verdict
30.120000	28.23	120.000	100.0	40.00	11.77	Vertical	Pass
142.740000	35.38	120.000	100.0	43.50	8.12	Vertical	Pass
307.970000	35.04	120.000	100.0	46.00	10.96	Vertical	Pass
499.560000	31.28	120.000	100.0	46.00	14.72	Vertical	Pass

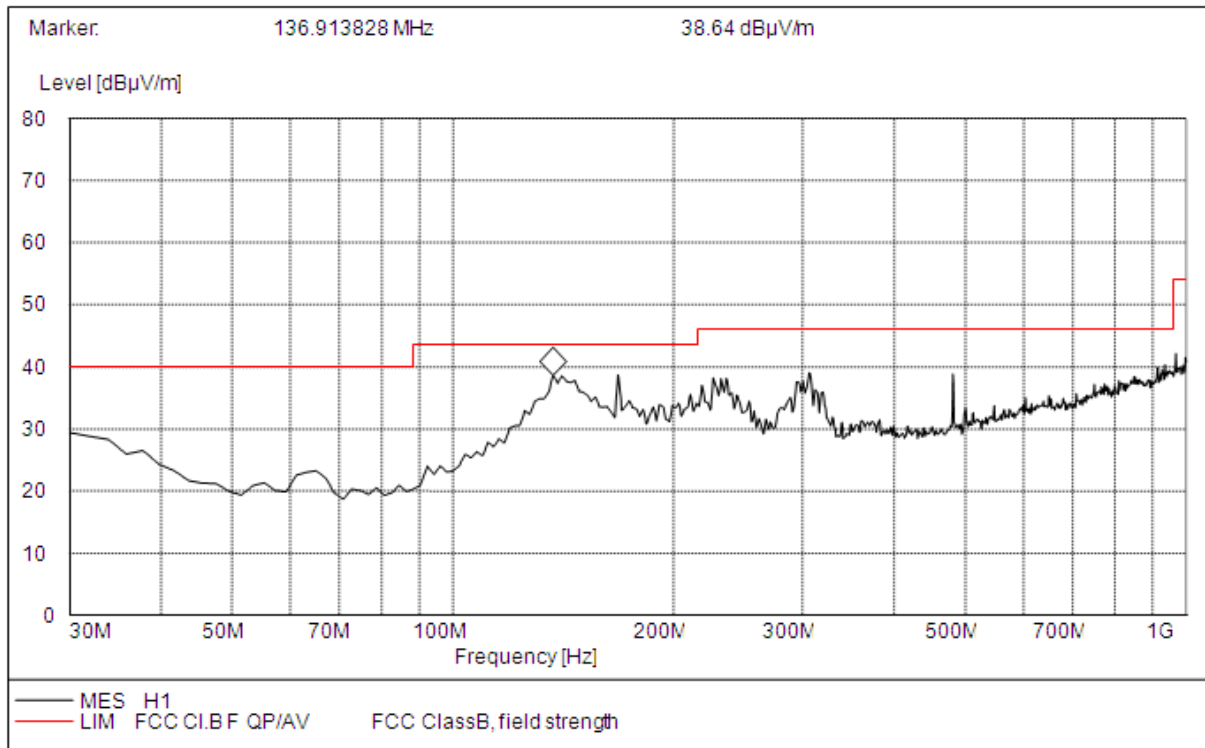

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Verdict
30.010000	29.14	120.000	100.0	40.00	10.86	Horizontal	Pass
136.940000	37.62	120.000	100.0	43.50	5.88	Horizontal	Pass
168.010000	38.66	120.000	100.0	43.50	5.01	Horizontal	Pass
226.330000	38.25	120.000	100.0	46.0	7.75	Horizontal	Pass
306.120000	39.01	120.000	100.0	46.0	6.99	Horizontal	Pass
480.980000	38.82	120.000	100.0	46.0	7.18	Horizontal	Pass



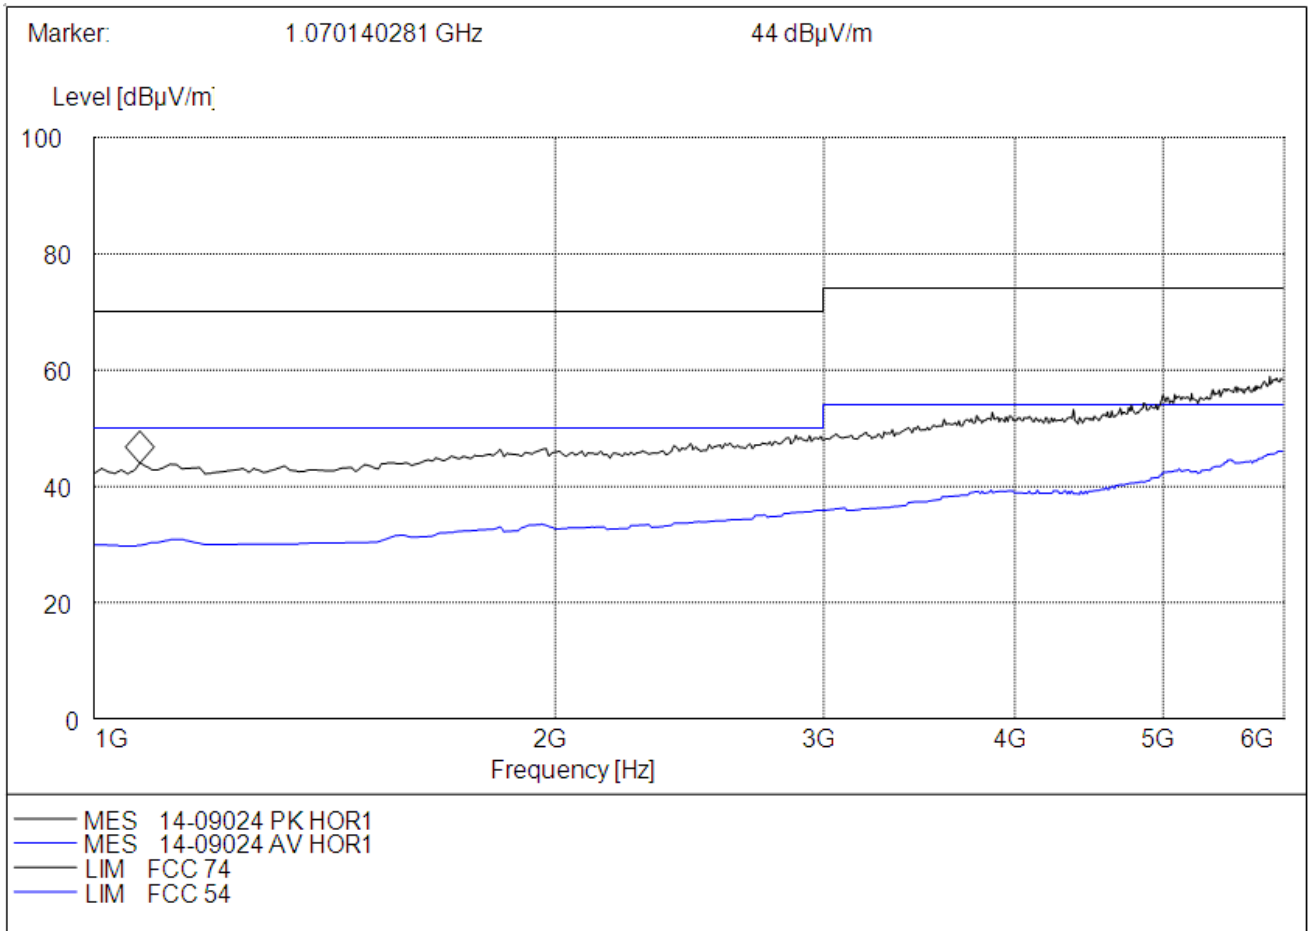


(Plot E: Test Antenna Horizontal 1G – 6G)

Frequency (MHz)	AV (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Verdict
1100.22044	30.79	1000.000	150.0	54.00	23.21	Horizontal	Pass
1841.68336	34.52	1000.000	150.0	54.00	19.48	Horizontal	Pass
2833.66700	35.69	1000.000	150.0	54.00	18.31	Horizontal	Pass
3875.75150	39.12	1000.000	150.0	54.00	14.88	Horizontal	Pass
4957.91583	39.80	1000.000	150.0	54.00	14.20	Horizontal	Pass
5929.85972	45.94	1000.000	100.0	54.00	8.06	Horizontal	Pass



Frequency (MHz)	PK (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Verdict
1100.22044	44.79	1000.000	150.0	74.00	29.21	Horizontal	Pass
1841.68336	46.18	1000.000	150.0	74.00	27.82	Horizontal	Pass
2833.66700	48.55	1000.000	150.0	74.00	25.45	Horizontal	Pass
3875.75150	52.48	1000.000	150.0	74.00	21.52	Horizontal	Pass
4957.91583	55.78	1000.000	150.0	74.00	18.22	Horizontal	Pass
5929.85972	59.15	1000.000	100.0	74.00	14.85	Horizontal	Pass

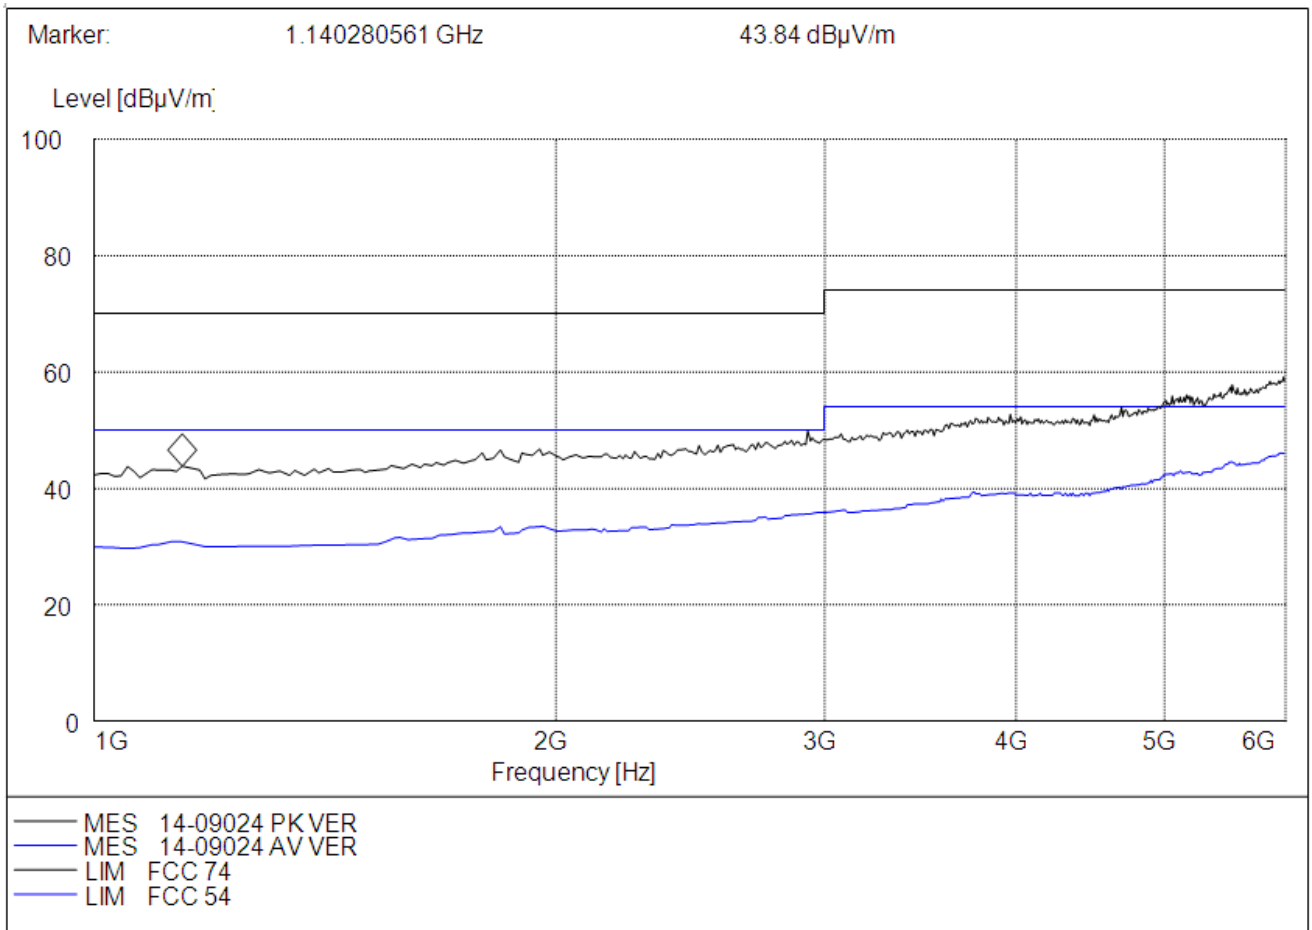

(Plot F: Test Antenna Vertical 1G – 6G)



Frequency (MHz)	AV (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Verdict
1140.28056	33.61	1000.000	100.0	54.00	20.39	Vertical	Pass
1951.90380	31.92	1000.000	150.0	54.00	22.08	Vertical	Pass
2923.84769	36.22	1000.000	150.0	54.00	17.78	Vertical	Pass
3965.95189	39.29	1000.000	150.0	54.00	14.71	Vertical	Pass
5058.11623	40.40	1000.000	100.0	54.00	13.60	Vertical	Pass
5539.07815	45.26	1000.000	150.0	54.00	8.74	Vertical	Pass

Frequency (MHz)	PK (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Verdict
1140.28056	43.84	1000.000	100.0	74.00	30.16	Vertical	Pass
1951.90380	46.74	1000.000	150.0	74.00	27.26	Vertical	Pass
2923.84769	49.92	1000.000	150.0	74.00	24.08	Vertical	Pass
3965.95189	52.69	1000.000	100.0	74.00	21.31	Vertical	Pass
5058.11623	55.69	1000.000	150.0	74.00	18.31	Vertical	Pass
5539.07815	57.81	1000.000	100.0	74.00	15.19	Vertical	Pass

**Test Result: PASS**

#### 4. PHOTOGRAPHS OF THE EUT







## 5. PHOTOGRAPHS OF THE TEST SET-UP



Conducted Emission

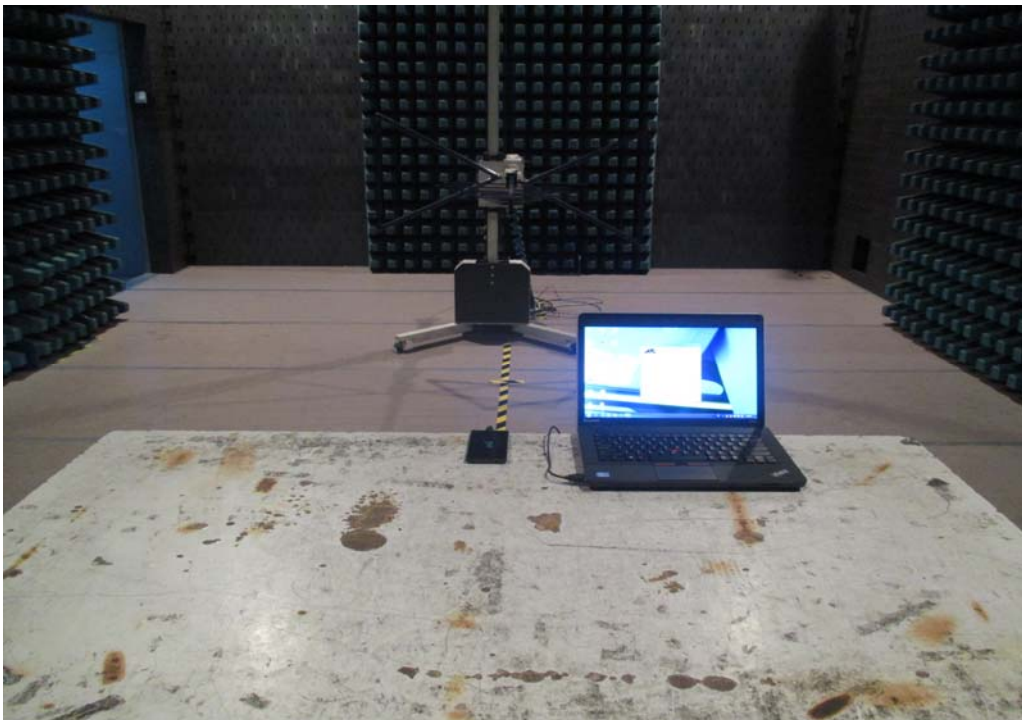

Radiated Emission of 30M-1G

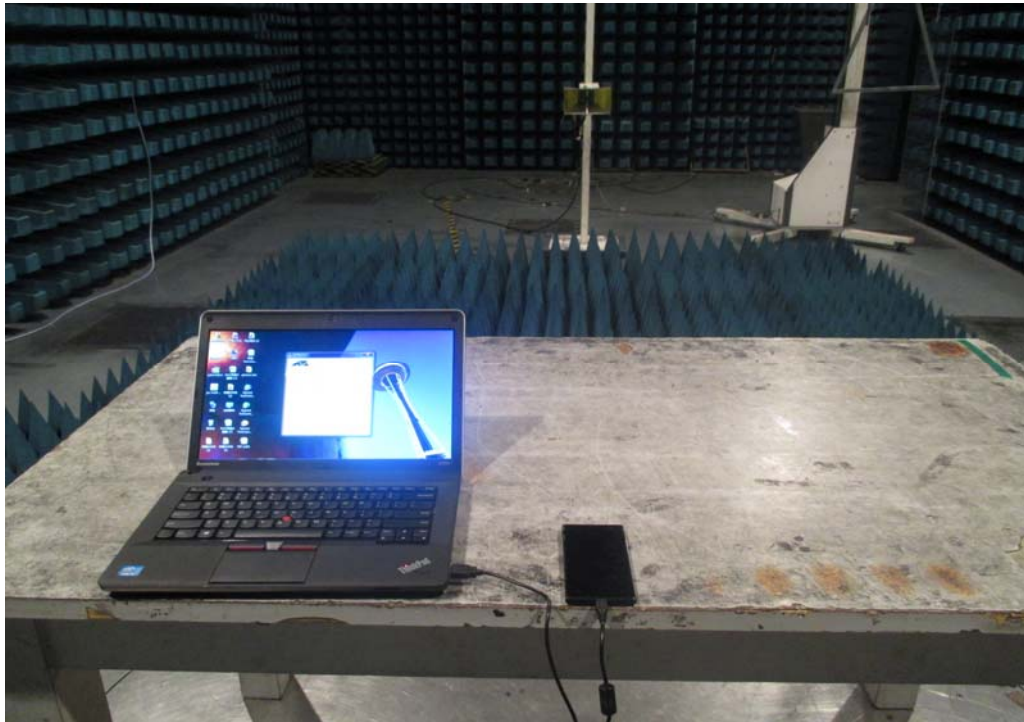

Radiated Emission of 1-6G

\*\* END OF REPORT \*\*