

FCC BT TEST REPORT

No. 150209-BT

For

MFOURTEL MEXICO S.A. DE C.V.

Product Name: Mobile Phone

Model Name: M4 SS4350

Trade Name: M4

Issued Date: 2015-03-17

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of GCCT.

To verify test report authenticity, send full test report to Email: dr_xywen@126.com

Test Laboratory:

GCCT, *Guangdong Telecommunications Terminal Products Quality Supervision and Testing Center*

Technology Road, High-tech Zone, He Yuan, Guang Dong, PR China 517001

Tel:+86(0)762-3607181, Fax:+86(0)762-3603336 Email: ncctmail@126.com. www.ncct.org.cn


CONTENTS

1. Test Laboratory	4
1.1 Testing Location.....	4
1.2 Testing Environment.....	4
1.3 Project Data.....	4
2. Client Information	4
2.1 Applicant Information.....	4
2.2 Manufacturer Information.....	4
3. Equipment Under Test (EUT) and Ancillary Equipment (AE)	5
3.1 About EUT.....	5
3.2 Internal Identification of EUT.....	6
3.3 Internal Identification of AE	6
4. Test Results	6
4.1 Summary of Test Results	6
4.2 Statements	7
5. Test Equipment Utilized	8
ANNEX A: EUT Photograph	9
ANNEX B: Detailed Test Results	18
B.1 Maximum Transmit Power.....	18
B.2 20dB Bandwidth.....	18
B.3 Band Edge Compliance.....	25
B.4 Carrier Frequency Separation.....	31
B.5 Time Of Occupancy (Dwell Time).....	34
B.6 Number of Channel Hopping	38
B.7 Conducted Spurious Emissions	41
B.8 AC Conducted Emission	56
B.9 Radiated Emission.....	57
B.10 Antenna Requirements	64

GENERAL SUMMARY

Product Name	Mobile phone
Model Name	M4 SS4350
Applicant	MFOURTEL MEXICO S.A. DE C.V.
Manufacturer	CK Telecom Limited
Test Laboratory	GCCT, Guangdong Telecommunications Terminal Products Quality Supervision and Testing Center
Reference Standards	FCC CFR 47 Part 15C:“Radio Frequency Devices Sub-Part C: intentional Radiators”
Test Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in annex B of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">Date of issue: 2015.03.17</p>
Comment	The test results in this report apply only to the tested sample of the stated device/equipment.

Approved by:



Luo Jian
Manager

Reviewed by:



Wen Xiaoyong
Deputy Manager

Tested by:



Gao Xiaoqing
Test Engineer

1. Test Laboratory

1.1 Testing Location

Company Name	GCCT, Guangdong Telecommunications Terminal Products Quality Supervision and Testing Center
Address	Technology Road, High-tech Zone, Heyuan, Guangdong Province, PR.China
CNAS Registration No.	L4992
FCC Registration No.	303878
Postal Code	517001
Telephone	+86-762-3607221
Fax	+86-762-3603336

1.2 Testing Environment

Environment Data	Temperature(°C)	Humidity(%)
Maximum Ambient	22.8	48
Minimum Ambient	19.1	41

EUT is under testing environment.

1.3 Project Data

Project Leader	Wen Xiaoyong
Testing Start Date	2015-02-10
Testing End Date	2015-03-17

2. Client Information

2.1 Applicant Information

Company Name	MFOURTEL MEXICO S.A. DE C.V
Address	Av.Egercito Nacional 436 Piso 3 Chapultepec Morales Miguel Hidalgo D.F 11570
City	Mexico
Postal Code	/
Country	Mexico
Telephone	/
Fax	/

2.2 Manufacturer Information

Company Name	CK Telecom Limited
Address	Technology Road.High-Tech Development Zone. Heyuan

City	heyuan
Postal Code	/
Country	China
Telephone	0755-26738515
Fax	0755-26739500

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1 About EUT

Model Name	M4 SS4350
FCC ID	CLNSS4350
Tx Frequency	GSM850:824.2~848.8 MHz UMTS Band V : 826.4~846.6MHz PCS1900 TX: 1850.2~1909.8MHz UMTS Band II TX: 1852.4~1907.6MHz Bluetooth/BLE: 2402 ~ 2480 MHz WIFI(802.11b/g/n-20): 2412 ~ 2462 MHz WIFI(n-40): 2422 ~ 2452 MHz
Rx Frequency	GSM850: 869.2~893.8 MHz UMTS Band V : 871.4~891.6 MHz PCS1900 TX: 1930.2~1989.8 MHz UMTS Band II TX: 1932.4~1987.6 MHz Bluetooth/BLE: 2402 ~ 2480 MHz WIFI(802.11b/g/n-20): 2412 ~ 2462 MHz WIFI(n-40): 2422 ~ 2452 MHz
Number of Channels	GSM850&WCDMA Band V:25 PCS1900&WCDMA Band II: 60 Bluetooth:79 WIFI(802.11b/g/n-20):11 WIFI(n-40):7 BLE:40
Modulation	GSM&DCS:GMSK WCDMA:BPSK/QPSK Bluetooth: GFSK& $\pi/4$ -DQPSK&8DPSK WIFI:CCK/OFDM BLE:GFSK
Antenna Type	PIFA(GSM/DCS/WCDMA); MONOPOLE (Bluetooth/WIFI)
Antenna Gain	GSM850:-0.5dBi DCS1900: -0.5dBi WCDMA850: -1dBi WCDMA1900: -1dBi Bluetooth/BLE/WIFI: -1dBi

Normal Voltage	3.7V
Extreme Low Voltage	3.6V
Extreme High Voltage	4.2V
Extreme Low Temperature	0°C
Extreme High Temperature	45°C

3.2 Internal Identification of EUT

EUT ID *	IMEI	HW Version	SW Version
150209-M01	867041020002461	SLFQPLUS-V1.0	SLFQPLUS15A-S00A_CKT_L2EN_102_150130
150209-M04	867041020002149	SLFQPLUS-V1.0	SLFQPLUS15A-S00A_CKT_L2EN_102_150130

*EUT ID: is used to identify the test sample in the lab internally. 150209-M01 and 150209-M04 are the same mobile phone.

3.3 Internal Identification of AE

AE ID *	Description	Type	SN
150209-B01	Battery	FH396070AR	/
150209-C01	Adapter	A8-501000	/
150209-B04	Battery	FH396070AR	/
150209-C04	Adapter	A8-501000	/

*AE ID: is used to identify the test sample in the lab internally. 150209-B01 and 150209-B04 are the same accessory, 150209-C01 and 150209-C04 are the same accessory.

4. Test Results

4.1 Summary of Test Results

No	Test cases	Sample	Verdict
1	Maximum transmit power	M01	Pass
2	20dB Bandwidth	M01	Pass
3	Band Edge Compliance	M01	Pass
4	Carrier Frequency Separation	M01	Pass
5	Time Of Occupancy (Dwell Time)	M01	Pass
6	Number Of Channel Hopping	M01	Pass
7	Conducted Spurious Emissions	M01	Pass
8	AC Conducted Emission	M04	Pass
9	Radiated Spurious Emissions	M04	Pass
10	Antenna Requirements	M01	Pass

Note: please refer to Annex B in this test report for the detailed test results.

4.2 Statements

GCCT has evaluated the test cases requested by the applicant/manufacturee as listed in section 4.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in general summary.

5. Test Equipment Utilized

Table 1. Measurement Equipment

Hardware						
No.	Name	Model	SN	Manufacture	Cal. Date	Cal. Due Date
1	Signal Tester	MT8852B	1307002	Anritsu	2014.08.15	2015.08.15
2	Spectrum Analyzer	N9020A	MY52091261	Agilent	2014.08.15	2015.08.15
3	Switch Unit	/	E0112	/	2014.08.15	2015.08.15
Software						
Tech BT			v1.0.3			

Table 2. Radiated emission test system

No.	Name	Model	SN	Manufacture	Cal. date	Cal. Due Date
1	Spectrum Analyzer	E4440A	MY48250641	Agilent	2014.08.15	2015.08.15
2	BiCoNilog Antenna	3142E	00142015	ETS-Lindgren	2014.08.15	2015.08.15
3	Horn Antenna	3117	129169	ETS-Lindgren	2014.08.15	2015.08.15
4	Signal Generator	N5183A-532	MY49060563	Agilent	2014.08.15	2015.08.15
5	Universal Radio Communication Tester	E5515C	MY48367105	Agilent	2014.08.15	2015.08.15
6	RF Preselector	N9039A	MY48260024	Agilent	/	/
7	Loop Antenna	HFH2	860015/00	R&S	2014.08.15	2015.08.15

ANNEX A: EUT Photograph

EUT Front View



EUT behind View



EUT Left View



EUT Right View




EUT Top View



EUT Rear View




All

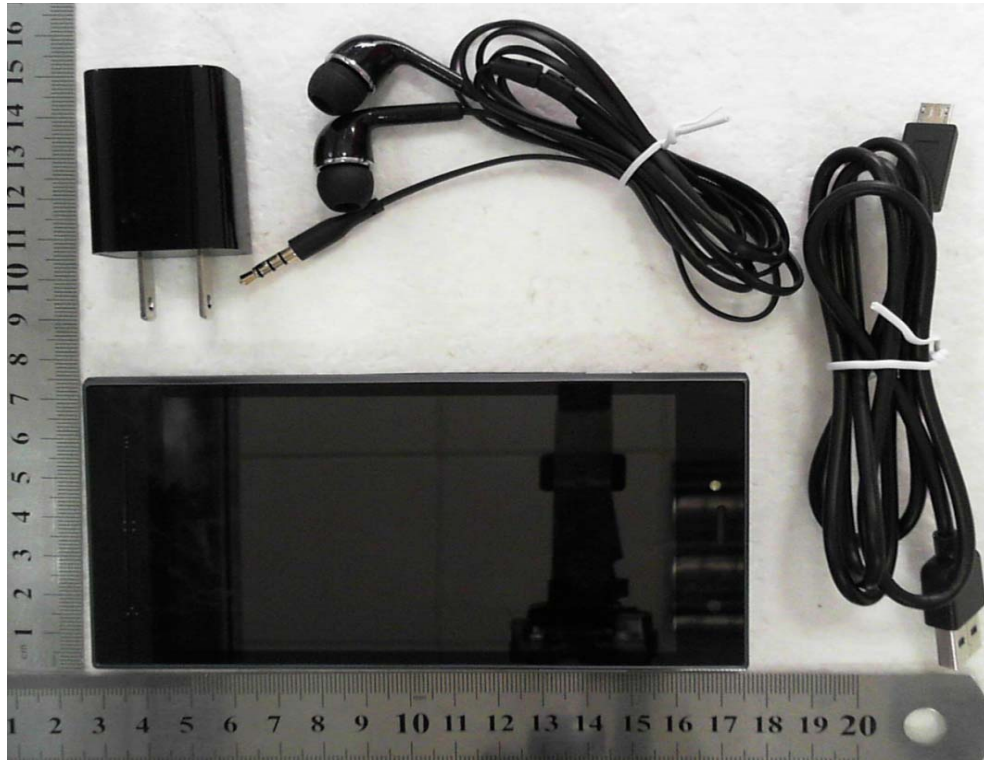


Cover off




Main board With shielding Front View

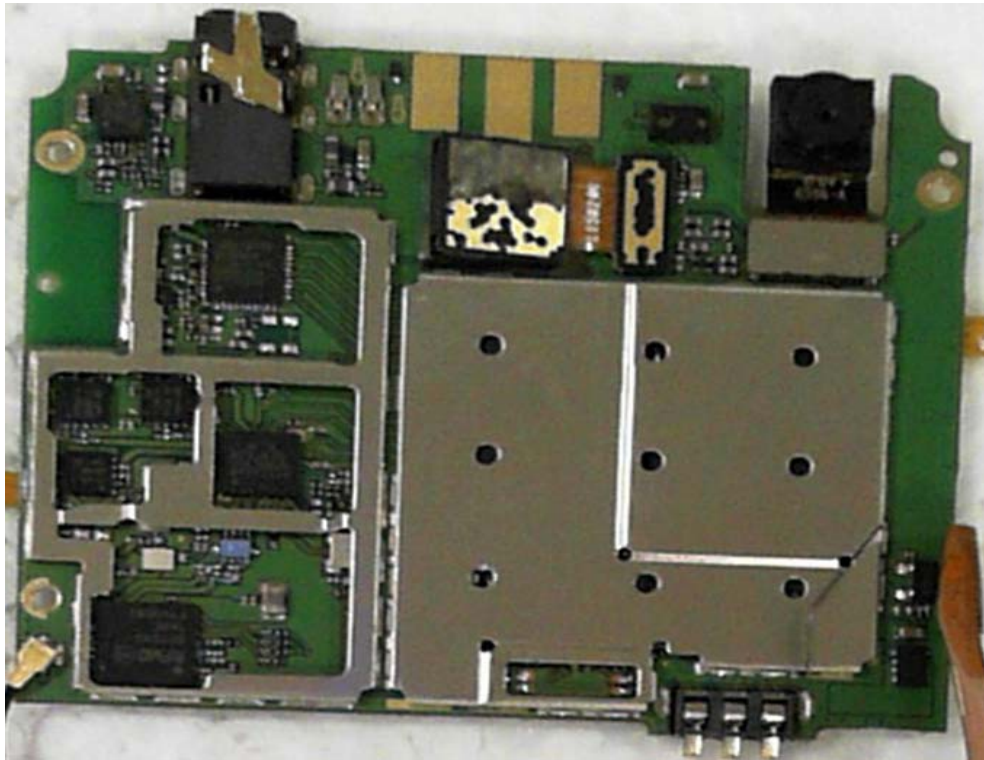

Main board Without shielding Front View

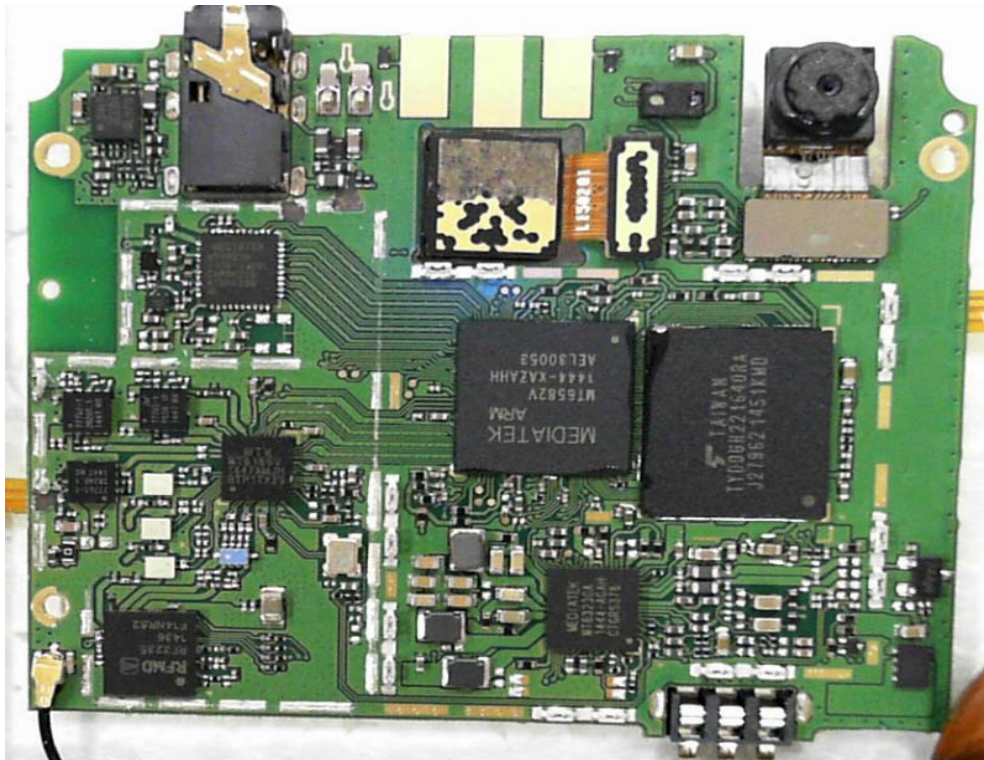

Main board Rear

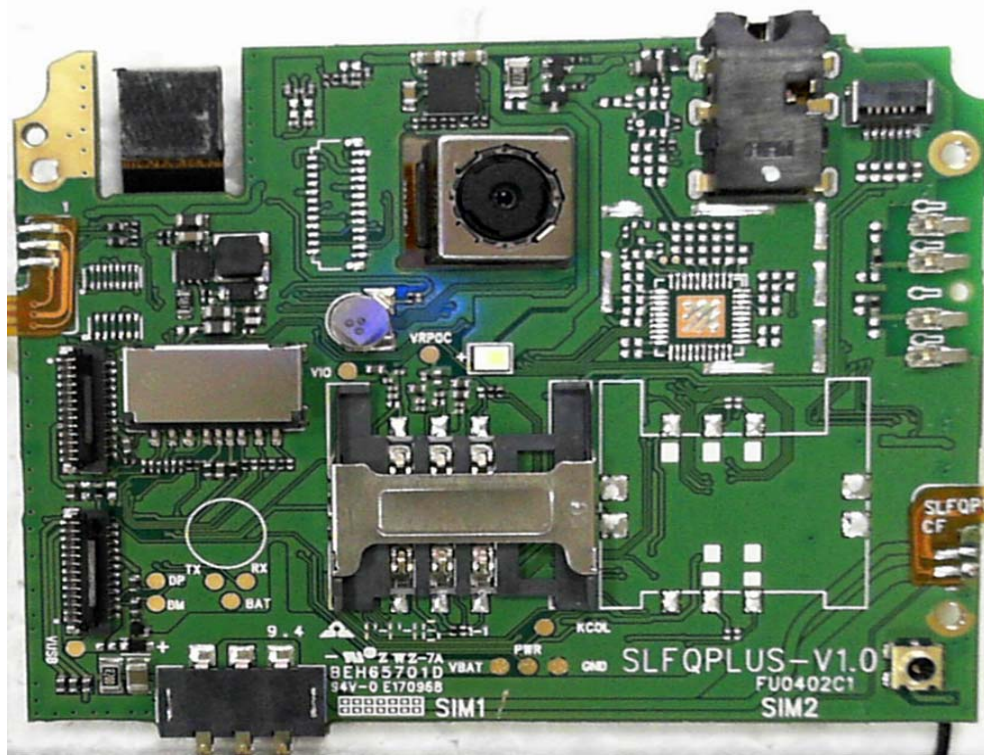


Battery Front View



USB Cable




Headset

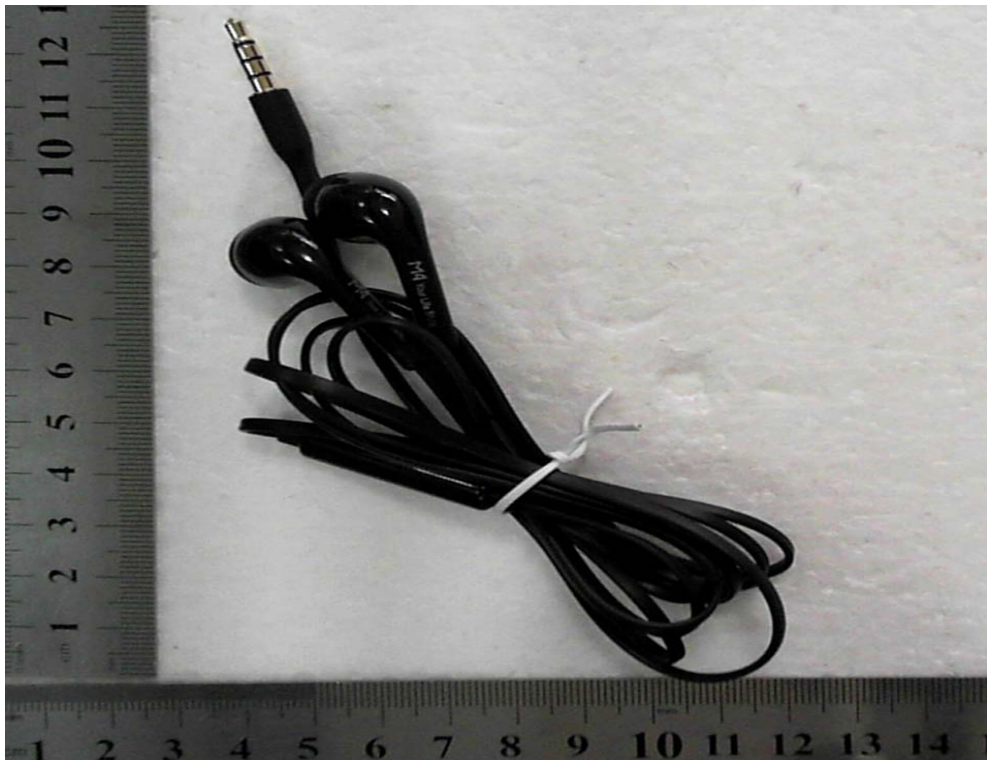

GSM/DCS/UMTS Antenna View



BT/WIFI Antenna View

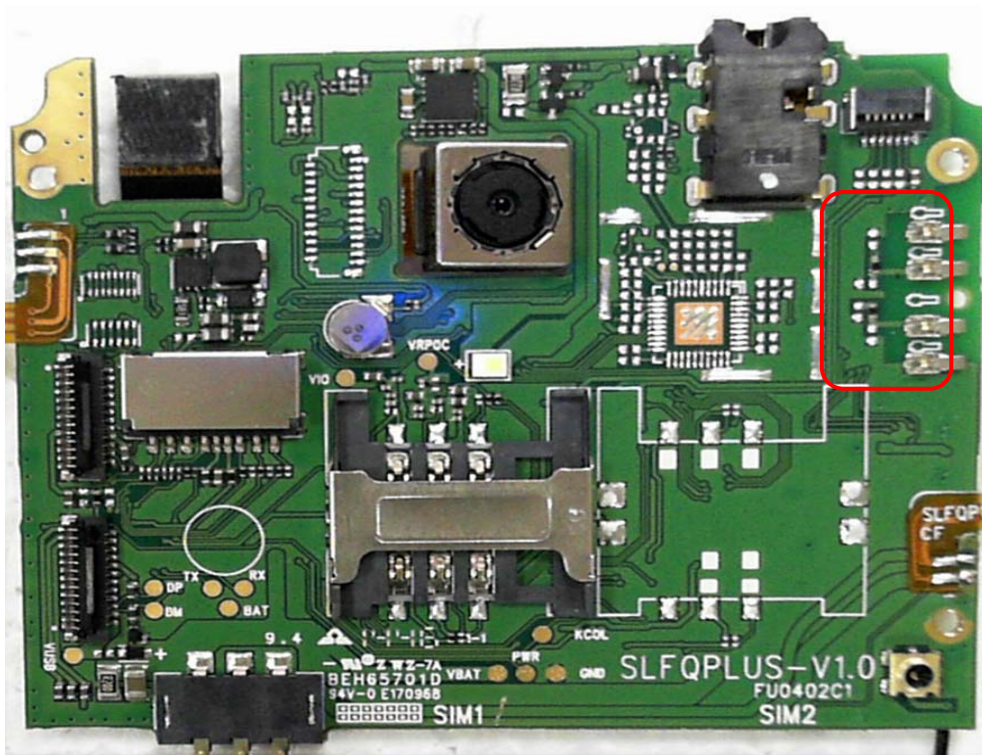


Adapter



ANNEX B: Detailed Test Results

The radiated test setup is shown in each radiated test case section. The conducted test setup is shown as following:

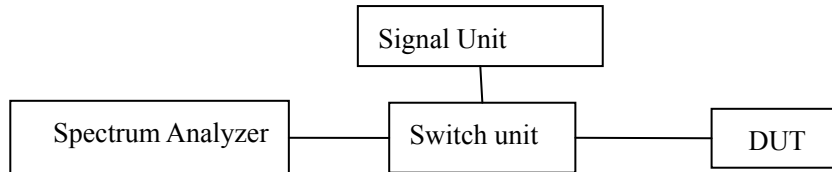

All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

B.1 Maximum Transmit Power

B.1.1 Description

According to §15.247(b)(1),

The maximum Peak Output power shall be equal to or less than 125mW \approx 21dBm..

B.1.2 Test Results

Date rate (Mbps)	Maximum peak output power(dBm)			Verdict
	2402MHz	2441MHz	2480MHz	
1	7.104dBm (2.401GHz)	7.331 dBm (2.440GHz)	7.267 dBm (2.479GHz)	Pass
2	5.664 dBm (2.400GHz)	5.872 dBm (2.440GHz)	5.764 dBm (2.479GHz)	Pass
3	5.769 dBm (2.400GHz)	5.879 dBm (2.441GHz)	5.792 dBm (2.480GHz)	Pass

B.2 20dB Bandwidth

B.2.1Description

According to §15.247(a)(1)(iii)

The bandwidth at 20 dBm down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receiver antenna while the EUT is operating in transmission mode at the appropriate frequencies.


B.2.2 Test Results

Test equipment parameter:

TRA: Max Hold RBW: 100kHz VBW: 300kHz Sweep time: AUTO


GFSK Modulation

Date rate (Mbps)	Frequency(MHz)	Test Result(MHz)		Verdict
1	2402	1.121	Fig.1	Pass
	2441	1.120	Fig.2	Pass
	2480	1.114	Fig.3	Pass

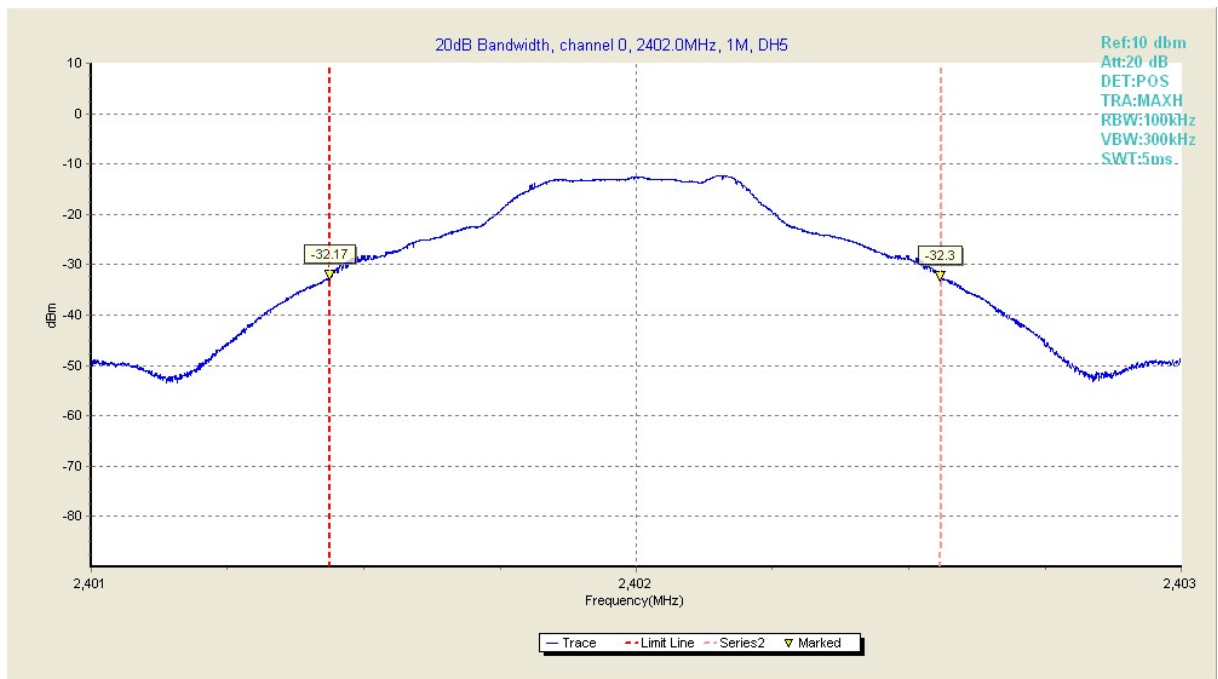


Test plot 1	2401.437500	-32.169998
Test plot 2	2402.558594	-32.299999

Fig1. 20dB Bandwidth in 2402MHz,1Mbps

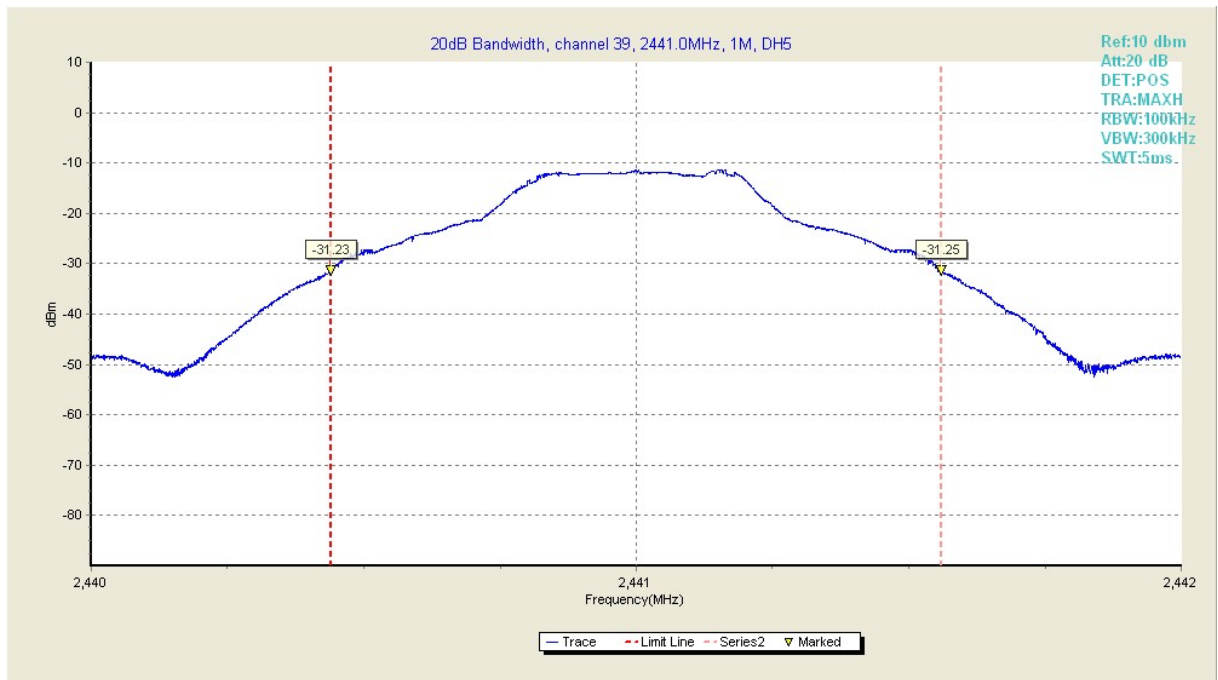

Test plot 1	2440.438965	-31.230000
Test plot 2	2441.559082	-31.250000

Fig2. 20 dB Bandwidth in 2441MHz,1Mbps

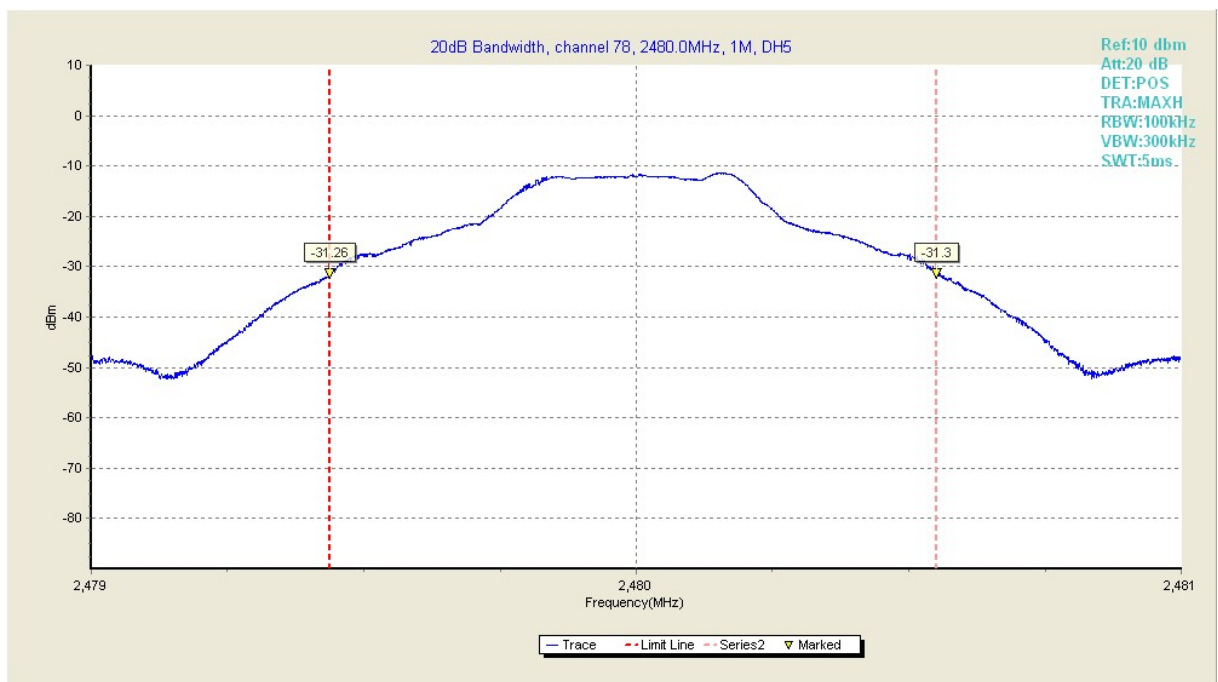


Test plot 1	2479.437012	-31.260000
Test plot 2	2480.550537	-31.299999

Fig3. 20 dB Bandwidth in 2480MHz,1Mbps


$\pi/4$ -DQPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Test Result(MHz)		Verdict
2	2402	1.351	Fig.4	Pass
	2441	1.349	Fig.5	Pass
	2480	1.348	Fig.6	Pass

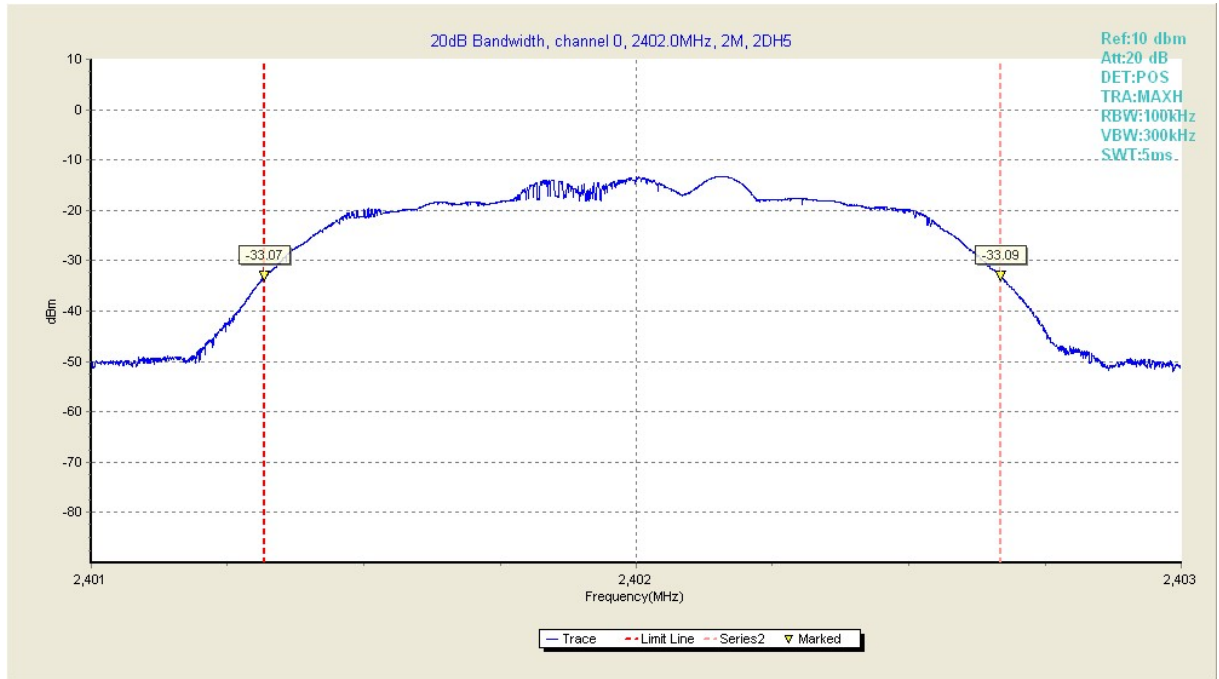


Test plot 1	2401.318115	-33.070000
Test plot 2	2402.668945	-33.090000

Fig4. 20dB Bandwidth in 2402MHz,2Mbps

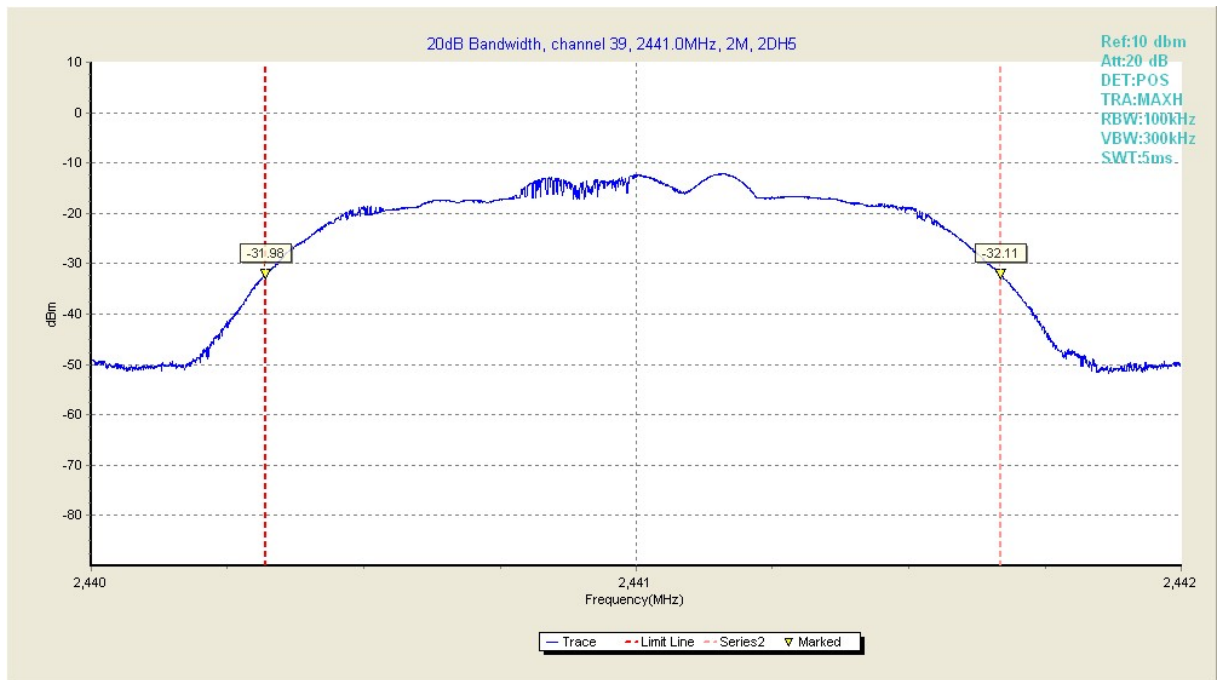

Test plot 1	2440.319580	-31.980000
Test plot 2	2441.667969	-32.110001

Fig5. 20 dB Bandwidth in 2441MHz,2Mbps

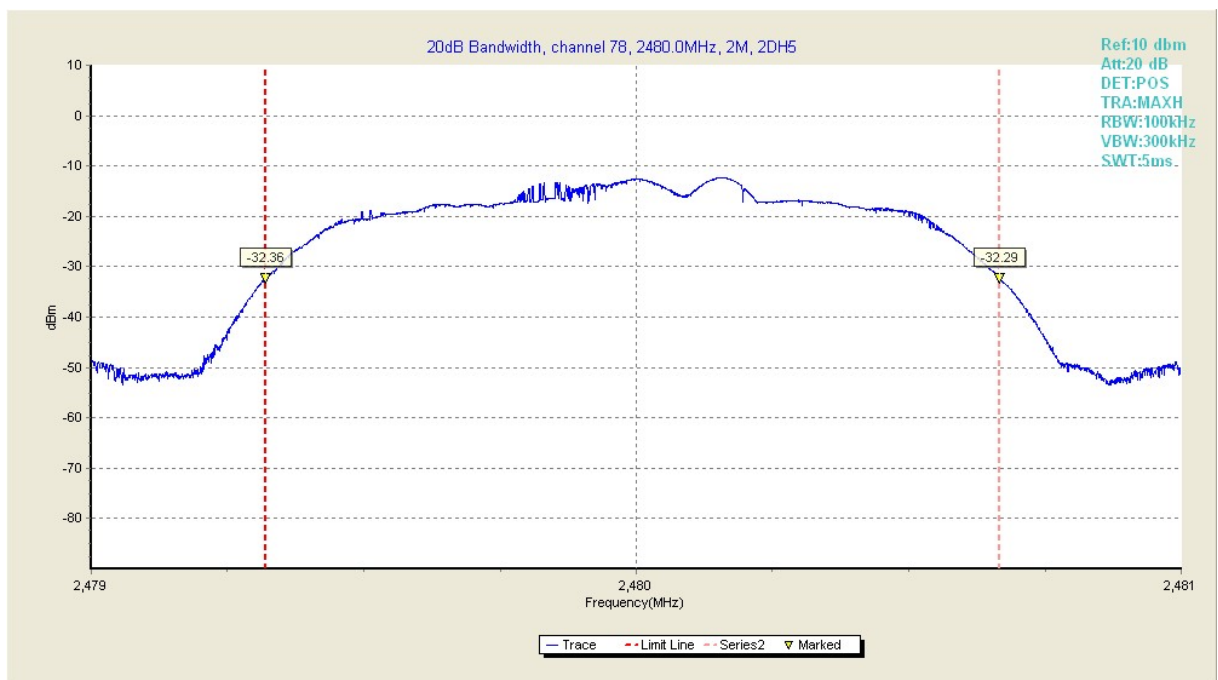


Test plot 1	2479.319092	-32.360001
Test plot 2	2480.666992	-32.290001

Fig6. 20 dB Bandwidth in 2480MHz,2Mbps


8DPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Test Result(MHz)		Verdict
3	2402	1.363	Fig.7	Pass
	2441	1.361	Fig.8	Pass
	2480	1.362	Fig.9	Pass

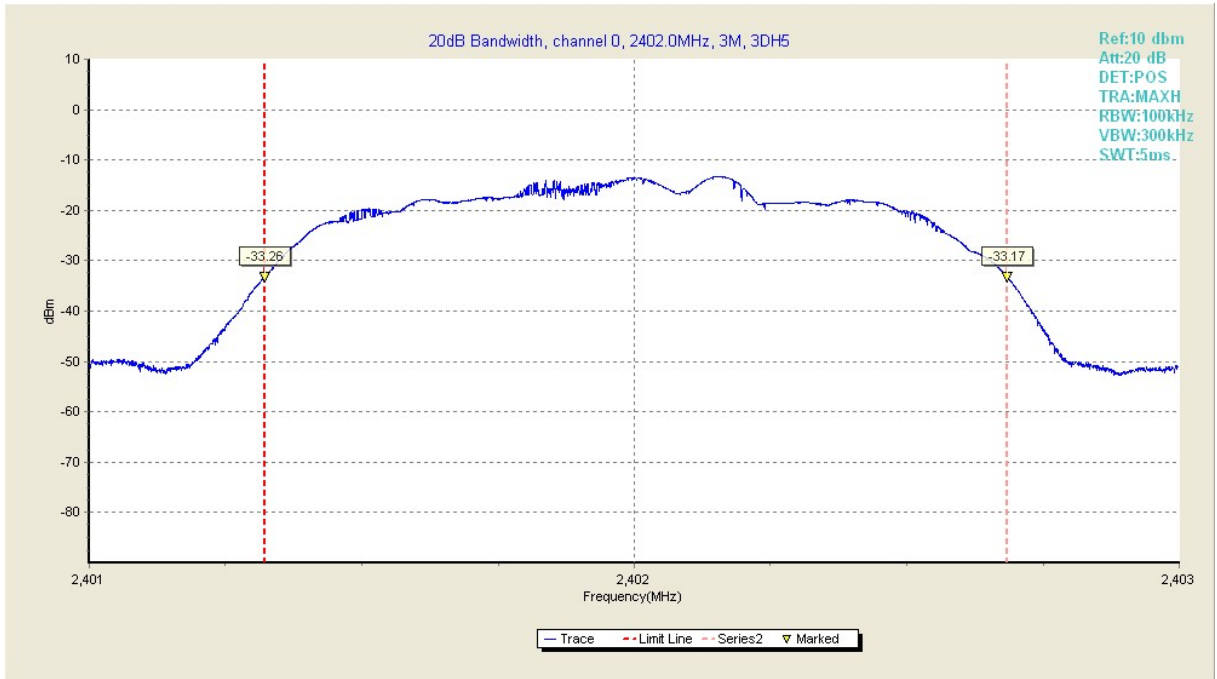


Test plot 1	2401.321533	-33.259998
Test plot 2	2402.684570	-33.169998

Fig7. 20dB Bandwidth in 2402MHz,3Mbps

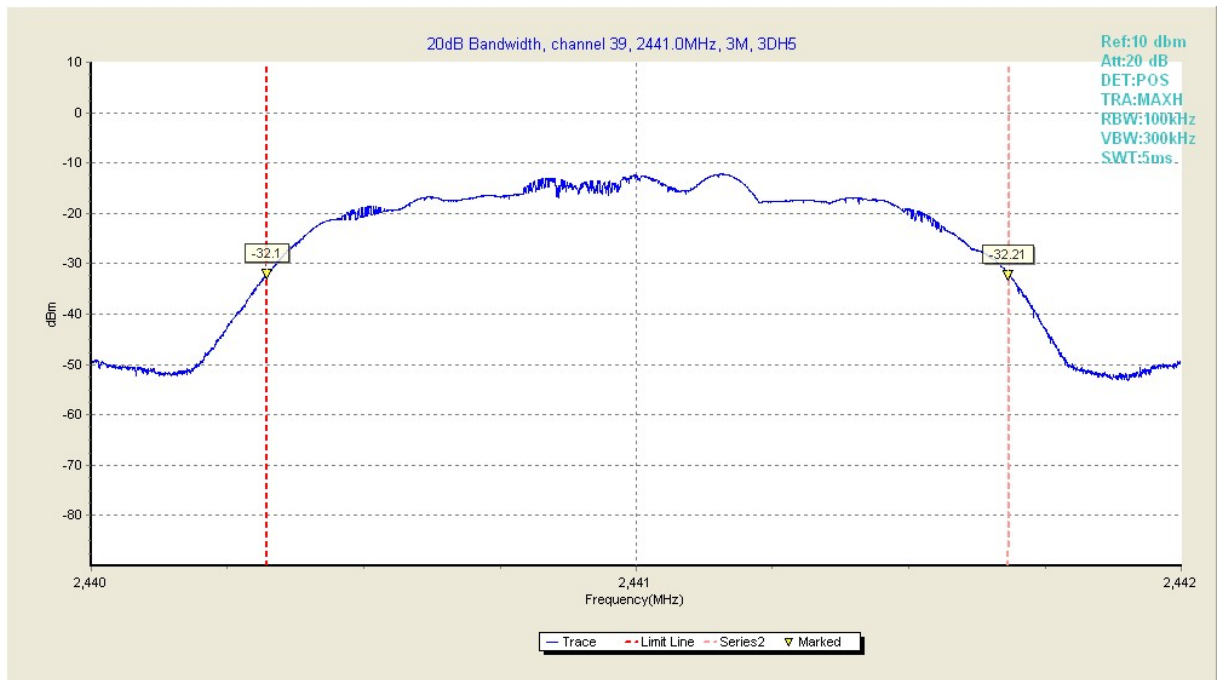

Test plot 1	2440.322510	-32.099998
Test plot 2	2441.683105	-32.209999

Fig8. 20 dB Bandwidth in 2441MHz,3Mbps

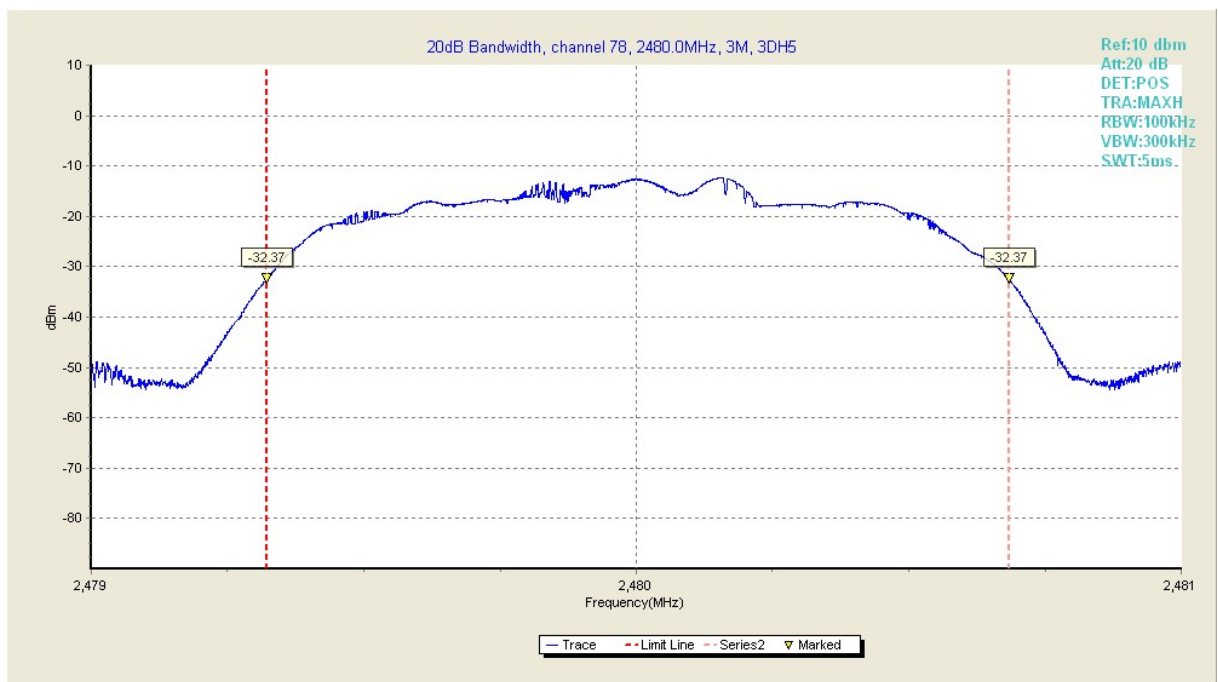

Test plot 1	2479.321533	-32.369999
Test plot 2	2480.683594	-32.369999

Fig9. 20 dB Bandwidth in 2480MHz, 3Mbps

B.3 Band Edge Compliance

B.3.1 Description

According to §15.247(d), the Band Edges Compliance shall be equal to or less than -20 dBc.

B.3.3 Test Results

Test equipment parameter:

TRA: Max Hold RBW: 100kHz VBW: 100kHz Sweep time: 1s

GFSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (dB)	Test Result(dB)		Verdict
1	2400	-20	-58.57	Fig.10	Pass
			-43.87	Fig.11	
	2483.5		-59.75	Fig.12	Pass
			-50.43	Fig.13	

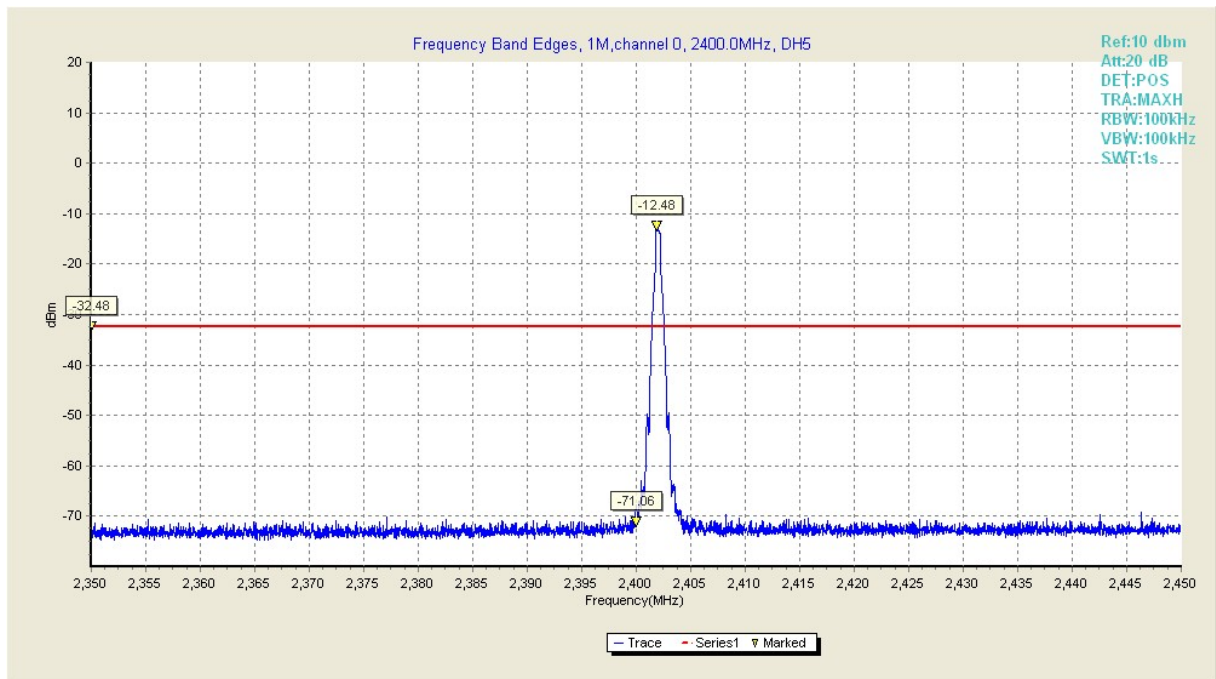


Fig10. Frequency Band Edges in CH0,1Mbps,Hopping off

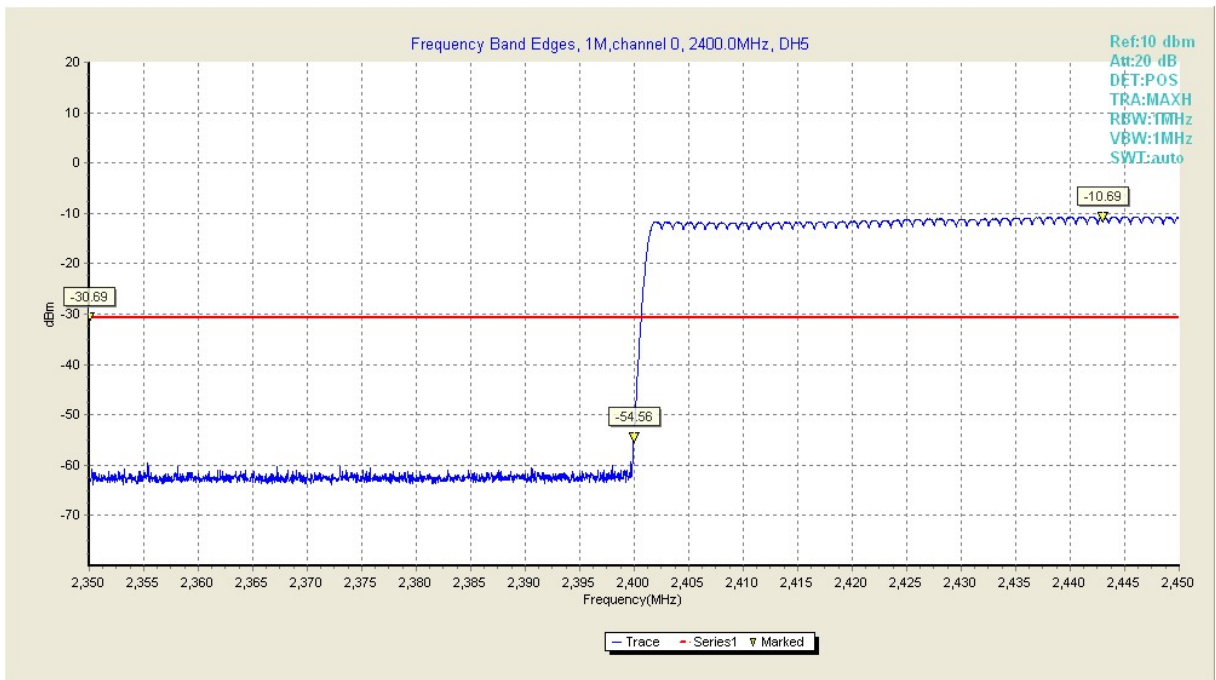


Fig11. Frequency Band Edges in CH0,1Mbps,Hopping on

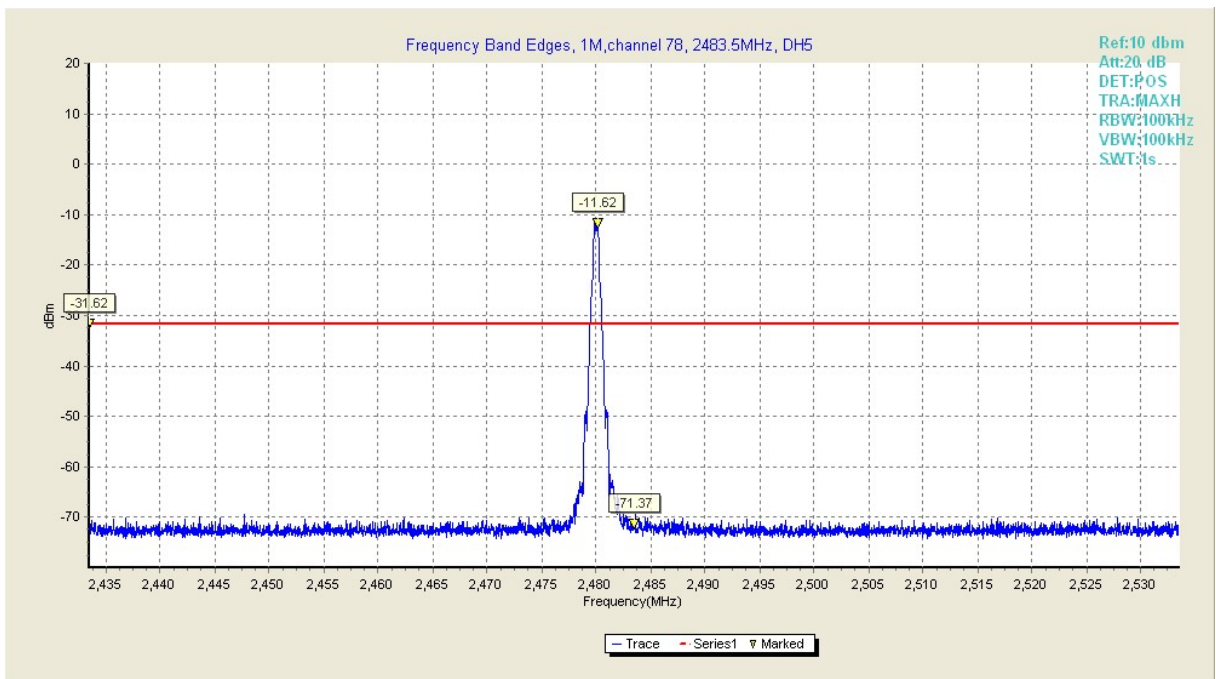


Fig12. Frequency Band Edges in CH78,1Mbps, Hopping off

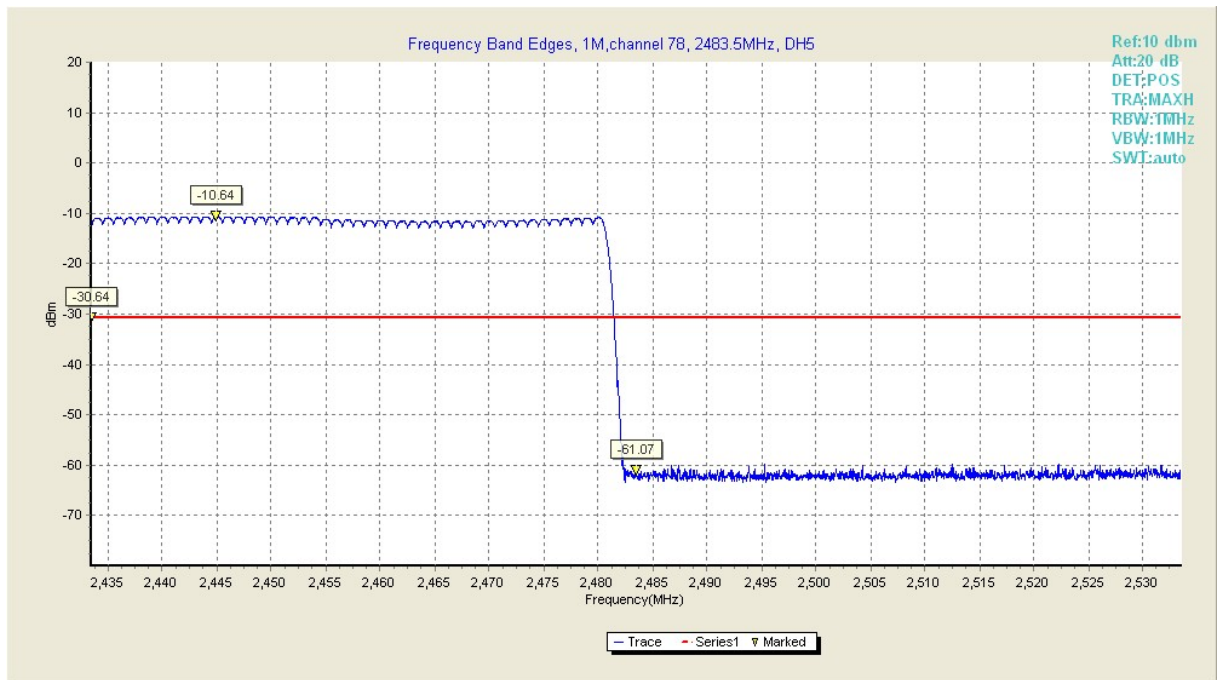


Fig13. Frequency Band Edges in CH78,1Mbps, Hopping on

$\pi/4$ -DQPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (dB)	Test Result(dB)		Verdict
			Value	Figure	
2	2400	-20	-55.90	Fig.14	Pass
			-35.14	Fig.15	
	2483.5		-57.49	Fig.16	Pass
			-42.30	Fig.17	

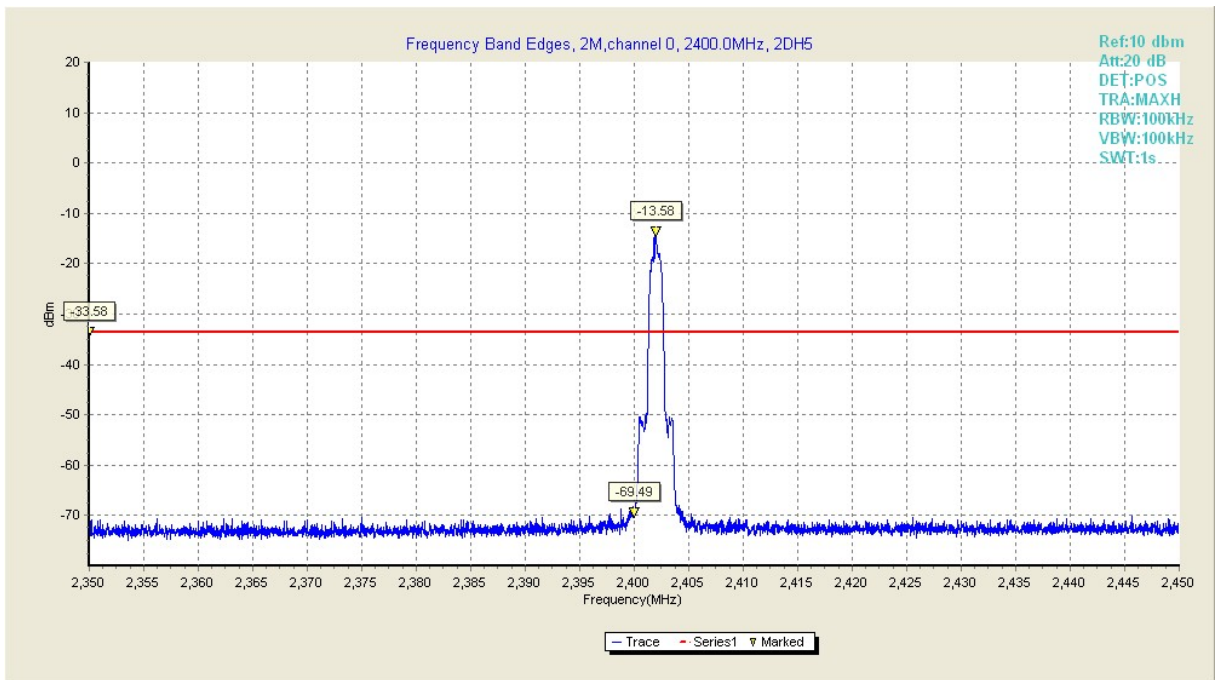


Fig14. Frequency Band Edges in CH 0, 2Mbps,Hopping off

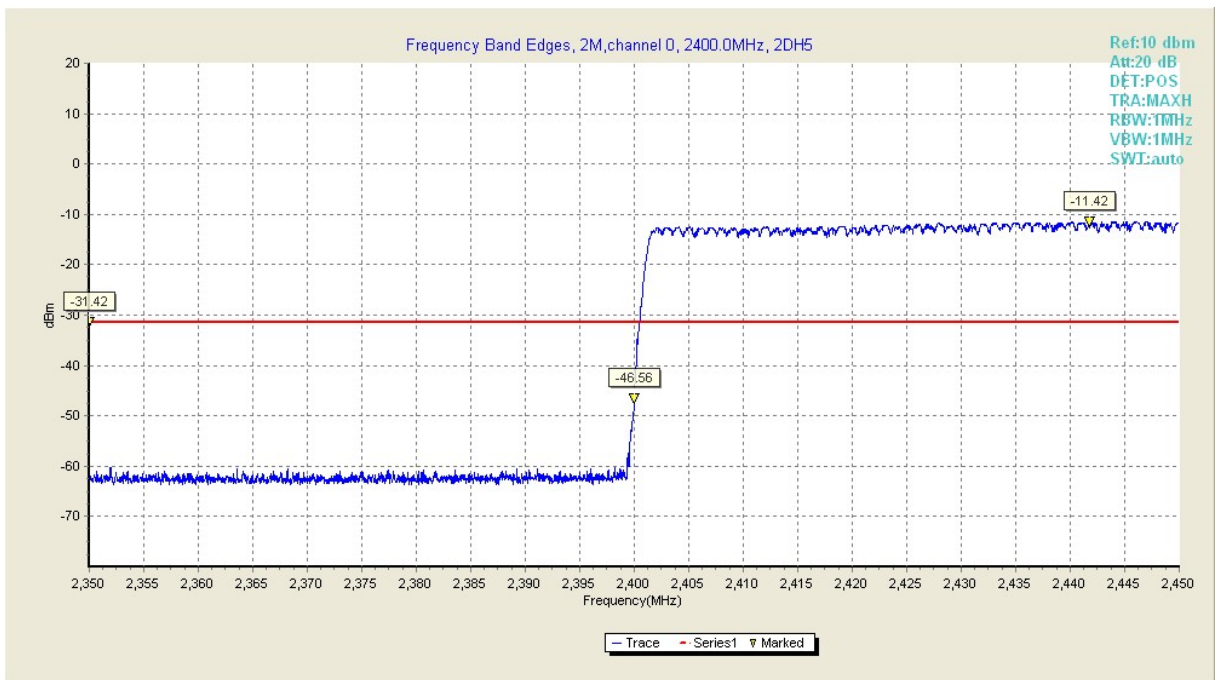


Fig15. Frequency Band Edges in CH 0, 2Mbps,Hopping on

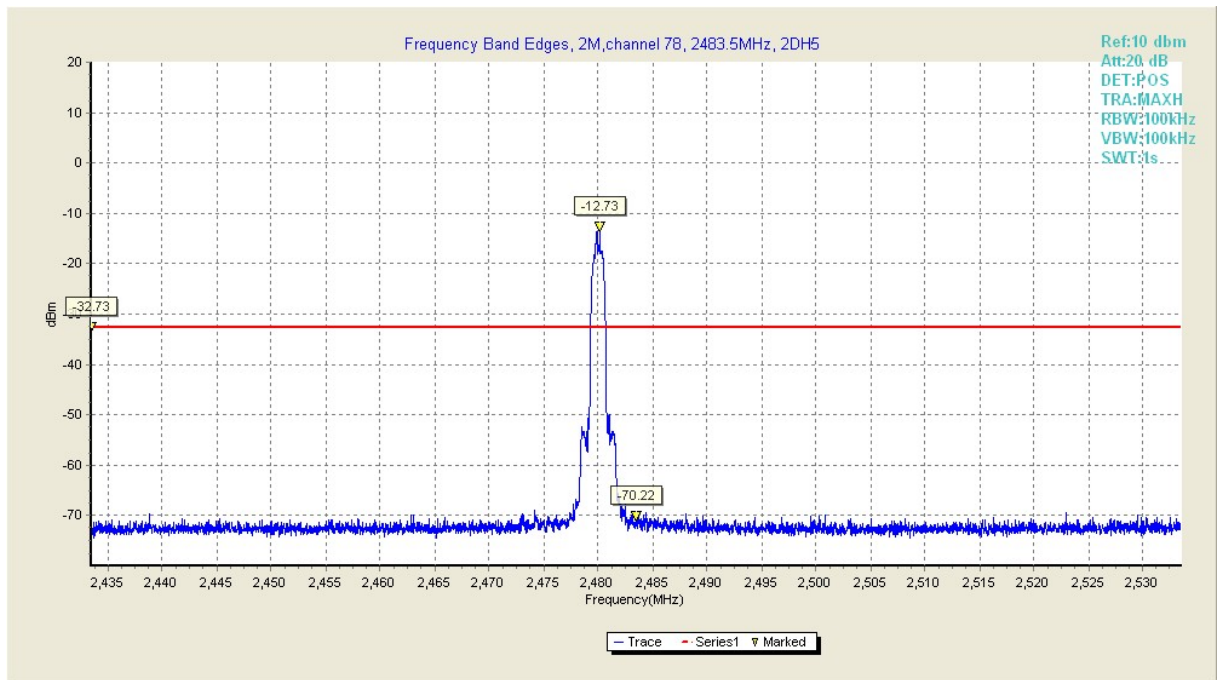


Fig16. Frequency Band Edges in CH 78, 2Mbps, Hopping off

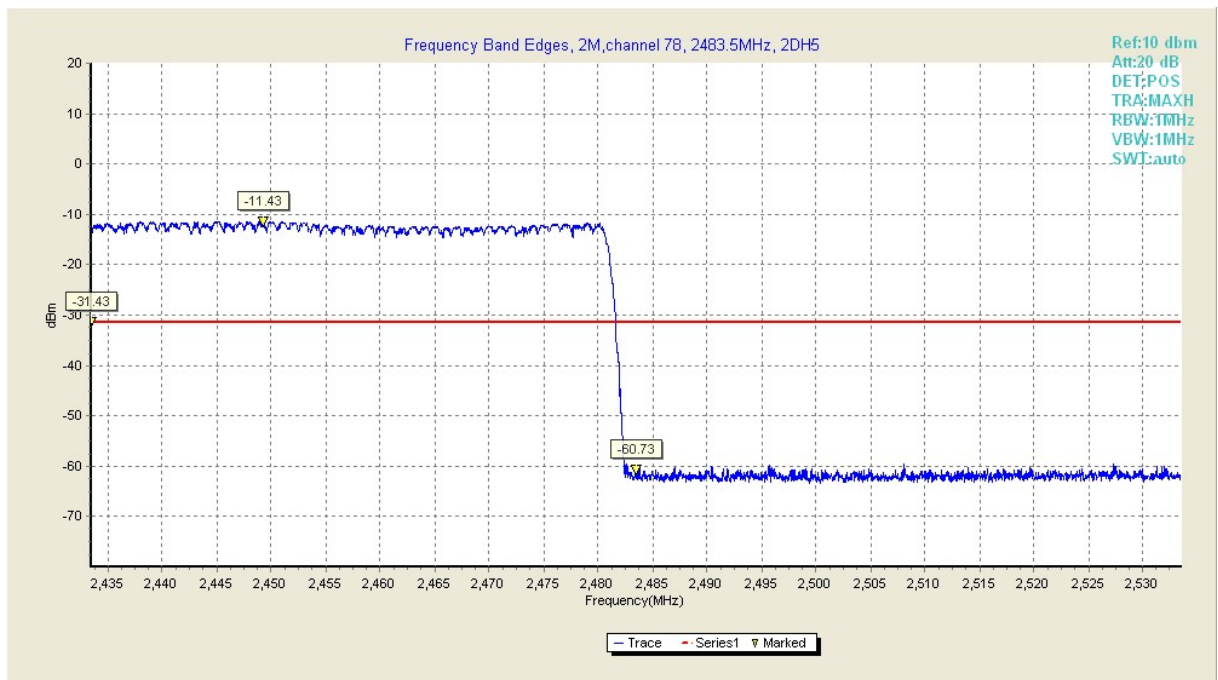


Fig17. Frequency Band Edges in CH 78, 2Mbps, Hopping on

8DPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (dB)	Test Result(dB)		Verdict
3	2400	-20	-54.95	Fig.18	Pass
			-35.62	Fig.19	

	2483.5		-59.45	Fig.20	Pass
			-48.74	Fig.21	

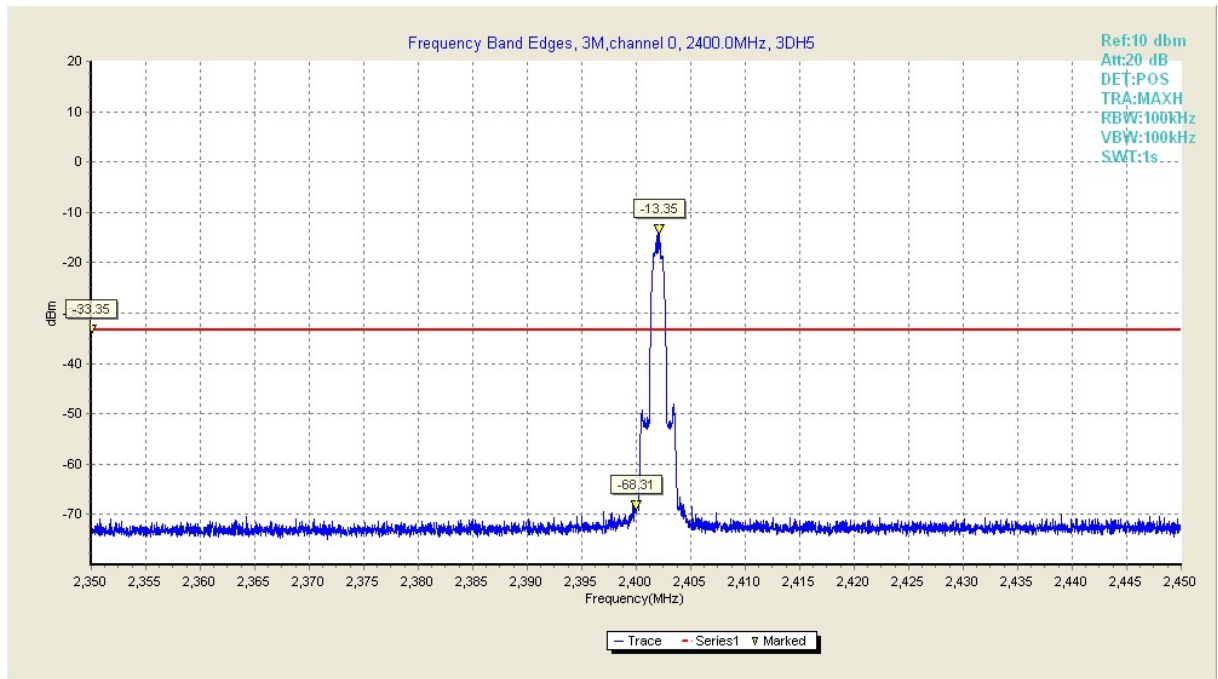


Fig18. Frequency Band Edges in CH0 , 3Mbps,Hopping off

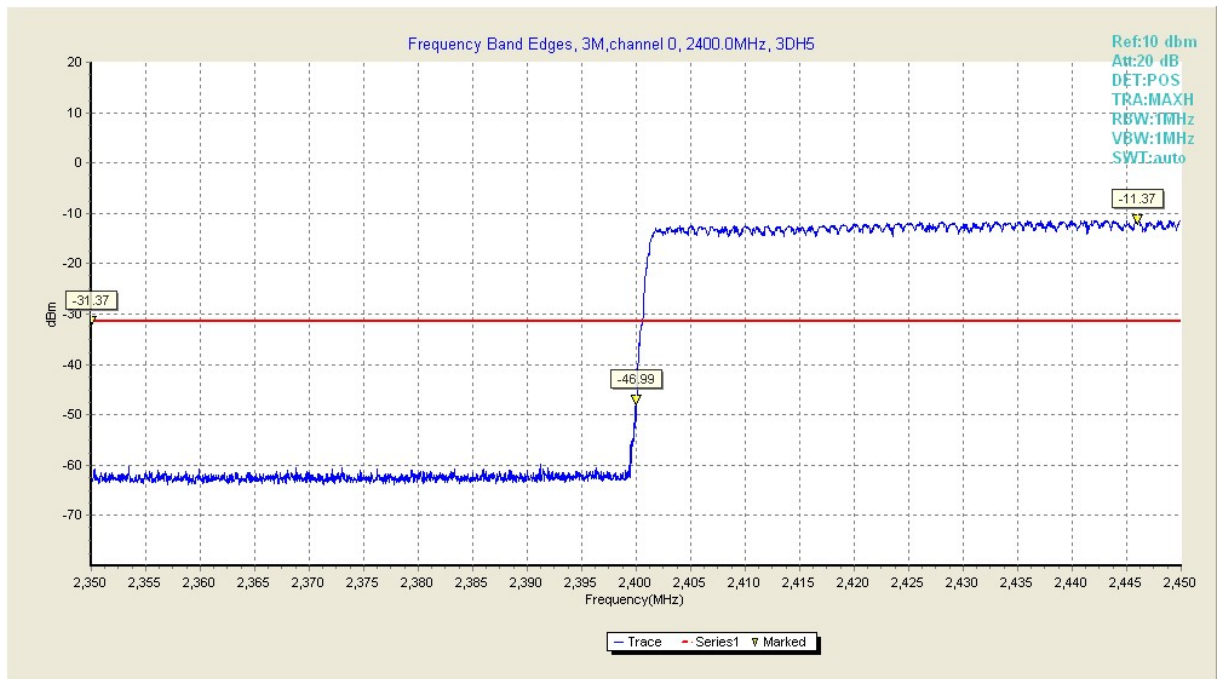


Fig19. Frequency Band Edges in CH0 , 3Mbps,Hopping on

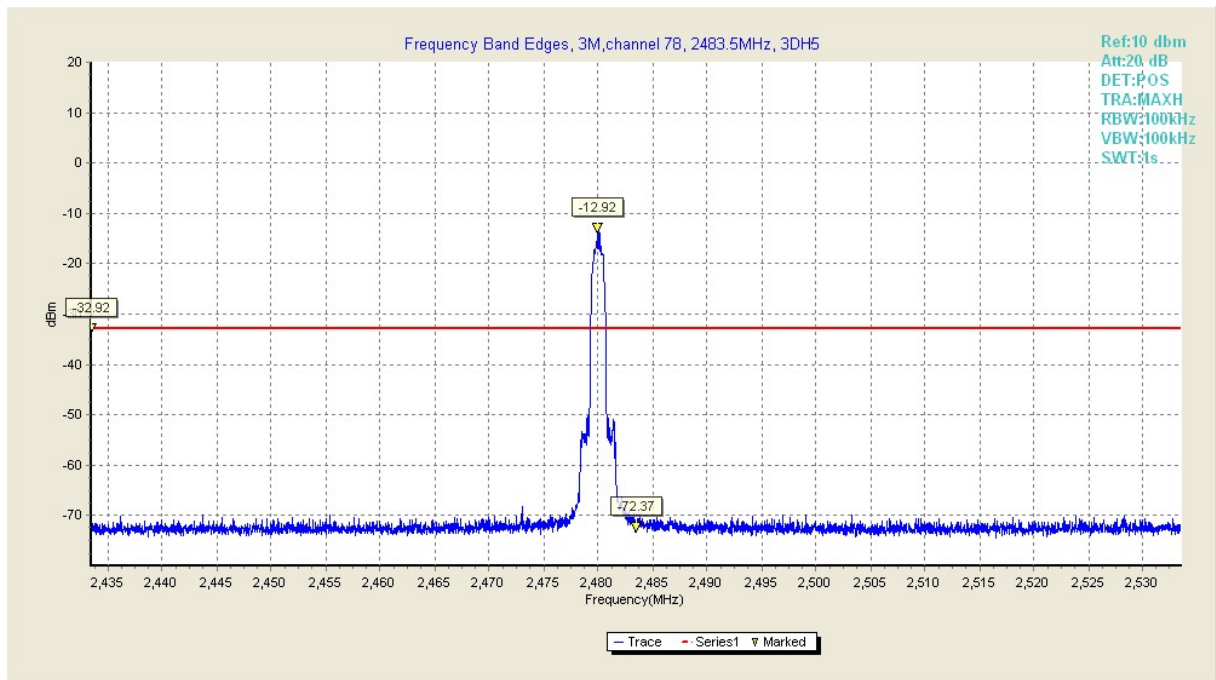


Fig20. Frequency Band Edges in CH 78, 3Mbps,Hopping off

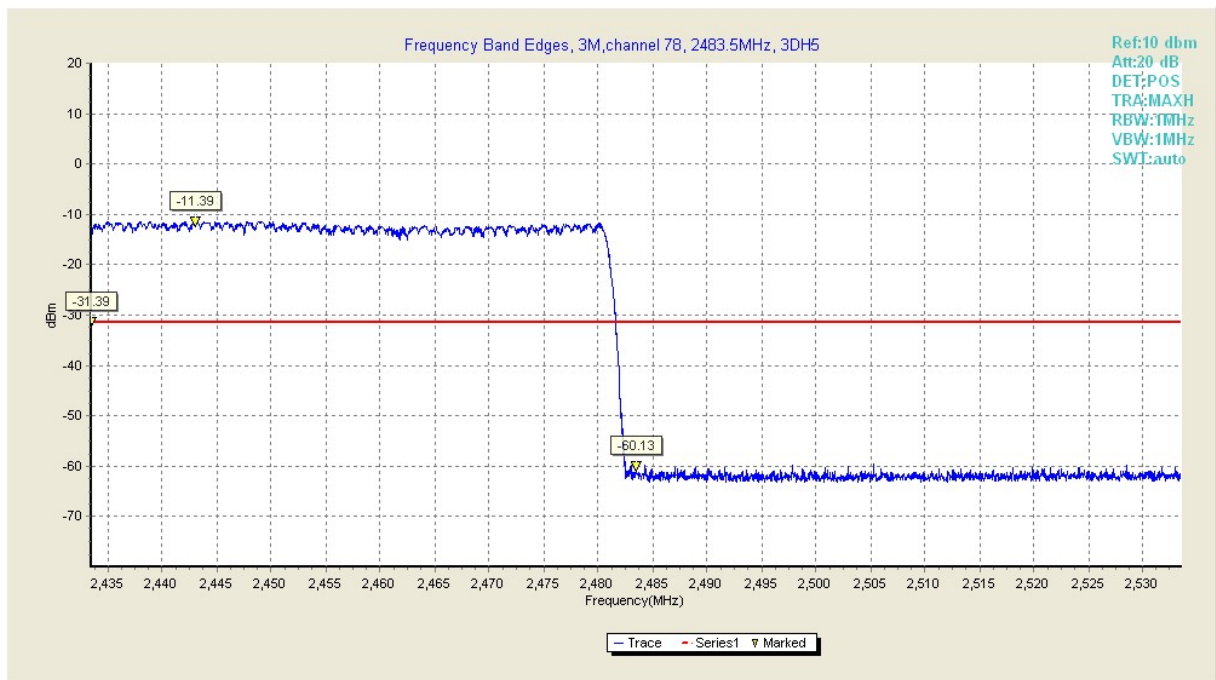


Fig21. Frequency Band Edges in CH 78, 3Mbps,Hopping on

B.4 Carrier Frequency Separation

B.4.1 Description

According to §15.247(a)(1),

Carrier Frequency Separation should be more than two-thirds of the 20 dB bandwidth of the hopping channel


B.4.2 Test Results

Test equipment parameter:

TRA: Max Hold RBW: 300kHz VBW: 300kHz Sweep time: 10ms

GFSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (MHz)	Test Result(MHz)		Verdict
1	2441	0.7467	0.9795	Fig.22	Pass

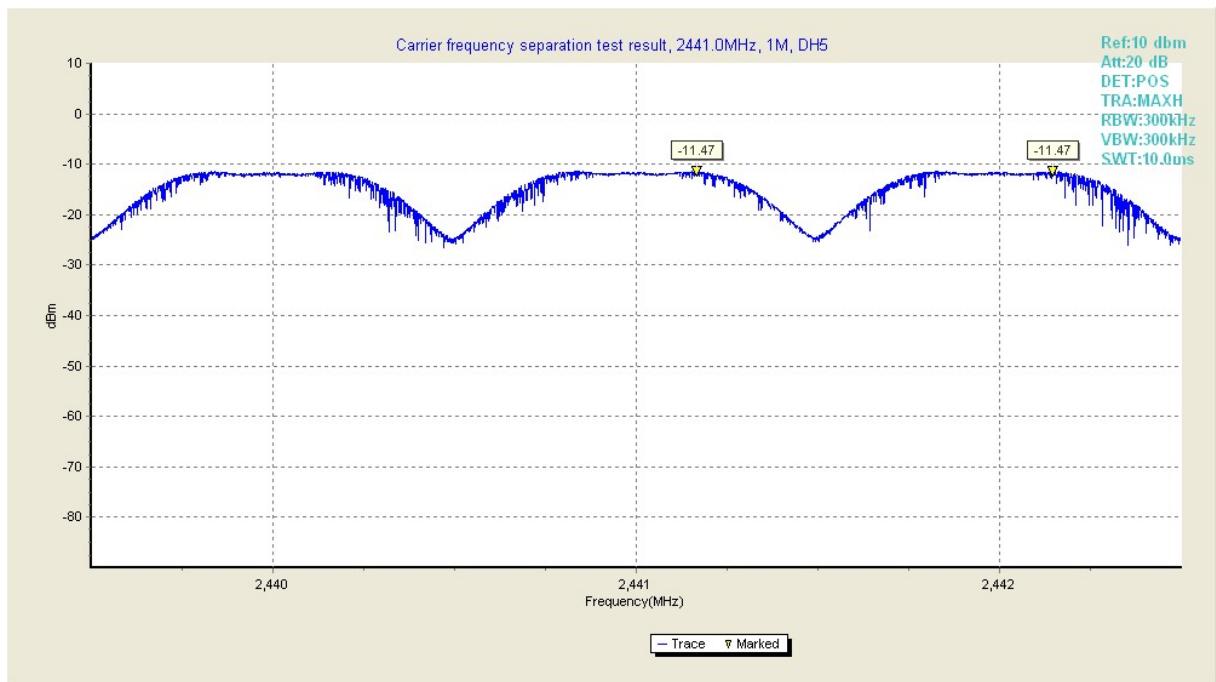


Test plot 1	2441.165771	-11.470000
Test plot 2	2442.145264	-11.470000

Fig 22. Carrier Frequency Separation in 2441MHz,1Mbps

$\pi/4$ -DQPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (MHz)	Test Result(MHz)		Verdict
2	2441	0.8993	1.3290	Fig.23	Pass

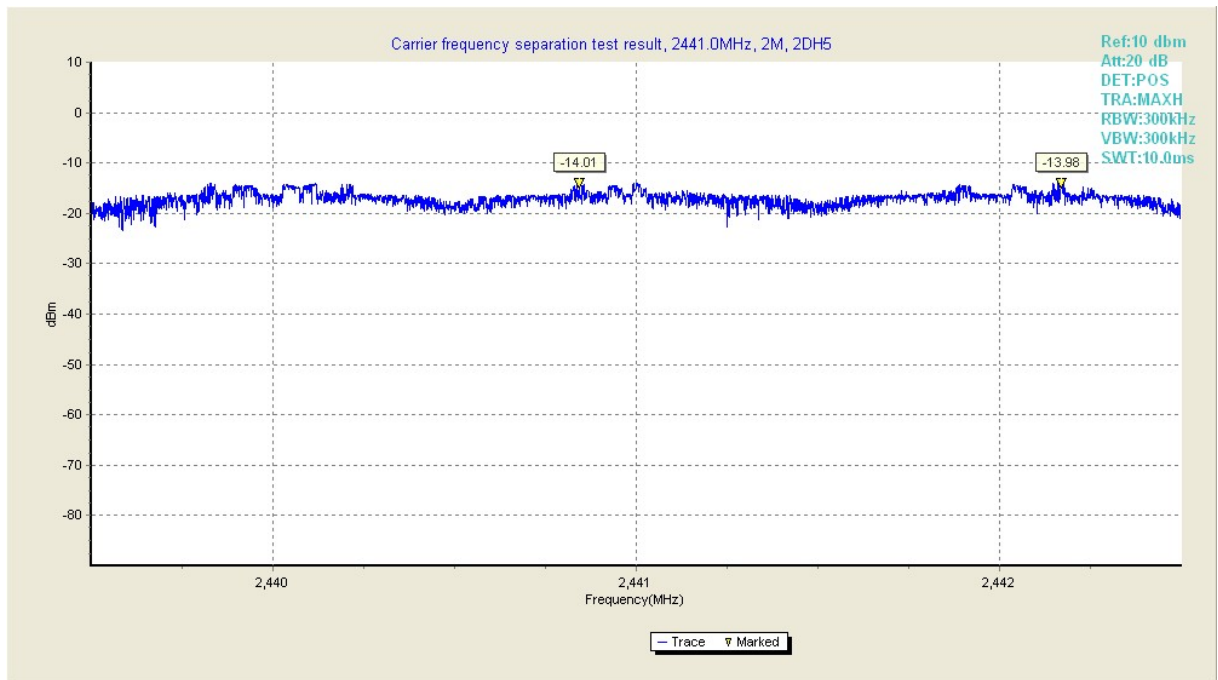


Test plot 1	2440.842011	-14.010572
Test plot 2	2442.171485	-13.980557

Fig 23. Carrier Frequency Separation in 2441MHz,2Mbps

8DPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (MHz)	Test Result(MHz)		Verdict
3	2441	0.9071	0.9915	Fig.24	Pass

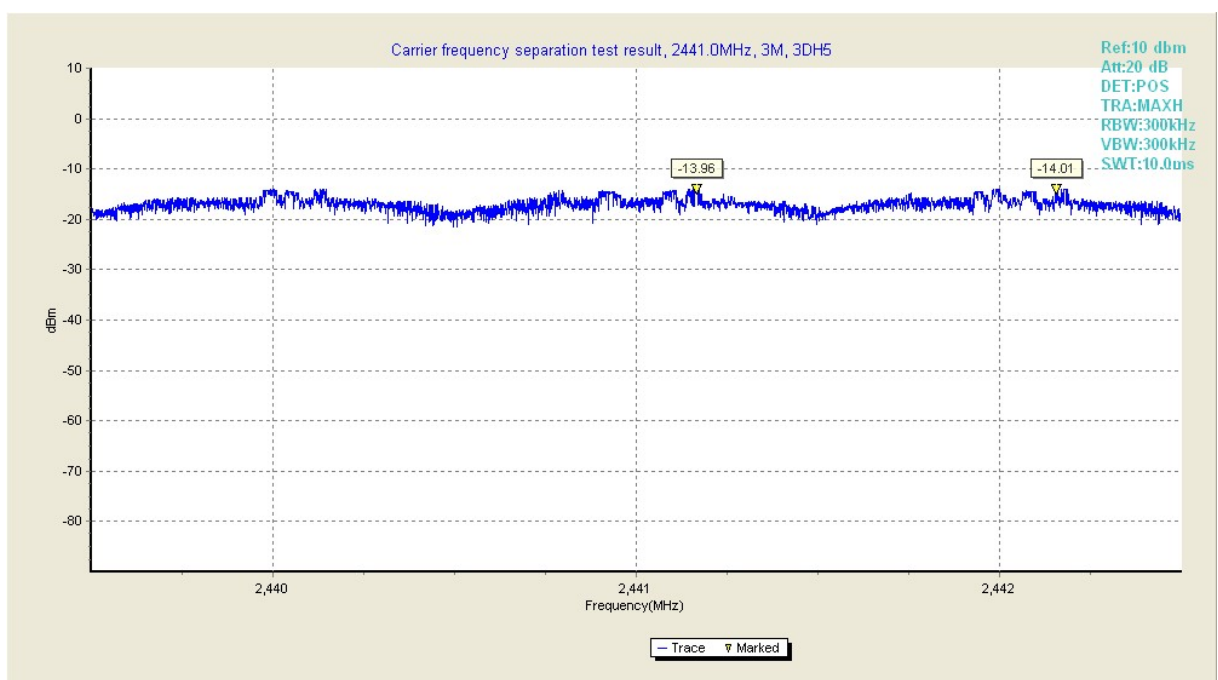

Test plot 1	2441.165785	-13.960785
Test plot 2	2442.157588	-14.010154

Fig24. Carrier Frequency Separation in 2441MHz,3Mbps

B.5 Time Of Occupancy (Dwell Time)

B.5.1 Description

According to §15.247(a)(1)(iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

B.5.2 Test Results

Test equipment parameter:

TRA: Max Hold RBW: 3MHz VBW: 3MHz Sweep time: 3.125ms

GFSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (ms)	Test Result(ms)		Verdict
1	2402	400	306.50	Fig.25	Pass
	2441		306.42	Fig.26	Pass
	2480		306.42	Fig.27	Pass

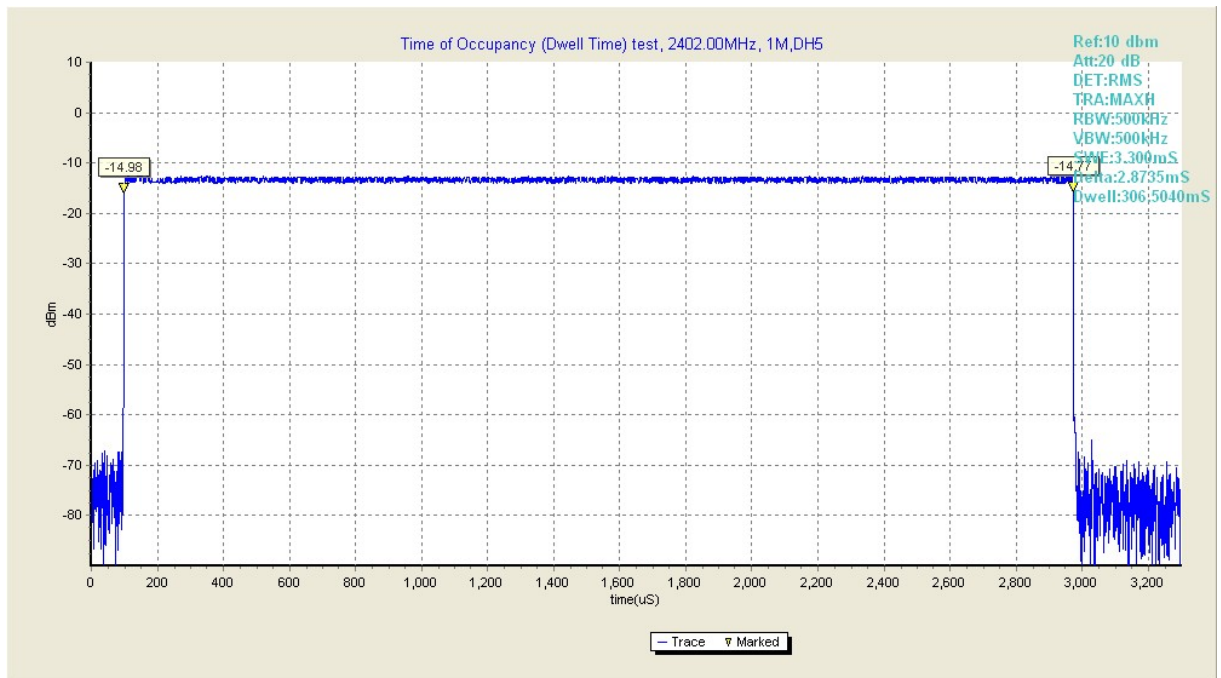


Fig25. Dwell Time in 2402MHz,1Mbps

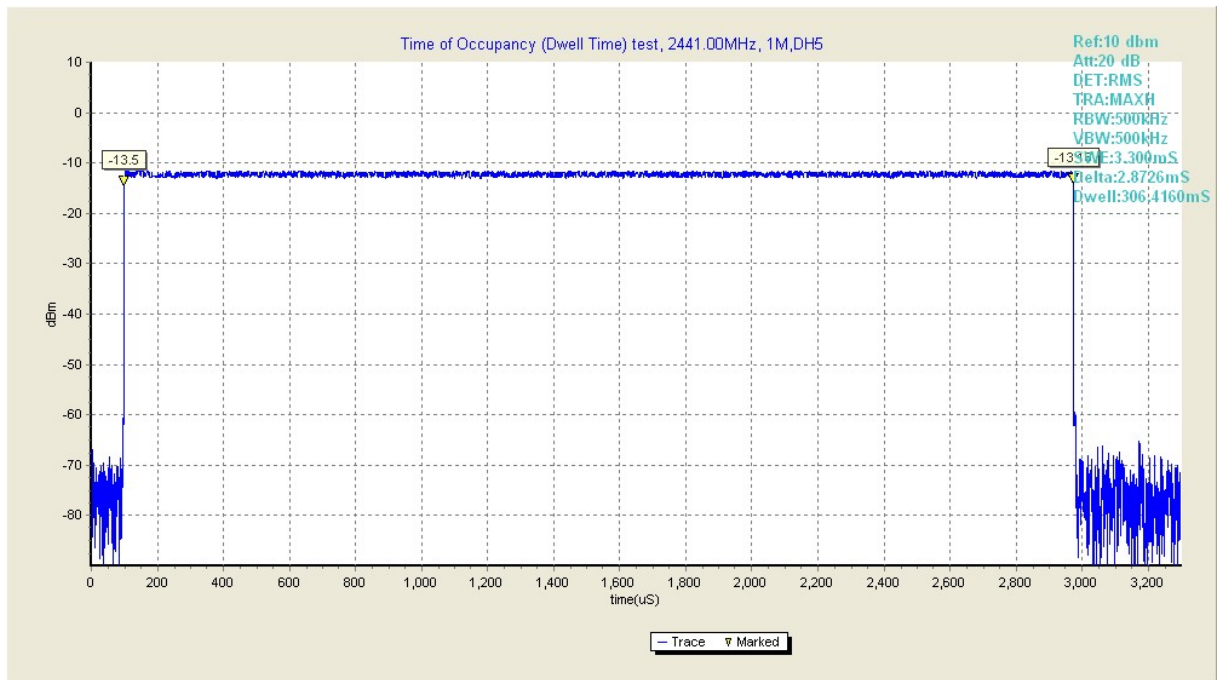


Fig26. Dwell Time in 2441MHz,1Mbps

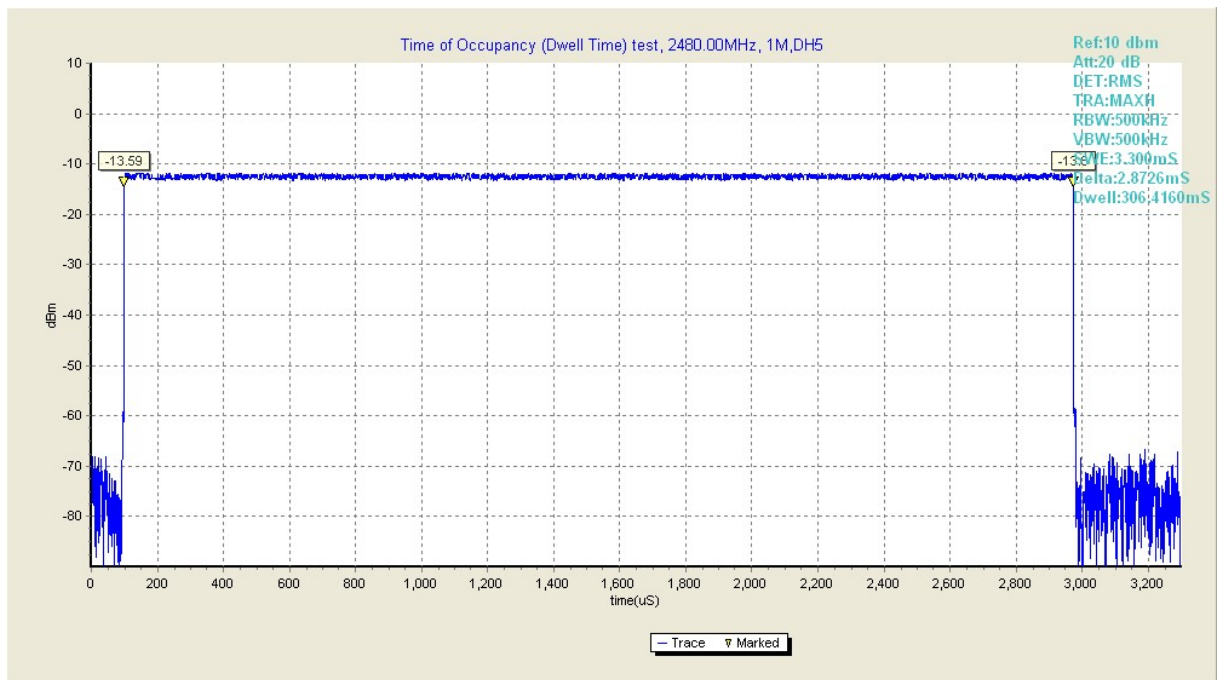


Fig27. Dwell Time in 2480MHz,1Mbps

$\pi/4$ -DQPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (ms)	Test Result(ms)		Verdict
2	2402	400	307.21	Fig.28	Pass
	2441		307.29	Fig.29	Pass

	2480		307.29	Fig.30	Pass
--	------	--	--------	--------	------

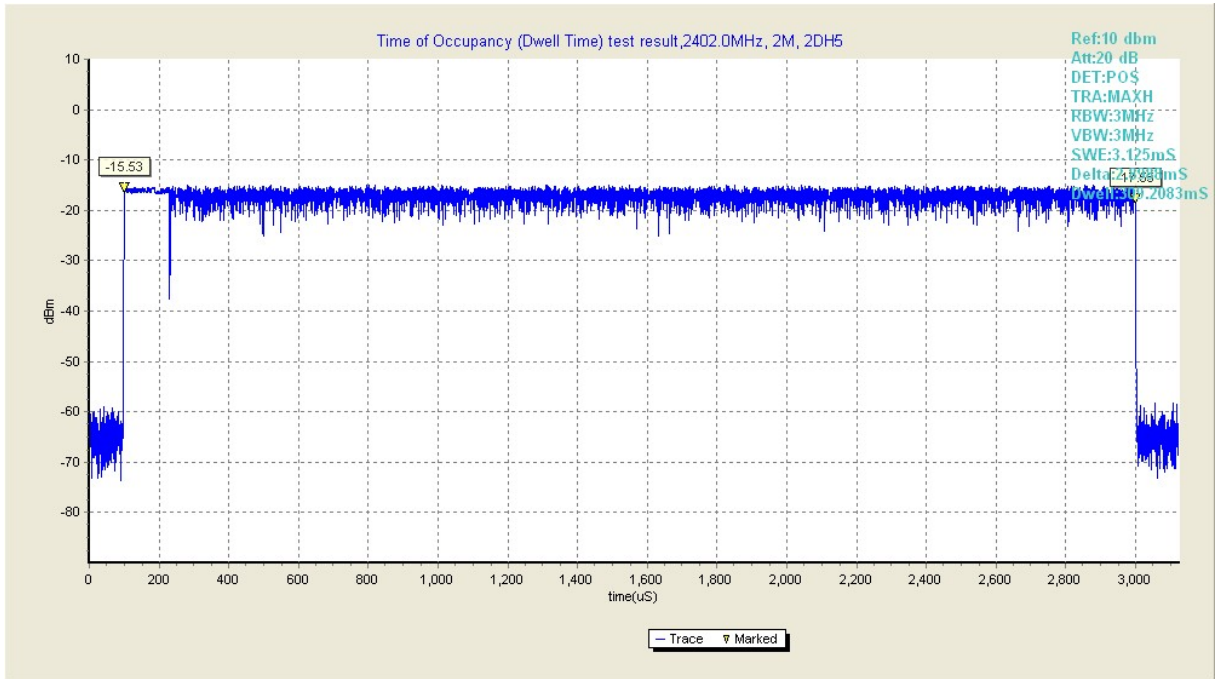


Fig28. Dwell Time in 2402MHz,2Mbps

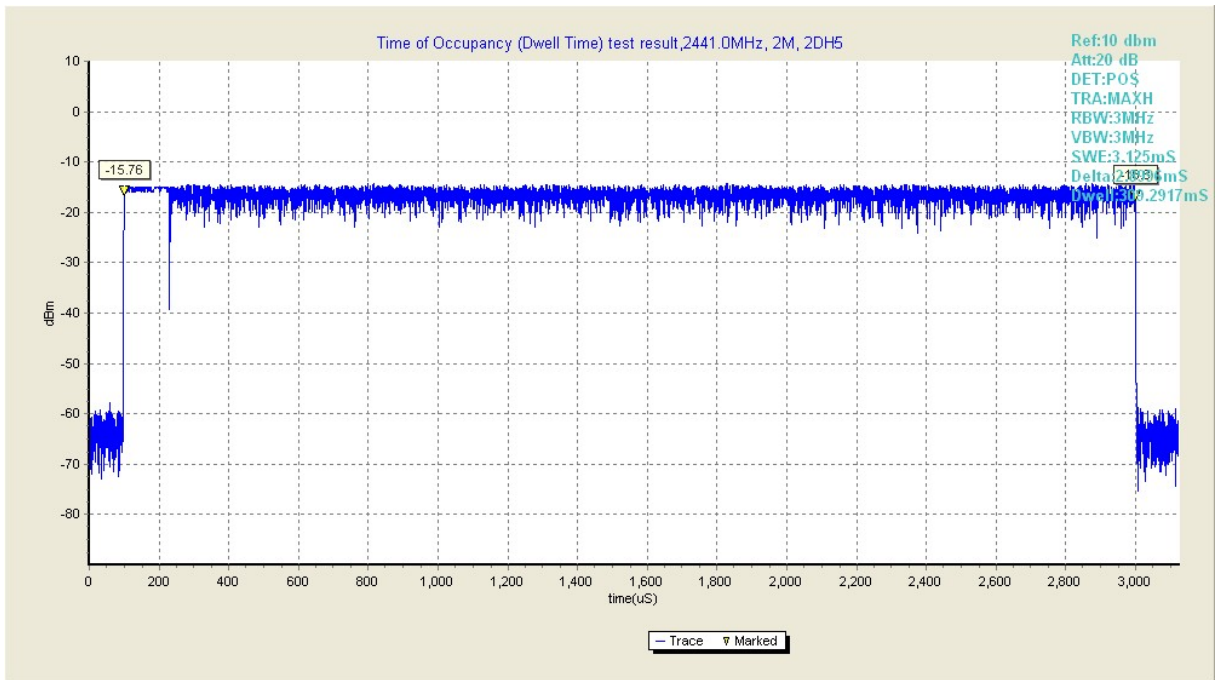


Fig29. Dwell Time in 2441MHz,2Mbps


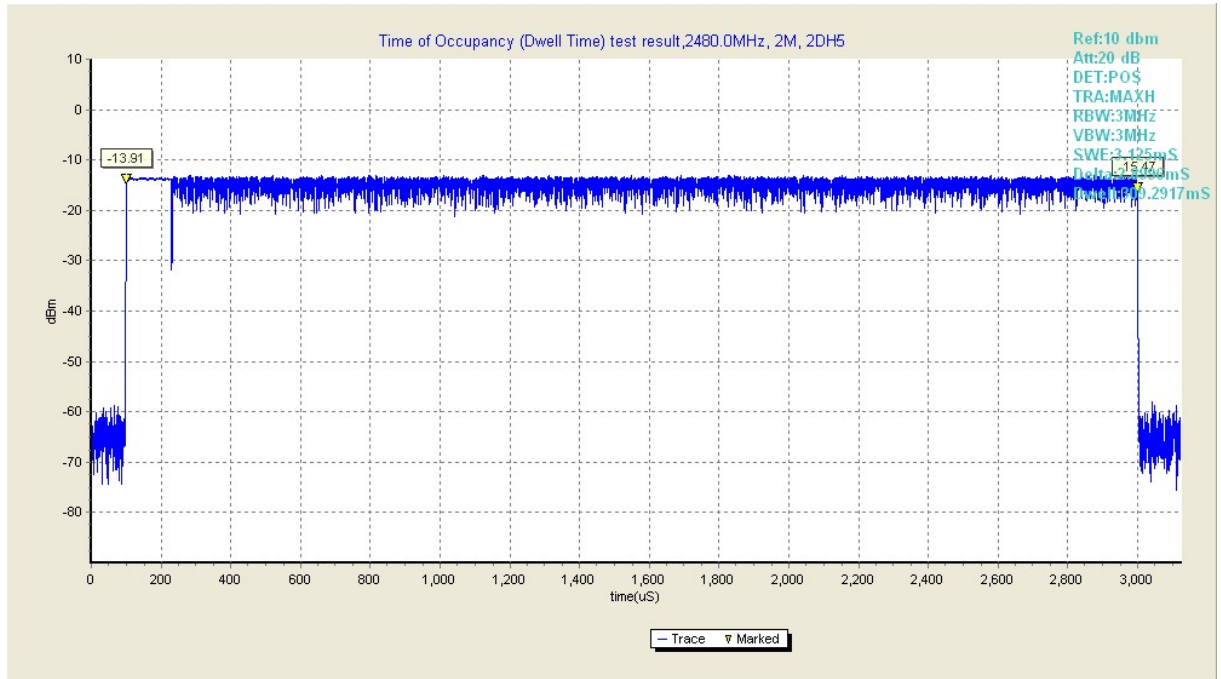


Fig30. Dwell Time in 2480MHz,2Mbps

8DPSK Modulation

Date rate (Mbps)	Frequency(MHz)	Limit (ms)	Test Result(ms)		Verdict
3	2402	400	306.99	Fig.31	Pass
	2441		307.03	Fig.32	Pass
	2480		307.03	Fig.33	Pass

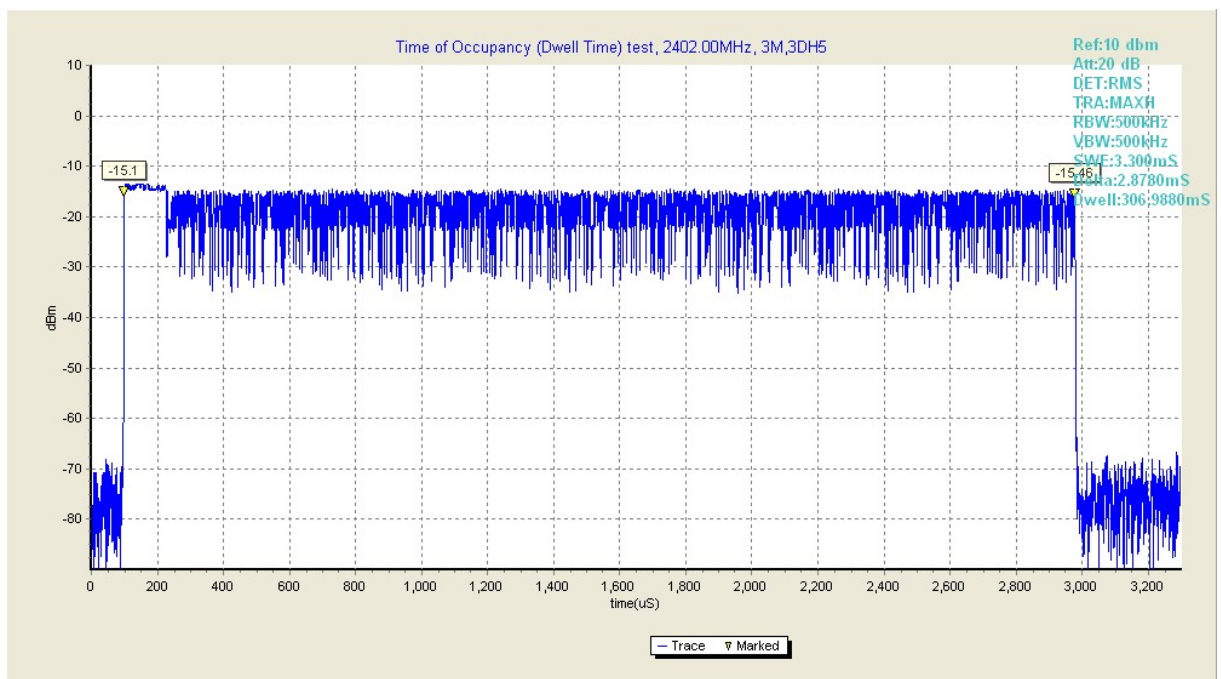

B.6.2 Test Results

Test equipment parameter:

TRA: Max Hold RBW: 300kHz VBW: 300kHz Sweep time: 10ms

GFSK Modulation

Hopping Channel Frequency Range(MHz)	Limits(Channel)	Number of hopping Channel	Test Results	Verdict
2402~2480	15	79	Fig.34	Pass

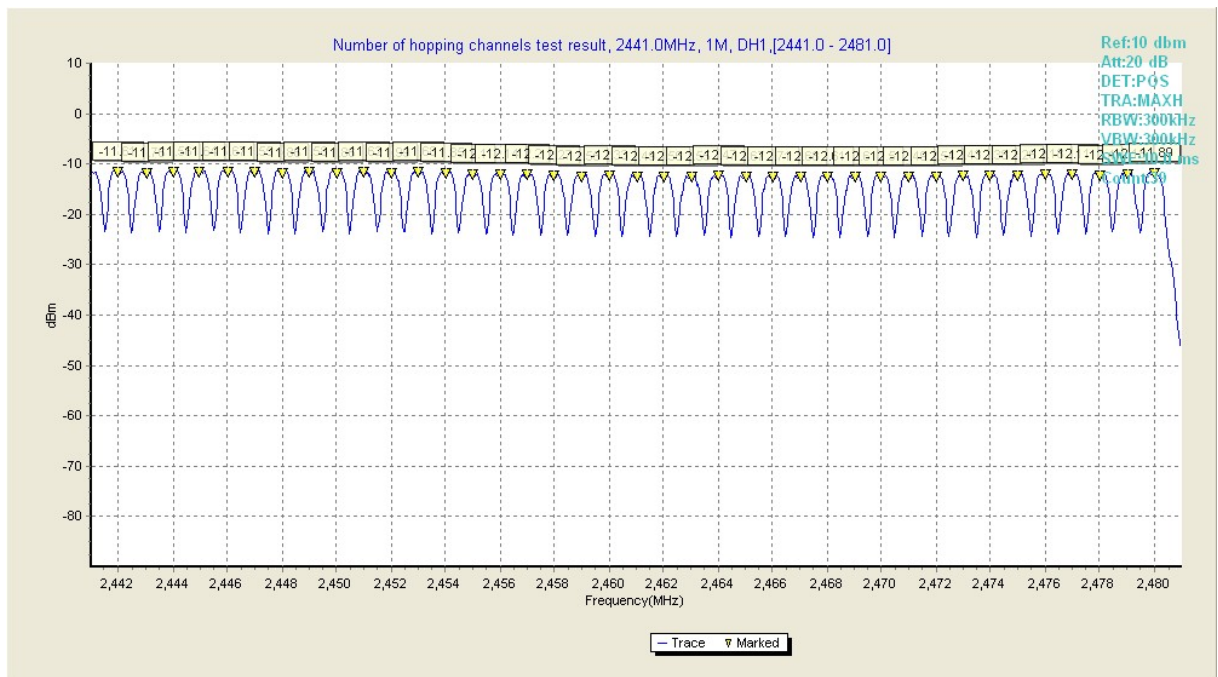
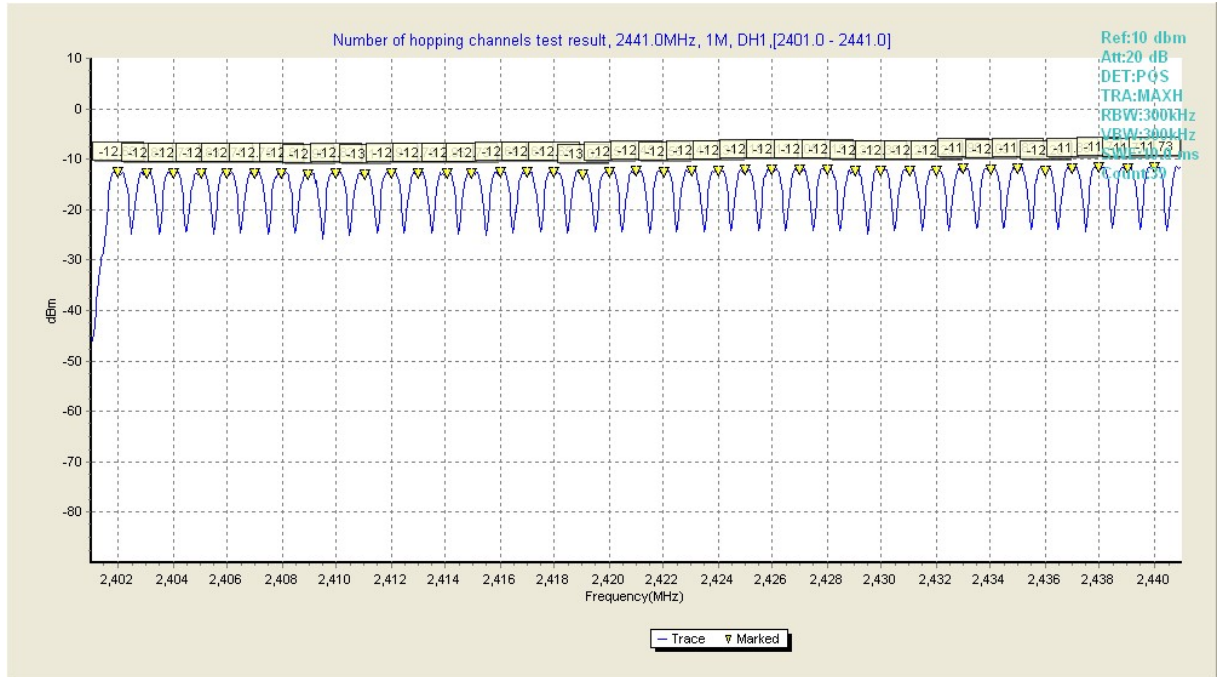


Fig34. Dwell Time in 1Mbps

$\pi/4$ -DQPSK Modulation

Hopping Channel Frequency Range(MHz)	Limits(Channel)	Number of hopping Channel	Test Results	Verdict
2402~2480	15	79	Fig.35	Pass

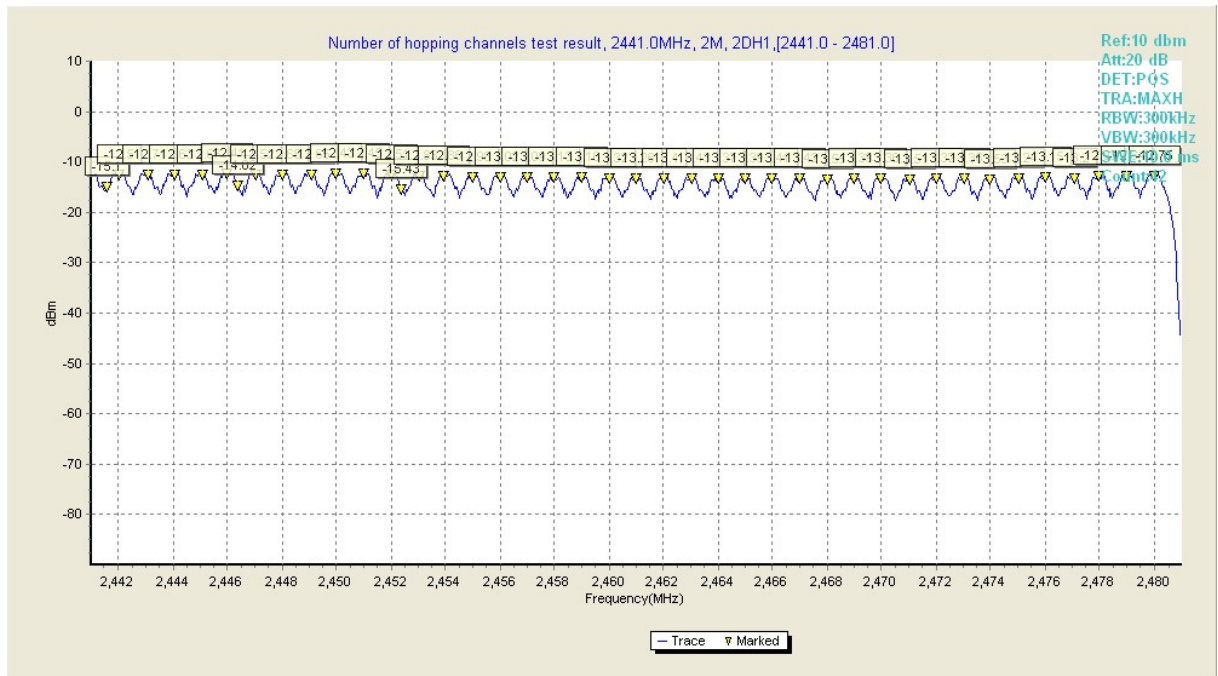
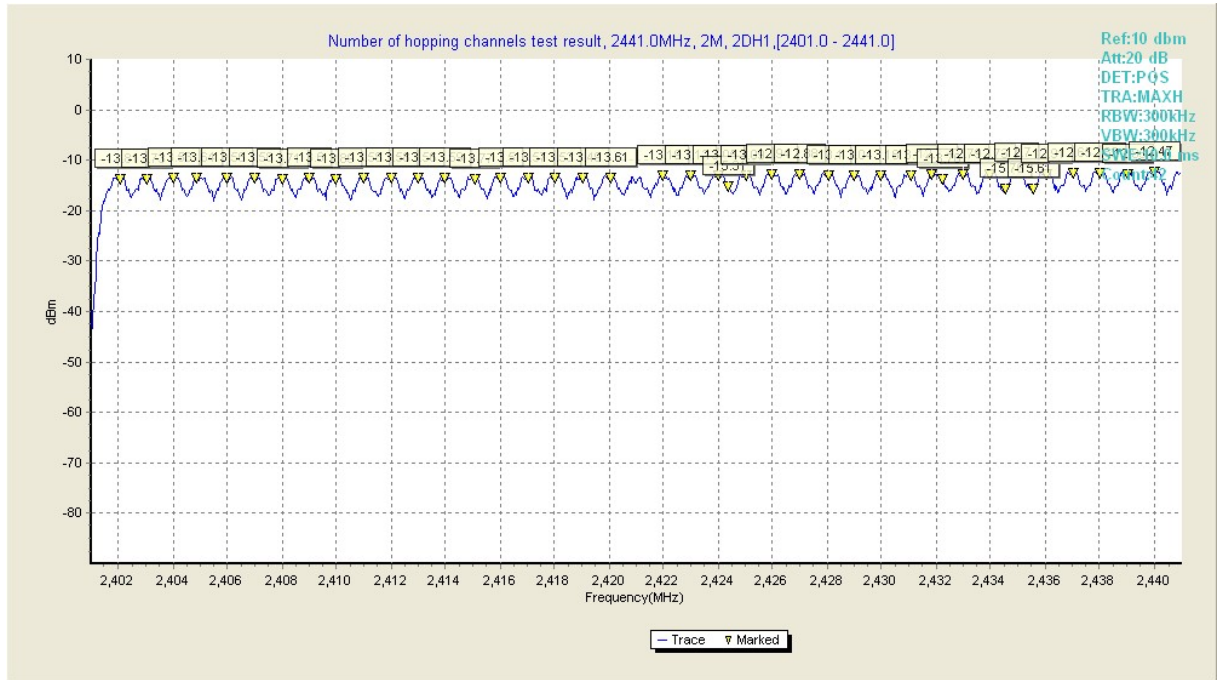


Fig35. Dwell Time in 2Mbps

8DPSK Modulation

Hopping Channel Frequency Range(MHz)	Limits(Channel)	Number of hopping Channel	Test Results	Verdict
--------------------------------------	-----------------	---------------------------	--------------	---------