



FCC SAR TEST REPORT

Report No.: SET2014-13062

Product: LTE Mobile Phone

Model No.: M4 SS4445

FCC ID: CLNSS4445

Applicant: MFOURTEL MEXICO S.A. DE C.V.

Address: Av. Ejército Nacional 436 Piso 3 Chapultepec Morales
Miguel Hidalgo Distrito Federal 11570.

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan
District, Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

Mail: manager@ccic-set.com **Website:** <http://www.ccic-set.com>

This test report consists of **198** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: LTE Mobile Phone
Model No.: M4 SS4445
Brand Name.....: M4
FCC ID.....: CLNSS4445
Applicant.....: MFOURTEL MEXICO S.A. DE C.V.
Applicant Address.....: Av. Ejército Nacional 436 Piso 3 Chapultepec Morales Miguel Hidalgo Distrito Federal 11570.

Manufacturer.....: CK Telecom Limited
Manufacturer Address: Technology Road.High-Tech Development Zone. Heyuan, Guangdong,P.R.China.

Test Standards.....: **47CFR § 2.1093-** Radiofrequency Radiation Exposure Evaluation: Portable Devices;
FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01): Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields;
ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz;
IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques;

Test Result.....: Pass

Tested by: Mei Chun 2014-12-11
 Chun Mei, Test Engineer

Reviewed by.....: Shuangwen Zhang 2014-12-11
 Shuangwen Zhang, Senior Eginer

Approved by.....: Wu Lian 2014-12-11
 Wu Li'an , Manager



Contents

- 1. **GENERAL CONDITIONS**-----4
- 2. **ADMINISTRATIVE DATA**-----5
 - 2.1. Identification of the Responsible Testing Laboratory-----5
 - 2.2. Identification of the Responsible Testing Location(s)-----5
 - 2.3. Organization Item-----5
 - 2.4. Identification of Applicant-----5
 - 2.5. Identification of Manufacture-----5
- 3. **EQUIPMENT UNDER TEST (EUT)**-----6
- 4. **OPERATIONAL CONDITIONS DURING TEST**-----7
 - 4.1. Introduction-----7
 - 4.2. SAR Definition-----7
 - 4.3. Phantoms-----8
 - 4.4. Device Holder-----8
 - 4.5. Probe Specification-----9
- 5. **OPERATIONAL CONDITIONS DURING TEST**-----10
 - 5.1. Schematic Test Configuration-----10
 - 5.2. SAR Measurement System-----10
 - 5.3. Equipments and results of validation testing-----14
 - 5.4. SAR measurement procedure-----17
 - 5.5. Antennas position and test position-----18
- 6. **CHARACTERISTICS OF THE TEST**-----19
 - 6.1. Applicable Limit Regulations-----19
 - 6.2. Applicable Measurement Standards-----19
- 7. **LABORATORY ENVIRONMENT**-----20
- 8. **CONDUCTED RF OUTPUT POWER**-----21
- 9. **TEST RESULTS**-----28
- 10. **MEASUREMENT UNCERTAINTY**-----35
- 11. **MAIN TEST INSTRUMENTS**-----36

This Test Report consists of the following Annexes:

Annex A: Accreditation Certificate -----	37
Annex B: Test Layout -----	39
Annex C: Sample Photographs -----	46
Annex D: System Performance Check Data and Highest SAR Plots -----	48
Annex E: Calibration Certificate of Probe and Dipoles -----	102



1. GENERAL CONDITIONS

1.1 This report only refers to the item that has undergone the test.

1.2 This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

1.3 This document is only valid if complete; no partial reproduction can be made without written approval of CCIC-SET

1.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of CCIC-SET and the Accreditation Bodies, if it applies.



2. Administrative Date

2.1. Identification of the Responsible Testing Laboratory

Company Name: CCIC-SET

Department: EMC & RF Department

Address: Electronic Testing Building, Shahe Road, Nanshan District, ShenZhen, P. R. China

Telephone: +86-755-26629676

Fax: +86-755-26627238

Responsible Test Lab Managers: Mr. Wu Li'an

2.2. Identification of the Responsible Testing Location(s)

Company Name: CCIC-SET

Address: Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, P. R. China

2.3. Organization Item

CCIC-SET Report No.: SET2014-13062

CCIC-SET Project Leader: Mr. Li Sixiong

CCIC-SET Responsible for accreditation scope: Mr. Wu Li'an

Start of Testing: 2014-11-19

End of Testing: 2014-11-25

2.4. Identification of Applicant

Company Name: MFOURTEL MEXICO S.A. DE C.V.

Address: Av. Ejército Nacional 436 Piso 3 Chapultepec Morales Miguel Hidalgo Distrito Federal 11570.

2.5. Identification of Manufacture

Company Name: CK Telecom Limited

Address: Technology Road.High-Tech Development Zone. Heyuan, Guangdong,P.R.China.

Notes: This data is based on the information by the applicant.

3. Equipment Under Test (EUT)

3.1. Identification of the Equipment under Test

Sample Name: LTE Mobile Phone

Type Name: M4 SS4445

Brand Name: M4

	Support Band	GSM850MHz/1900MHz/900MHz/1800MHz WCDMA 850MHz/1900MHz/2100MHz LTE Band 4,17 Wi-Fi802.11b,802.11g,802.11n-20, Bluetooth4.0
	Test Band	GSM 850MHz/ GSM 1900MHz, GPRS 850MHz/ GPRS 1900MHz, WCDMA 850MHz/ WCDMA 1900MHz LTE Band 4,17, Wi-Fi 802.11b
	Multislot Class	GPRS: Class 12,EDGE:Class 12
General	GPRS Class	Class B
description:	Development Stage	Identical Prototype
	Accessories	Power Supply
	Battery type	3.7V 2000mAh
	Antenna type	PIFI Antenna
	Operation mode	GSM / GPRS/EDGE/WCDMA / Bluetooth / WIFI
	Modulation mode	GMSK, QPSK,DSSS, OFDM, GFSK/π /4-DQPSK/8-DPSK
	IMEI	863147020002403
	Max. RF Power	33.63dBm
	Max. SAR Value	Head:0.433w/kg; Body:1.350w/kg

NOTE:

- a. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- b. This device supports GPRS and EDGE operation up to class12(max.uplink:4, max.downlink:4, total timeslots:5)
- c. The EUT does not support 16QAM uplink function in HSPA+ mode.



4 SAR SUMMARY

Highest Measured Standalone SAR Summary

Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Head	GSM850	0.361	0.433
	GSM1900	0.261	
	WCDMA Band II	0.377	
	WCDMA Band V	0.346	
	LTE FDD4	0.355	
	LTE FDD17	0.433	
	WIFI	0.029	
	BT	0.053	
Body-worn Accessory & Hotspot (5mm Gap)	GSM850	1.199	1.350
	GSM1900	1.350	
	WCDMA Band II	1.146	
	WCDMA Band V	0.749	
	LTE FDD4	0.727	
	LTE FDD17	0.707	
	WIFI	0.046	
	BT	0.027	

5 Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

5.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

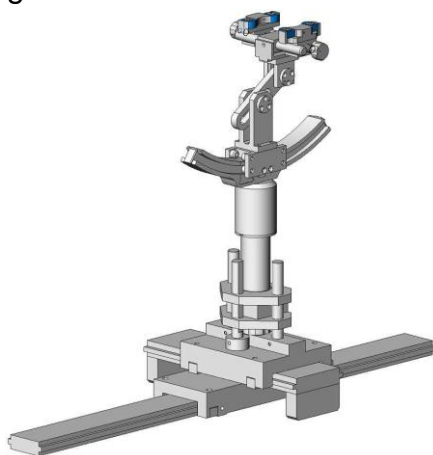

Device holder

5.5 Probe Specification




Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	700 MHz to 3 GHz; Linearity: ± 0.5 dB (700 MHz to 3 GHz)
Directivity	± 0.25 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	1.5 μ W/g to 100 mW/g; Linearity: ± 0.5 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 5 mm (Body: 8 mm) Distance from probe tip to dipole centers: <2.7 mm
Application	General dosimetry up to 3 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Frequency	450 MHz to 6 GHz; Linearity: ± 0.5 dB (450 MHz to 6 GHz)
Dimensions	Overall length: 330 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: 1 mm
Compatibility	COMOSAR

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

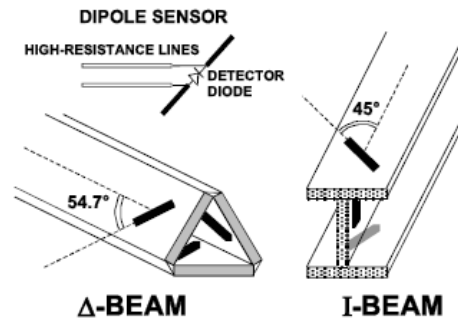

6 OPERATIONAL CONDITIONS DURING TEST

6.1 Schematic Test Configuration

During SAR test, EUT was operating in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) was allocated to 128, 189 and 251 respectively in the case of GSM 850MHz, or to 512, 661 and 810 respectively in the case of PCS 1900MHz, or to 4132, 4182 and 4233 respectively in the case of WCDMA 850MHz, or to 9262, 9400 and 9538 respectively in the case of WCDMA 1900MHz, or to High, Middle, and Low Channel respectively in the case of LTE Band 4 and Band 17, and WIFI 802.11b. The EUT was commanded to operate at maximum transmitting power.

The EUT should use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link was used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point should be lower than the output power level of the handset by at least 35 dB

6.2 SAR Measurement System

The SAR measurement system being used is the SATIMO system, the system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

6.2.1 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 1: Recommended Dielectric Performance of Tissue

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.46	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Table 2 Recommended Tissue Dielectric Parameters

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	$\sigma(S/m)$	ϵ_r	$\sigma(S/m)$
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

6.2.2 Simulant liquids

For measurements against the phantom head, the “cheek” and “tilt” position on both the left hand and the right hand sides of the phantom. For body-worn measurements, the EUT was tested against flat phantom representing the user body. The EUT was put on in the belt holder. Simulant liquids that are used for testing at frequencies of GSM 850MHz/1900MHz, WCDMA850MHz/1900MHz, LTE Band 4 and Band 17and Wi-Fi 2.4GHz, which are made mainly of sugar, salt and water solutions may be left in the phantoms.

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	835MHz	41.5	0.90
Validation value (Nov. 19th, 2014)	835MHz	41.45	0.91
Target value	1750 MHz	40.0	1.40
Validation value (Nov. 20h, 2014)	1750 MHz	39.98	1.41
Target value	1900MHz	40.0	1.40
Validation value (Nov. 21th, 2014)	1900MHz	39.98	1.41
Target value	2450MHz	39.2	1.80
Validation value (Nov. 24th, 2014)	2450MHz	38.99	1.81
Target value	835MHz	41.5	0.90
Validation value (Nov. 25th, 2014)	835MHz	41.46	0.91

Table 4: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	835MHz	55.2	0.97
Validation value (Nov. 19th, 2014)	835MHz	55.26	0.98
Target value	1750 MHz	53.3	1.52
Validation value (Nov. 20h, 2014)	1750 MHz	53.89	1.53
Target value	1900MHz	53.3	1.52
Validation value (Nov. 21th, 2014)	1900MHz	53.28	1.53
Target value	2450MHz	52.7	1.95
Validation value (Nov. 24th, 2014)	2450MHz	52.65	1.96
Target value	835MHz	55.2	0.97
Validation value (Nov. 25th, 2014)	835MHz	55.53	1.02



Fig. 1 Configuration of body tissue


6.3 Equipments and results of validation testing

Table 6 Important equipments :

Equipment description	Manufacturer/Model	Identification No.
System Simulator	E5515C	GB 47200710
SAR Probe	SATIMO	SN 09/13 EP169
SAR Probe	SATIMO	SN 27/14 EPG210
Dipole	SID750	SN 25/13 DIP 0G750-253
Dipole	SID835	SN 09/13 DIP 0G835-217
Dipole	SID1800	SN 09/13 DIP 1G800-216
Dipole	SID1900	SN 09/13 DIP 1G900-218
Dipole	SID2450	SN 09/13 DIP 2G450-220
Vector Network Analyzer	ZVB8	A0802530
Signal Generator	SMR27	A0304219
Amplifier	Nucleudes	143060
Power Meter	NRVS	1020.1809.02
Power Sensor	NRV-Z4	100069
Multimeter	Keithley-2000	4014020
Device Holder	SATIMO	SN 09/13 MSH80
SAM Phantom	SAM97	SN 09/13 SAM97

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the draft IEEE standard P1528. Setup according to the setup diagram below :

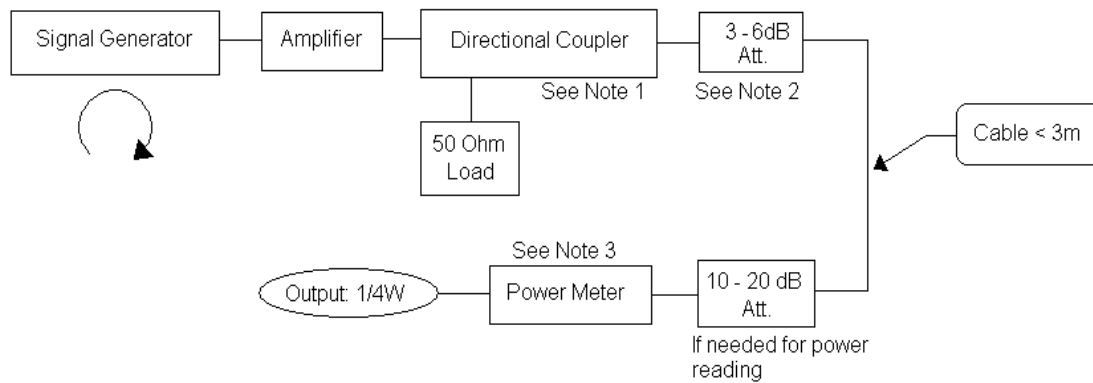

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.25W (24 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.

Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.

Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 7 and Table 8. The humidity and ambient temperature of test facility were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528 and the place of the antenna).

Table 7: Head SAR system validation (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			250 mW	1W
835MHz(Nov. 19th, 2014)	1:1	9.77	2.45	9.80
1750MHz(Nov. 20th, 2014)	1:1	38.67	9.82	39.28
1900MHz(Nov. 21th, 2014)	1:1	40.37	9.79	39.16
2450MHz(Nov. 24th, 2014)	1:1	53.60	13.17	52.68
750MHz(Nov. 25th, 2014)	1:1	8.19	1.98	7.92


Table 8: Body SAR system validation (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			250 mW	1W
835MHz(Nov. 19th, 2014)	1:1	10.31	2.46	9.84
1750MHz(Nov. 20th, 2014)	1:1	40.07	9.81	39.24
1900MHz(Nov. 21th, 2014)	1:1	40.81	9.98	39.92
2450MHz(Nov. 24th, 2014)	1:1	52.66	13.08	52.32
750MHz(Nov. 25th, 2014)	1:1	8.21	1.99	7.96

* Note: Target value was referring to the measured value in the calibration certificate of reference dipole.
 Note: All SAR values are normalized to 1W forward power.

6.4 SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

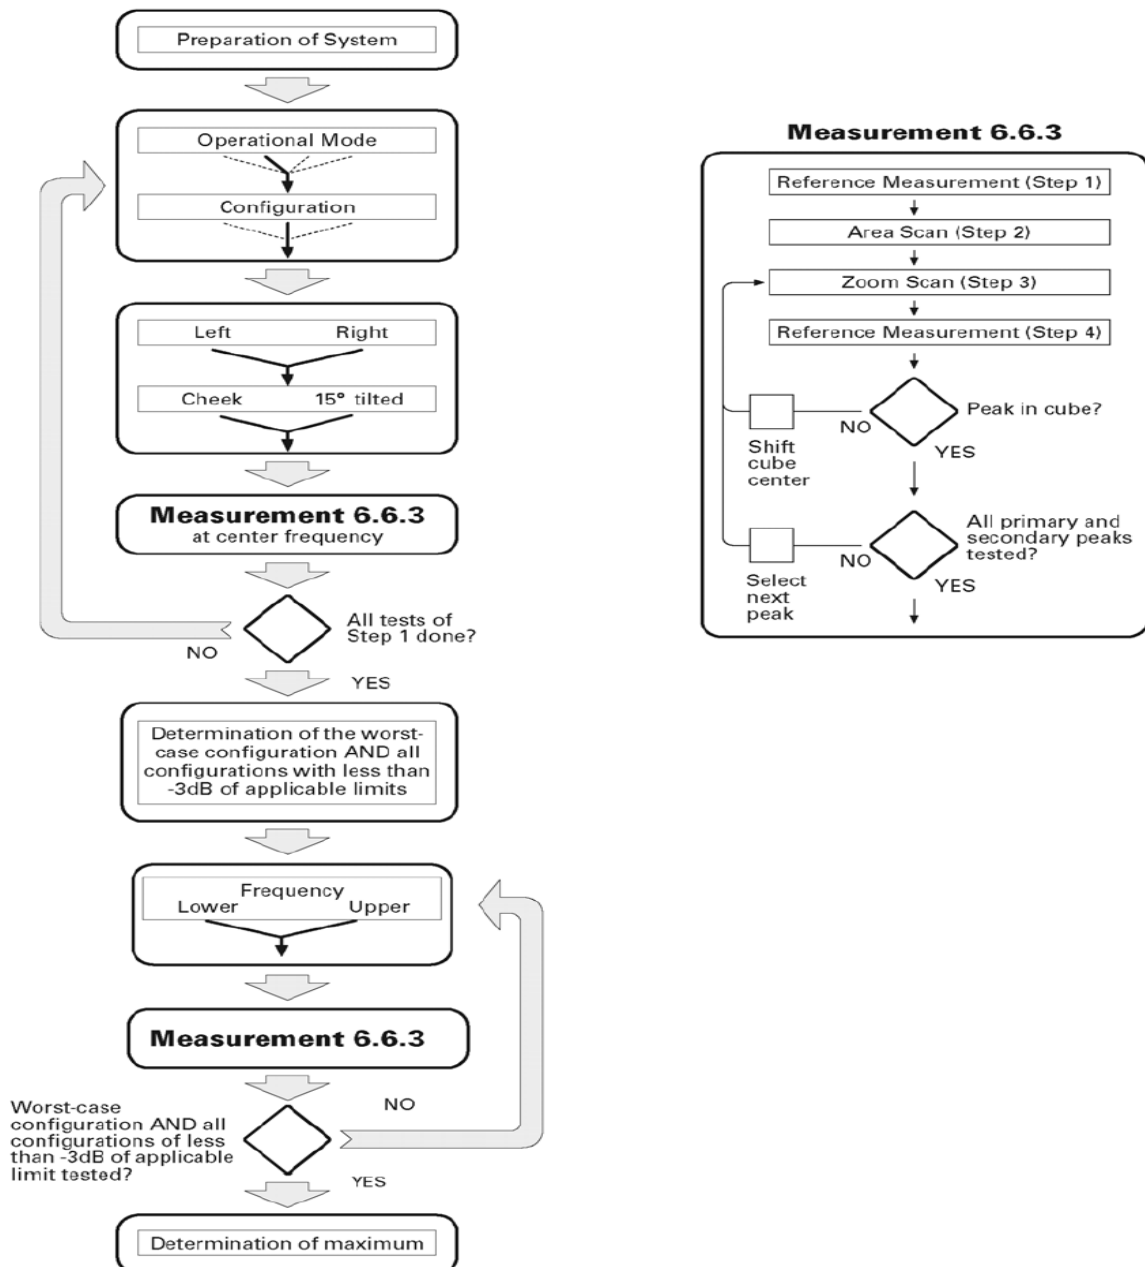

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.

After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE p1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behaviour are tested.

For body-worn measurement, the EUT was tested under two position: face upward and back upward.

6.5 Transmitting antenna information

There are three antennas (GSM & WCDMA antenna, WIFI & BT antenna) inside the EUT, the former two antennas are the transmitting source, and they are a type of PIFA antenna.

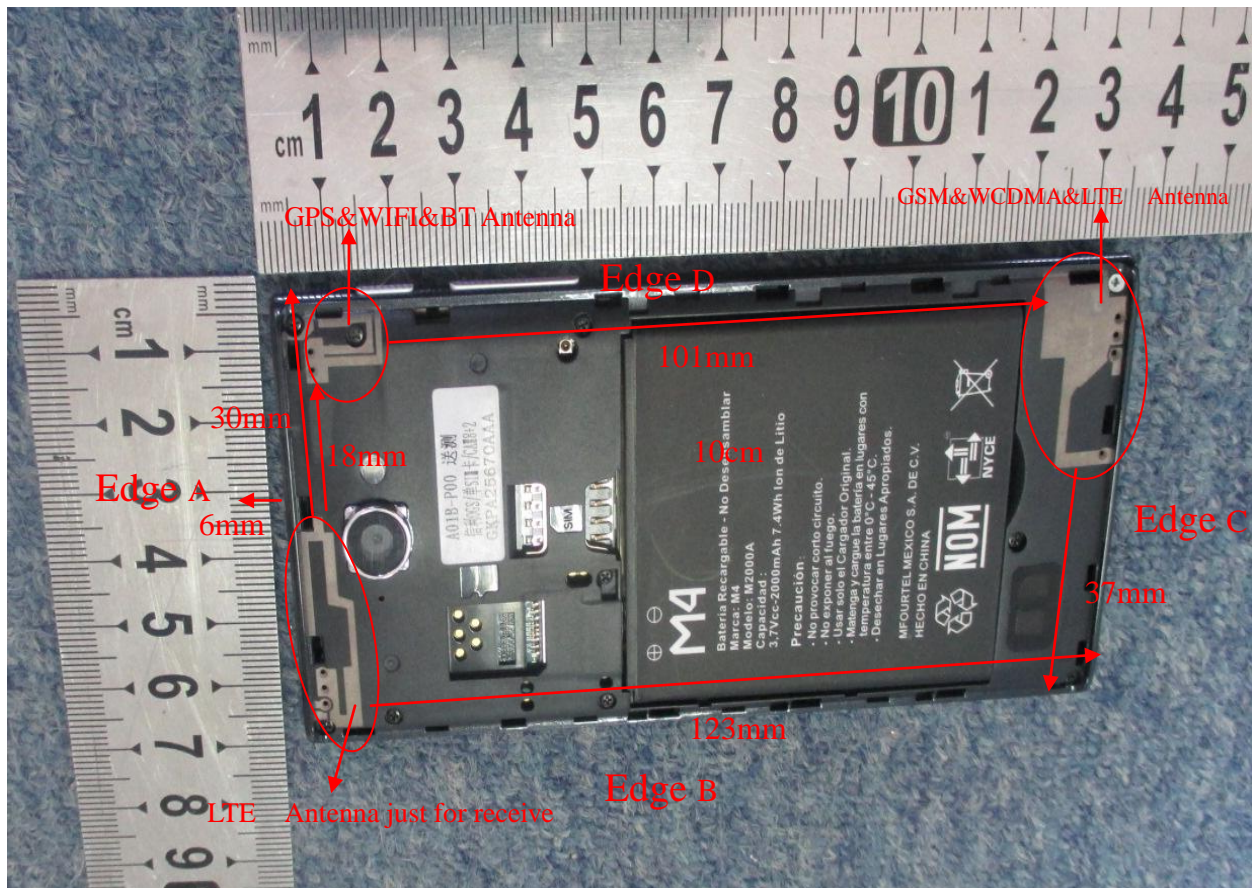


Fig. 3 Position of the antennas



7 CHARACTERISTICS OF THE TEST

7.1 Applicable Limit Regulations

47CFR § 2.1093- Radiofrequency Radiation Exposure Evaluation: Portable Devices;

FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01): Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields;

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz;

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques;

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

7.2 Applicable Measurement Standards

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this is in accordance with the following standards:

FCC 47 CFR Part2 (2.1093)

FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)

ANSI/IEEE C95.1-1992

IEEE 1528-2003

IC RSS 102 Issue 4

FCC KDB 447498 D02 v01r01 Dipole Requirements for SAR System Validation and Verification

FCC KDB 447498 D01 v05r02 General RF Exposure Guidance v05r02

FCC KDB 648474 D04 v01r02 SAR Evaluation Considerations for Wireless Handsets

FCC KDB 248227 D01 v01r02 SAR Measurement Procedures-802.11a/b/g Transmitters

FCC KDB 865664 D01 v01r03 SAR Measurement 100MHz to 6GHz

FCC KDB 865664 D02 v01r01 SAR Reporting

FCC KDB 941225 D01 v02 SAR test for 3G devices

FCC KDB 941225 D04 v01 Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode

FCC KDB 941225 D06 v01r01 Hot Spot SAR

8 LABORATORY ENVIRONMENT

8.1 The Ambient Conditions during SAR Test

Temperature	Min. = 15 ° C, Max. = 30 ° C
Atmospheric pressure	Min.=86 kPa, Max.=106 kPa
Relative humidity	Min. = 45%, Max. = 75%
Ground system resistance	< 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.

9. Conducted RF Output Power

9.1 GSM Conducted Power

Band	TX Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
		128	189	251	128	189	251
GSM850	Frequency(MHz)	824.2	836.4	848.8	824.2	836.4	848.8
	GSM	33.28	33.63	33.61	24.25	24.6	24.58
	GPRS (Slot 1)	33.13	33.24	33.45	24.10	24.21	24.42
	GPRS (Slot 2)	30.04	30.14	30.11	24.02	24.12	24.09
	GPRS (Slot 3)	28.28	28.27	28.29	24.02	24.01	24.03
	GPRS (Slot 4)	26.62	26.64	26.63	23.61	23.63	23.62
	EDGE (Slot 1)	30.3	30.29	30.31	21.27	21.26	21.28
	EDGE (Slot 2)	27.18	27.24	27.2	21.16	21.22	21.18
	EDGE (Slot 3)	25.21	25.23	25.22	20.95	20.97	20.96
	EDGE (Slot 4)	23.96	23.76	23.84	20.95	20.75	20.83
	GSM1900	TX Channel	512	661	810	512	661
Frequency(MHz)		1850.2	1880	1909.8	1850.2	1880	1909.8
GSM		30.76	30.70	30.58	21.73	21.67	21.55
GPRS (Slot 1)		30.62	30.57	30.53	21.59	21.54	21.5
GPRS (Slot 2)		27.34	27.37	27.36	21.32	21.35	21.34
GPRS (Slot 3)		25.75	25.77	25.75	21.49	21.51	21.49
GPRS (Slot 4)		23.87	23.89	23.88	20.86	20.88	20.87



GSM1900	EDGE (Slot 1)	30.23	30.34	30.26	21.2	21.31	21.23
	EDGE (Slot 2)	27.12	27.18	27.21	21.10	21.16	21.19
	EDGE (Slot 3)	25.24	25.21	25.19	20.98	20.95	20.93
	EDGE (Slot 4)	23.47	23.45	23.48	20.46	20.44	20.47

Note:Per KDB 447498 D01 v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.

For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM1900 due to its highest frame-average power.

For Body worn SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM 1900 due to its highest frame-average power.

For hotspot mode SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS (4Tx slots) due to its highest frame-average power.

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up3Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:267	1:2
Crest Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

9.2 WCDMA Conducted peak output Power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4182	4233	9262	9400	9538
	subtest	dBm			dBm		
WCDMA	non	23.17	23.36	23.21	23.23	23.25	23.09
HSDPA	1	22.71	22.51	22.84	22.67	22.79	22.58
	2	22.29	22.71	22.29	22.47	22.05	22.54
	3	21.68	21.91	21.78	21.85	21.89	21.95
	4	21.79	21.54	21.61	21.77	21.94	21.83
HSUPA	1	22.24	22.37	22.77	22.54	22.37	22.77
	2	22.29	22.14	22.21	22.03	21.89	21.74
	3	21.86	22.09	22.08	22.17	22.01	22.08

	4	22.05	22.04	22.33	21.99	21.51	21.74
	5	22.23	22.16	22.11	22.05	22.25	22.08
HSPA+	1	22.23	22.48	22.25	22.39	22.45	22.57
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter.						

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	58/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d=12/15$, $\beta_{HS}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Note:

1. WCDMA SAR was tested under PMC 12.2kbps with HSPA Inactive per KDB Publication 941225 D01.HSPA SAR was not requires since the average output power of the HSPA subtests was not more than 0.25dB higher than the RMC level and SAR was less than 1.2W/kg.
2. It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2dB more than specified by 3GPP, but also as low as 0dB according to the chipset implementation in this model.



9.3 LTE Conducted peak output Power

LTE Band 4 Conducted Power Test Verdict:

BW (MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.	Turn up
Channel				20050	20175	20300	
Frequency(MHz)				1720	1732.5	1745	
20	QPSK	1	0	23.47	23.59	23.60	23.7
20	QPSK	1	49	23.54	23.65	23.57	23.7
20	QPSK	1	99	23.51	23.57	23.35	23.7
20	QPSK	50	0	22.72	22.84	22.87	23.7
20	QPSK	50	24	22.57	22.75	22.81	23.7
20	QPSK	50	49	22.64	22.72	22.82	23.7
20	QPSK	100	0	22.61	22.75	22.85	23.7
20	16QAM	1	0	22.20	23.01	22.91	23.2
20	16QAM	1	49	22.34	22.65	22.93	23.2
20	16QAM	1	99	22.84	22.90	22.74	23.2
20	16QAM	50	0	21.57	21.75	21.78	23.2
20	16QAM	50	24	21.59	21.67	21.80	23.2
20	16QAM	50	49	21.61	21.71	21.86	23.2
20	16QAM	100	0	21.54	21.65	21.81	23.2
Channel				20025	20175	20325	
Frequency(MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.57	23.60	23.52	24.0
15	QPSK	1	37	23.43	23.51	23.44	24.0
15	QPSK	1	74	23.49	23.47	23.51	24.0
15	QPSK	36	0	22.62	22.77	22.84	24.0
15	QPSK	36	18	22.58	22.76	22.81	24.0
15	QPSK	36	37	22.56	22.74	22.80	24.0
15	QPSK	75	0	22.59	22.76	22.92	24.0
15	16QAM	1	0	22.76	22.57	23.03	23.0
15	16QAM	1	37	22.10	22.66	23.09	23.0
15	16QAM	1	74	22.07	22.92	22.78	23.0
15	16QAM	36	0	21.46	21.73	21.84	23.0
15	16QAM	36	18	21.49	21.73	21.77	23.0
15	16QAM	36	37	21.49	21.70	21.83	23.0
15	16QAM	75	0	21.58	21.71	21.81	23.0



BW (MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.	Turn up
Channel				20000	20175	20350	
Frequency(MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.47	23.50	23.62	24.0
10	QPSK	1	24	23.41	23.62	23.55	24.0
10	QPSK	1	49	23.52	23.59	23.46	24.0
10	QPSK	25	0	22.54	22.76	22.85	24.0
10	QPSK	25	12	22.52	22.69	22.80	24.0
10	QPSK	25	24	22.51	22.80	22.85	24.0
10	QPSK	50	0	22.66	22.82	22.91	24.0
10	16QAM	1	0	22.67	22.75	22.64	23.0
10	16QAM	1	24	22.61	22.32	22.65	23.0
10	16QAM	1	49	22.28	22.79	22.46	23.0
10	16QAM	25	0	21.60	21.73	21.96	23.0
10	16QAM	25	12	21.64	21.75	21.82	23.0
10	16QAM	25	24	21.52	21.75	21.84	23.0
10	16QAM	50	0	21.52	21.74	21.79	23.0
Channel				19975	20175	20375	
Frequency(MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	23.47	23.51	23.52	24.0
5	QPSK	1	12	23.45	23.48	23.62	24.0
5	QPSK	1	24	23.41	23.63	23.48	24.0
5	QPSK	12	0	22.51	22.77	22.82	24.0
5	QPSK	12	6	22.51	22.80	22.78	24.0
5	QPSK	12	11	22.61	22.73	22.77	24.0
5	QPSK	25	0	22.55	22.78	22.75	24.0
5	16QAM	1	0	22.67	22.96	22.60	23.0
5	16QAM	1	12	22.61	22.27	22.49	23.0
5	16QAM	1	24	22.19	22.51	22.55	23.0
5	16QAM	12	0	21.61	21.71	21.86	23.0
5	16QAM	12	6	21.46	21.62	21.69	23.0
5	16QAM	12	11	21.50	21.75	21.72	23.0
5	16QAM	25	0	21.53	21.72	21.70	23.0



BW (MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.	Turn up
Channel				19965	20175	20385	
Frequency(MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	23.56	23.64	23.58	24.0
3	QPSK	1	7	23.53	23.60	23.50	24.0
3	QPSK	1	14	23.52	23.62	23.58	24.0
3	QPSK	8	0	22.47	22.71	22.76	24.0
3	QPSK	8	4	22.55	22.75	22.78	24.0
3	QPSK	8	7	22.59	22.70	22.80	24.0
3	QPSK	15	0	22.57	22.67	22.81	24.0
3	16QAM	1	0	22.31	22.55	22.49	23.0
3	16QAM	1	7	22.57	22.95	22.93	23.0
3	16QAM	1	14	22.58	22.60	22.86	23.0
3	16QAM	8	0	21.63	21.80	21.82	23.0
3	16QAM	8	4	21.64	21.68	21.88	23.0
3	16QAM	8	7	21.43	21.72	21.75	23.0
3	16QAM	15	0	21.42	21.66	21.78	23.0
Channel				19957	20175	20393	
Frequency(MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	23.55	23.60	23.49	23.9
1.4	QPSK	1	2	23.59	23.52	23.58	23.9
1.4	QPSK	1	5	23.49	23.79	23.45	23.9
1.4	QPSK	3	0	23.53	23.58	23.42	23.9
1.4	QPSK	3	1	23.57	23.47	23.52	23.9
1.4	QPSK	3	2	23.56	23.37	23.41	23.9
1.4	QPSK	6	0	23.57	23.46	23.53	23.9
1.4	16QAM	1	0	22.72	22.97	22.61	23.0
1.4	16QAM	1	2	22.63	22.84	23.01	23.0
1.4	16QAM	1	5	22.41	22.91	22.94	23.0
1.4	16QAM	3	0	22.55	22.74	22.85	23.0
1.4	16QAM	3	1	22.52	22.73	22.67	23.0
1.4	16QAM	3	2	22.50	22.55	22.67	23.0
1.4	16QAM	6	0	22.49	22.55	22.66	23.0



LTE Band 17 Conducted Power Test Verdict:

BW (MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.	Turn up
Channel				23780	23790	23800	
Frequency(MHz)				709	710	711	
10	QPSK	1	0	23.38	23.25	23.33	23.6
10	QPSK	1	24	23.49	23.40	23.39	23.6
10	QPSK	1	49	23.57	23.40	23.39	23.6
10	QPSK	25	0	22.72	22.71	22.76	23.6
10	QPSK	25	12	22.67	22.36	22.64	23.6
10	QPSK	25	24	22.61	22.61	22.66	23.6
10	QPSK	50	0	22.69	22.66	22.67	23.6
10	16QAM	1	0	22.14	22.14	22.27	23.0
10	16QAM	1	24	22.66	22.11	22.53	23.0
10	16QAM	1	49	22.30	22.31	22.42	23.0
10	16QAM	25	0	21.41	21.46	21.45	23.0
10	16QAM	25	12	21.64	21.75	21.41	23.0
10	16QAM	25	24	21.51	21.74	21.46	23.0
10	16QAM	50	0	21.53	21.46	21.51	23.0
Channel				23755	23790	23825	
Frequency(MHz)				706.5	710	713.5	
5	QPSK	1	0	23.22	23.34	23.27	23.5
5	QPSK	1	12	23.29	23.13	23.46	23.5
5	QPSK	1	24	23.51	23.40	23.41	23.5
5	QPSK	12	0	22.60	22.63	22.67	23.5
5	QPSK	12	6	22.56	22.52	22.52	23.5
5	QPSK	12	11	22.56	22.56	22.59	23.5
5	QPSK	25	0	22.56	22.53	22.52	23.5
5	16QAM	1	0	22.24	22.29	22.19	23.0
5	16QAM	1	12	22.25	22.18	22.26	23.0
5	16QAM	1	24	22.53	22.47	22.17	23.0
5	16QAM	12	0	21.40	21.45	21.45	23.0
5	16QAM	12	6	21.42	21.45	21.19	23.0
5	16QAM	12	11	21.51	21.54	21.44	23.0
5	16QAM	25	0	21.41	21.44	21.44	23.0

9.4 WLAN 2.4GHz Band Conducted Power

Channel	Frequency (MHz)	WIFI Output Power(dBm)		
		802.11b	802.11g	802.11n-20
CH 01	2412	17.69	15.28	15.50
CH 06	2437	17.55	15.41	15.39
CH 11	2462	17.42	15.87	15.81

Channel	Frequency (MHz)	WIFI Output Power(dBm)
		802.11n-40
CH 03	2422	14.02
CH 06	2437	14.54
CH 09	2452	14.95

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at lowest data rate
3. Per KDB 248227 D01 v01r02, 802.11g /11n-HT20/11n-HT40 is not required, for the maximum average output power is less than 1/4dB higher than measured on the corresponding 802.11b mode. Thus the SAR can be excluded.

Bluetooth Conducted Power

Channel	Frequency(MHz)	BT 4.0
CH 0	2402	-0.09
CH 20	2442	0.27
CH 39	2480	0.22



Note:

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\leq 50\text{mm}$ are determined by: $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - (1) f(GHz) is the RF channel transmit frequency in GHz
 - (2) Power and distance are round to the nearest mW and mm before calculation
 - (3) The result is rounded to one decimal place for comparison
 - (4) If the test separation distance(antenna-user) is $< 5\text{mm}$, 5mm is used for excluded SAR calculation

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
1	1.259	5	2.48	0.397

2. Per KDB 447498 D01v05r02 exclusion thresholds is $0.397 < 3$, RF exposure evaluation is not required.

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = $\text{tune-up limit power(mW)} / \text{EUT RF power(mW)}$, where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle , the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: $\text{Reported SAR(W/kg)} = \text{Measured SAR(W/kg)} * \text{Tune-up Scaling Factor}$
 - d. For WLAN: $\text{Reported SAR(W/kg)} = \text{Measured SAR(W/kg)} * \text{Duty Cycle scaling factor} * \text{Tune-up scaling factor}$
2. Per KDB 447498 D01v05r02, for each exposure position, if the highest output channel reported $\text{SAR} \leq 0.8\text{W/kg}$, other channels SAR testing is not necessary.
3. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
4. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories with the required minimum separation.
5. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is $\leq 1.2\text{W/kg}$, SAR testing with a headset connected to the handset is not required.



6. Scaling Factor calculation

Operation Mode	Channel	Output Power(dBm)	Tune up Power in tolerance(dBm)	Scaling Factor
GSM 850	128	33.28	33.15 ±0.5	1.089
	190	33.63	33.15 ±0.5	1.005
	251	33.61	33.15 ±0.5	1.009
GPRS 850(1Tx)	128	33.13	33.00 ±0.5	1.089
	190	33.24	33.00±0.5	1.062
	251	33.45	33.00 ±0.5	1.012
GSM1900	512	30.76	30.30 ±0.5	1.009
	661	30.70	30.30 ±0.5	1.023
	810	30.58	30.30 ±0.5	1.052
GPRS1900(1Tx)	512	30.62	30.15 ±0.5	1.007
	661	30.57	30.15 ±0.5	1.019
	810	30.53	30.15 ±0.5	1.028
WCDMA850	4132	23.17	22.90 ±0.5	1.054
	4183	23.36	22.90 ±0.5	1.009
	4233	23.21	22.90 ±0.5	1.045
WCDMA1900	9262	23.23	22.80 ±0.5	1.016
	9400	23.25	22.80 ±0.5	1.012
	9538	23.09	22.80 ±0.5	1.050
LTE Band 4	1745	23.60	23.20 ±0.5	1.023
LTE Band 17	709	23.57	23.10 ±0.5	1.007
802.11b	2412	17.69	17.25 ±0.5	1.014
BT 3.0 GFSK	2441	0.27	0 ±1	1.183



13 SIMULTANEOUS TRANSMISSION ANALYSIS

Sum of the SAR for GSM850 + WiFi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM850	WiFi DTS Band	Bluetooth		
Head	Right Cheek	0.315	0.029		0.344	No
	Right Tilt	0.268	0.017		0.004	No
	Left Cheek	0.361	0.025	0.032	0.408	No
	Left Tilt	0.283	0.014		0.297	No
Body-worn Accessory	Rear	0.894			0.894	No
	Face	0.687			0.687	No
	Edge C	0.212			0.212	No
	Edge D	1.199			1.199	No
Hotspot	Rear	1.199	0.046	0.053	1.298	No
	Face	0.812	0.026		0.838	No
	Edge A		0.012		0.012	No
	Edge B		0.014		0.014	No
	Edge C	0.185			0.185	No
	Edge D	0.875			0.875	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required

Sum of the SAR for GSM1900 + WiFi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM1900	WiFi DTS Band	Bluetooth		
Head	Right Cheek	0.261	0.029	0.332	0.295	No
	Right Tilt	0.049	0.017		0.066	No
	Left Cheek	0.182	0.025		0.207	No
	Left Tilt	0.038	0.014		0.052	No
Body-worn Accessory & Hotspot	Rear	1.350			1.350	No
	Face	1.236			1.236	No
	Edge C	0.554			0.554	No
	Edge D	0.414			0.414	No
Hotspot	Rear	1.033	0.046	0.063	1.142	No
	Face	0.706	0.026		0.732	No
	Edge A		0.012		0.012	No
	Edge B		0.014		0.014	No
	Edge C	0.399			0.399	No
	Edge D	0.331			0.331	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required



Sum of the SAR for W-CDMA Band 2 + WiFi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		WCDMA1900	WiFi DTS Band	Bluetooth		
Head	Right Cheek	0.352	0.029		0.381	No
	Right Tilt	0.109	0.017		0.126	No
	Left Cheek	0.377	0.025	0.032	0.434	No
	Left Tilt	0.112	0.014		0.126	No
Body-worn Accessory & Hotspot	Rear	1.132	0.046	0.063	1.241	No
	Face	1.146	0.026		1.172	No
	Edge A		0.012		0.012	No
	Edge B		0.014		0.014	No
	Edge C	0.720			0.720	No
	Edge D	0.692			0.692	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required



Sum of the SAR for W-CDMA Band 5 + WiFi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		WCDMA850	WiFi DTS Band	Bluetooth		
Head	Right Cheek	0.281	0.029	0.032	0.279	No
	Right Tilt	0.222	0.017		0.239	No
	Left Cheek	0.346	0.025		0.371	No
	Left Tilt	0.249	0.014		0.263	No
Body-worn Accessory & Hotspot	Rear	0.497	0.046	0.063	0.606	No
	Face	0.403	0.026		0.429	No
	Edge A		0.012		0.012	No
	Edge B		0.014		0.014	No
	Edge C	0.486			0.486	No
	Edge D	0.749			0.749	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required



Sum of the SAR for LTE Band 4 + WiFi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		LTE Band4	WiFi DTS Band	Bluetooth		
Head	Right Cheek	0.355	0.029	0.032	0.416	No
	Right Tilt	0.219	0.017		0.236	No
	Left Cheek	0.350	0.025		0.375	No
	Left Tilt	0.202	0.014		0.216	No
Body-worn Accessory & Hotspot	Rear	0.727	0.046	0.063	0.836	No
	Face	0.635	0.026		0.661	No
	Edge A		0.012		0.012	No
	Edge B		0.014		0.014	No
	Edge C	0.158			0.158	No
	Edge D	0.395			0.395	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required



Sum of the SAR for LTE Band 17 + WiFi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		LTE Band17	WiFi DTS Band	Bluetooth		
Head	Right Cheek	0.433	0.029	0.032	0.494	No
	Right Tilt	0.219	0.017		0.236	No
	Left Cheek	0.398	0.025		0.423	No
	Left Tilt	0.242	0.014		0.256	No
Body-worn Accessory & Hotspot	Rear	0.091	0.046	0.063	0.200	No
	Face	0.397	0.026		0.423	No
	Edge A		0.012		0.012	No
	Edge B		0.014		0.014	No
	Edge C	0.621			0.621	No
	Edge D	0.707			0.707	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required



10 TEST RESULTS

10.1 Summary of Power Measurement Results

According to the description above, the measurements against the head phantom were executed on the operation mode: GSM850 /1900MHz, WCDMA850/1900MHz and WIFI 802.11b, while the tests against the body-worn were carried out on the operation mode : GSM850/1900MHz, GPRS 850 /1900MHz, WCDMA850/1900MHz,WIFI 802.11b.

Table 1: SAR Values of GSM 850MHz Band

Temperature: 23.0~23.5°C, humidity: 62~64%.					
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)		
			SAR(W/Kg)1g Peak	Scaled SAR(W/Kg),1g	
Right Side of Head	Cheek	190/836.6	0.314	0.315	
	Tilt 15 degrees	190/836.6	0.267	0.268	
Left Side of Head	Cheek	190/836.6	0.359	0.361	
	Tilt 15 degrees	190/836.6	0.282	0.283	
Body (5mm Separation)	GSM	Face Upward	190/836.6	0.684	0.687
		Back Upward	128/824.2	0.821	0.894
			190/836.6	0.829	0.833
			190/836.6	0.824	0.828
		251/848.8	0.817	0.825	
		Edge C	190/836.6	0.211	0.212
		Edge D	128/824.2	1.101	1.199
			190/836.6	1.183	1.188
			190/836.6	1.181	1.186
			251/848.8	1.163	1.174
	GPRS (1Tx)	Face Upward	251/848.8	0.746	0.812
		Back Upward	128/824.2	0.102	0.111
			190/836.6	1.127	1.199
			190/836.6	1.071	1.137
			251/848.8	0.987	0.998
		Edge C	251/848.8	0.174	0.185
		Edge D	128/824.2	0.809	0.881
			190/836.6	0.824	0.875
			190/836.6	0.816	0.866
			251/848.8	0.812	0.821



Table 2: SAR Values of GSM1900 MHz Band

Temperature: 23.0~23.5°C, humidity: 62~64%.					
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)		
			SAR(W/Kg1g Peak)	Scaled SAR(W/Kg),1g	
Right Side of Head	Cheek	661/1880.0	0.255	0.261	
	Tilt 15 degrees	661/1880.0	0.048	0.049	
Left Side of Head	Cheek	661/1880.0	0.178	0.182	
	Tilt 15 degrees	661/1880.0	0.037	0.038	
Body (5mm Separation)	GSM	Face Upward	512/1850.2	1.169	1.180
			661/1880.0	1.208	1.236
			661/1880.0	1.176	1.203
			661/1880.0	1.176	1.203
			810/1909.8	1.167	1.228
		Back Upward	512/1850.2	1.268	1.280
			661/1880.0	1.296	1.326
			661/1880.0	1.282	1.312
	Edge C	661/1880.0	0.541	0.554	
		Edge D	661/1880.0	0.405	0.414
	GPRS (1Tx)	Face Upward	512/1850.2	0.693	0.706
			512/1850.2	0.999	1.006
		Back Upward	661/1880.0	1.014	1.033
			661/1880.0	1.003	1.022
		Edge C	512/1850.2	0.392	0.399
			Edge D	512/1850.2	0.325



Table 3: SAR Values of WCDMA850

Temperature: 23.0~23.5°C, humidity: 62~64%.

Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)	
			SAR(W/Kg1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	4183/836.6	0.278	0.281
	Tilt 15 degrees	4183/836.6	0.220	0.222
Left Side of Head	Cheek	4183/836.6	0.343	0.346
	Tilt 15 degrees	4183/836.6	0.247	0.249
Body (10mm Separation)	Face Upward	4183/836.6	0.399	0.403
	Back Upward	4183/836.6	0.492	0.497
	Edge C	4183/836.6	0.482	0.486
	Edge D	4183/836.6	0.742	0.749

Table 4: SAR Values of WCDMA1900

Temperature: 23.0~23.5°C, humidity: 62~64%.

Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)	
			SAR(W/Kg1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	9400/1880.0	0.348	0.352
	Tilt 15 degrees	9400/1880.0	0.108	0.109
Left Side of Head	Cheek	9400/1880.0	0.373	0.377
	Tilt 15 degrees	9400/1880.0	0.111	0.112
Body (5mm Separation)	Face Upward	9262/1852.4	1.087	1.105
		9400/1880.0	1.131	1.144
		9400/1880.0	1.124	1.137
		9538/1907.6	1.092	1.146
	Back Upward	9262/1852.4	1.092	1.110
		9400/1880.0	1.098	1.111
		9400/1880.0	1.094	1.107
		9538/1907.6	1.079	1.132
	Edge C	9400/1880.0	0.712	0.720
	Edge D	9400/1880.0	0.684	0.692



Table 5:SAR Values of LTE Band 4, Bandwidth 20MHz, QPSK

Temperature: 23.0~23.5°C, humidity: 62~64%.

Test Positions		Channel /Frequency (MHz)	RB Size	RB Offest	SAR(W/Kg), 1.6 (1g average)	
					SAR(W/Kg)1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	High	1	49	0.347	0.355
		High	50	24	0.335	0.343
	Tilt 15 degrees	High	1	49	0.214	0.219
		High	50	24	0.210	0.215
Left Side of Head	Cheek	High	1	49	0.342	0.350
		High	50	24	0.338	0.350
	Tilt 15 degrees	High	1	49	0.197	0.202
		High	50	24	0.195	0.200
Body (5mm Separation)	Edge C	High	1	49	0.154	0.158
		High	50	24	0.147	0.150
	Edge D	High	1	49	0.386	0.395
		High	50	24	0.367	0.376
	Face Upward	High	1	49	0.621	0.635
		High	50	24	0.599	0.613
	Back Upward	High	1	49	0.710	0.727
		High	50	24	0.684	0.700



Table 6:SAR Values of LTE Band 17, Bandwidth 10MHz,QPSK

Temperature: 23.0~23.5°C, humidity: 62~64%.

Test Positions		Channel /Frequency (MHz)	RB Size	RB Offset	SAR(W/Kg), 1.6 (1g average)	
					SAR(W/Kg)1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	Low	1	24	0.430	0.433
		Low	25	12	0.329	0.331
	Tilt 15 degrees	Low	1	24	0.207	0.208
		Low	25	12	0.217	0.219
Left Side of Head	Cheek	Low	1	24	0.395	0.398
		Low	25	12	0.330	0.398
	Tilt 15 degrees	Low	1	24	0.240	0.242
		Low	25	12	0.192	0.193
Body (5mm Separation)	Edge C	Low	1	24	0.090	0.091
		Low	25	12	0.089	0.090
	Edge D	Low	1	24	0.394	0.397
		Low	25	12	0.359	0.361
	Face Upward	Low	1	24	0.617	0.621
		Low	25	12	0.597	0.601
	Back Upward	Low	1	24	0.702	0.707
		Low	25	12	0.652	0.657



Table 7:SAR Values of Wi-Fi 802.11b

Temperature: 23.0~23.5°C, humidity: 62~64%.				
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)	
			SAR(W/Kg)1g Peak)	Scaled SAR(W/Kg),1g
Right Side of Head	Cheek	1/2412	0.029	0.029
	Tilt 15 degrees	1/2412	0.017	0.017
Left Side of Head	Cheek	1/2412	0.025	0.025
	Tilt 15 degrees	1/2412	0.014	0.014
802.11b(5mm Separation)	Edge A	1/2412	0.012	0.012
	Edge B	1/2412	0.014	0.014
	Face Upward	1/2412	0.026	0.026
	Back Upward	1/2412	0.045	0.046

Note:

a) According to KDB 941225 D01, since the maximum average output of each RF channel with HSDPA/HSUPA active is less than that measured without HSDPA/HSUPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is less 1.2 W/kg, the measurement against HSDPA and HSUPA were ignored in this report.

b) When the 1-g SAR for the mid-band channel or the channel with the Highest output power satisfy the following conditions, testing of the other channels in the band is not required.(Per KDB 447498 D01 General RF Exposure Guidance v05r02)

- ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg, when the transmission band is ≥ 200 MHz

10.2 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 6 of this report. Maximum localized SAR is **below** exposure limits specified in the relevant standards.

11 Measurement Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom v_{eff} or v_i
Measurement System								
1	– Probe Calibration	B	7	N	3	1	3.5	∞
2	– Axial isotropy	B	4.7	R	$\sqrt{3}$	0.5	4.3	∞
3	– Hemispherical Isotropy	B	9.4	R	$\sqrt{3}$	0.5	4.3	∞
4	– Boundary Effect	B	11.0	R	$\sqrt{3}$	1	6.4	∞
5	– Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
6	– System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
7	– Readout Electronics	B	1.0	N	3	1	1.00	∞
8	– Response Time	B	0.00	R	$\sqrt{3}$	1	0.00	∞
9	– Integration Time	B	0.00	R	$\sqrt{3}$	1	0.00	∞
10	– RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
11	– Probe Position Mechanical tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
12	– Probe Position with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
13	– Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Uncertainties of the DUT								
14	– Position of the DUT	A	4.8	N	3	1	4.8	5
15	– Holder of the DUT	A	7.1	N	3	1	7.1	5



16	–Output Power Variation –SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
17	–Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
18	–Liquid Conductivity Target –tolerance	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
19	–Liquid Conductivity –measurement Uncertainty)	B	0.23	N	3	1	0.23	9
20	–Liquid Permittivity Target tolerance	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
21	–Liquid Permittivity –measurement uncertainty	B	0.46	N	3	1	0.46	∞
Combined Standard Uncertainty				RSS			12.92	44.15
Expanded uncertainty (Confidence interval of 95 %)				K=2			25.84	

12 MAIN TEST INSTRUMENTS

No.	EQUIPMENT	TYPE	Series No.	Last Calibratio	Due Date
1	System Simulator	E5515C	GB 47200710	2014/02/23	1 Year
2	SAR Probe	SATIMO	SN 09/13 EP169	2014/04/05	1 Year
3	SAR Probe	SATIMO	SN 27/14 EPG210	2014/05/16	1 Year
4	Dipole	SID750	SN25/13 DIP0G750-253	2014/08/17	1 Year
5	Dipole	SID835	SN09/13 DIP0G835-217	2014/08/28	1 Year
6	Dipole	SID1800	SN09/13 DIP1G800-216	2014/08/28	1 Year
7	Dipole	SID1900	SN09/13 DIP1G900-218	2014/08/28	1 Year
8	Dipole	SID2450	SN09/13 DIP2G450-220	2014/08/28	1 Year
9	Network Analyzer	ZVB8	A0802530	2014/06/13	1 Year
10	Signal Generator	SMR27	A0304219	2014/06/10	1 Year
11	Amplifier	Nucletudes	143060	2014/04/05	1 Year
12	Power Meter	NRVS	1020.1809.02	2014/06/13	1 Year
13	Power Sensor	NRV-Z4	100069	2014/06/10	1 Year
14	Multimeter	Keithley-2000	4014020	2013/01/29	2 Year
15	Device Holder	SATIMO	SN 09/13 MSH80	2014/04/05	1 Year
16	SAM Phantom	SAM97	SN 09/13 SAM97	2014/04/05	1 Year



ANNEX A
of
CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-13062

CK Telecom Limited

LTE Mobile Phone

Type Name: M4 SS4445

Hardware Version: A-V1.0

Software Version: M4_SS4445_S10_VER200

Accreditation Certificate

This Annex consists of 2 pages

Date of Report: 2014-12-11



China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(Registration No. CNAS L1659)

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Building 28/29, Shigudong, Xili Industrial Area, Xili Street,

Nanshan District, Shenzhen, Guangdong, China

is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.

The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.

Date of Issue: 2012-09-29

Date of Expiry: 2015-09-28

Date of Initial Accreditation: 1999-08-03

Date of Update: 2012-09-29



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

No.CNAS AL 2

0005210



ANNEX B
of
CCIC-SET

CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-13062

CK Telecom Limited

LTE Mobile Phone

Type Name: M4 SS4445

Hardware Version: A-V1.0

Software Version: M4_SS4445_S10_VER200

TEST LAYOUT

This Annex consists of 7 pages

Date of Report: 2014-12-11

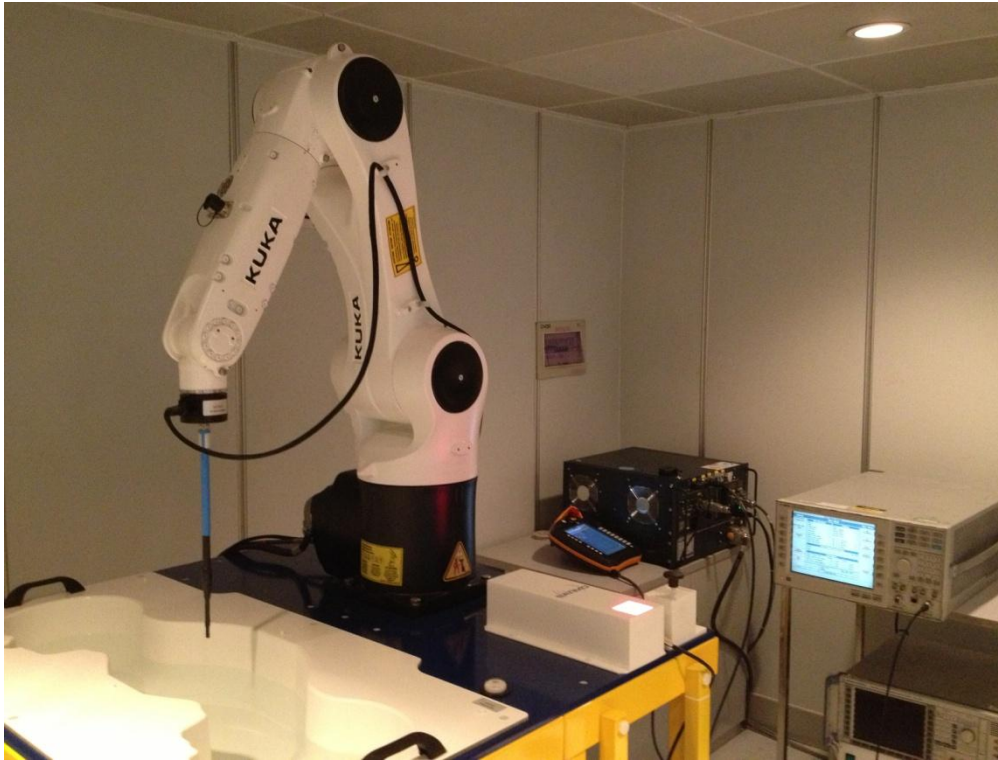


Fig.1 COMO SAR Test System

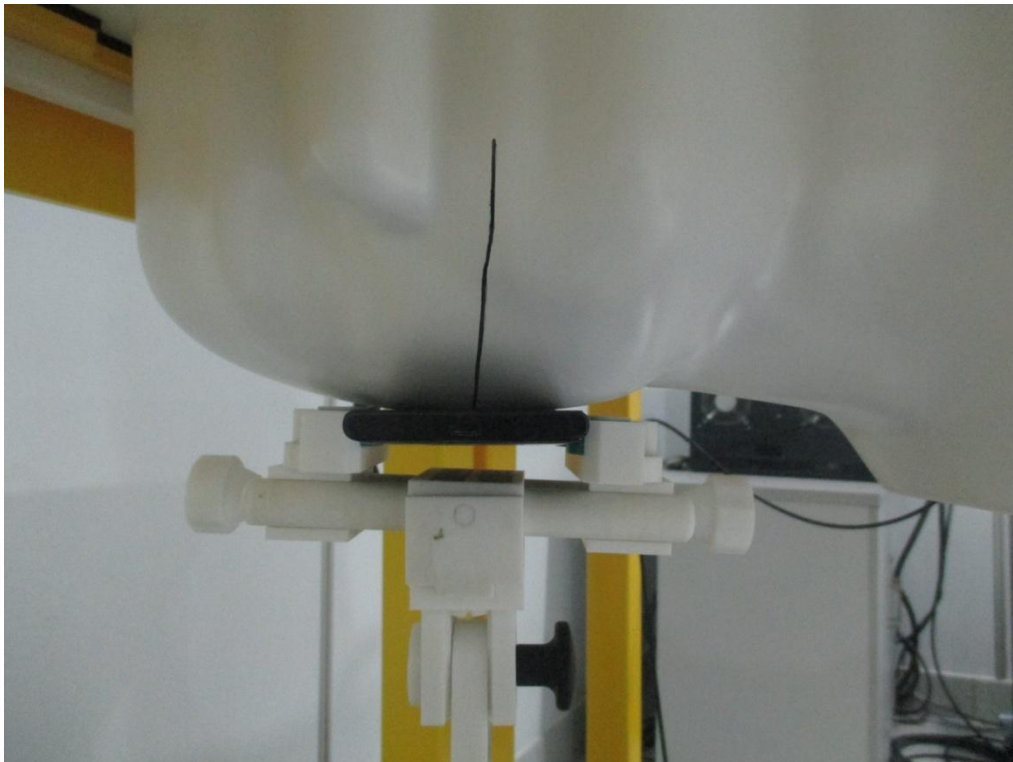


Fig.2 Right_Cheek



Fig.3 Right_Tilt

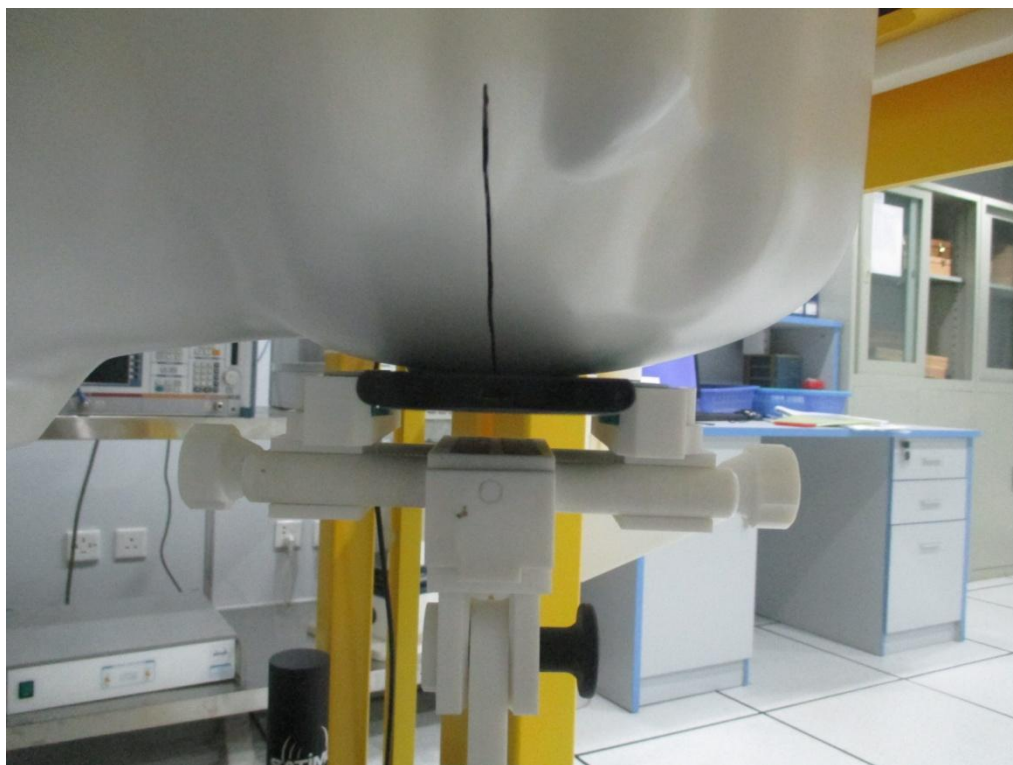


Fig.4 Left Cheek



Fig.5 Left_Tilt



Fig.6 Body(Back upside,5mm separation)



Fig.7 Body(Face upside,5mm separation)



Fig.8 Body Edge A(UP,5mm separation)



Fig.9 Body Edge B(Right upside,5mm separation)



Fig.10 Body Edge C(Down,5mm separation)



Fig.11 Body Edge D(Left upside,5mm separation)



ANNEX C

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-13062

LTE Mobile Phone

Type Name: M4 SS4445

Hardware Version: A-V1.0


Software Version: M4_SS4445_S10_VER200

Sample Photographs

This Annex consists of 2 pages

Date of Report: 2014-12-11

1. Appearance

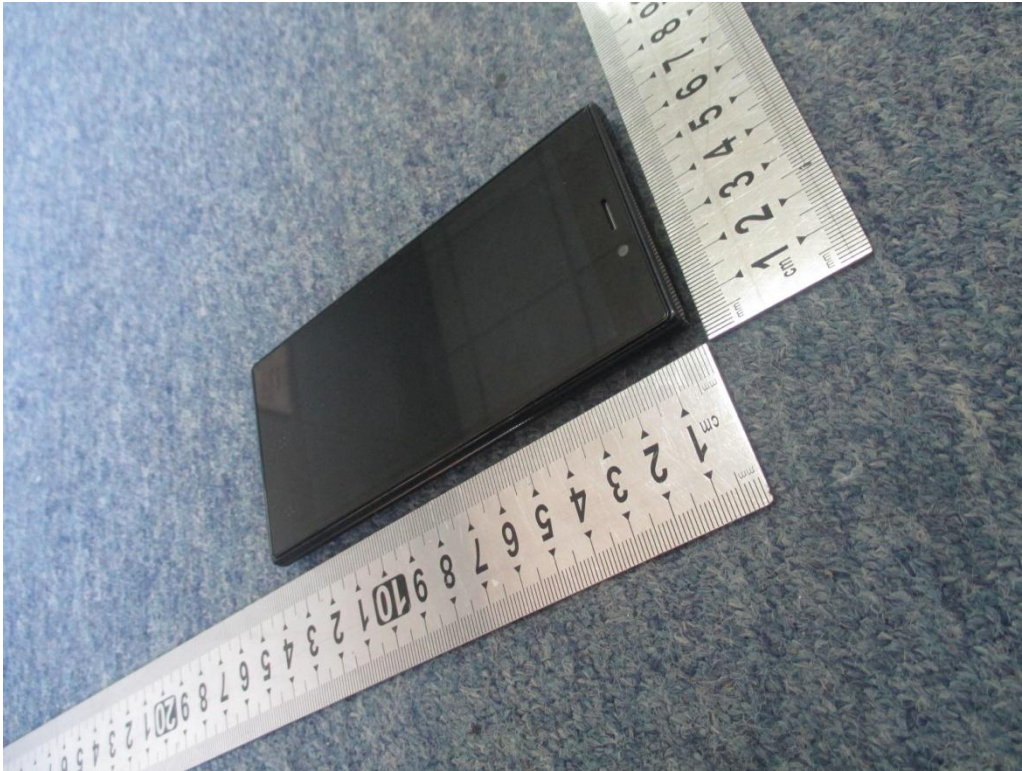

Appearance and size (obverse)



Appearance and size (reverse)



ANNEX D
of
CCIC-SET

CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2014-13062

LTE Mobile Phone

Type Name: M4 SS4445

Hardware Version: A-V1.0

Software Version: M4_SS4445_S10_VER200

System Performance Check Data and Highest SAR Plots

This Annex consists of 50 pages

Date of Report: 2014-12-11



GRAPH TEST RESULTS

BAND	PAPAMETERS
GSM 850	Left Head with Cheek device position on Middle Channel in GSM mode Flat Plane with Back Body device position on Middle Channel in GSM mode Flat Plane with Edge D Body device position on Middle Channel in GSM mode Flat Plane with Edge D Body device position on Middle Channel in GSM mode (repeated measurement) Flat Plane with Back Body device position on Middle Channel in GPRS mode Flat Plane with Back Body device position on Middle Channel in GPRS mode (repeated measurement)
GSM 1900	Right Head with Cheek device position on Middle Channel in GSM mode Flat Plane with Back Body device position on Middle Channel in GSM mode Flat Plane with Back Body device position on Middle Channel in GSM mode (repeated measurement1) Flat Plane with Back Body device position on Middle Channel in GSM mode (repeated measurement2) Flat Plane with Back Body device position on Middle Channel in GPRS mode Flat Plane with Back Body device position on Middle Channel in GPRS mode (repeated measurement)
WCDMA 850	Left Head with Cheek device position on Middle Channel in WCDMA mode Flat Plane with Edge D Body device position on Middle Channel in WCDMA mode
WCDMA 1900	Left Head with Cheek device position on Middle Channel in WCDMA mode Flat Plane with Face Body device position on Middle Channel in WCDMA mode Flat Plane with Face Body device position on Middle Channel in WCDMA mode(repeated measurement)
WIFI 802.11b	Right Head with Cheek device position on Low Channel in DSSS mode Flat Plane with Back Body device position on Low Channel in DSSS mode
LTE Band4	Right Head with Cheek device position on High Channel in QPSK mode Flat Plane with Back Body device position on High Channel in QPSK mode
LTE Band17	Right Head with Cheek device position on Low Channel in QPSK mode Flat Plane with Back Body device position on Low Channel in QPSK mode

System Performance Check (Head, 835MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:19/11/2014

Measurement duration: 12 minutes 57 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.45
Relative permittivity	15.07
Conductivity (S/m)	0.91
Power drift (%)	-0.230000
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.5 °C
ConvF:	5.51
Duty factor:	1:1

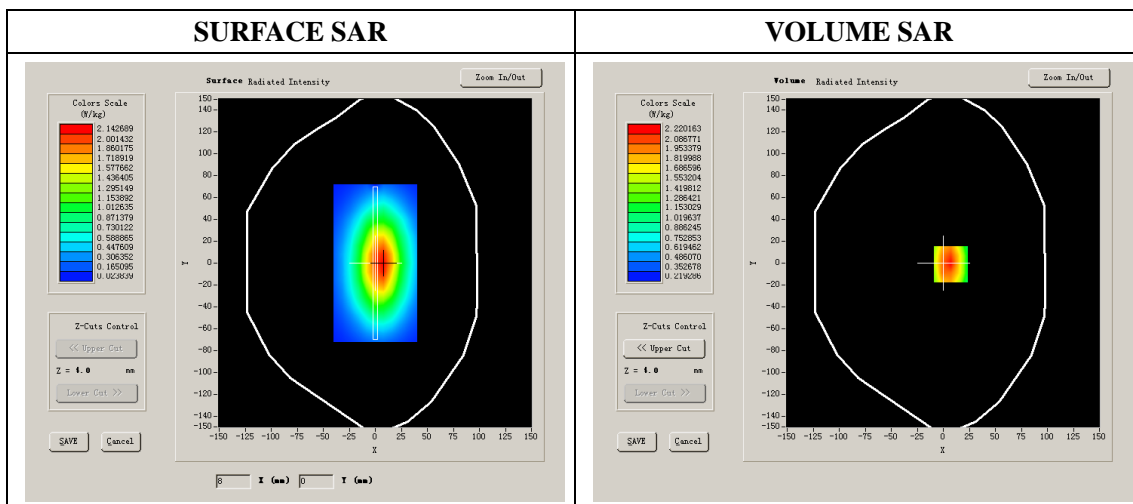


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.824256
SAR 1g (W/Kg)	2.454673


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5214	1.6624	1.1451	0.8065	0.5875	0.4153


SAR, Z Axis Scan (X = 7, Y = -1)

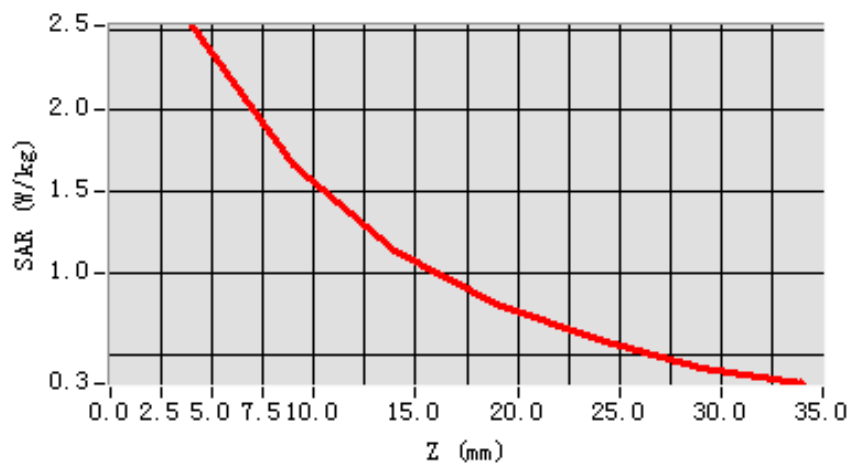

3D scene shot

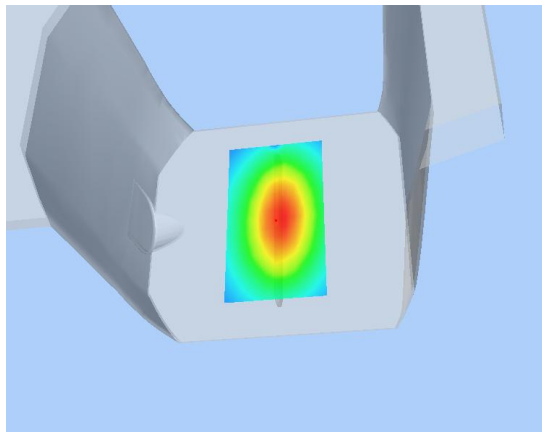

Hot spot position

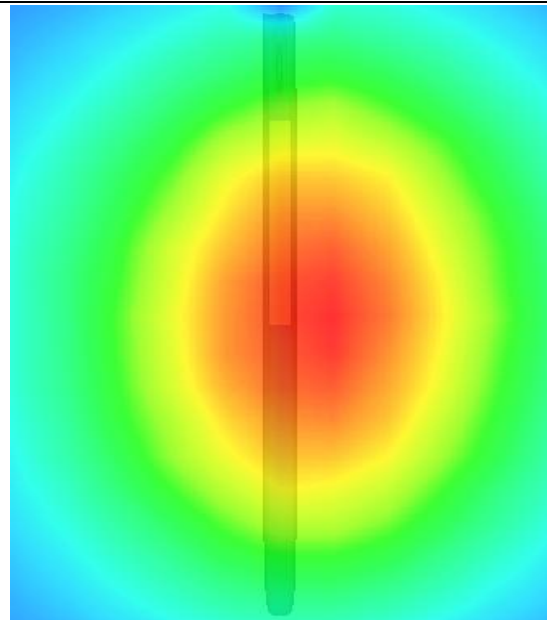

System Performance Check (Head, 1750MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/11/2014

Measurement duration: 12 minutes 52 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1750.000000
Relative permittivity (real part)	39.979347
Relative permittivity	15.067700
Conductivity (S/m)	1.413587
Power drift (%)	-0.140000
Ambient Temperature:	23.3 °C
Liquid Temperature:	23.6 °C
ConvF:	4.80
Crest factor:	1:1

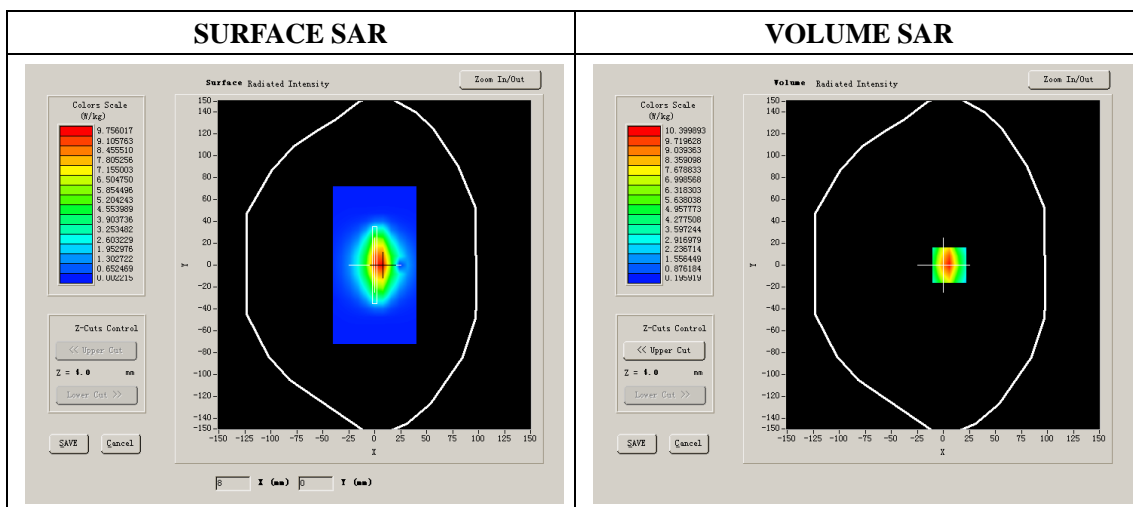


Maximum location: X=7.00, Y=0.00

SAR 10g (W/Kg)	5.035784
SAR 1g (W/Kg)	9.824367


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2574	6.0013	3.7134	2.2345	1.4352	0.9653


SAR, Z Axis Scan (X = 7, Y = 0)

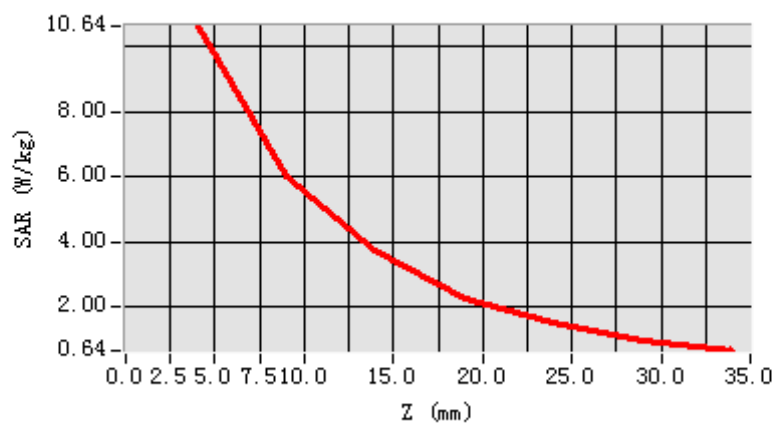

3D scene shot

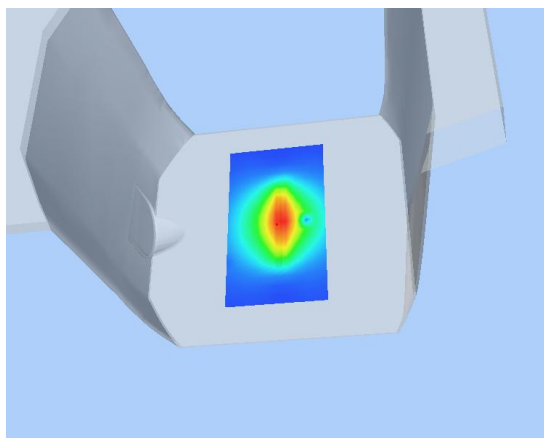

Hot spot position

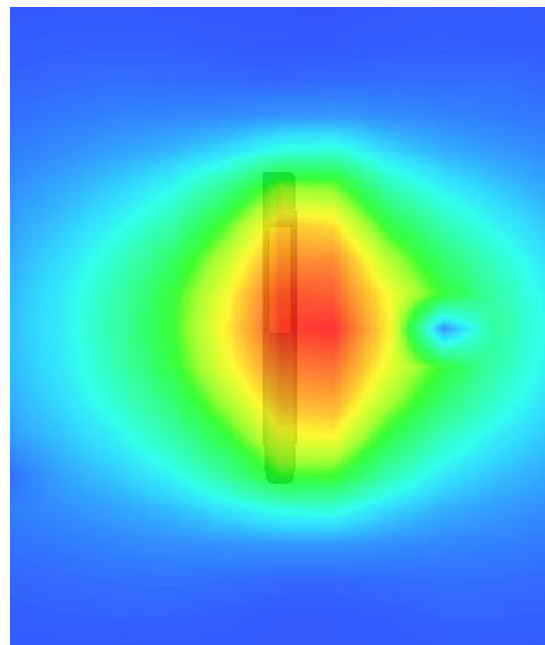

System Performance Check (Head, 1900MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 21/11/2014

Measurement duration: 12 minutes 57 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.98
Relative permittivity	15.07
Conductivity (S/m)	1.41
Power drift (%)	-0.150000
Ambient Temperature:	22.3 °C
Liquid Temperature:	22.6 °C
ConvF:	5.49
Duty factor:	1:1


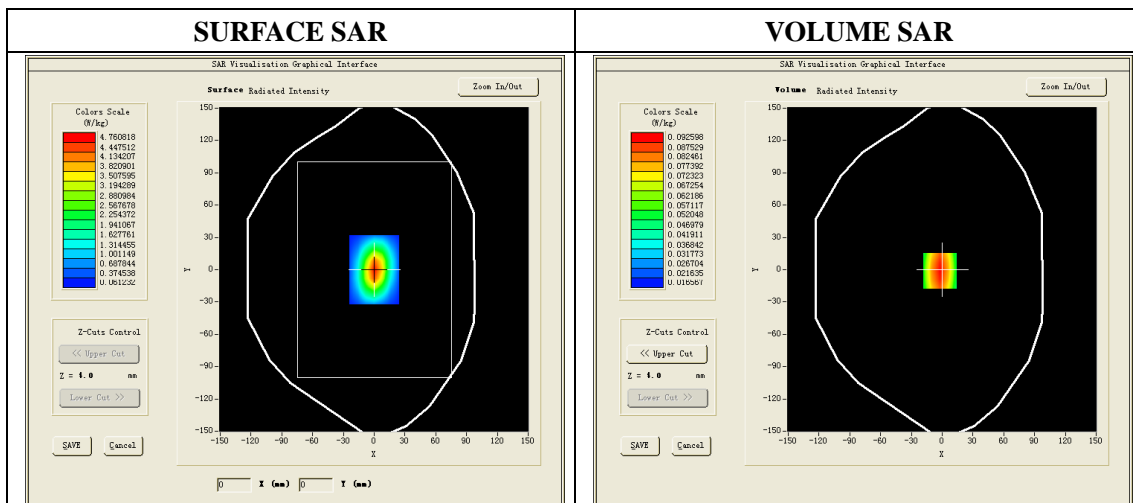


Maximum location: X=6.00, Y=0.00

SAR 10g (W/Kg)	5.142873
SAR 1g (W/Kg)	9.794237

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.6418	6.0044	3.7296	2.2605	1.5117	0.9790

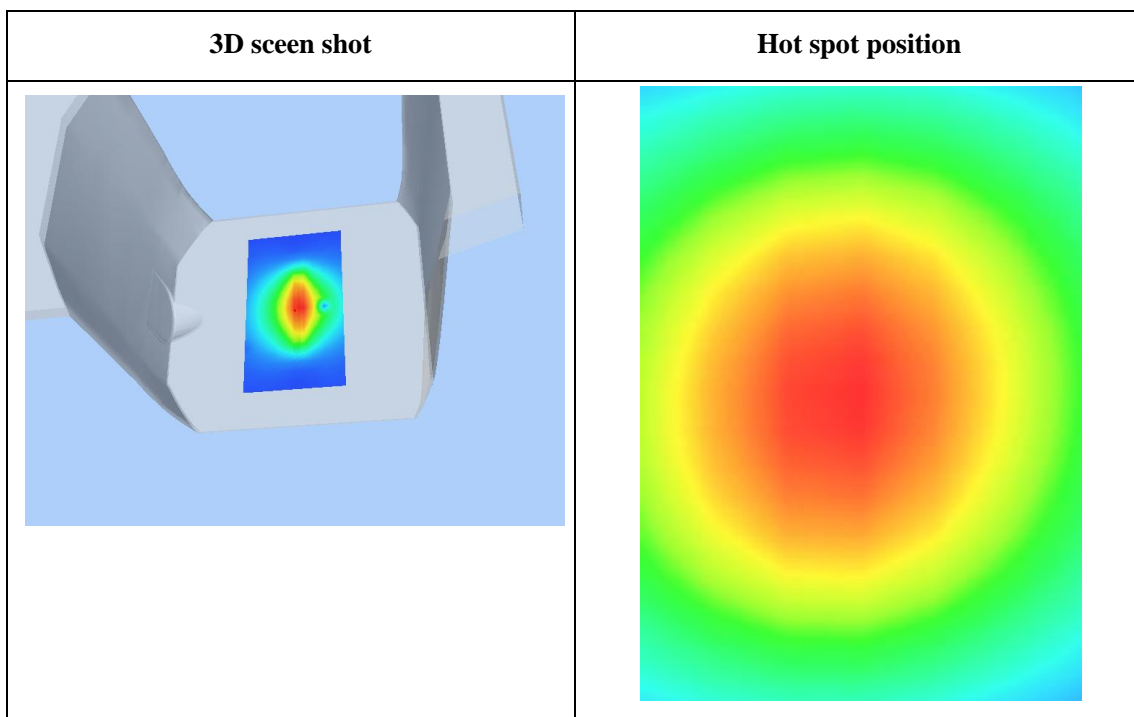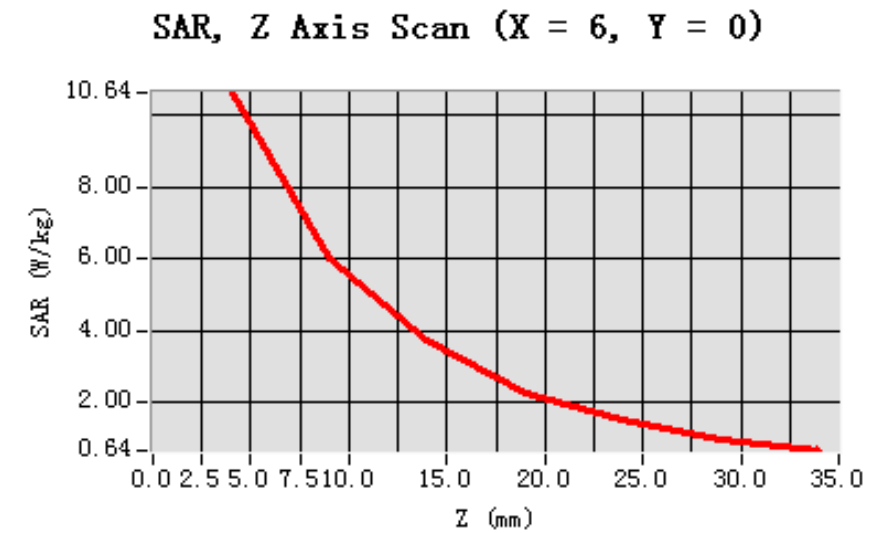

System Performance Check (Head, 2450MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:24/11/2014

Measurement duration: 15 minutes 24 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.99
Relative permittivity	13.19
Conductivity (S/m)	1.81
Power Drift (%)	0.420000
ConvF:	4.81
Duty factor:	1:1



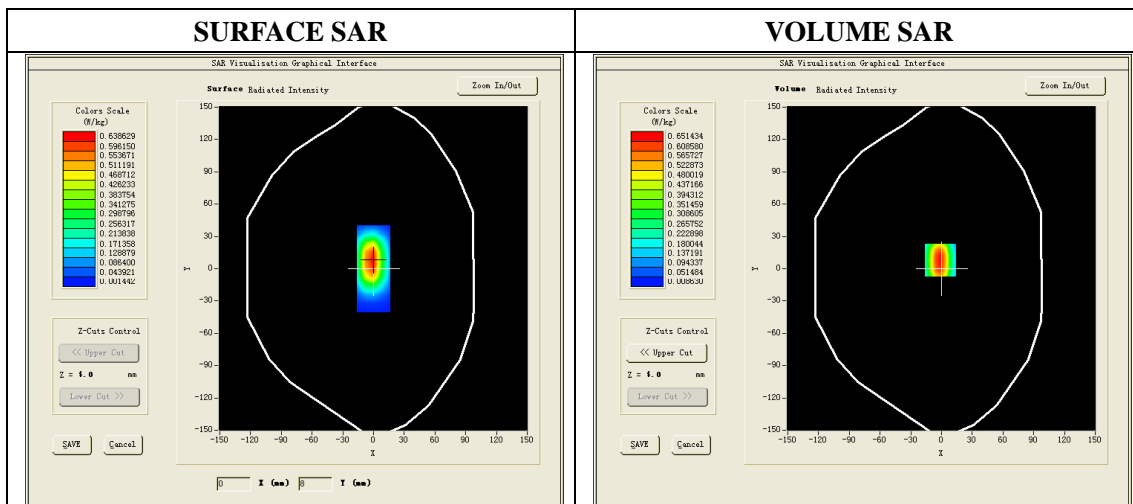


Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	5.900543
SAR 1g (W/Kg)	13.174632

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	20.3890	13.160218	3.8625	0.8019	0.2333

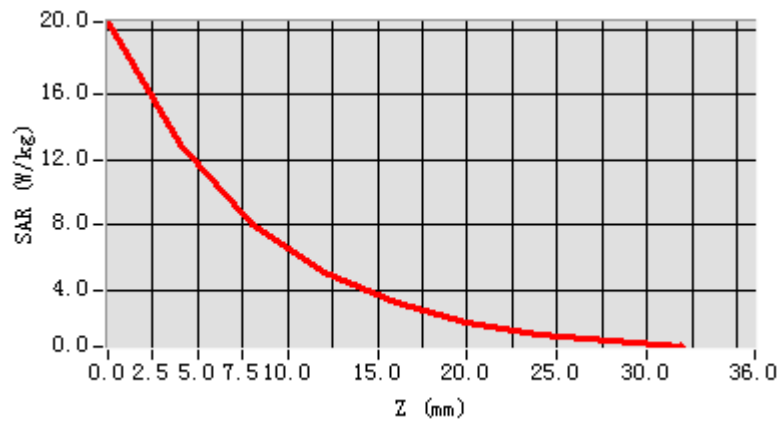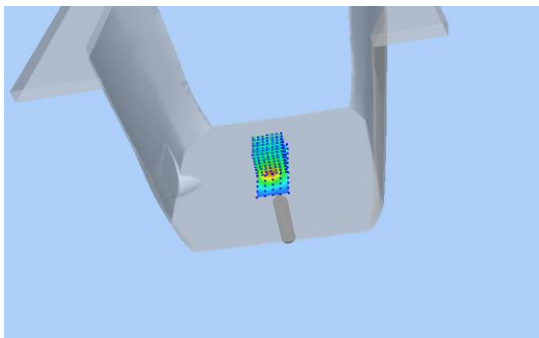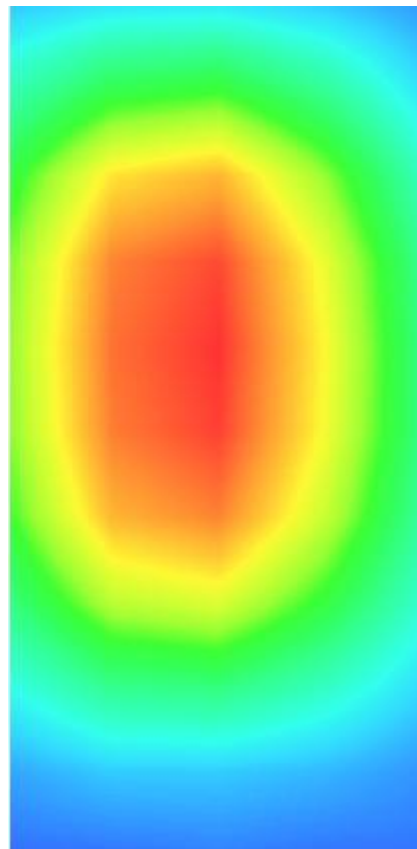
3D scene shot

Hot spot position


System Performance Check (Head, 750MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:25/11/2014

Measurement duration: 12 minutes 57 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	750.000000
Relative permittivity (real part)	41.46
Relative permittivity	15.07
Conductivity (S/m)	0.91
Power drift (%)	-0.430000
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.5 °C
ConvF:	22.51
Duty factor:	1:1

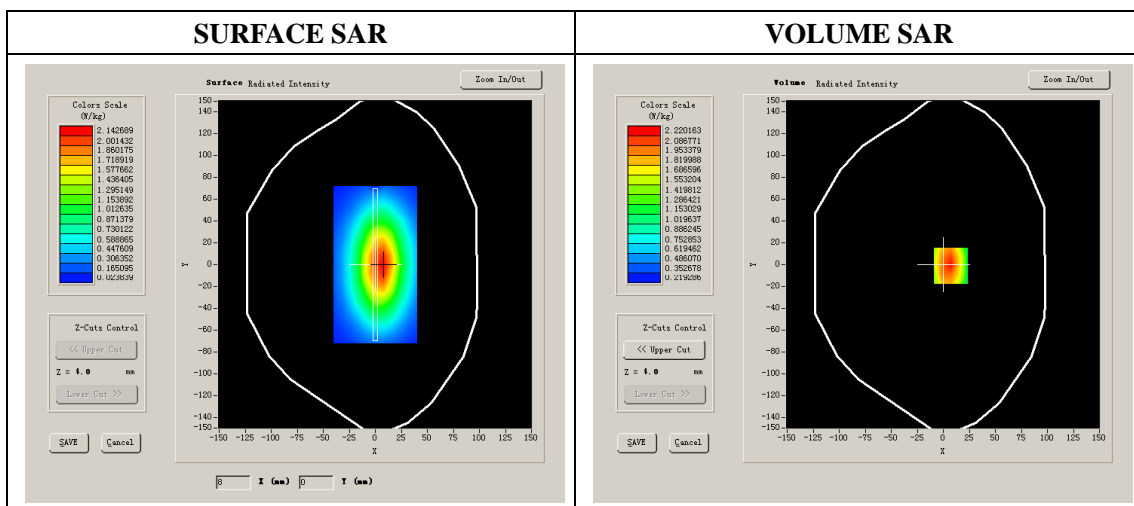


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	0.995872
SAR 1g (W/Kg)	1.983241


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.2147	1.5231	1.1215	0.8010	0.5625	0.4024


SAR, Z Axis Scan (X = 7, Y = -1)

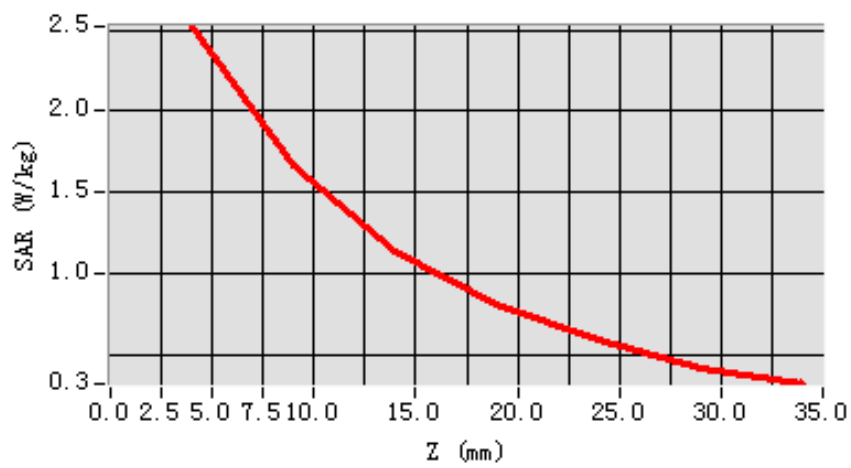

3D seen shot

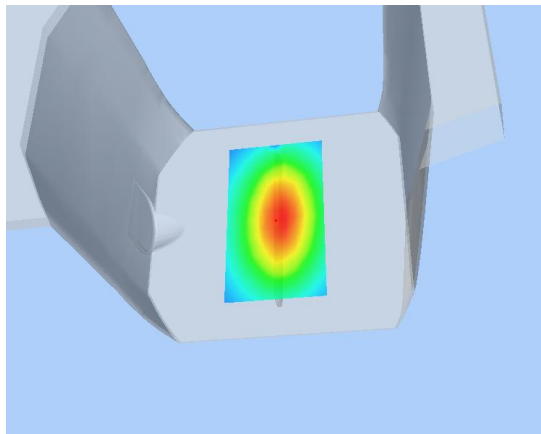

Hot spot position

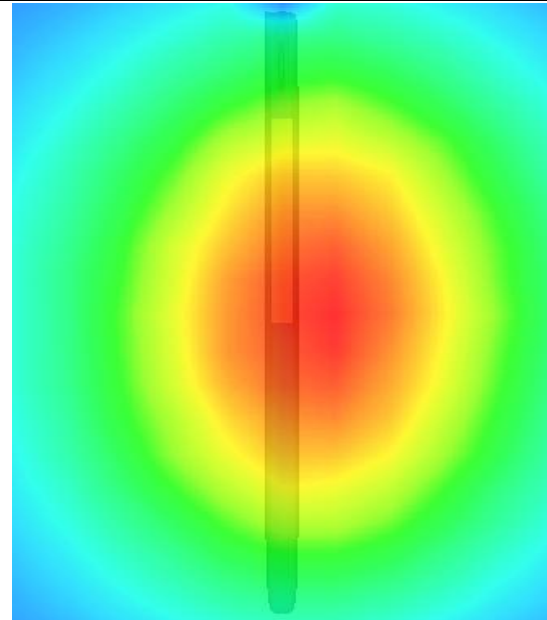



System Performance Check (Body, 835MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 19/11/2014

Measurement duration: 13 minutes 12 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.26
Relative permittivity	21.71
Conductivity (S/m)	0.98
Power drift (%)	-0.270000
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.5 °C
ConvF:	5.68
Duty factor:	1:1

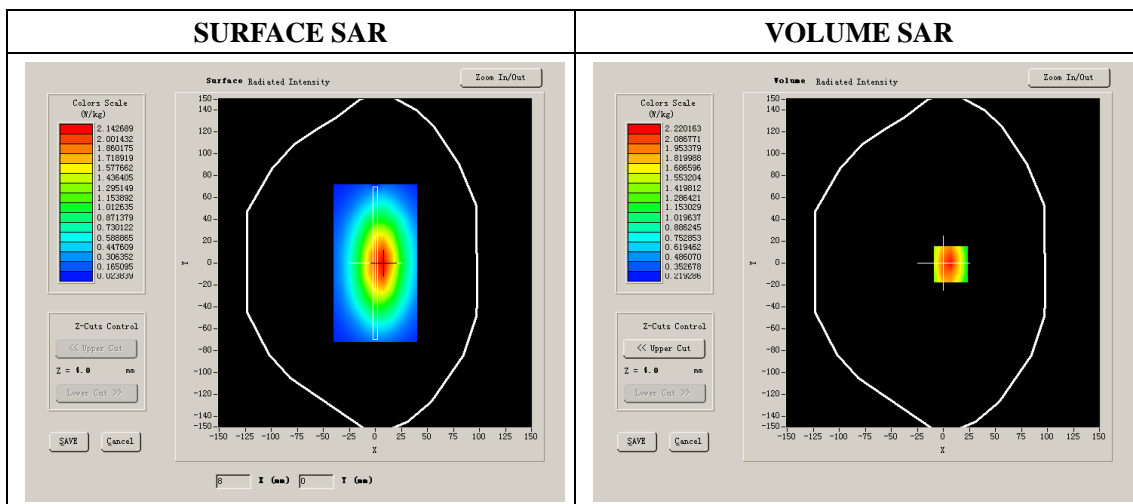


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.735712
SAR 1g (W/Kg)	2.463547


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5212	1.6645	1.1443	0.8082	0.5893	0.4148


SAR, Z Axis Scan (X = 7, Y = -1)

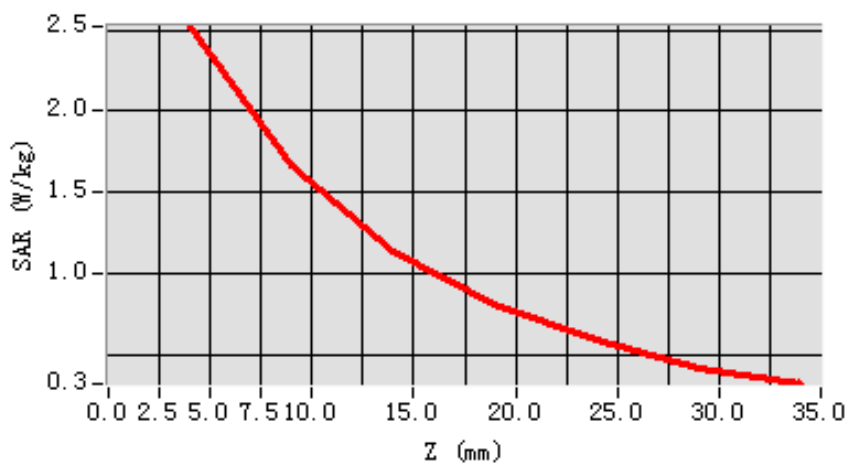

3D scene shot

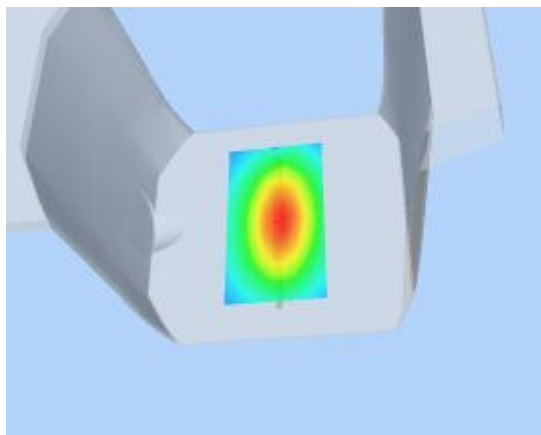

Hot spot position

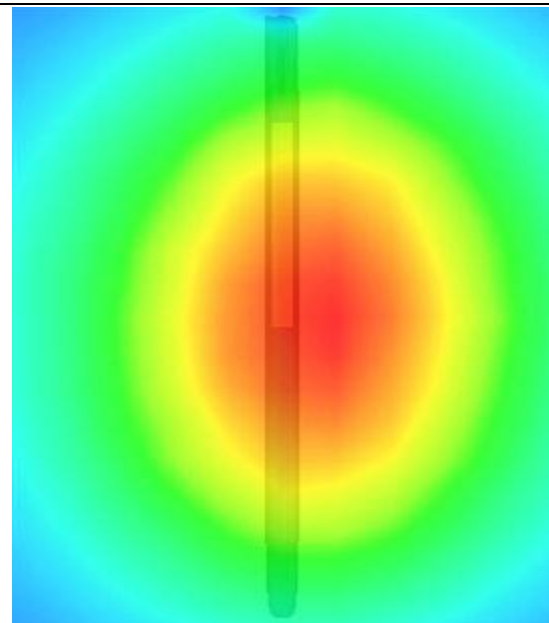

System Performance Check (Body, 1750MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 20/11/2014

Measurement duration: 13 minutes 06 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1750.000000
Relative permittivity (real part)	53.890442
Relative permittivity	14.070000
Conductivity (S/m)	1.529512
Power drift (%)	-0.330000
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.6 °C
ConvF:	4.94
Crest factor:	1:1

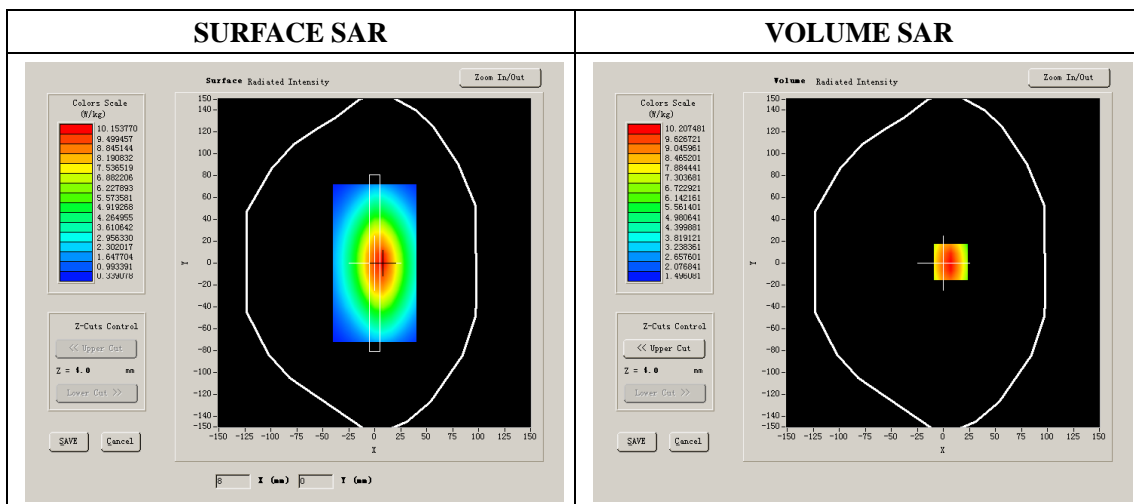


Maximum location: X=7.00, Y=1.00

SAR 10g (W/Kg)	5.102475
SAR 1g (W/Kg)	9.814257


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2075	7.3996	5.4654	4.1101	3.1286	2.4128


SAR, Z Axis Scan (X = 7, Y = 1)

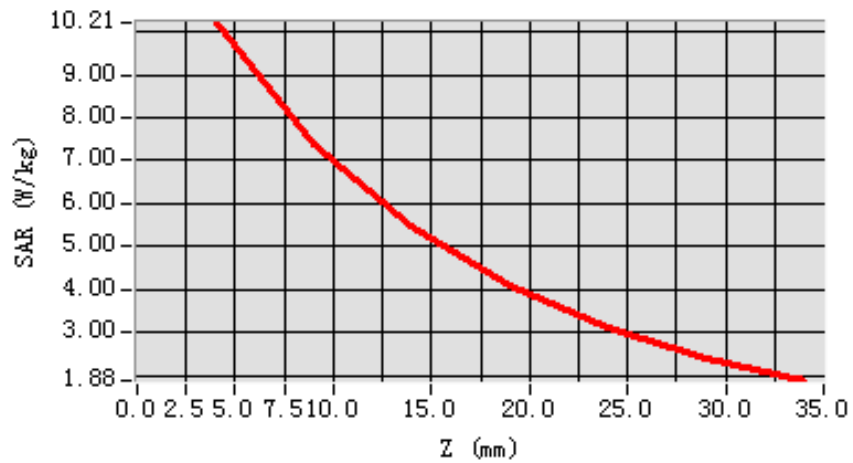

3D scene shot

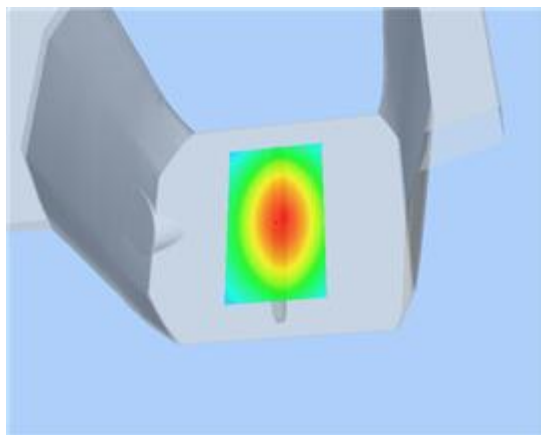

Hot spot position

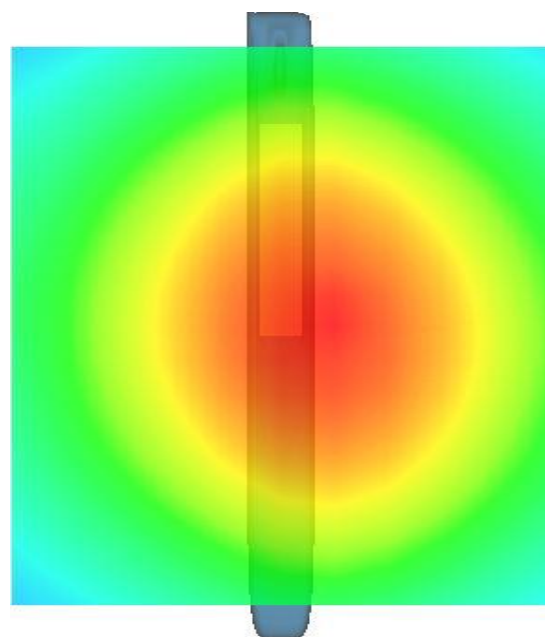

System Performance Check (Body, 1900MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 21/11/2014

Measurement duration: 13 minutes 12 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.28
Relative permittivity	12.99
Conductivity (S/m)	1.53
Power Drift (%)	0.410000
Ambient Temperature:	22.0 °C
Liquid Temperature:	21.8 °C
ConvF:	5.65
Duty factor:	1:1

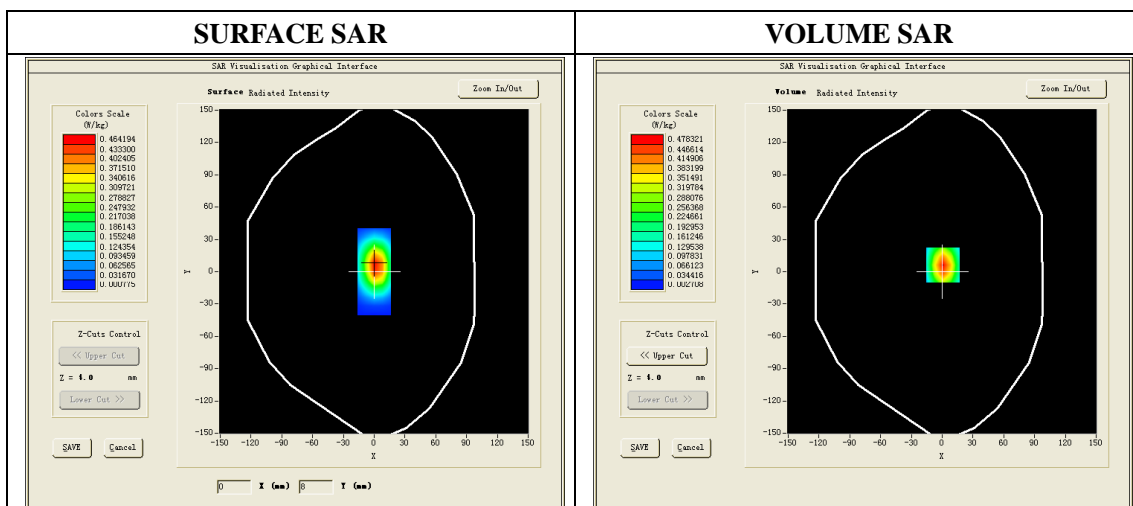


Maximum location: X=1.00, Y=6.00

SAR 10g (W/Kg)	5.215326
SAR 1g (W/Kg)	9.982523


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	10.0613	5.7282	3.6529	2.0314


SAR, Z Axis Scan (X = 1, Y = 6)

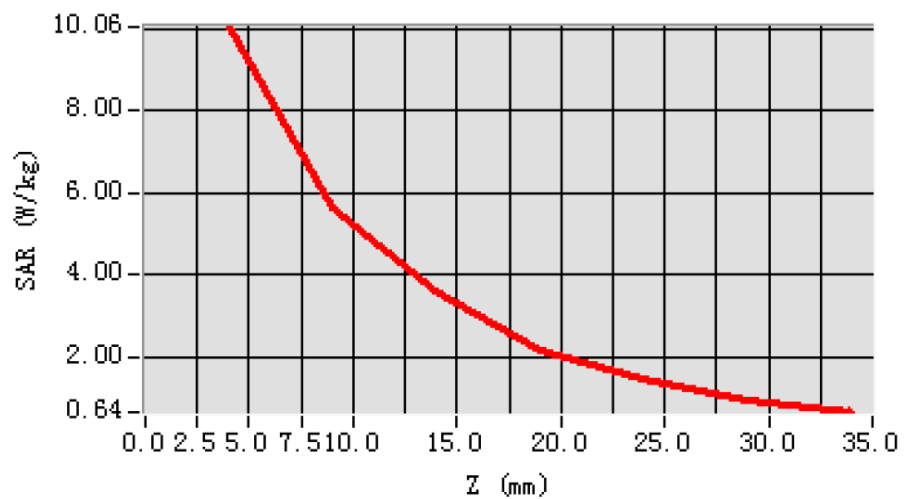

3D scene shot

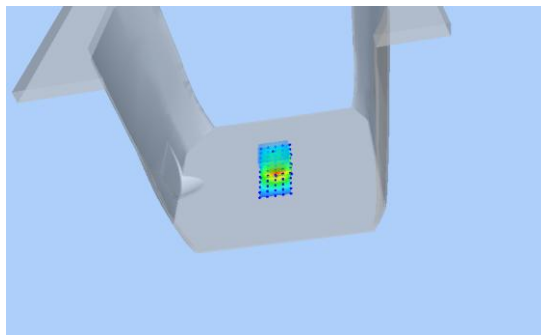

Hot spot position

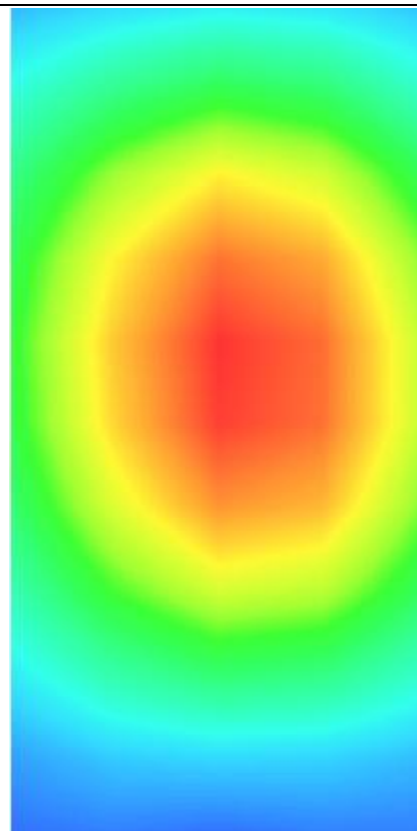

System Performance Check (Body, 2450MHz)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 24/11/2014

Measurement duration: 13 minutes 21 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.65
Relative permittivity	13.02
Conductivity (S/m)	1.96
Power Drift (%)	-0.310000
Duty factor:	1:1
ConvF:	4.91

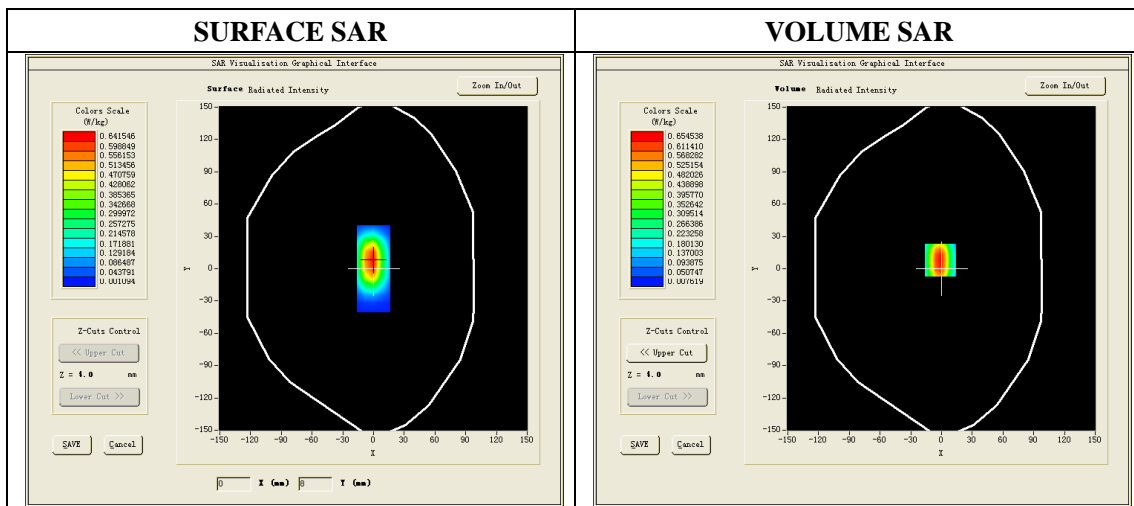


Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	6.032464
SAR 1g (W/Kg)	13.087432


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.3124	3.8627	0.8023	0.2335


SAR, Z Axis Scan (X = 0, Y = 8)

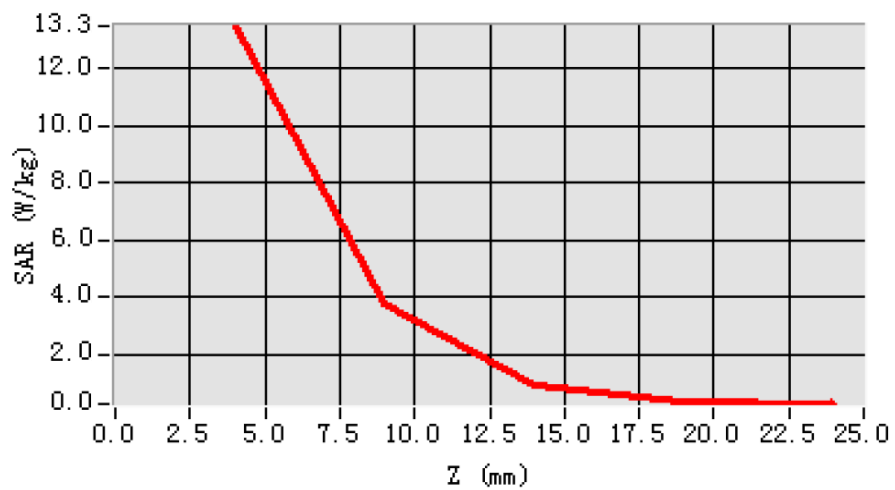

3D scene shot

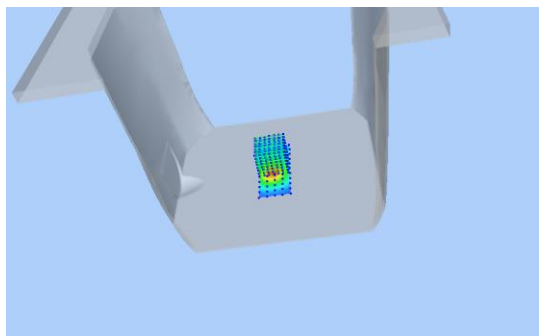

Hot spot position

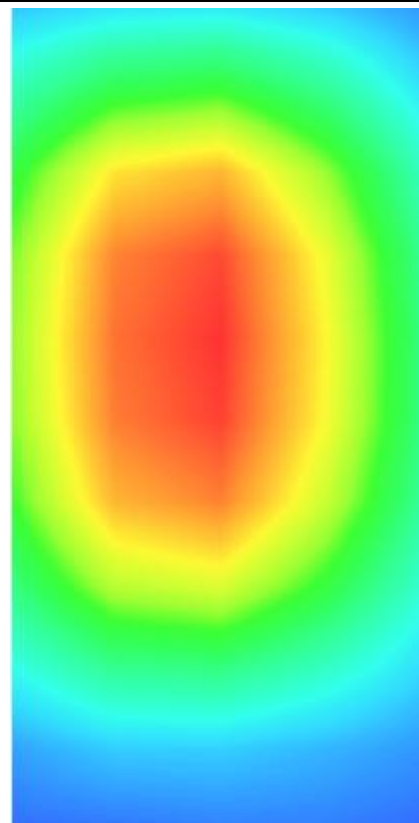

System Performance Check (Body, 750MHz)


Type: Validation measurement (Complete)
 Date of measurement: 25/11/2014
 Measurement duration: 13 minutes 52 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/nsurf_sam_plan.txt, h= 5.00 mm
Phantom	Validation plane
Device Position	Body
Band	CW750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	55.531170
Relative permittivity (imaginary part)	24.594805
Conductivity (S/m)	1.024784
Variation (%)	-0.170000
ConvF	23.36

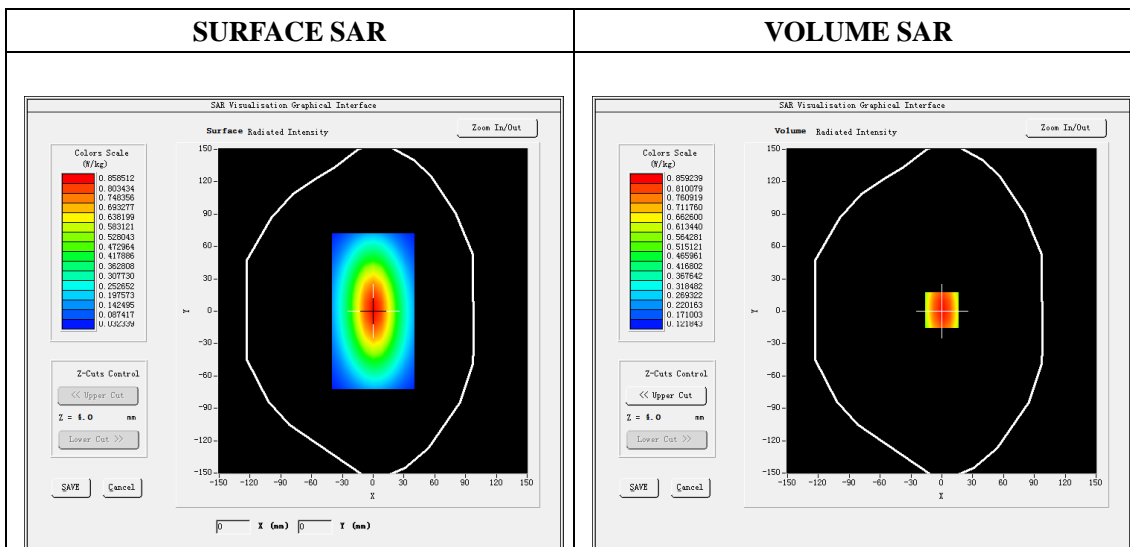


Maximum location: X=0.00, Y=1.00

SAR 10g (W/Kg)	0.965604
SAR 1g (W/Kg)	1.988657


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.3214	1.6241	1.1402	0.8001	0.5821	0.4104


SAR, Z Axis Scan (X = 7, Y = -1)

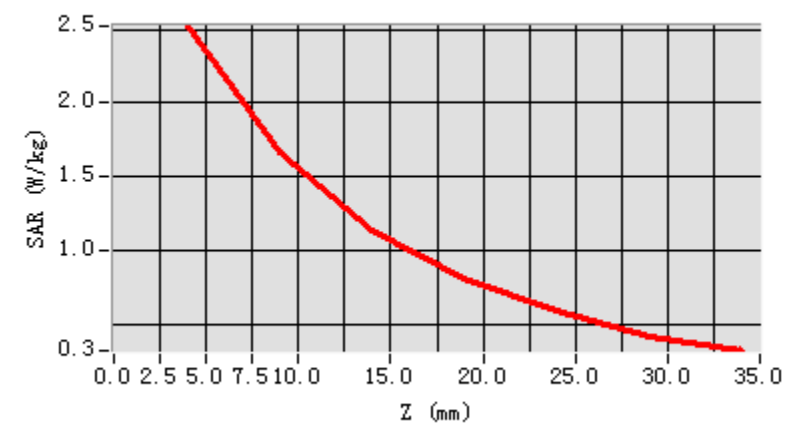

3D screen shot

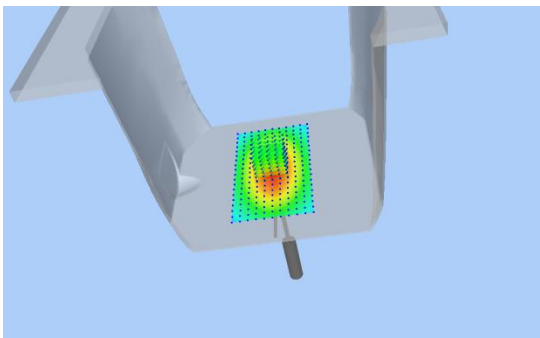

Hot spot position

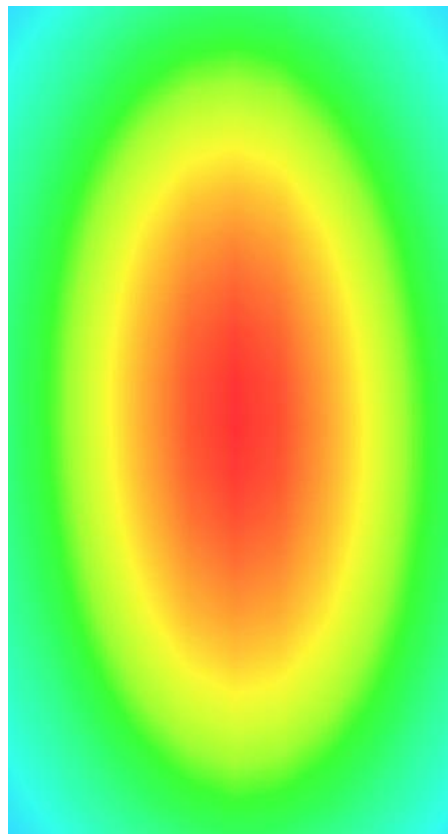

GSM850, Left Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 19/11/2014

Measurement duration: 6 minutes 35 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	190
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	41.45
Relative permittivity (imaginary part)	15.07
Conductivity (S/m)	0.91
Variation (%)	-0.900000
ConvF:	5.51


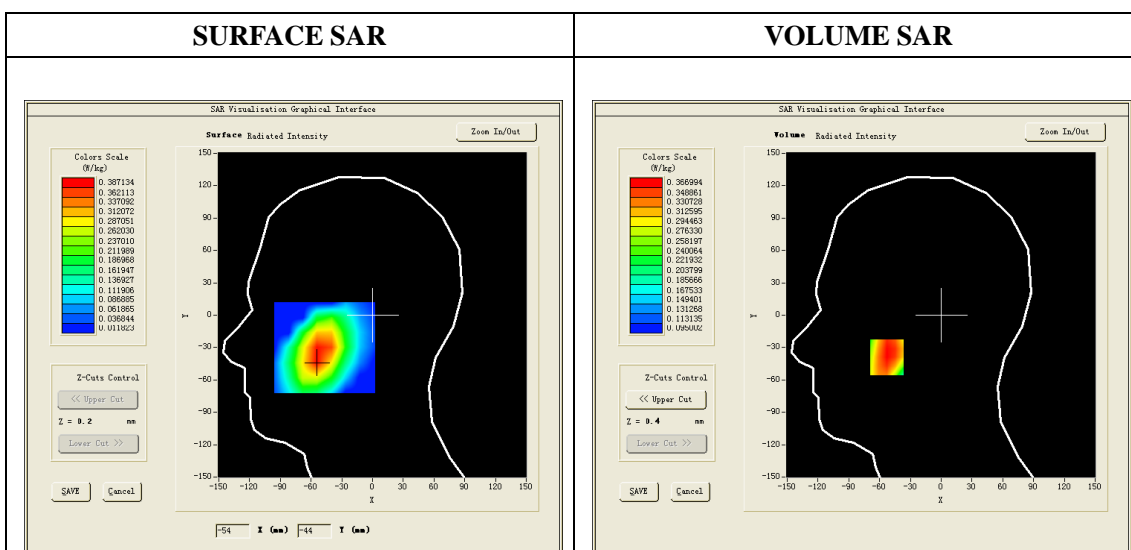


Maximum location: X=-53.00, Y=-39.00

SAR 10g (W/Kg)	0.290021
SAR 1g (W/Kg)	0.359269

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3976	0.3670	0.3246	0.2785	0.2311

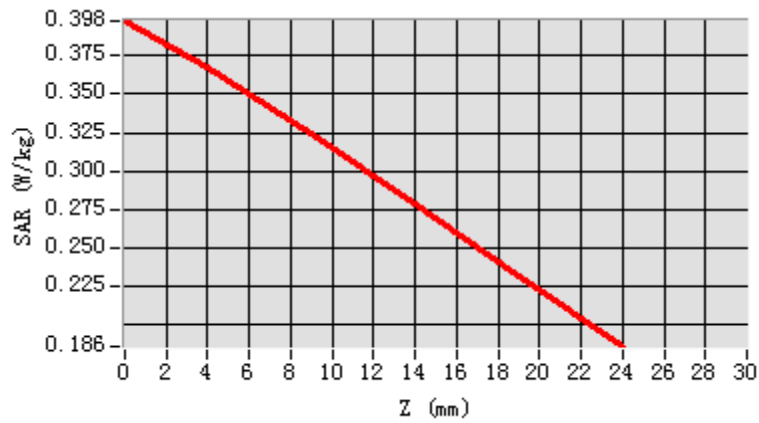

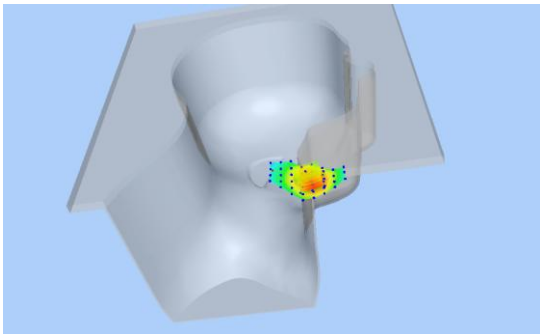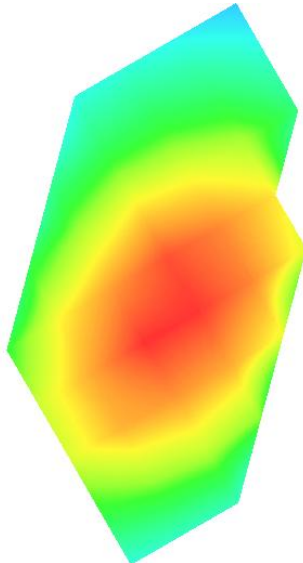3D screen shot	Hot spot position
	

GSM850, Back, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 19/11/2014

Measurement duration: 7 minutes 32 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	GSM850
Channels	190
Signal	GSM(Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	1.420000
ConvF:	5.68


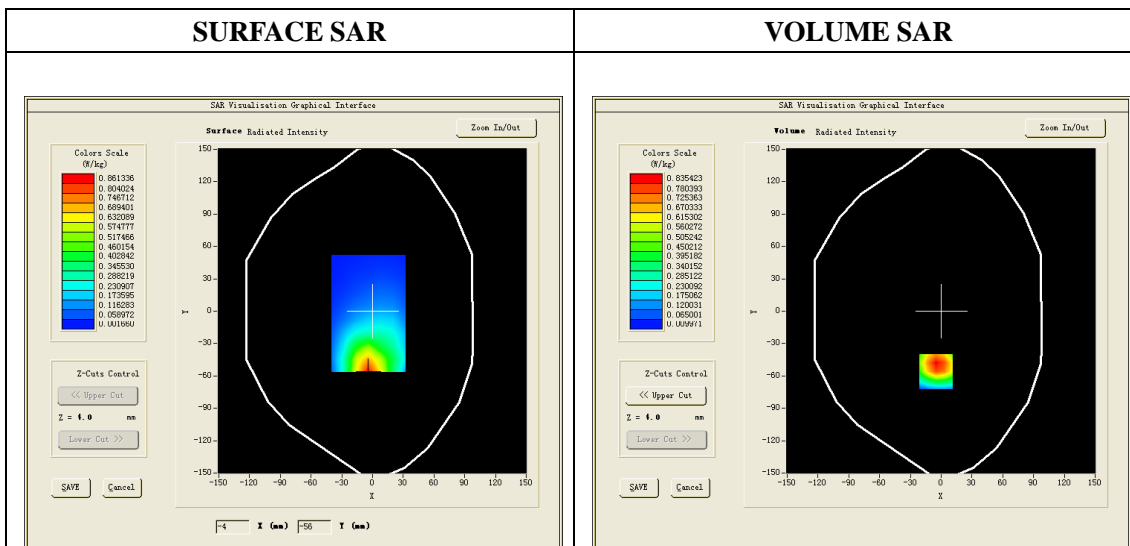


Maximum location: X=-5.00, Y=-56.00

SAR 10g (W/Kg)	0.476586
SAR 1g (W/Kg)	0.829417

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1744	0.7720	0.4540	0.2776	0.1847

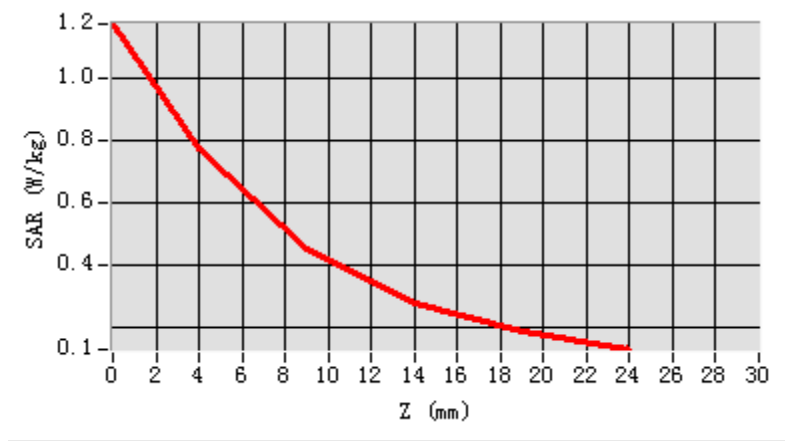

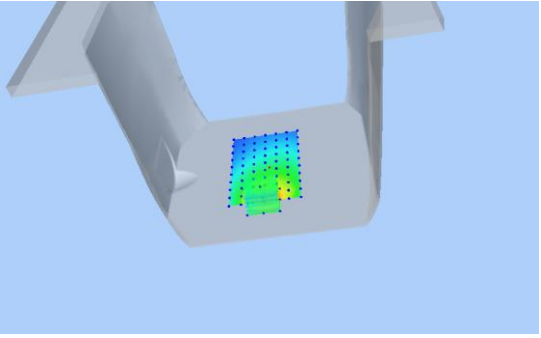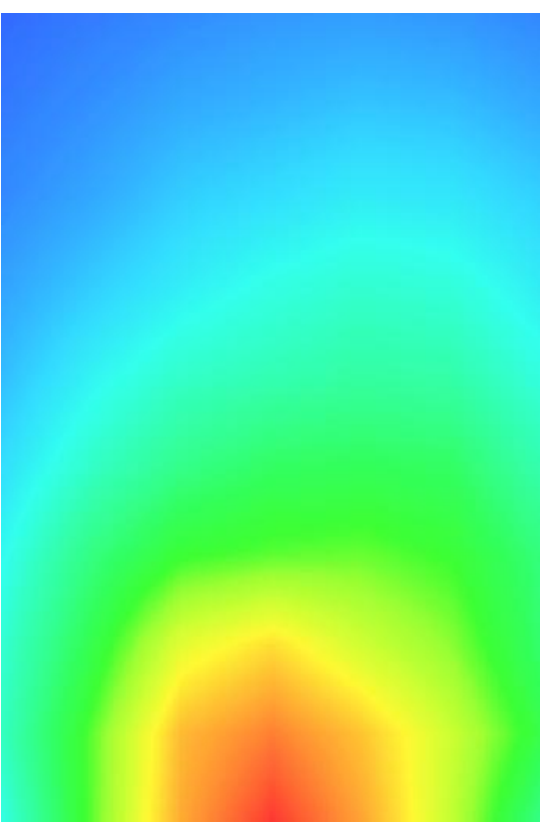3D screen shot	Hot spot position
	

GSM850, Edge D, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 19/11/2014

Measurement duration: 7 minutes 32 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	GSM850
Channels	190
Signal	GSM(Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	0.250000
ConvF:	5.68


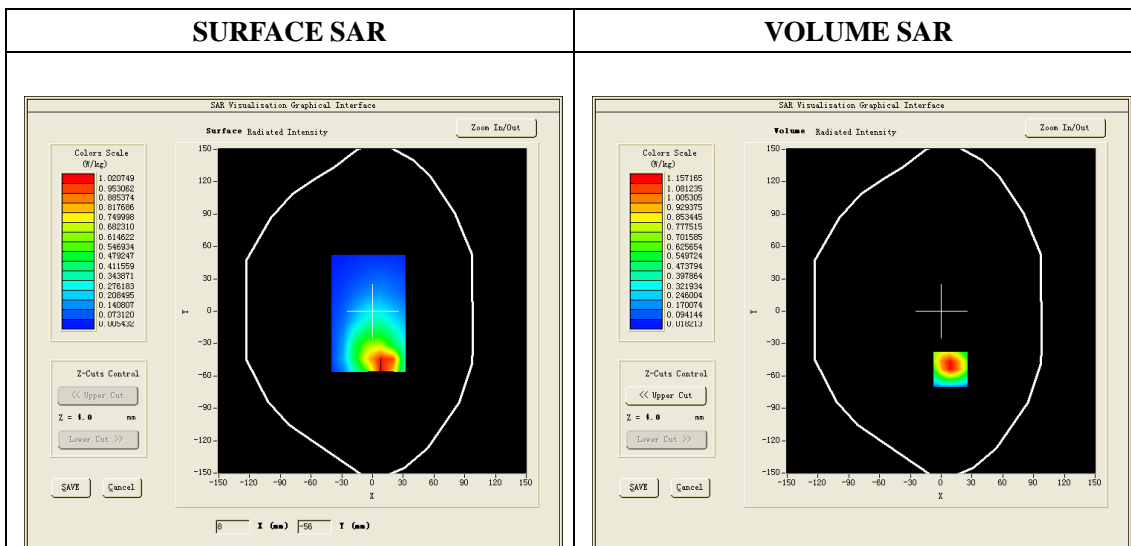


Maximum location: X=9.00, Y=-54.00

SAR 10g (W/Kg)	0.641398
SAR 1g (W/Kg)	1.182803

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8520	1.1572	0.6387	0.3767	0.2565

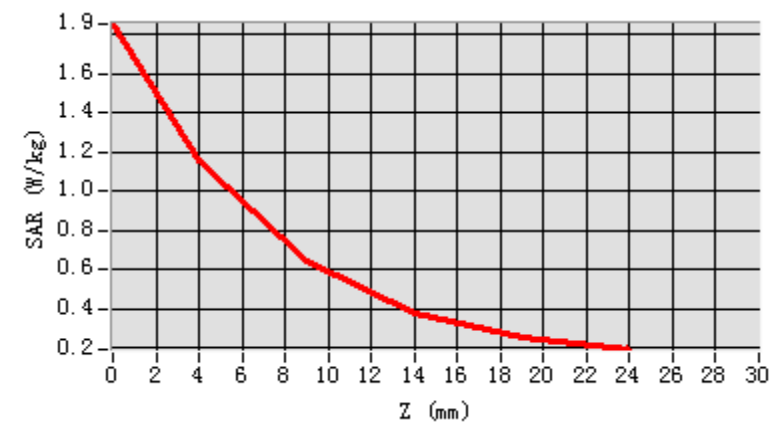

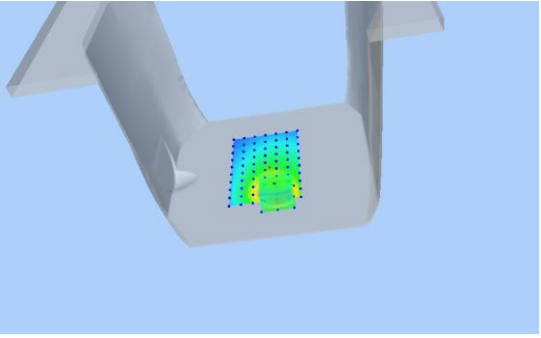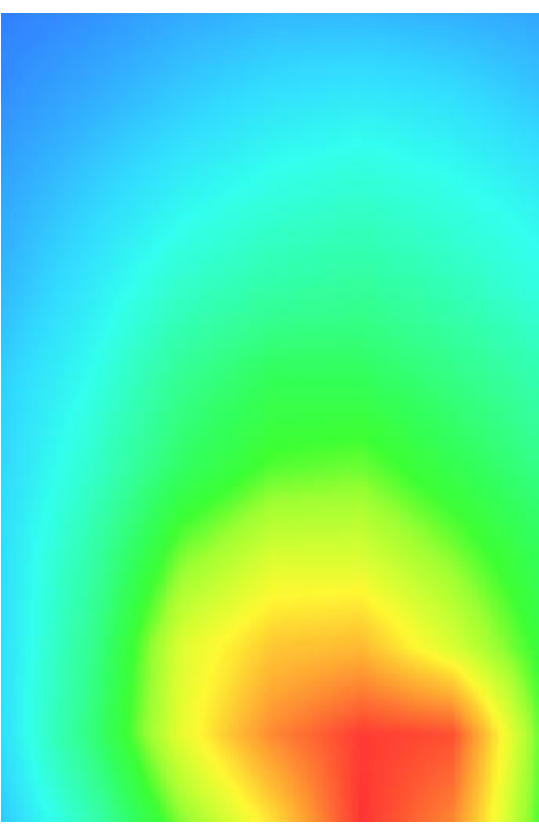3D screen shot	Hot spot position
	

GSM850, Edge D, Middle, Repeated testing

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 19/11/2014

Measurement duration: 7 minutes 32 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	GSM850
Channels	190
Signal	GSM(Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	1.010000
ConvF:	5.68


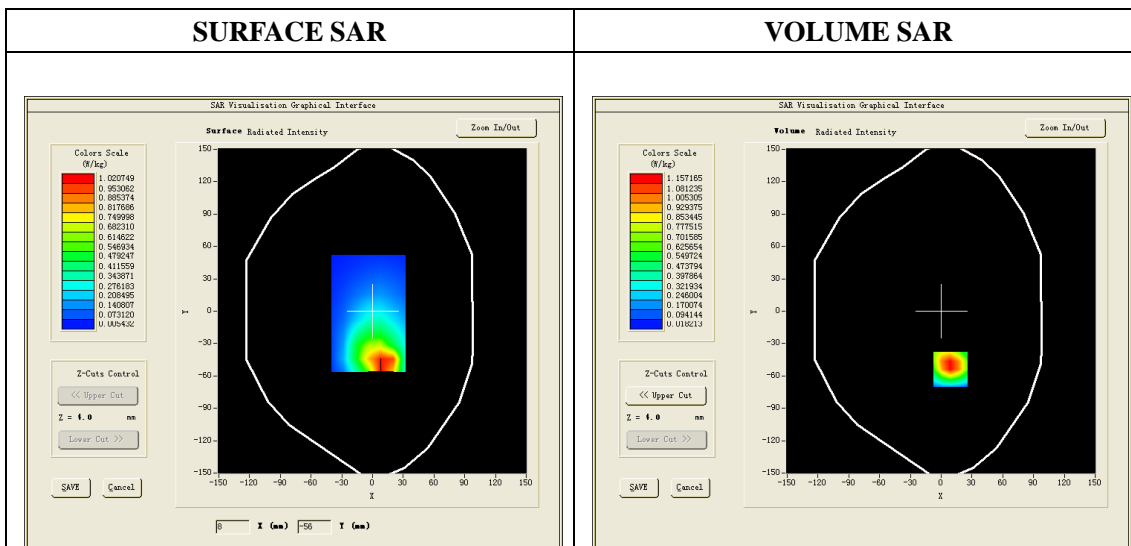


Maximum location: X=9.00, Y=-54.00

SAR 10g (W/Kg)	0.640243
SAR 1g (W/Kg)	1.181345

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8520	1.1571	0.6385	0.3764	0.2563

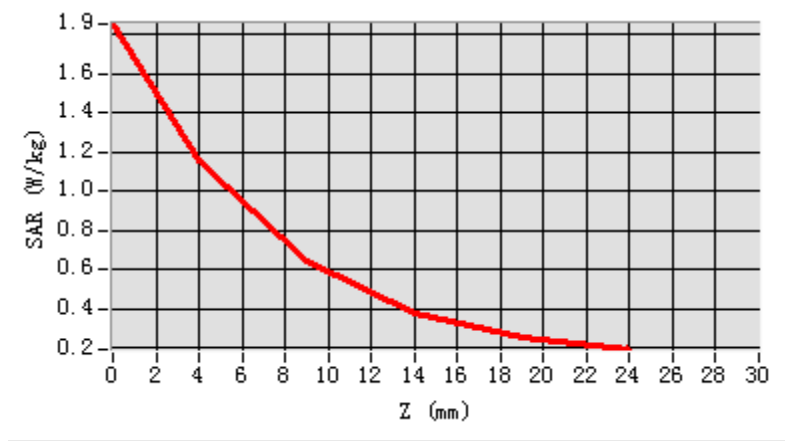

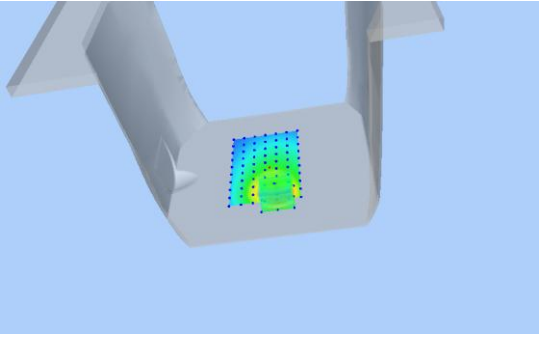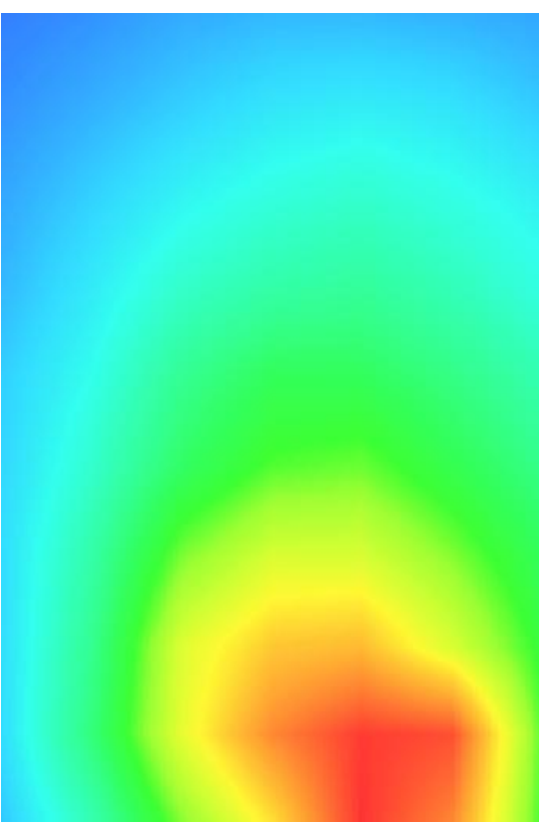3D screen shot	Hot spot position
	

GPRS 850, Back, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 19/11/2014

Measurement duration: 7 minutes 33 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	CUSTOM (GPRS850_1Tx)
Channels	190
Signal	GPRS(Duty cycle: 1:8)

B.SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	-0.300000
ConvF:	5.68


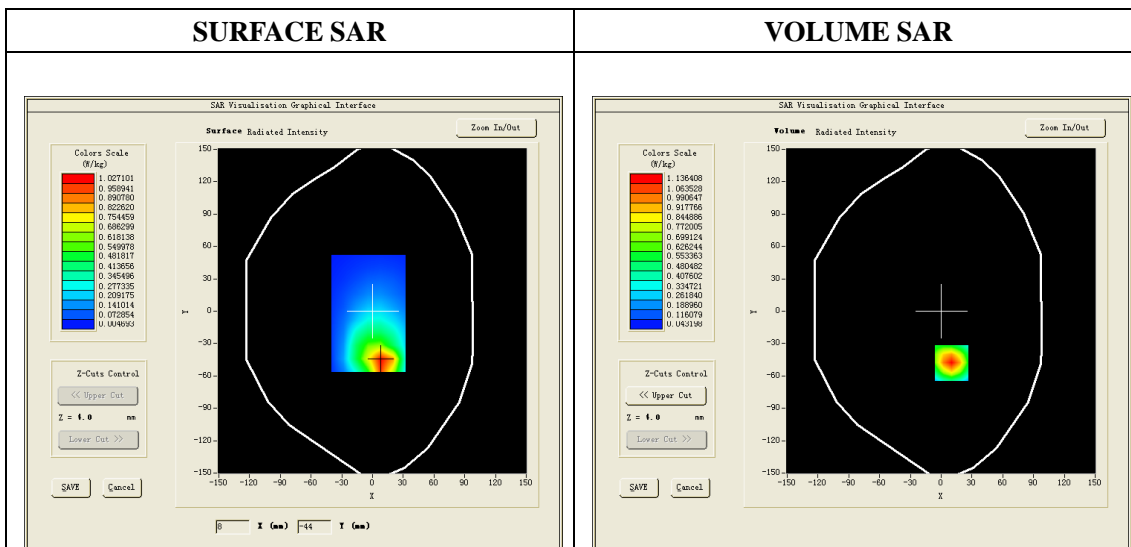


Maximum location: X=10.00, Y=-48.00

SAR 10g (W/Kg)	0.652154
SAR 1g (W/Kg)	1.127243

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.6637	1.1324	0.6968	0.4454	0.3063

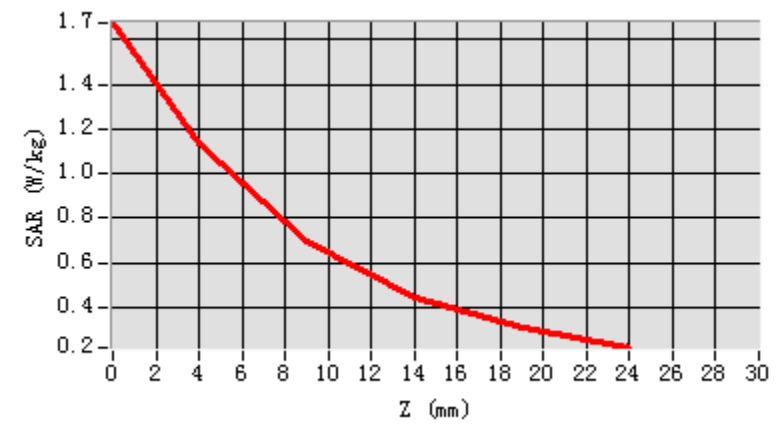

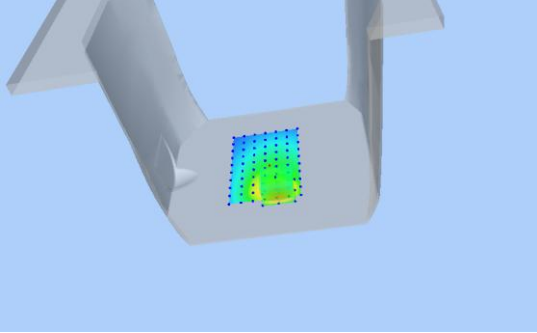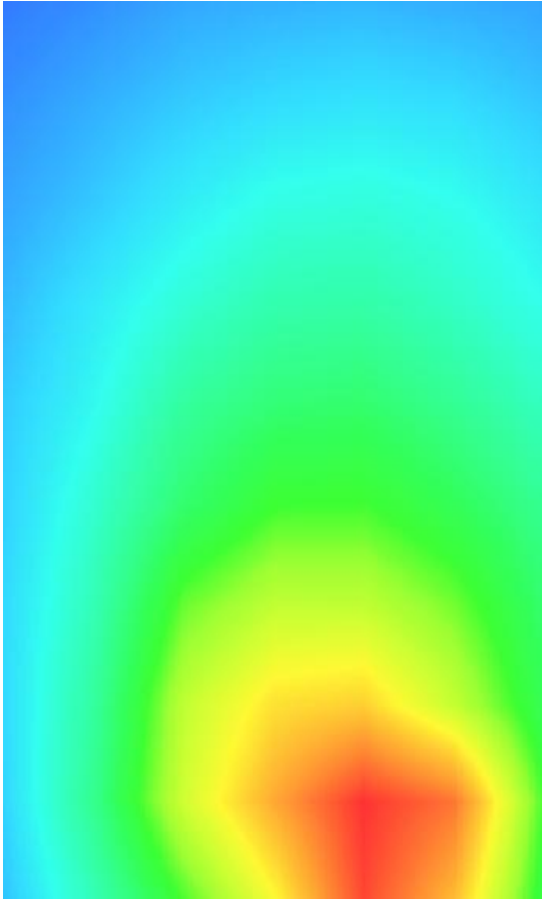3D screen shot	Hot spot position
	

GPRS 850, Back, Middle, Repeated testing

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 19/11/2014

Measurement duration: 7 minutes 33 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	CUSTOM (GPRS850_1Tx)
Channels	190
Signal	GPRS(Duty cycle: 1:8)

B.SAR Measurement Results


Frequency (MHz)	836.6
Relative permittivity (real part)	55.26
Relative permittivity (imaginary part)	21.71
Conductivity (S/m)	0.98
Variation (%)	-0.700000
ConvF:	5.68


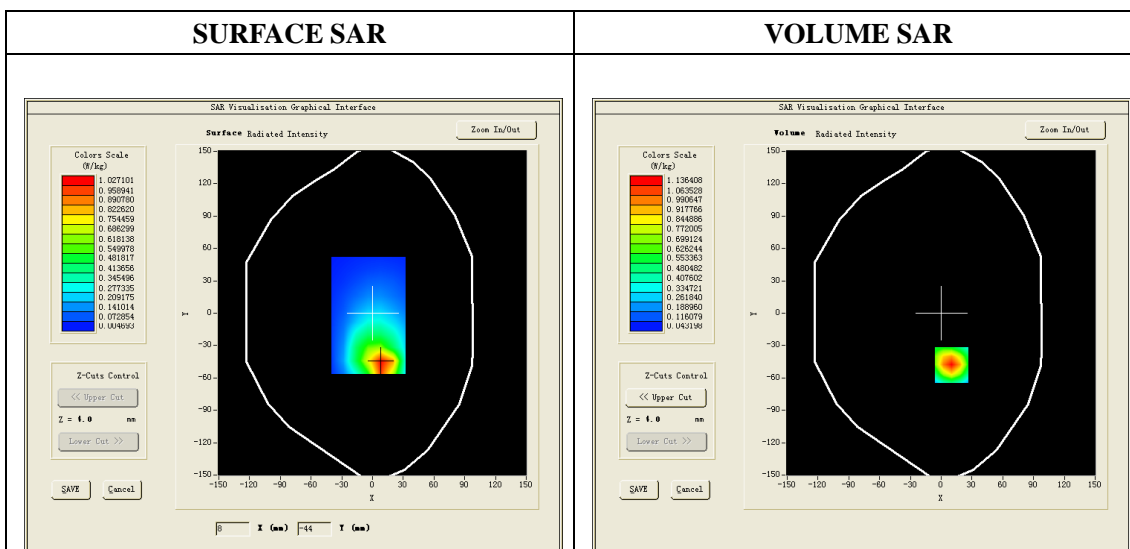


Maximum location: X=10.00, Y=-48.00

SAR 10g (W/Kg)	0.599261
SAR 1g (W/Kg)	1.070822

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.6712	1.1345	0.6957	0.4434	0.3058

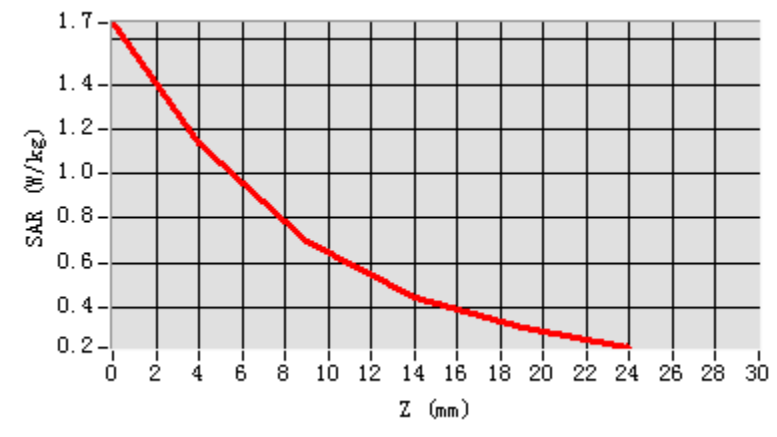

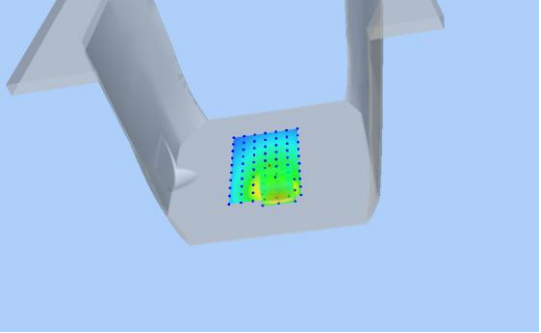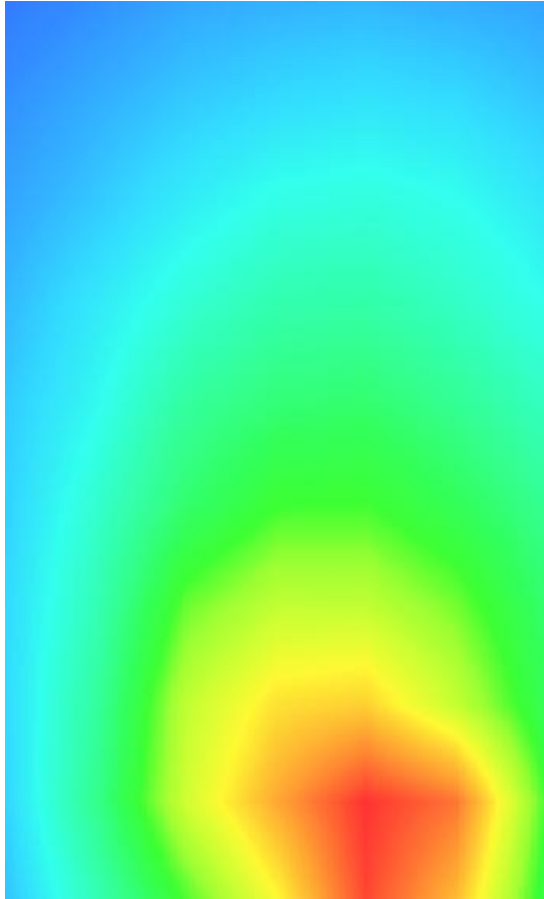3D screen shot	Hot spot position
	

GSM1900, Right Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 21/11/2014

Measurement duration: 5 minutes 37 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	661
Signal	GSM (Duty cycle: 1:8)

B.SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	39.98
Relative permittivity (imaginary part)	15.07
Conductivity (S/m)	1.41
Variation (%)	-1.400000
ConvF:	5.49


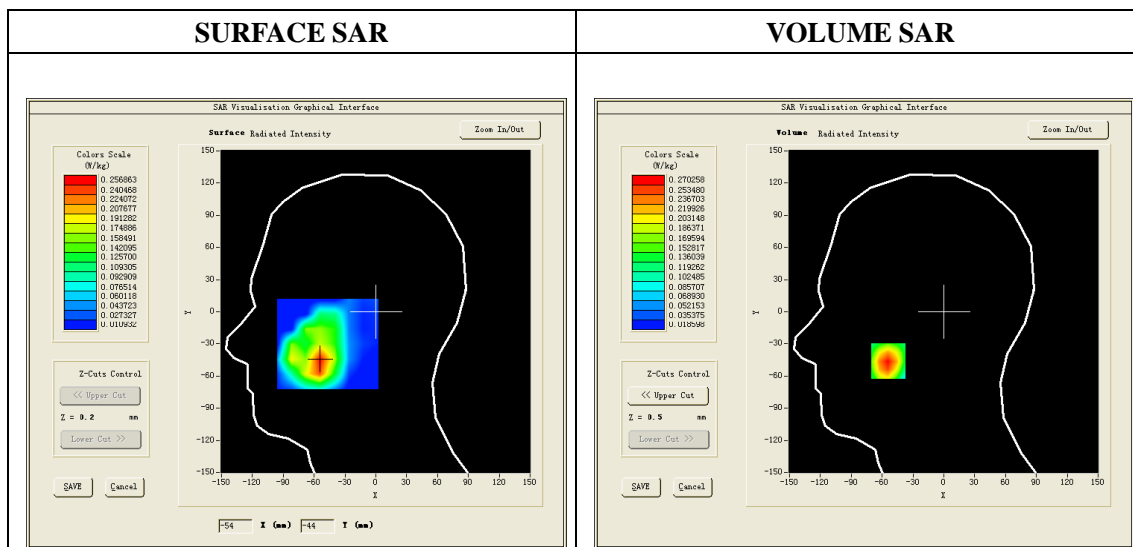


Maximum location: X=-54.00, Y=-46.00

SAR 10g (W/Kg)	0.165250
SAR 1g (W/Kg)	0.254945

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3279	0.2703	0.2062	0.1510	0.1045

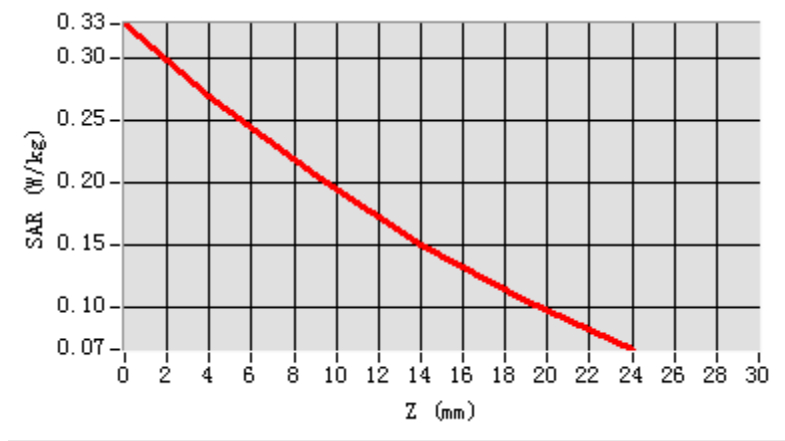

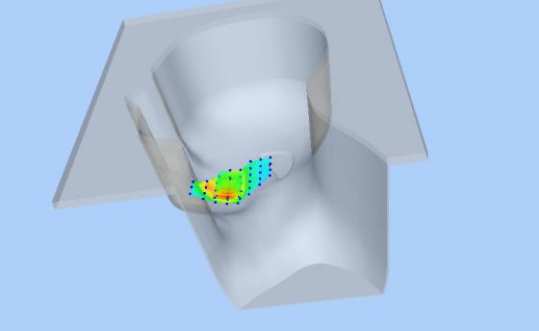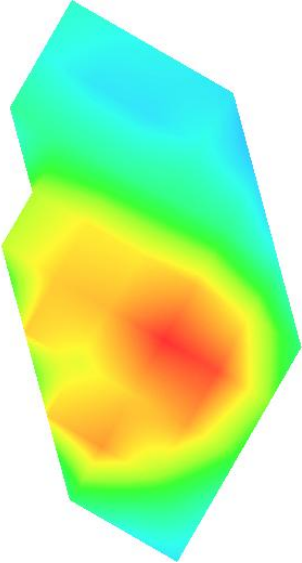3D screen shot	Hot spot position
	

GSM1900, Back, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 21/11/2014

Measurement duration: 6 minutes 52 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	GSM1900
Channels	661
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	53.28
Relative permittivity (imaginary part)	12.99
Conductivity (S/m)	1.53
Variation (%)	-3.010000
ConvF:	5.65


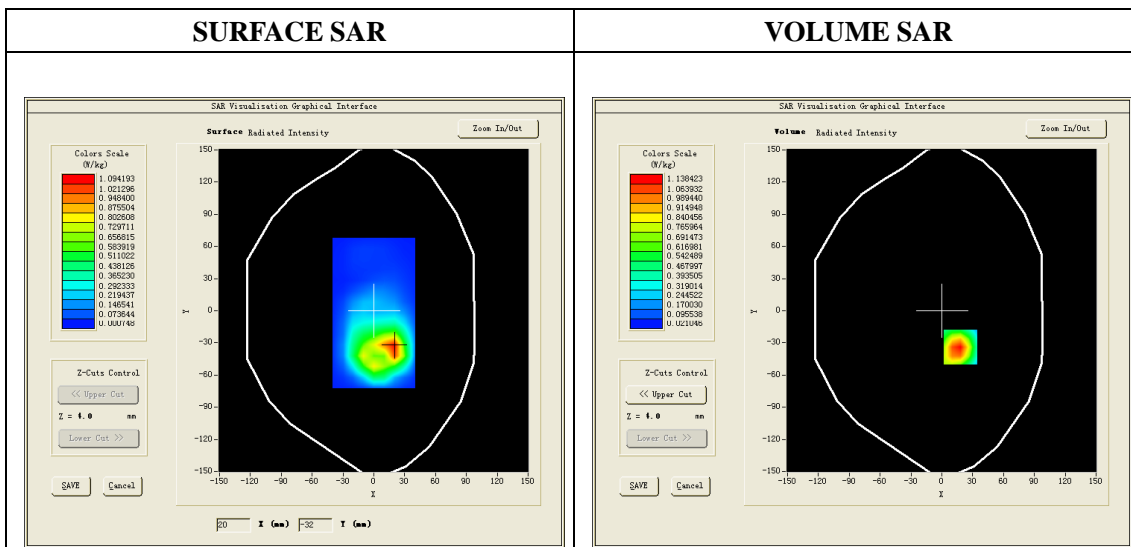


Maximum location: X=18.00, Y=-34.00

SAR 10g (W/Kg)	0.673158
SAR 1g (W/Kg)	1.295928

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8262	1.1384	0.6134	0.3352	0.1963

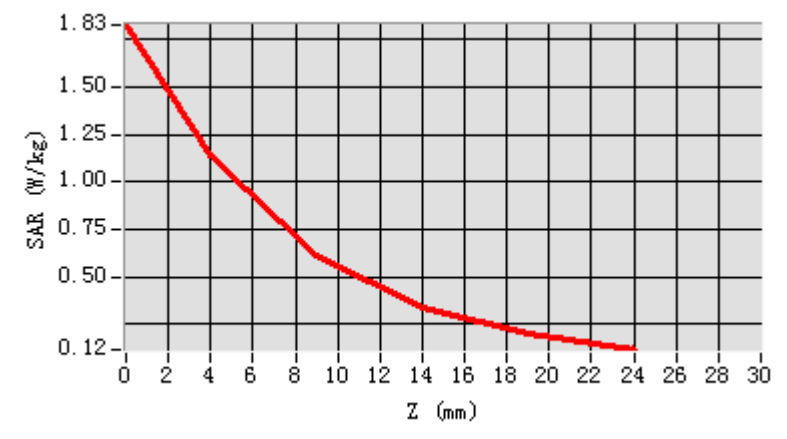

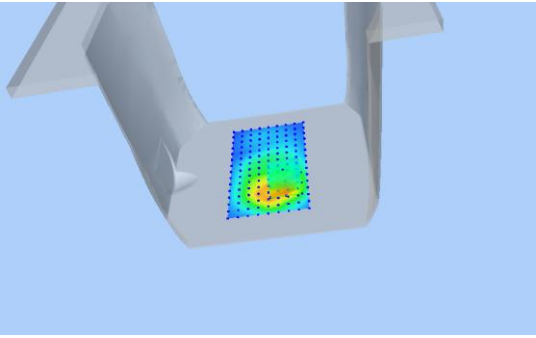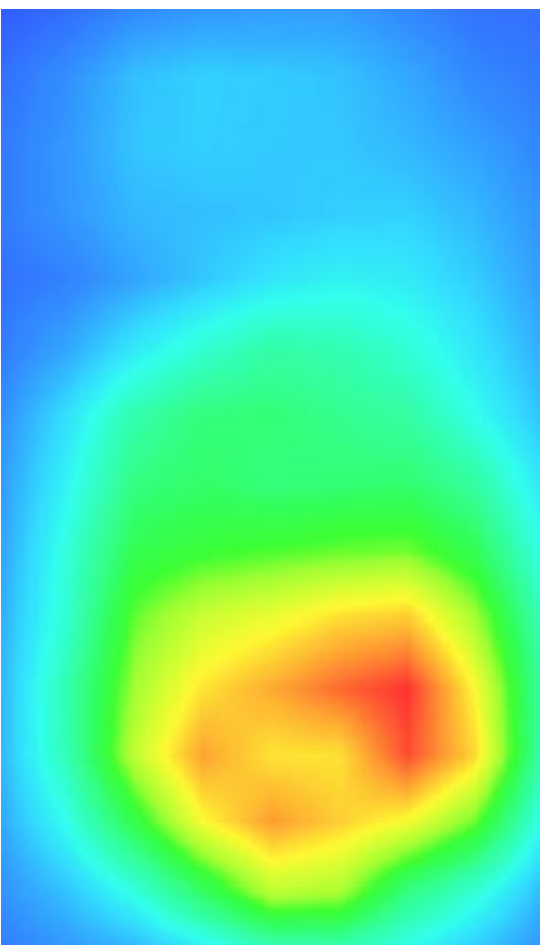3D screen shot	Hot spot position
	

GSM1900, Back, Middle, Repeated testing

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 21/11/2014

Measurement duration: 6 minutes 52 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	GSM1900
Channels	661
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	53.28
Relative permittivity (imaginary part)	12.99
Conductivity (S/m)	1.53
Variation (%)	-1.820000
ConvF:	5.65


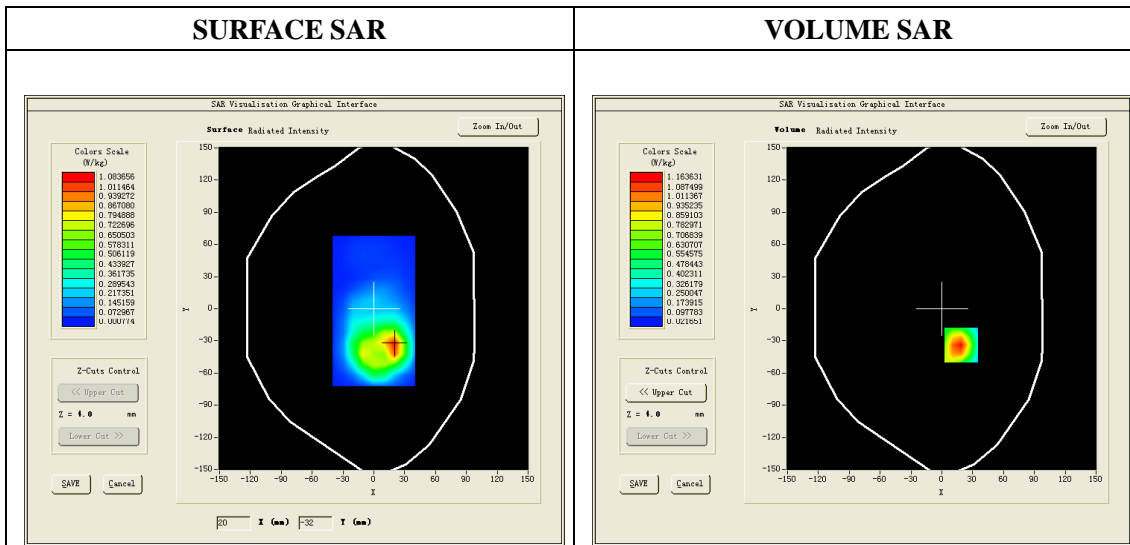


Maximum location: X=19.00, Y=-34.00

SAR 10g (W/Kg)	0.665618
SAR 1g (W/Kg)	1.282632

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8200	1.1636	0.6470	0.3600	0.2076

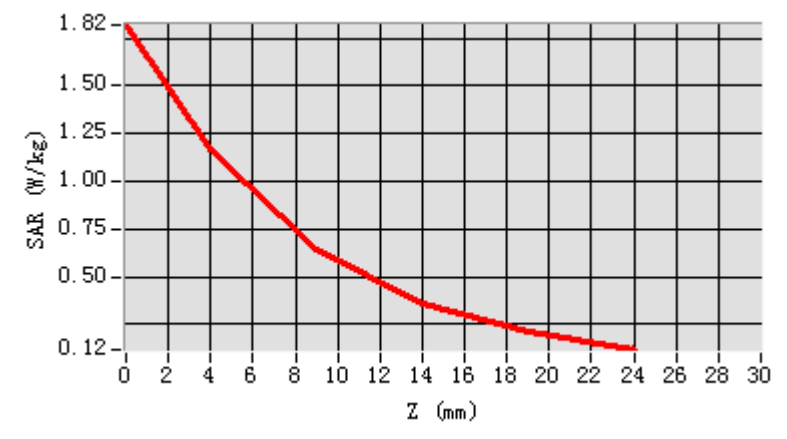

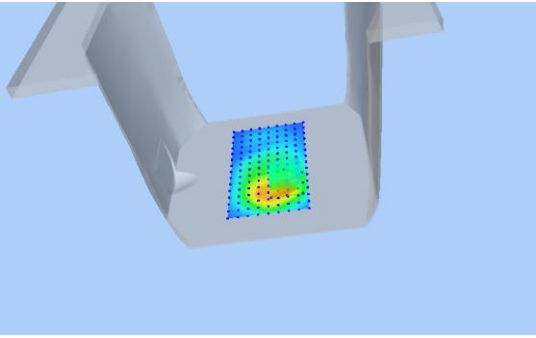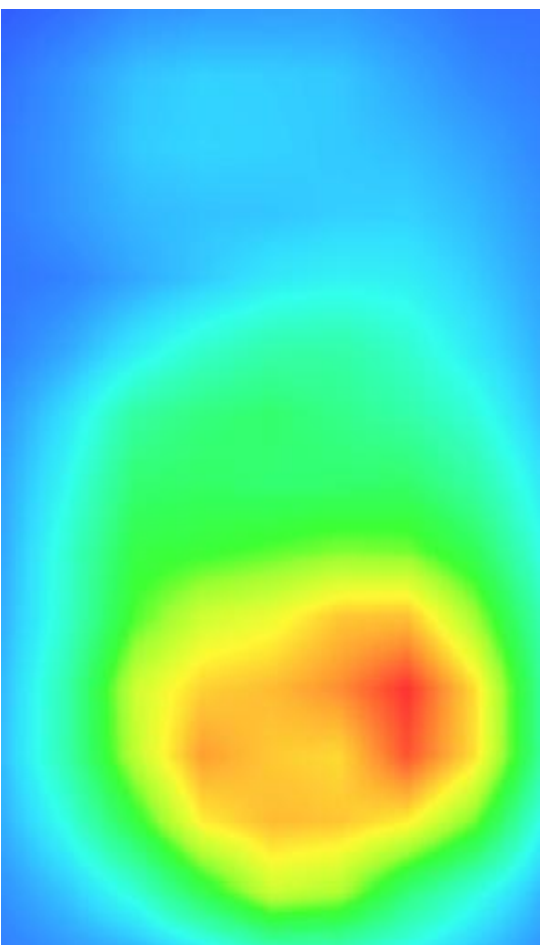3D screen shot	Hot spot position
	

GSM1900, Back, Middle, Repeated testing

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 21/11/2014

Measurement duration: 6 minutes 52 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Back
Band	GSM1900
Channels	661
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	53.28
Relative permittivity (imaginary part)	12.99
Conductivity (S/m)	1.53
Variation (%)	-1.240000
ConvF:	5.65


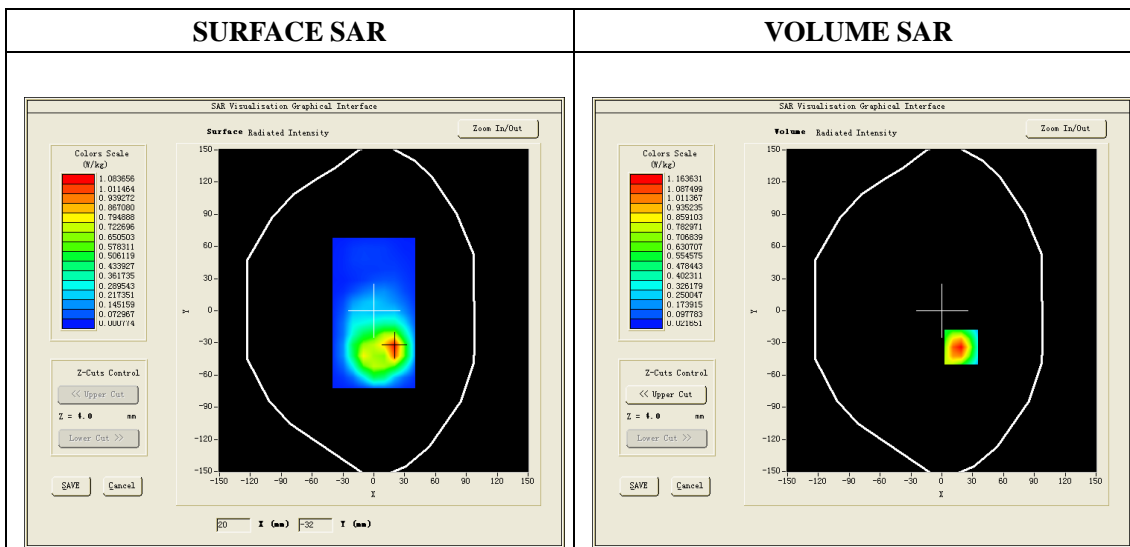


Maximum location: X=19.00, Y=-34.00

SAR 10g (W/Kg)	0.671057
SAR 1g (W/Kg)	1.287425

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8200	1.1638	0.6474	0.3602	0.2068

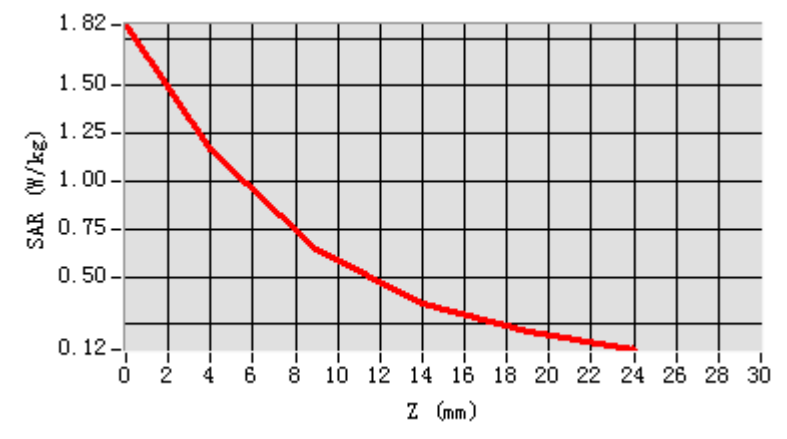

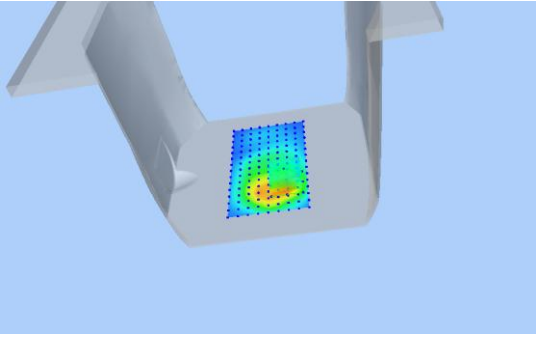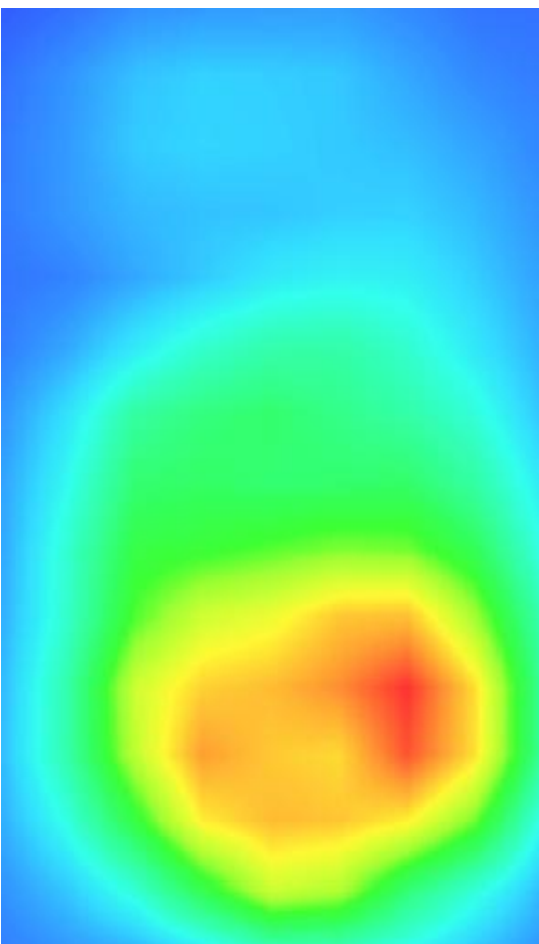3D screen shot	Hot spot position
	

GPRS1900, BACK, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 21/11/2014

Measurement duration: 7 minutes 31 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	CUSTOM (GPRS1900_1Tx)
Channels	661
Signal	GPRS (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	53.28
Relative permittivity (imaginary part)	12.99
Conductivity (S/m)	1.53
Variation (%)	-3.720000
ConvF:	5.65


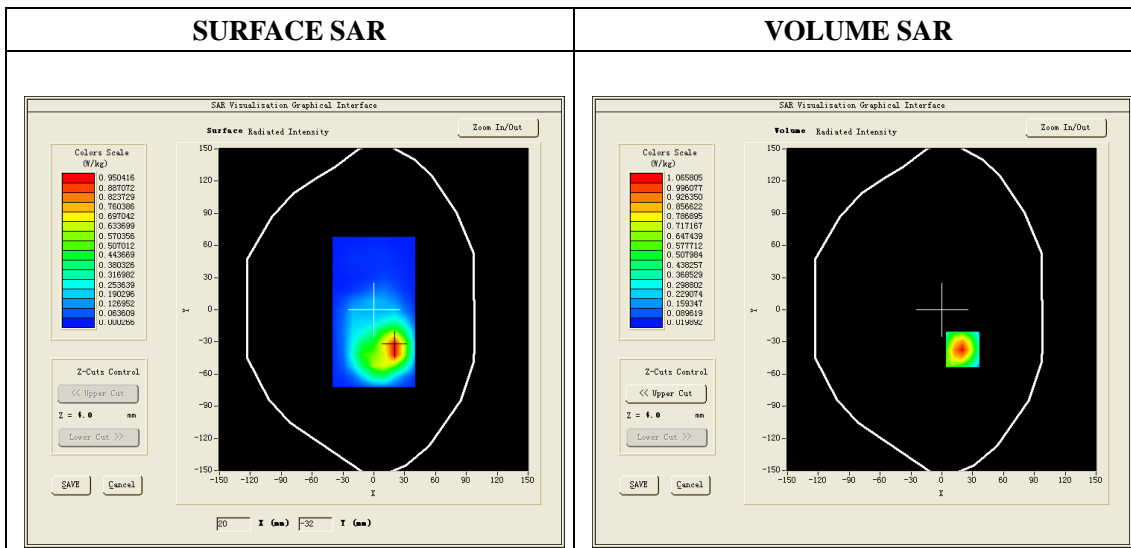


Maximum location: X=20.00, Y=-37.00

SAR 10g (W/Kg)	0.522610
SAR 1g (W/Kg)	1.014037

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.6573	1.0658	0.5996	0.3404	0.2025

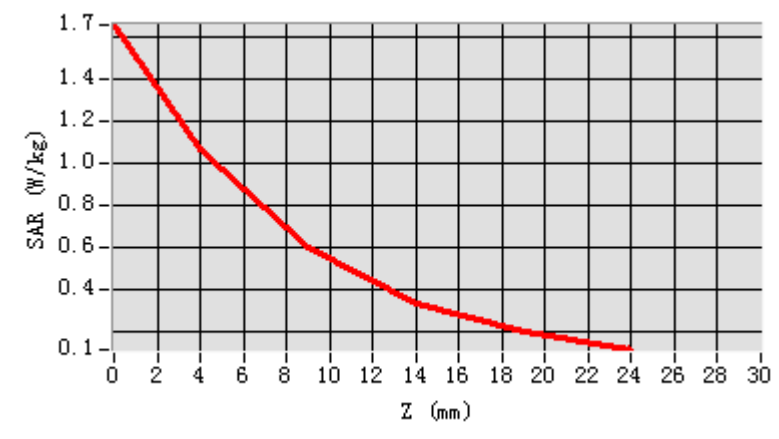

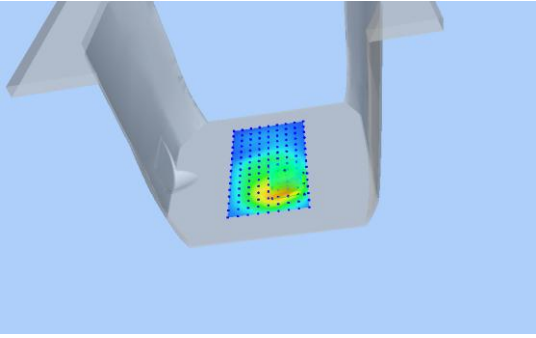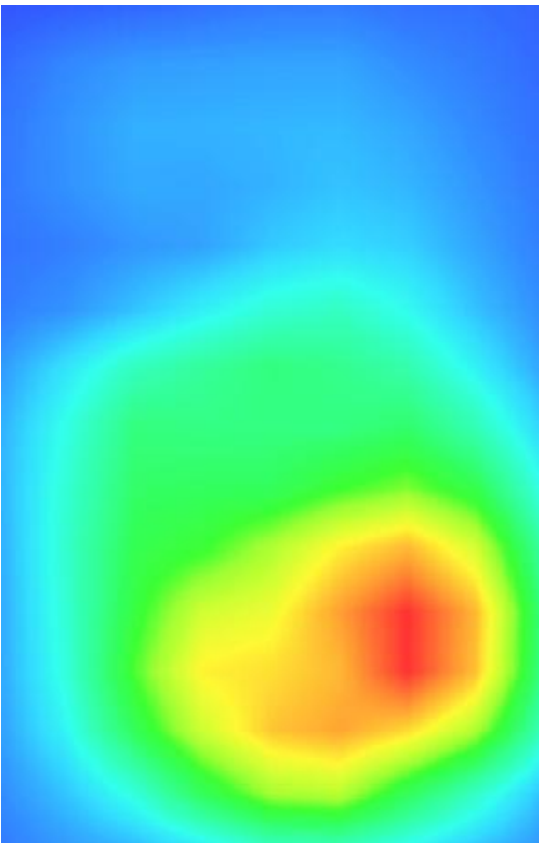3D screen shot	Hot spot position
	

GPRS1900, BACK, Middle, Repeated testing

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 21/11/2014

Measurement duration: 7 minutes 31 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	CUSTOM (GPRS1900_1Tx)
Channels	661
Signal	GPRS (Duty cycle: 1:8)

B. SAR Measurement Results


Frequency (MHz)	1880.0
Relative permittivity (real part)	53.28
Relative permittivity (imaginary part)	12.99
Conductivity (S/m)	1.53
Variation (%)	-1.020000
ConvF:	5.65


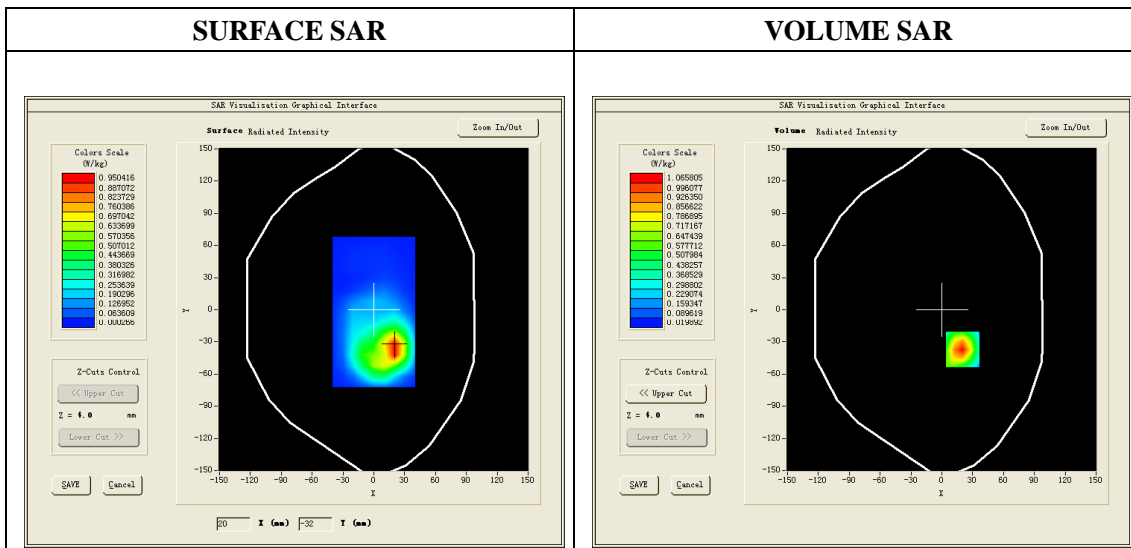


Maximum location: X=20.00, Y=-37.00

SAR 10g (W/Kg)	0.512573
SAR 1g (W/Kg)	1.003247

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.6425	1.0534	0.5948	0.3235	0.2012

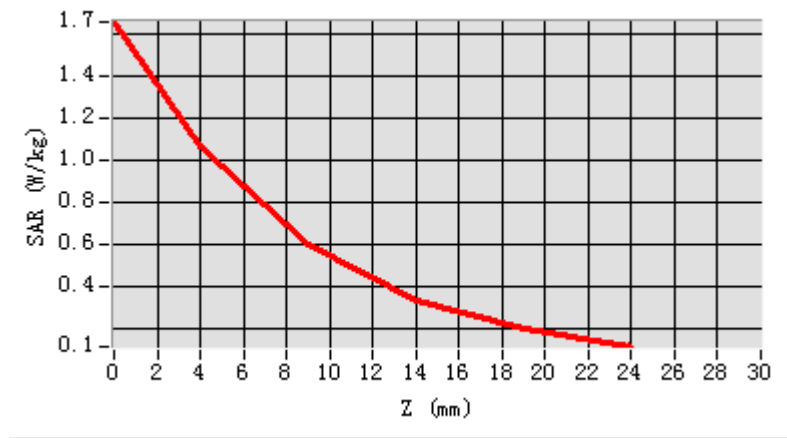

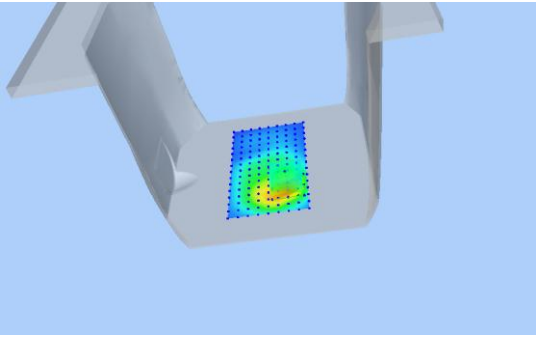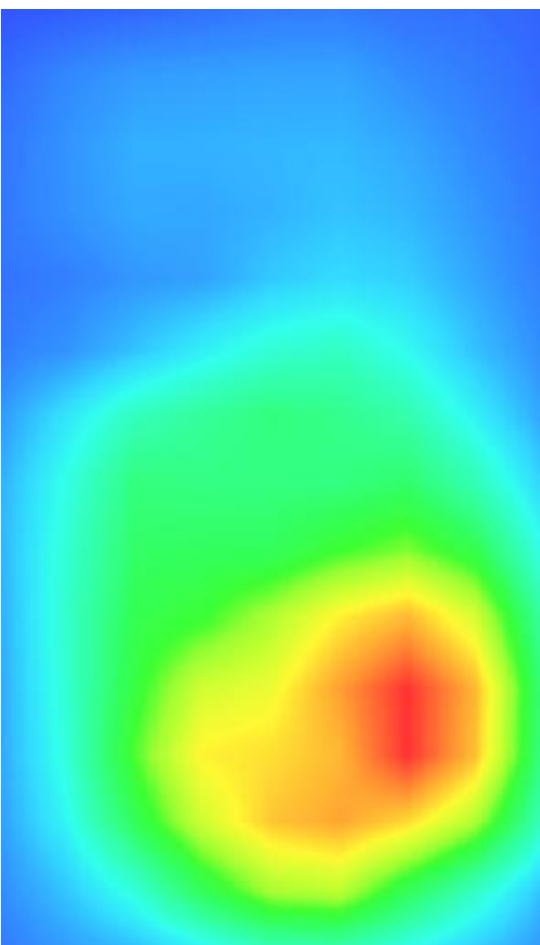3D screen shot	Hot spot position
	

WCDMA850, Left Cheek, Middle

Type: Phone measurement (Very fast, 11 points in the volume)

Date of measurement: 19/11/2014

Measurement duration: 5 minutes 19 seconds


Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	Band5_WCDMA850
Channels	4183
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results

Frequency (MHz)	836.6
Relative permittivity (real part)	41.45
Relative permittivity (imaginary part)	15.07
Conductivity (S/m)	0.91
Variation (%)	-0.970000
ConvF:	5.51

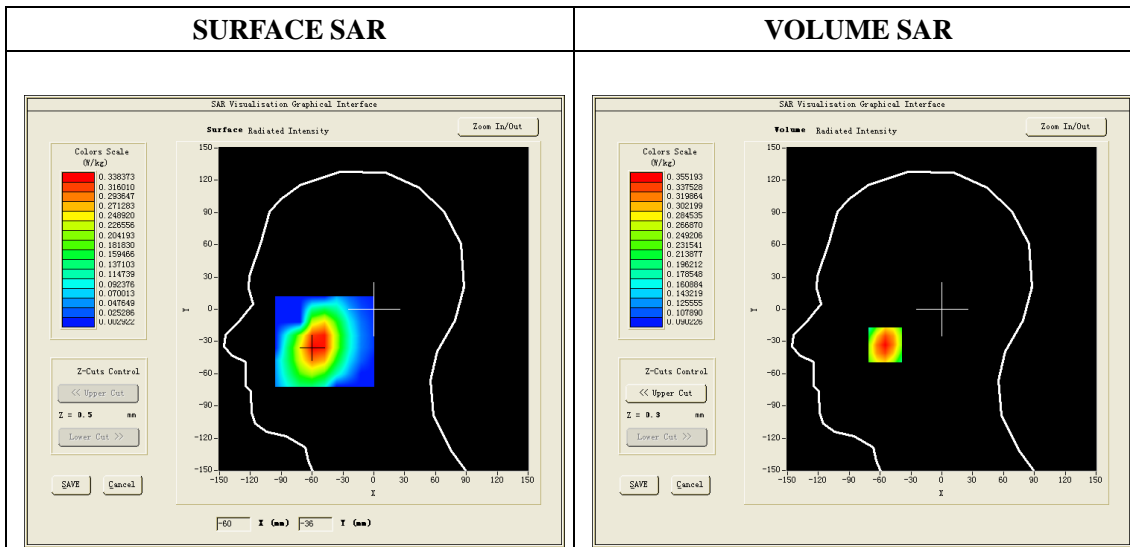

Maximum location: X=-55.00, Y=-33.00

SAR 10g (W/Kg)	0.270419
SAR 1g (W/Kg)	0.342508