




# RF TEST REPORT



Report No.: 16070559-FCC-R2

Supersede Report No.: N/A

Applicant	MFOURTEL MEXICO S.A. DE C.V.	
Product Name	LTE Mobile Phone	
Model No.	M4 SS4450	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	June 07 to 24, 2016	
Issue Date	June 25, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070559-FCC-R2
Page	3 of 61

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 CHANNEL SEPARATION .....	11
6.3 20DB BANDWIDTH.....	15
6.4 PEAK OUTPUT POWER.....	19
6.5 NUMBER OF HOPPING CHANNEL.....	23
6.6 TIME OF OCCUPANCY (DWELL TIME) .....	25
6.7 BAND EDGE & RESTRICTED BAND .....	29
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	37
6.9 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND .....	43
ANNEX A. TEST INSTRUMENT.....	49
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	50
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	56
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	60
ANNEX E. DECLARATION OF SIMILARITY.....	61

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070559-FCC-R2	NONE	Original	June 25, 2016

## 2. Customer information

Applicant Name	MFOURTEL MEXICO S.A. DE C.V.
Applicant Add	Av. Ejercito Nacional 436 Piso 3 Chapultepec Morales Miguel Hidalgo D.F 11570
Manufacturer	CK Telecom Limited
Manufacturer Add	Technology Road.High-Tech Development Zone. Heyuan, Guangdong,P.R.China.

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

## 4. Equipment under Test (EUT) Information

Description of EUT:	LTE Mobile Phone
Main Model:	M4 SS4450
Serial Model:	N/A
Date EUT received:	June 06, 2016
Test Date(s):	June 07 to 24, 2016
Equipment Category :	DSS
Antenna Gain:	GSM850: -3.5dBi PCS1900: -3.5dBi UMTS-FDD Band 5: -3.5dBi UMTS-FDD Band 2: -3.5dBi LTE Band 2: -3.5dBi LTE Band 4: -3.5dBi LTE Band 7: -5.5dBi LTE Band 17: -6.5dBi Bluetooth/BLE/WIFI:-3.5dBi GPS: -2.5dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK LTE Band: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK

RF Operating Frequency (ies):

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz  
 PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz  
 UMTS-FDD Band 5 TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz  
 UMTS-FDD Band 2 TX: 1852.4 ~ 1907.6 MHz;  
 RX: 1932.4 ~ 1987.6 MHz  
 LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz  
 LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz  
 LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz  
 LTE Band 17 TX: 706.5 ~ 713.5 MHz; RX : 736.5 ~ 743.5 MHz  
 WIFI: 802.11b/g/n(20M): 2412-2462 MHz  
 WIFI: 802.11n(40M): 2422-2452 MHz  
 Bluetooth& BLE: 2402-2480 MHz  
 GPS: 1575.42 MHz

Max. Output Power: -1.052dBm

Number of Channels:

GSM 850: 124CH  
 PCS1900: 299CH  
 UMTS-FDD Band 5: 102CH  
 UMTS-FDD Band 2: 277CH  
 WIFI :802.11b/g/n(20M): 11CH  
 WIFI :802.11n(40M): 7CH  
 Bluetooth: 79CH  
 BLE: 40CH  
 GPS:1CH

Port: Power Port, Earphone Port, USB Port

Input Power:

Adapter:  
 Model: A8-501000  
 Input: AC 100-240V,50/60Hz;150mA  
 Output: DC 5.0V,1000mA(5.00Wh)  
 Battery:  
 Model: M2250A  
 Spec: 3.7V,2250mAh(8.33Wh)  
 Charge limited voltage: 4.2V

Trade Name : M4

Test Report	16070559-FCC-R2
Page	8 of 61

---

GPRS/EGPRS Multi-slot class      8/10/12

FCC ID:                                      CLNSS4450



## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 3 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is -3.5dBi for Bluetooth/BLE/WIFI, the gain is -2.5dBi for GPS.

A permanently attached PIFA antenna for GSM/PCS/UMTS, the gain is -3.5dBi for GSM850, -3.5dBi for PCS1900, -3.5dBi for UMTS-FDD Band V, -3.5dBi for UMTS-FDD Band II.

A permanently attached PIFA antenna for LTE Band 2/4/7/17, the gain is -3.5dBi for LTE Band 2, the gain is -3.5dBi for LTE Band 4, the gain is -5.5dBi for LTE Band 7, the gain is -6.5dBi for LTE Band 17.

**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 Channel Separation

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.</li> </ul>
----------------	--

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

### Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.681	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.684	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.689	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.871	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.872	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.857	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.861	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.864	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.860	Pass
	Adjacency Channel	2479			

## Test Plots

### Channel Separation measurement result

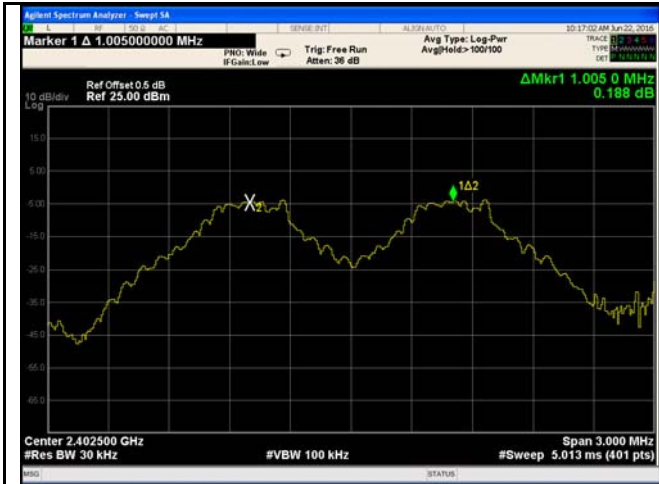

GFSK - Low Channel



GFSK - Middle Channel



GFSK - High Channel



$\pi/4$  DPSK - Low Channel



$\pi/4$  DQPSK - Middle Channel



$\pi/4$  DQPSK - High Channel



8DPSK - Low Channel



8DPSK - Middle Channel



8DPSK - High Channel




### 6.3 20dB Bandwidth

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

**Requirement(s):**

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW <math>\geq</math> 1% of the 20 dB bandwidth</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold.</li> <li>- The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference</li> </ul>
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A


#### Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.021	0.9001
	Mid	2441	1.026	0.8942
	High	2480	1.034	0.8984
$\pi/4$ DQPSK	Low	2402	1.306	1.1745
	Mid	2441	1.308	1.1793
	High	2480	1.285	1.1709
8-DPSK	Low	2402	1.291	1.1840
	Mid	2441	1.296	1.1970
	High	2480	1.290	1.1838



## Test Plots

### 20dB Bandwidth measurement result

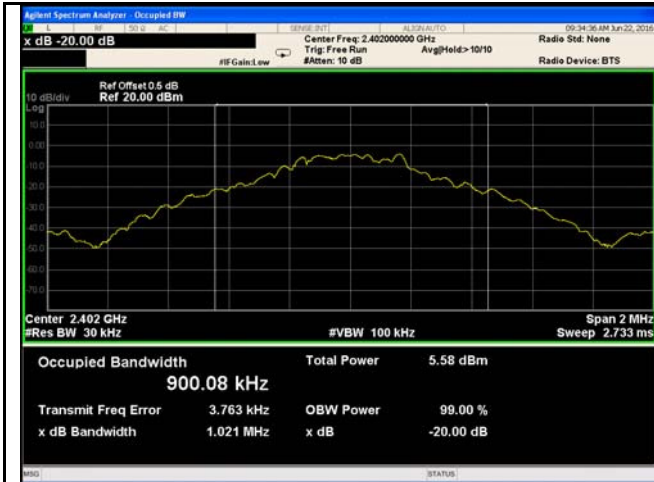

GFSK - Low Channel




GFSK - Middle Channel




GFSK - High Channel




$\pi/4$  DPSK - Low Channel

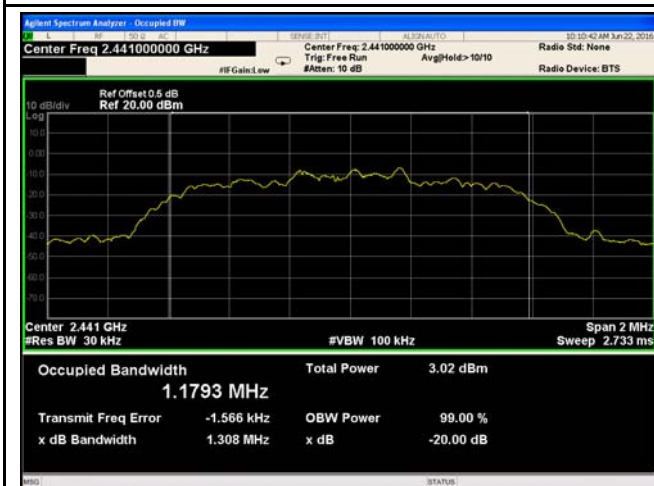


$\pi/4$  DQPSK - Middle Channel

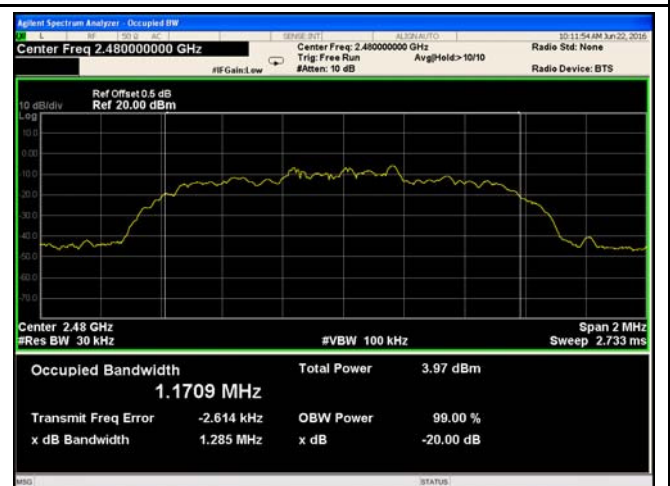


$\pi/4$  DQPSK - High Channel

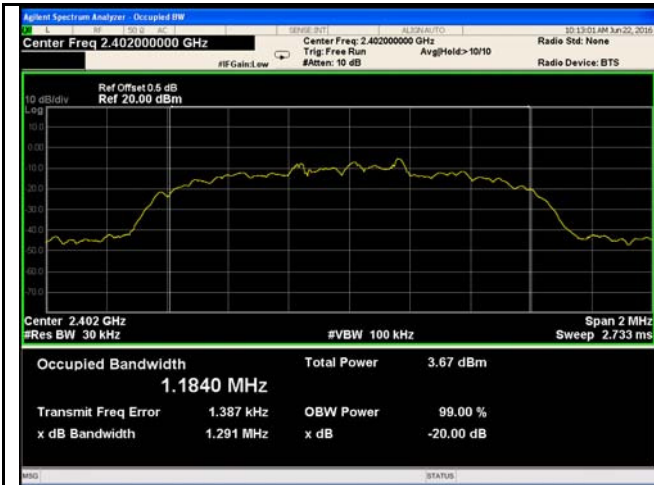

8DPSK - Low Channel

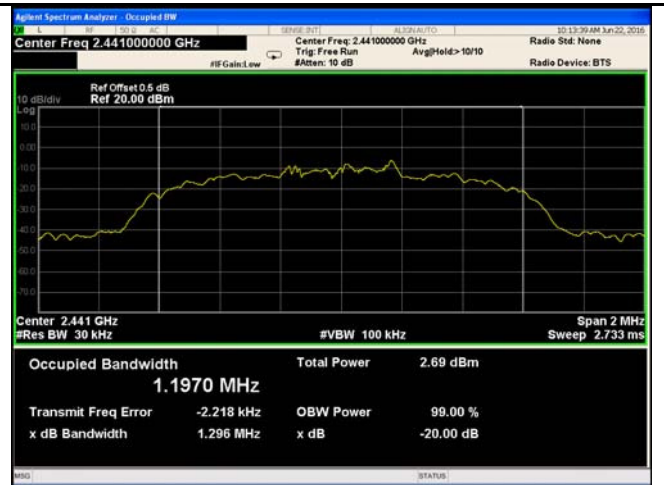

8DPSK - Middle Channel

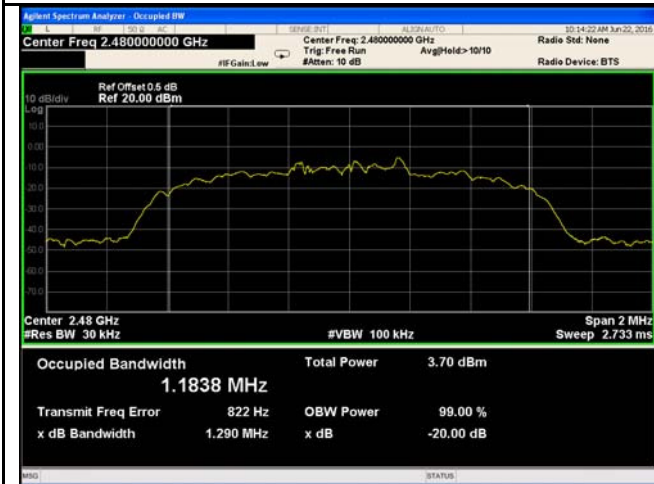

8DPSK - High Channel

## 6.4 Peak Output Power

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $< 50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq 1$ Watt	<input type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW <math>&gt;</math> the 20 dB bandwidth of the emission being measured</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize.</li> </ul>
----------------	---

	<ul style="list-style-type: none"> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)             N/A

**Peak Output Power measurement result**


Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	-1.338	125	Pass
		Mid	2441	-2.556	125	Pass
		High	2480	<b>-1.052</b>	125	Pass
	$\pi/4$ DQPSK	Low	2402	-1.971	125	Pass
		Mid	2441	-3.098	125	Pass
		High	2480	-1.746	125	Pass
	8-DPSK	Low	2402	-1.879	125	Pass
		Mid	2441	-3.011	125	Pass
		High	2480	-1.634	125	Pass

Test Plots


Output Power measurement result



GFSK Output power - Low CH 2402

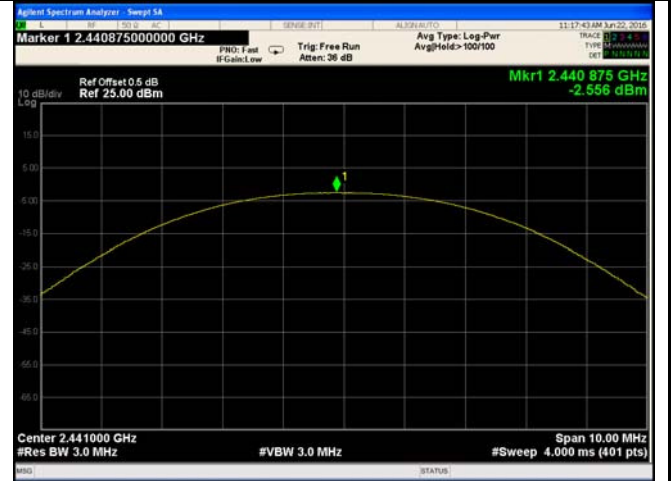


GFSK Output power - Mid CH 2441

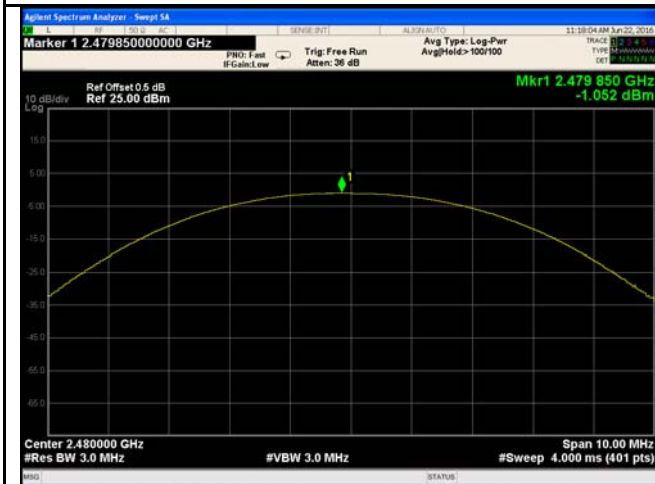


GFSK Output power - High CH 2480




$\pi/4$  DQPSK Output power - Low CH 2402

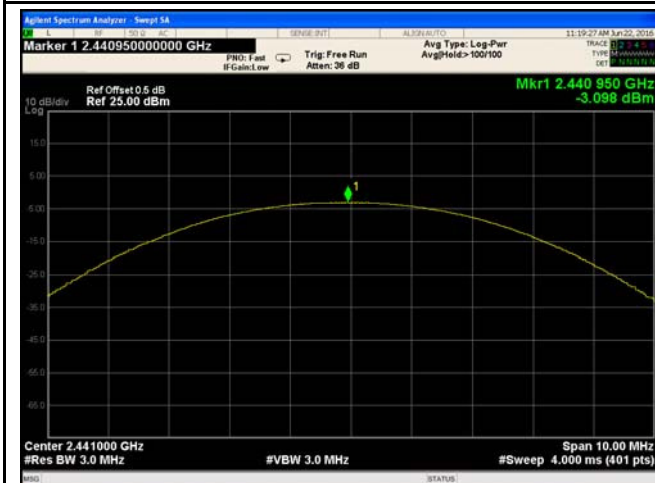


$\pi/4$  DQPSK Output power - Mid CH 2441

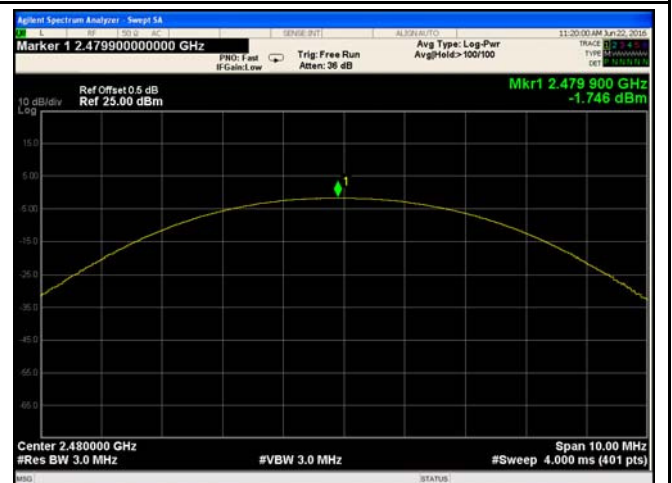


$\pi/4$  DQPSK Output power - High CH 2480

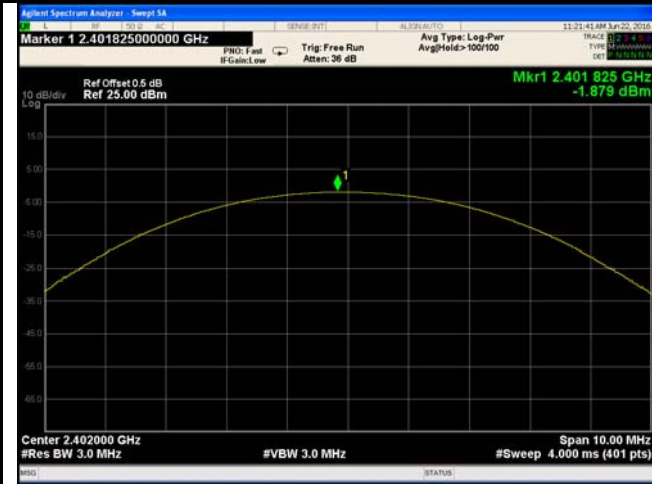


8DPSK Output power - Low CH 2402

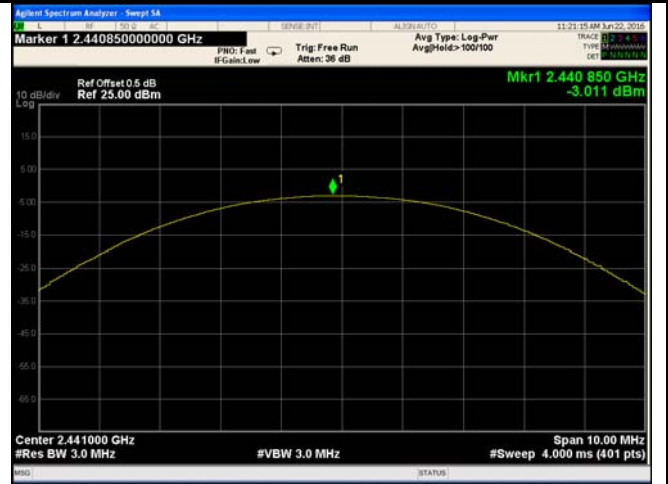

8DPSK Output power - Mid CH 2441

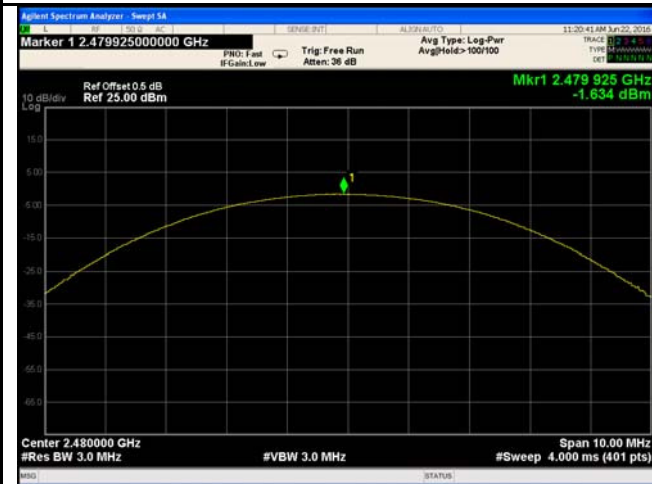


8DPSK Output power - High CH 2480



## 6.5 Number of Hopping Channel

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> <li>- Span = the frequency band of operation</li> <li>- RBW ≥ 1% of the span</li> <li>- VBW ≥ RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow trace to fully stabilize.</li> <li>- It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A  
 Test Plot     Yes (See below)       N/A




**Number of Hopping Channel measurement result**

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

**Test Plots**

**Number of Hopping Channels measurement result**

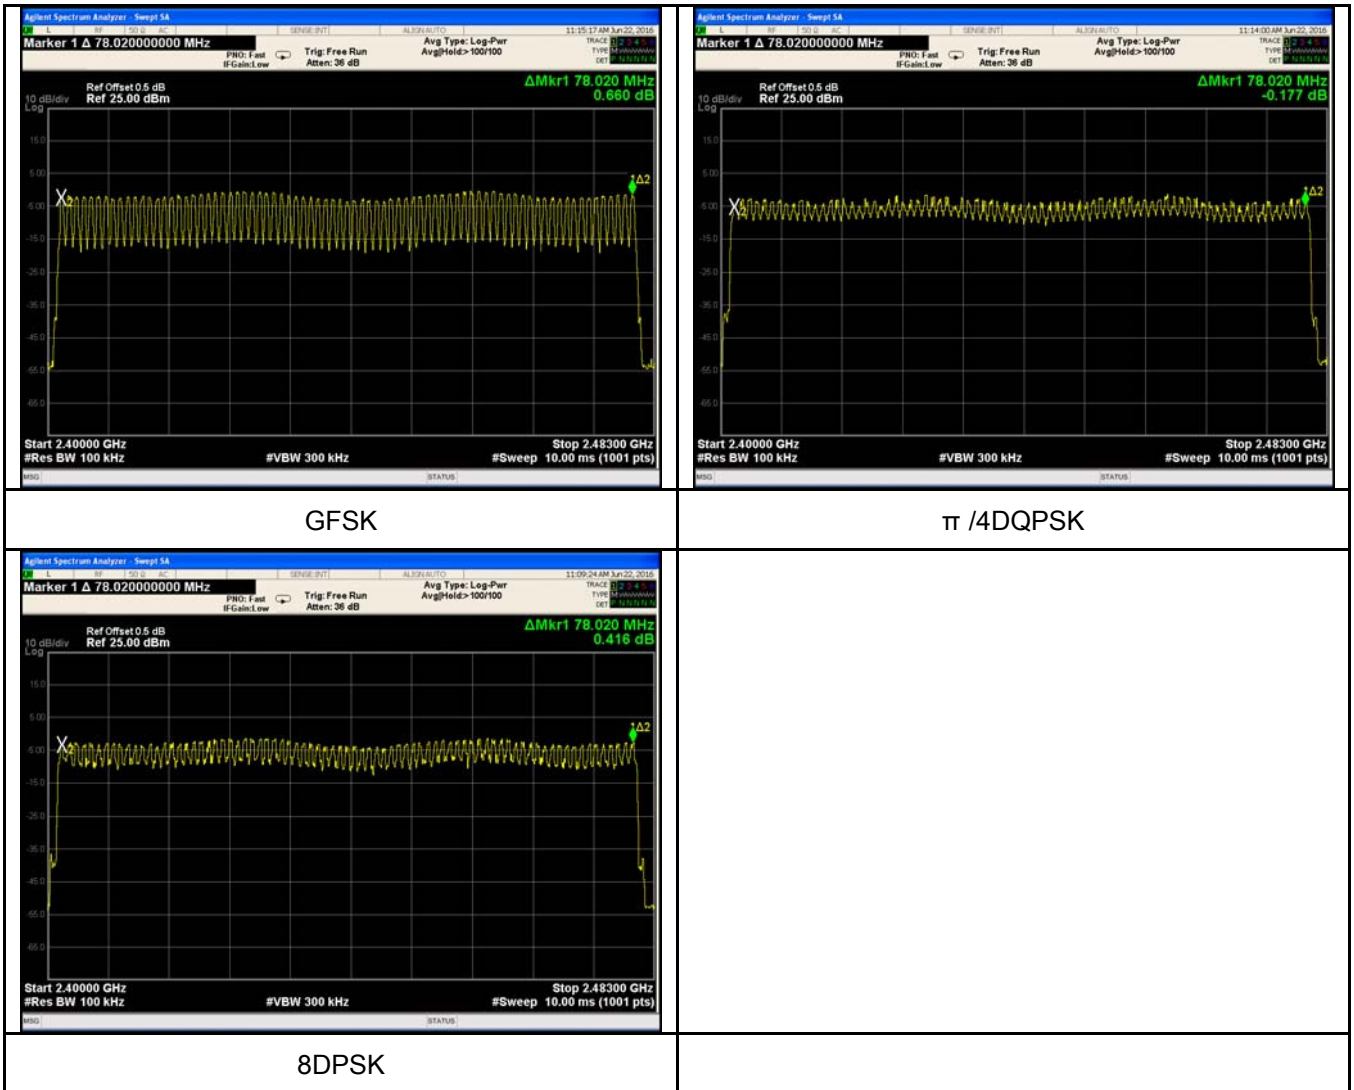




### 6.6 Time of Occupancy (Dwell Time)

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

**Requirement(s):**

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.  <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> <li>- Span = zero span, centered on a hopping channel</li> <li>- RBW = 1 MHz</li> <li>- VBW ≥ RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- use the marker-delta function to determine the dwell time</li> </ul>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)             N/A

**Dwell Time measurement result**

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.975	317.333	400	Pass
		Mid	2.925	312.000	400	Pass
		High	2.975	317.333	400	Pass
	π /4 DQPSK	Low	2.925	312.000	400	Pass
		Mid	2.950	314.667	400	Pass
		High	2.925	312.000	400	Pass
	8-DPSK	Low	2.925	312.000	400	Pass
		Mid	2.975	317.333	400	Pass
		High	2.950	314.667	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots


Dwell Time measurement result




GFSK - Low CH 2402




GFSK - Mid CH 2441

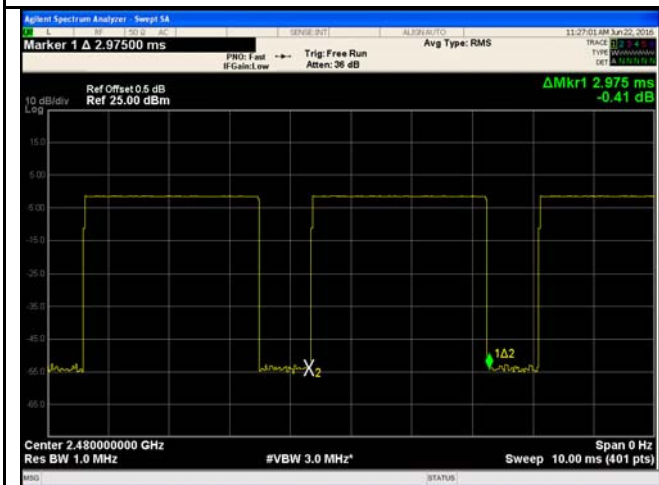


GFDK - High CH 2480

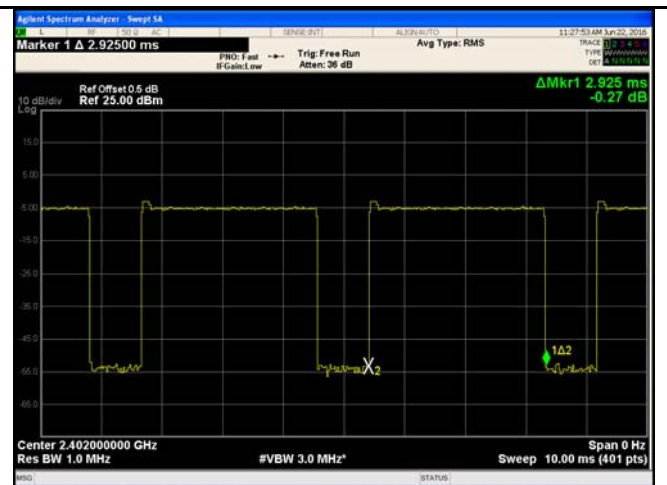

$\pi/4$  DQPSK - Low CH 2402

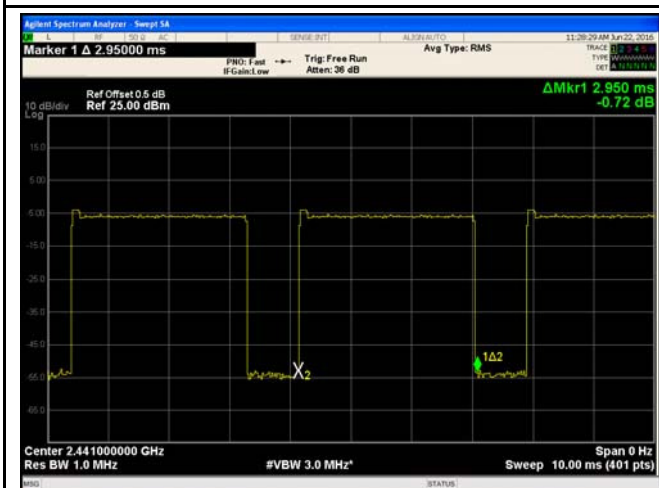


$\pi/4$  DQPSK - Mid CH 2441

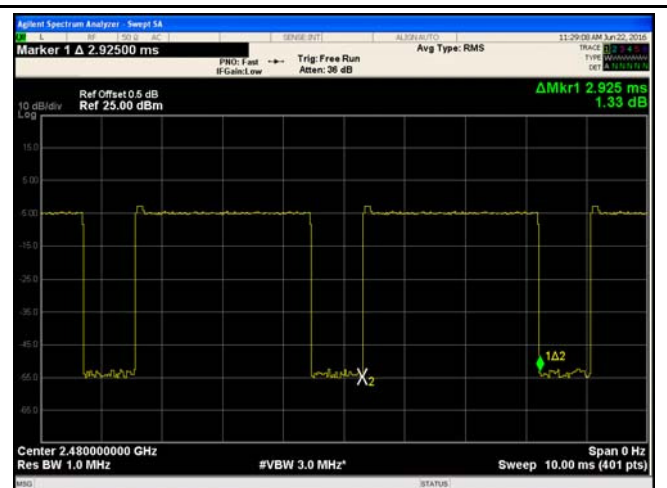


$\pi/4$  DQPSK - High CH 2480




8DPSK - Low CH 2402

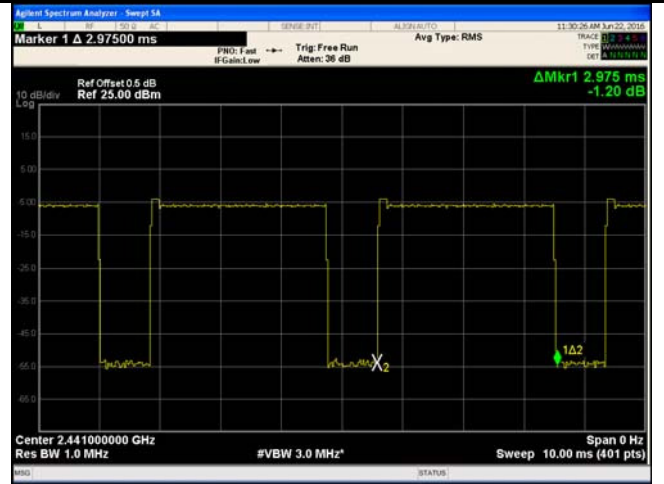

8DPSK - Mid CH 2441

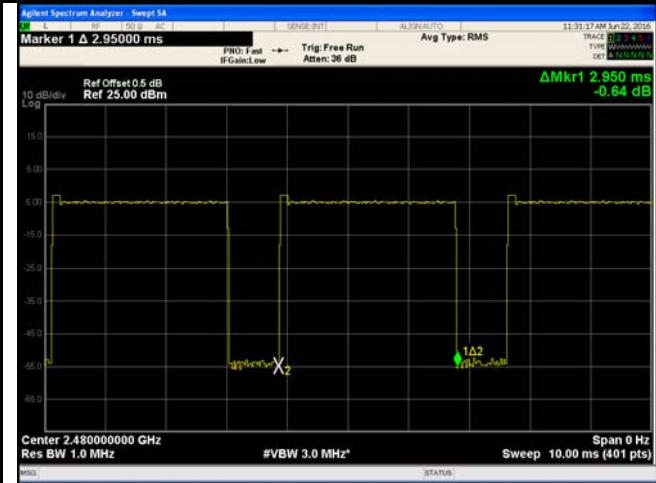

8DPSK - High CH 2480



## 6.7 Band Edge & Restricted Band

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

Test Setup	
------------	--


Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,</li> </ul>
----------------	--

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:           <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes                       N/A  
**Test Plot**     Yes (See below)       N/A


**Test Plots**

**GFSK Mode:**

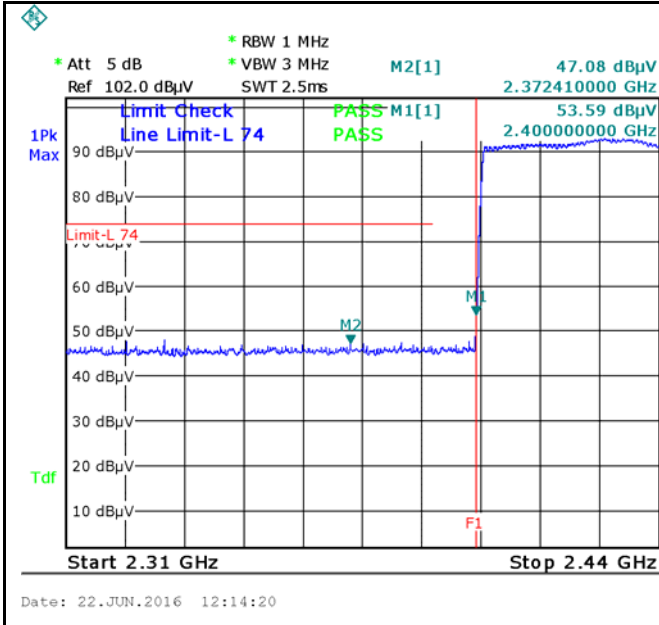


GFSK-Hopping Left Side-PK  
 Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

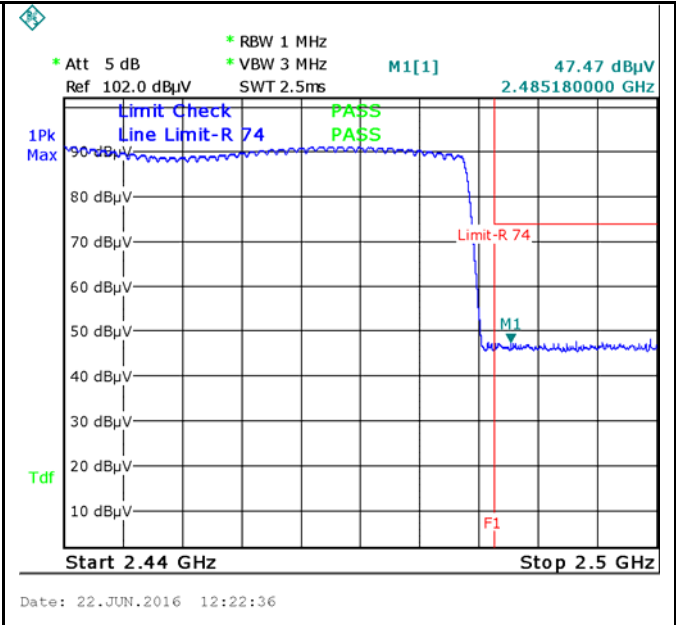


GFSK-Hopping Right Side-PK  
 Note: F1 is frequency 2483.5MHz


Note: (no need if PK value less than the AV limit)

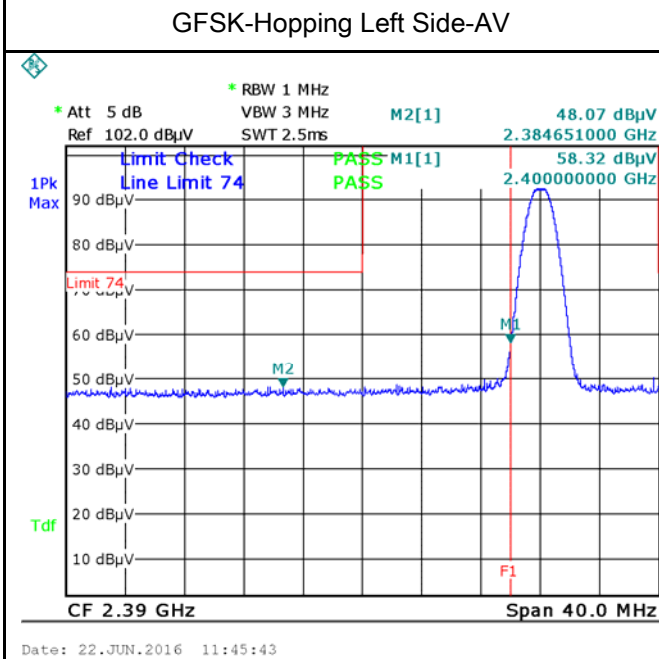

GFSK-Left Side-PK  
 Note: F1 is frequency 2400MHz

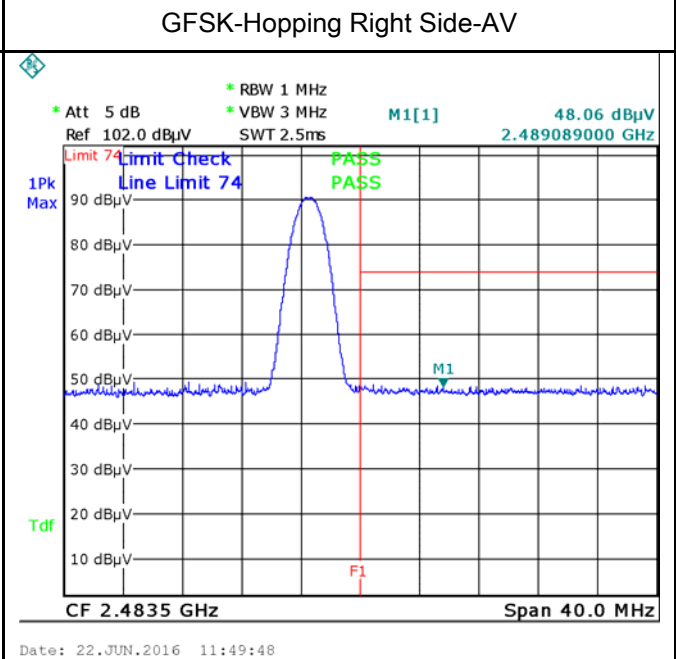

GFSK-Right Side-PK  
 Note: F1 is frequency 2483.5MHz

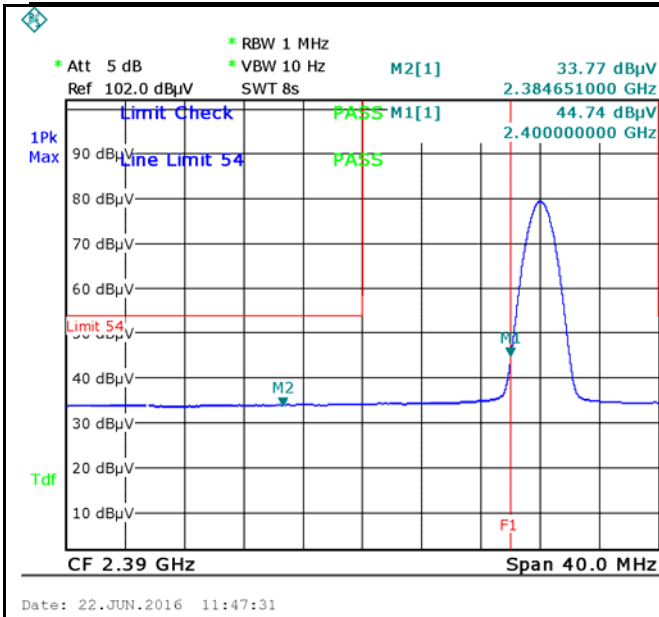



Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV

GFSK-Right Side-AV






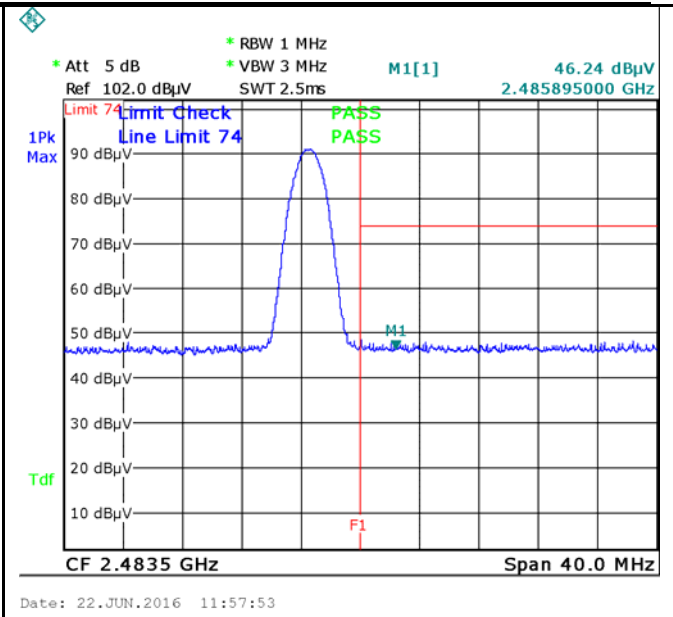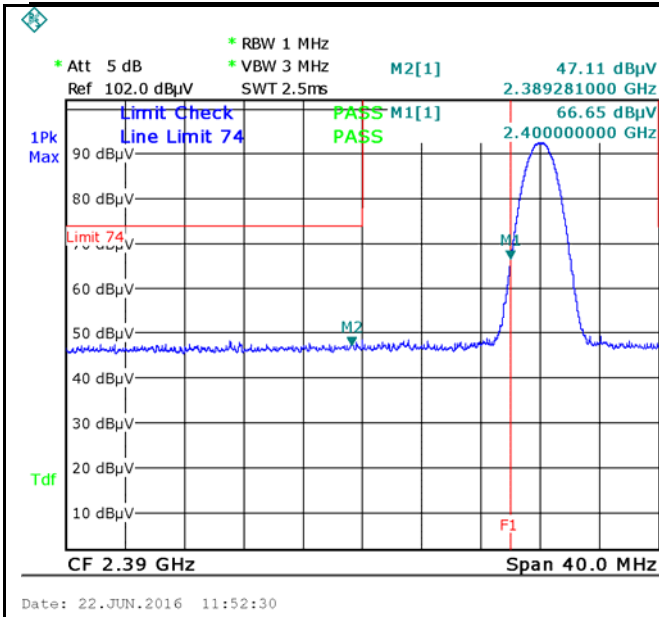

$\pi$  / 4 DQPSK-Left Side-PK  
 Note: F1 is frequency 2400MHz

$\pi$  / 4 DQPSK-Right Side-PK  
 Note: F1 is frequency 2483.5MHz

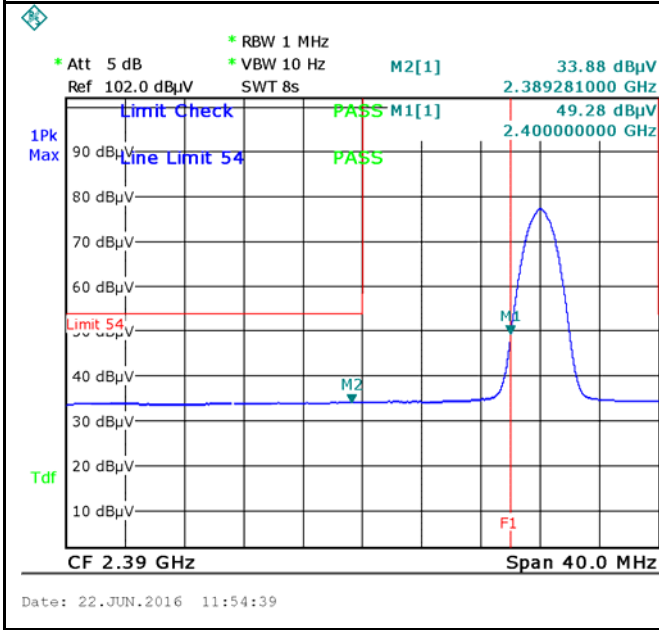


Note: (no need if PK value less than the AV limit)

$\pi$  / 4 DQPSK-Left Side-AV


$\pi$  / 4 DQPSK-Right Side-AV

**8-DPSK Mode:**

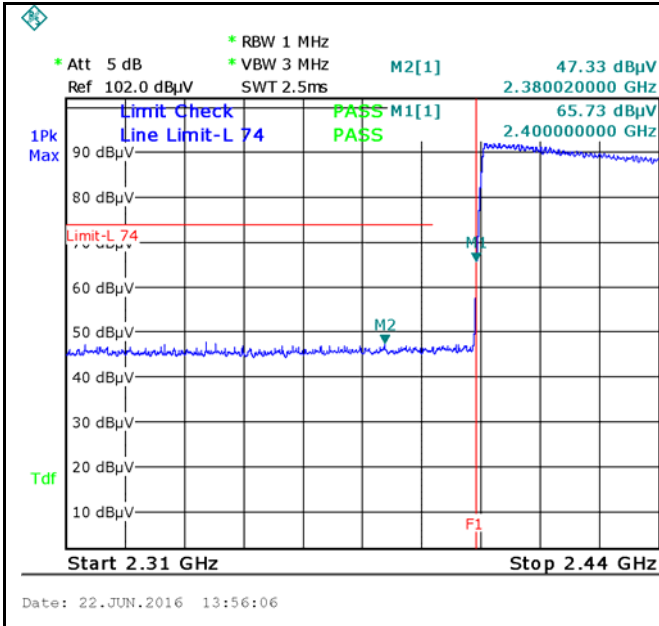


8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

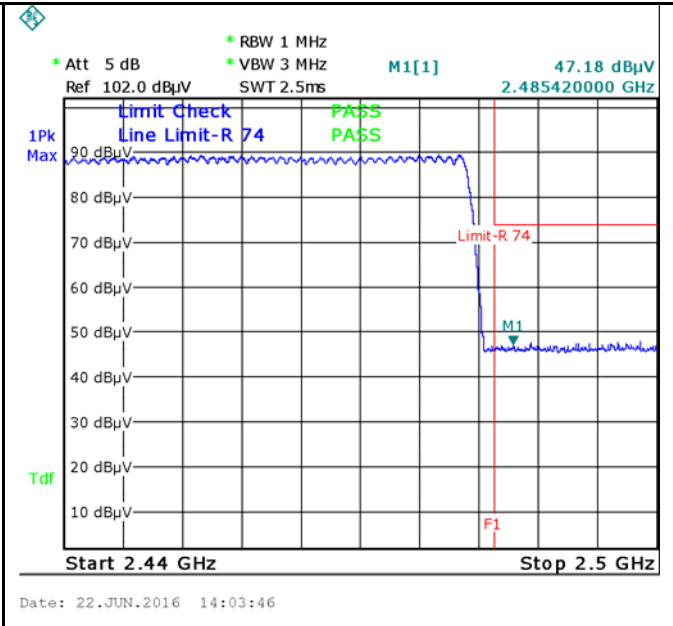

8DPSK-Hopping Right Side-PK


Note: F1 is frequency 2483.5MHz

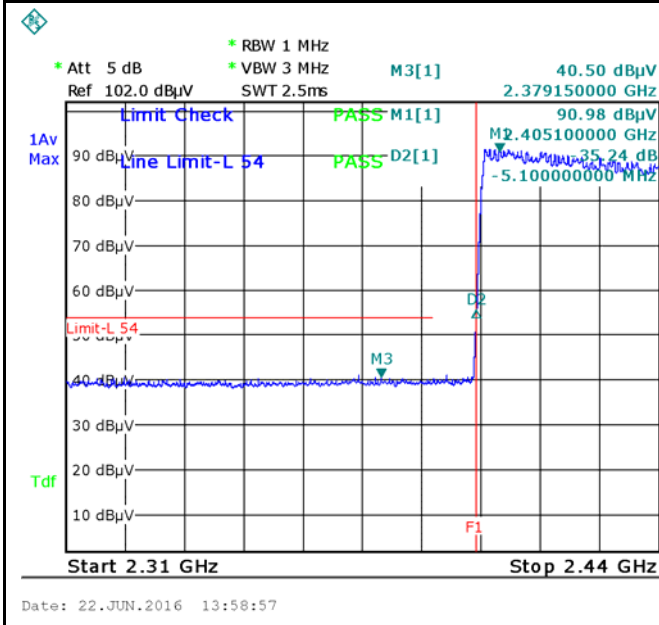


8DPSK-Hopping Left-AV

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Right-AV

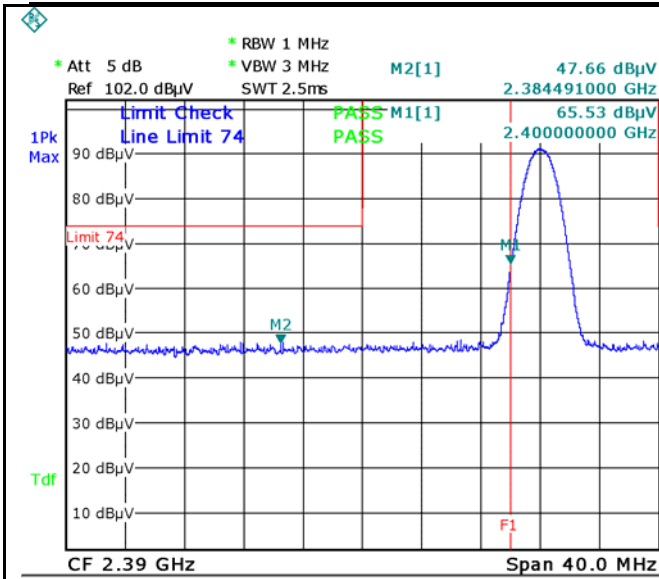

Date: 22.JUN.2016 12:01:13

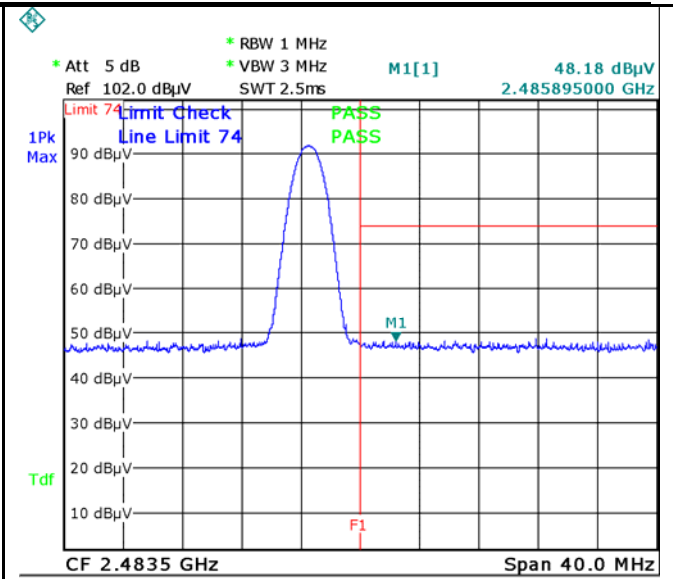


Date: 22.JUN.2016 12:08:29

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

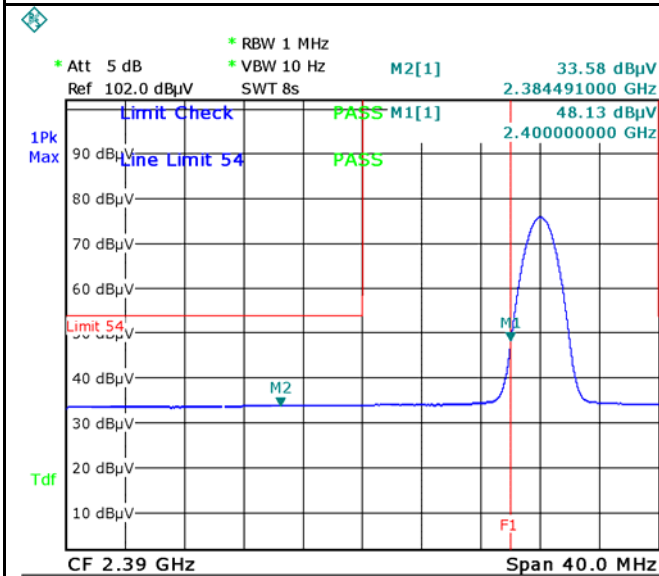

Date: 22.JUN.2016 12:04:41

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV

## 6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

Test Setup	<p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	--

Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>
-----------	---


Test Report	16070559-FCC-R2
Page	38 of 61

	<p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

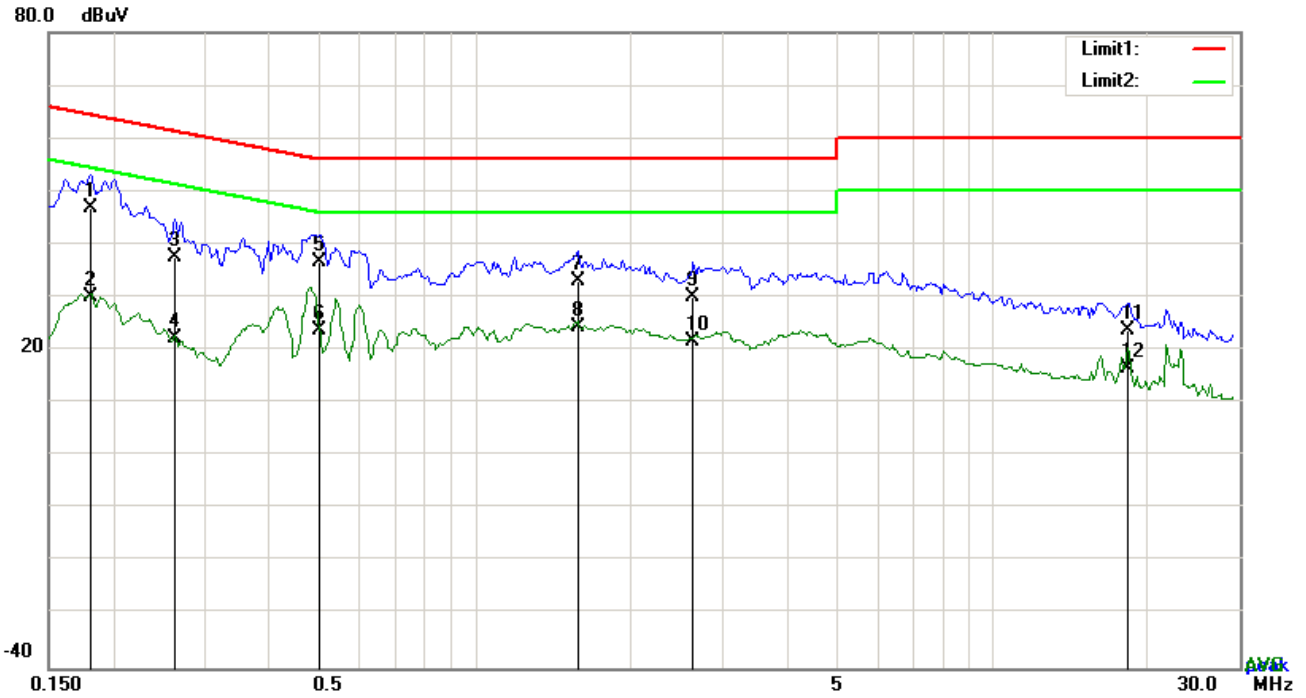


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1812	36.97	QP	10.03	47.00	64.43	-17.43
2	L1	0.1812	20.17	AVG	10.03	30.20	54.43	-24.23
3	L1	0.2631	27.67	QP	10.03	37.70	61.33	-23.63
4	L1	0.2631	12.18	AVG	10.03	22.21	51.33	-29.12
5	L1	0.5010	26.64	QP	10.03	36.67	56.00	-19.33
6	L1	0.5010	13.64	AVG	10.03	23.67	46.00	-22.33
7	L1	1.5774	23.01	QP	10.04	33.05	56.00	-22.95
8	L1	1.5774	14.31	AVG	10.04	24.35	46.00	-21.65
9	L1	2.6382	19.88	QP	10.05	29.93	56.00	-26.07
10	L1	2.6382	11.57	AVG	10.05	21.62	46.00	-24.38
11	L1	18.3036	13.54	QP	10.27	23.81	60.00	-36.19
12	L1	18.3036	6.39	AVG	10.27	16.66	50.00	-33.34

**Test Mode:** Bluetooth Mode

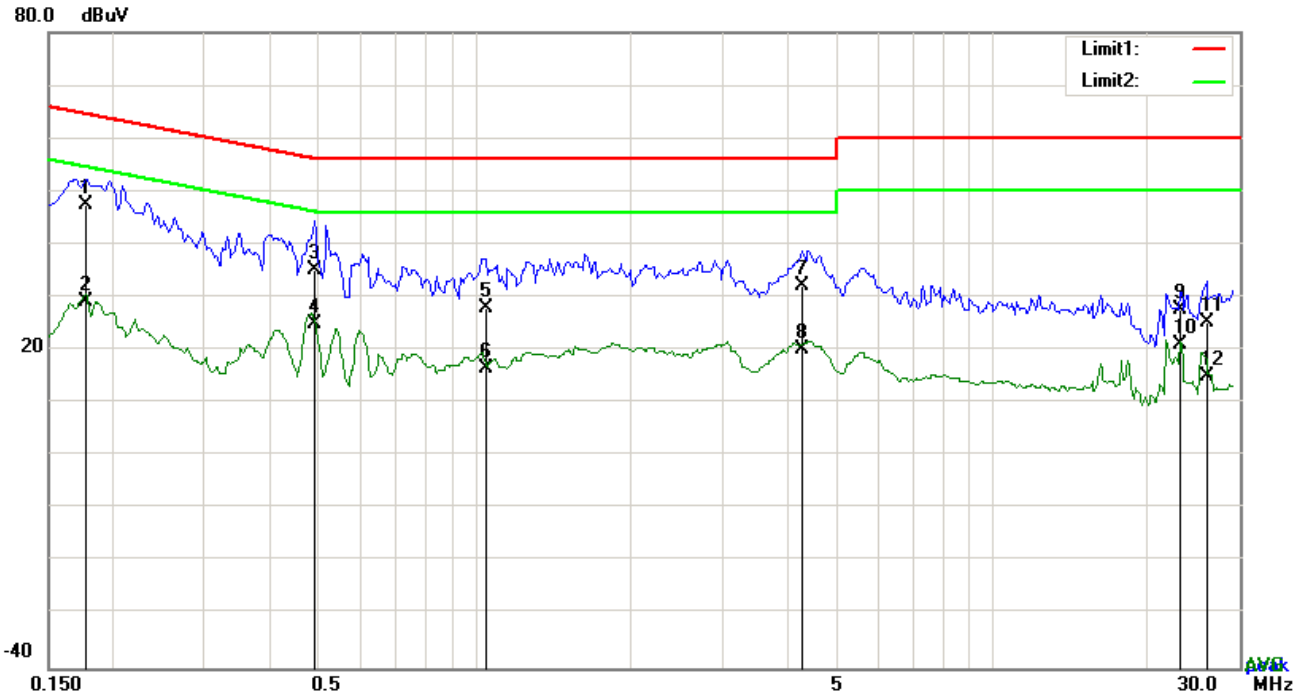


**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1773	37.46	QP	10.02	47.48	64.61	-17.13
2	N	0.1773	19.17	AVG	10.02	29.19	54.61	-25.42
3	N	0.4893	25.04	QP	10.02	35.06	56.18	-21.12
4	N	0.4893	15.06	AVG	10.02	25.08	46.18	-21.10
5	N	1.0509	17.88	QP	10.03	27.91	56.00	-28.09
6	N	1.0509	6.64	AVG	10.03	16.67	46.00	-29.33
7	N	4.2870	21.98	QP	10.06	32.04	56.00	-23.96
8	N	4.2870	10.22	AVG	10.06	20.28	46.00	-25.72
9	N	23.1318	17.22	QP	10.31	27.53	60.00	-32.47
10	N	23.1318	10.87	AVG	10.31	21.18	50.00	-28.82
11	N	25.8774	15.02	QP	10.35	25.37	60.00	-34.63
12	N	25.8774	4.56	AVG	10.35	14.91	50.00	-35.09



**Test Mode:** Bluetooth Mode

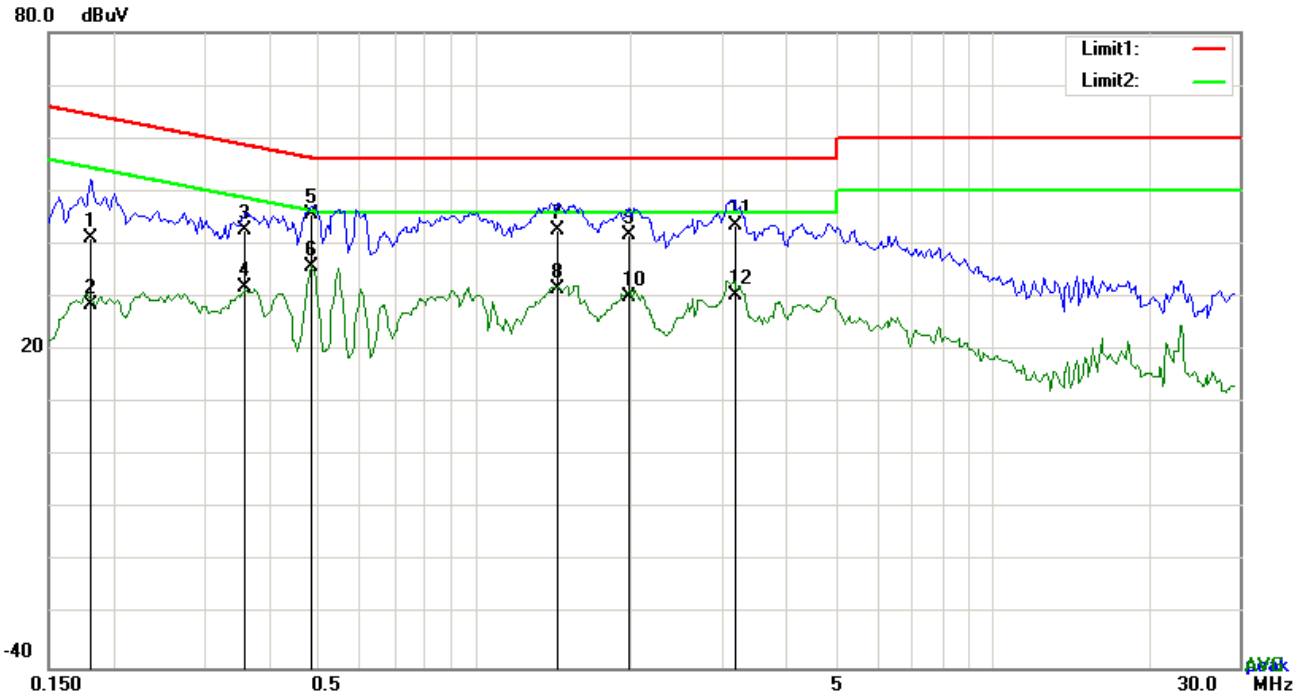


**Test Data**

**Phase Line Plot at 240Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1812	31.17	QP	10.02	41.19	64.43	-23.24
2	L1	0.1812	18.58	AVG	10.02	28.60	54.43	-25.83
3	L1	0.3606	32.62	QP	10.02	42.64	58.71	-16.07
4	L1	0.3606	21.81	AVG	10.02	31.83	48.71	-16.88
5	L1	0.4815	35.76	QP	10.02	45.78	56.31	-10.53
6	L1	0.4815	25.72	AVG	10.02	35.74	46.31	-10.57
7	L1	1.4448	32.67	QP	10.03	42.70	56.00	-13.30
8	L1	1.4448	21.64	AVG	10.03	31.67	46.00	-14.33
9	L1	1.9830	31.59	QP	10.04	41.63	56.00	-14.37
10	L1	1.9830	20.15	AVG	10.04	30.19	46.00	-15.81
11	L1	3.1833	33.57	QP	10.05	43.62	56.00	-12.38
12	L1	3.1833	20.19	AVG	10.05	30.24	46.00	-15.76

<b>Test Mode:</b>	<b>Bluetooth Mode</b>
-------------------	-----------------------

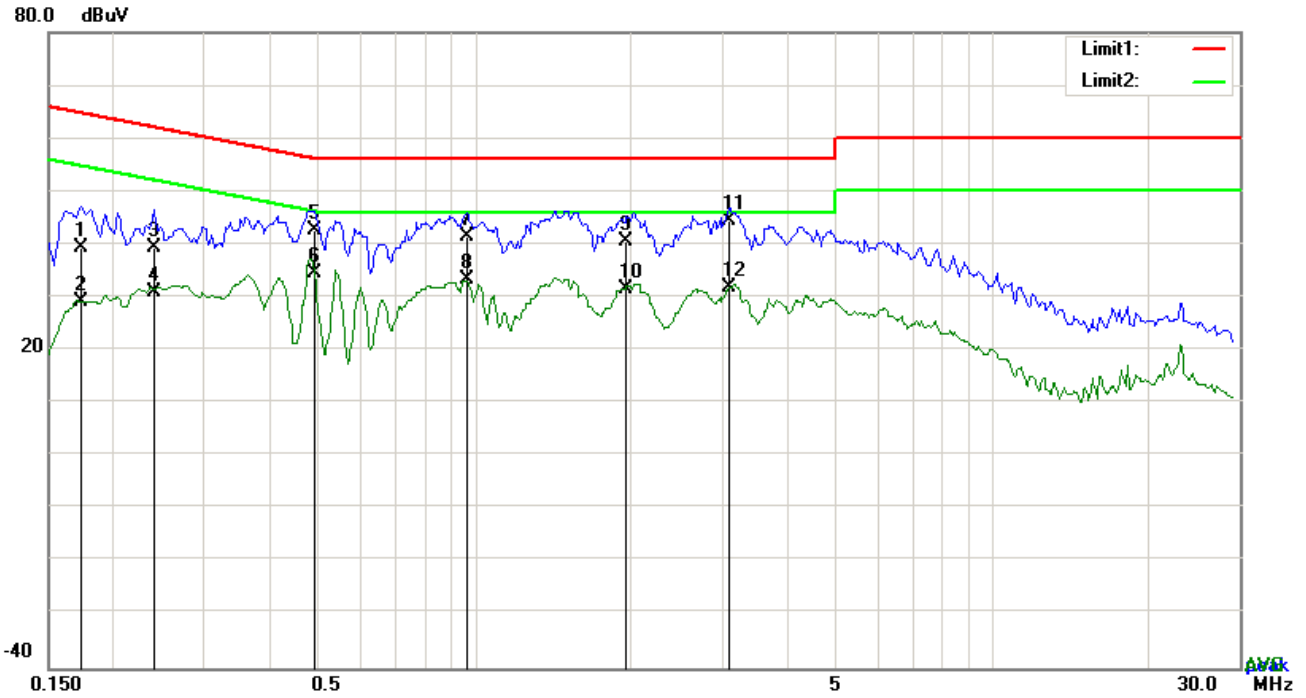

**Test Data**

**Phase Neutral Plot at 240Vac, 60Hz**


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1734	29.27	QP	10.03	39.30	64.80	-25.50
2	N	0.1734	19.01	AVG	10.03	29.04	54.80	-25.76
3	N	0.2397	29.20	QP	10.03	39.23	62.11	-22.88
4	N	0.2397	21.02	AVG	10.03	31.05	52.11	-21.06
5	N	0.4893	32.65	QP	10.03	42.68	56.18	-13.50
6	N	0.4893	24.40	AVG	10.03	34.43	46.18	-11.75
7	N	0.9651	31.35	QP	10.03	41.38	56.00	-14.62
8	N	0.9651	23.19	AVG	10.03	33.22	46.00	-12.78
9	N	1.9635	30.61	QP	10.04	40.65	56.00	-15.35
10	N	1.9635	21.41	AVG	10.04	31.45	46.00	-14.55
11	N	3.1014	34.32	QP	10.06	44.38	56.00	-11.62
12	N	3.1014	21.80	AVG	10.06	31.86	46.00	-14.14

## 6.9 Radiated Spurious Emissions & Restricted Band

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V/m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

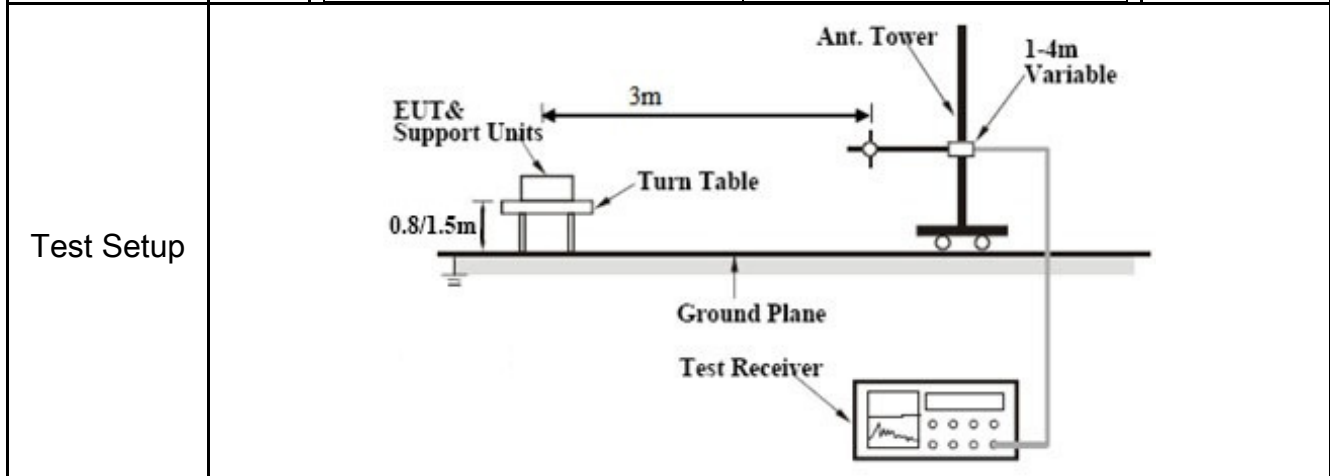

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:</li> </ol>
-----------	---

Test Report	16070559-FCC-R2
Page	44 of 61


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.        The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

**Test Mode: Bluetooth Mode**

**Below 1GHz**

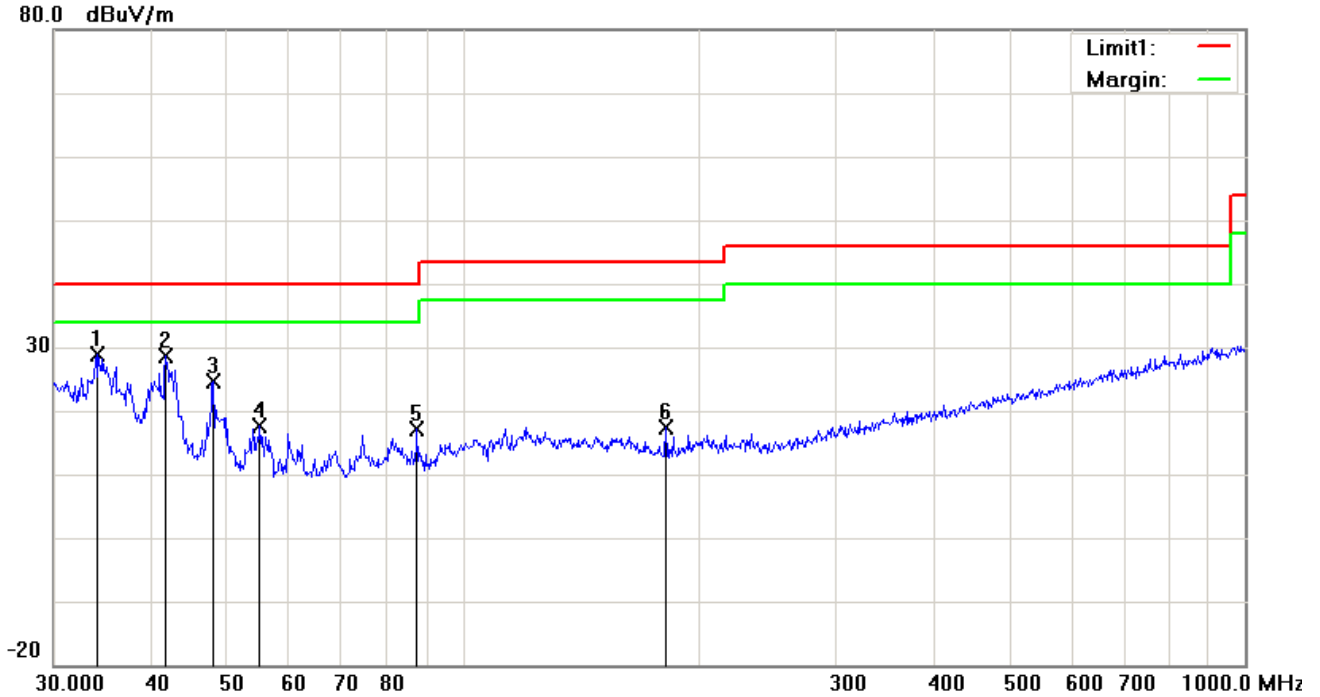


**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )
1	H	34.0365	32.03	peak	-3.24	28.79	40.00	-11.21	100	186
2	H	41.7130	37.25	peak	-8.73	28.52	40.00	-11.48	100	257
3	H	47.9940	36.91	peak	-12.28	24.63	40.00	-15.37	100	143
4	H	55.0274	31.48	peak	-13.77	17.71	40.00	-22.29	100	23
5	H	87.4177	30.68	peak	-13.44	17.24	40.00	-22.76	100	106
6	H	181.9202	27.21	peak	-9.76	17.45	43.50	-26.05	100	59

**Below 1GHz**

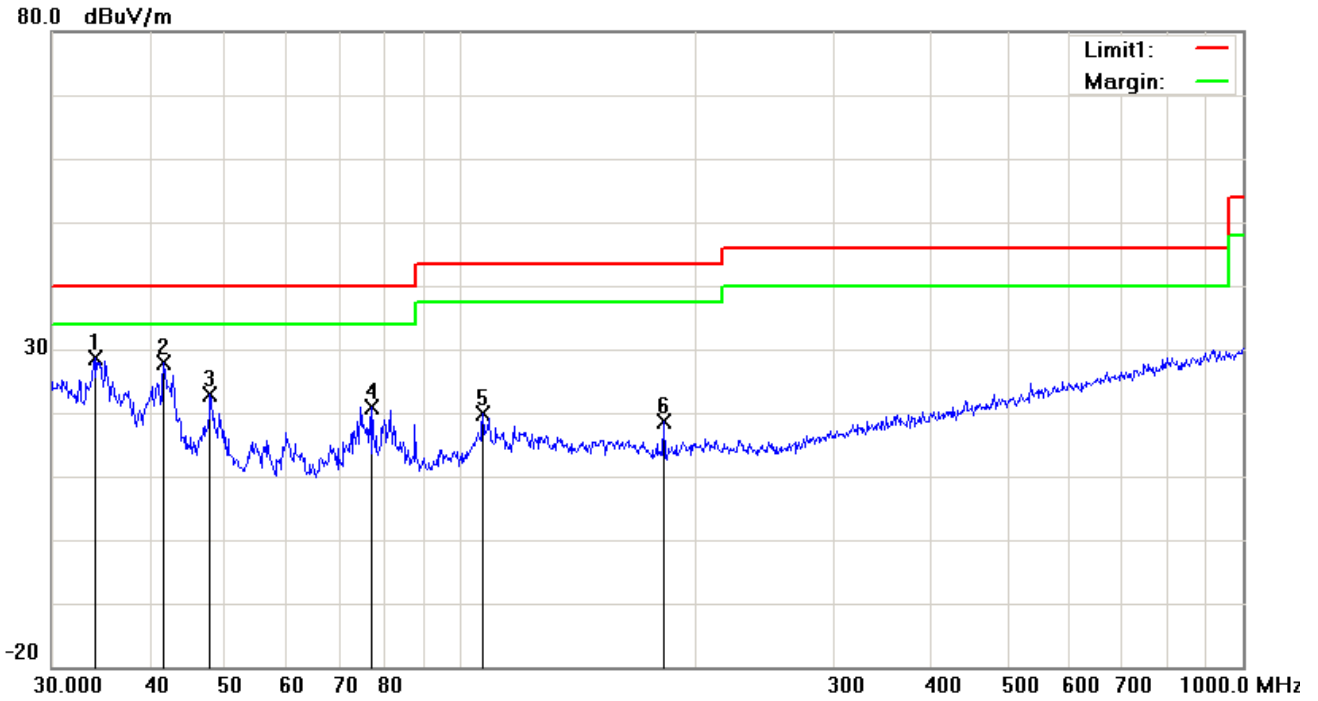

**Test Data**

**Vertical Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )
1	V	34.0365	31.90	peak	-3.24	28.66	40.00	-11.34	100	2574
2	V	41.7130	36.71	peak	-8.73	27.98	40.00	-12.02	100	223
3	V	47.8260	35.18	peak	-12.20	22.98	40.00	-17.02	100	189
4	V	77.0505	34.65	peak	-13.75	20.90	40.00	-19.10	100	154
5	V	106.7587	29.37	peak	-9.60	19.77	43.50	-23.73	100	102
6	V	181.9202	28.28	peak	-9.76	18.52	43.50	-24.98	100	89

### Above 1GHz

<b>Test Mode:</b>	<b>Transmitting Mode</b>
-------------------	--------------------------

Mode: GFSK (Worst Case)

#### Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	38.49	AV	V	33.67	6.86	32.66	46.36	54	-7.64
4804	38.34	AV	H	33.67	6.86	32.66	46.21	54	-7.79
4804	47.71	PK	V	33.67	6.86	32.66	55.58	74	-18.42
4804	47.65	PK	H	33.67	6.86	32.66	55.52	74	-18.48
17785	24.86	AV	V	45.03	11.21	32.38	48.72	54	-5.28
17785	24.92	AV	H	45.03	11.21	32.38	48.78	54	-5.22
17785	41.15	PK	V	45.03	11.21	32.38	65.01	74	-8.99
17785	40.98	PK	H	45.03	11.21	32.38	64.84	74	-9.16

#### Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	38.56	AV	V	33.71	6.95	32.74	46.48	54	-7.52
4882	38.42	AV	H	33.71	6.95	32.74	46.34	54	-7.66
4882	47.68	PK	V	33.71	6.95	32.74	55.6	74	-18.4
4882	47.55	PK	H	33.71	6.95	32.74	55.47	74	-18.53
17824	24.91	AV	V	45.15	11.18	32.41	48.83	54	-5.17
17824	24.76	AV	H	45.15	11.18	32.41	48.68	54	-5.32
17824	40.92	PK	V	45.15	11.18	32.41	64.84	74	-9.16
17824	40.64	PK	H	45.15	11.18	32.41	64.56	74	-9.44

### High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960	38.51	AV	V	33.9	6.76	32.74	46.43	54	-7.57
4960	38.37	AV	H	33.9	6.76	32.74	46.29	54	-7.71
4960	47.52	PK	V	33.9	6.76	32.74	55.44	74	-18.56
4960	47.66	PK	H	33.9	6.76	32.74	55.58	74	-18.42
17789	24.85	AV	V	45.22	11.35	32.38	49.04	54	-4.96
17789	24.61	AV	H	45.22	11.35	32.38	48.8	54	-5.2
17789	40.87	PK	V	45.22	11.35	32.38	65.06	74	-8.94
17789	40.69	PK	H	45.22	11.35	32.38	64.88	74	-9.12

**Note:**

- 1, The testing has been conformed to  $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



## Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

**Annex B. EUT And Test Setup Photographs**

**Annex B.i. Photograph: EUT External Photo**



Whole Package View

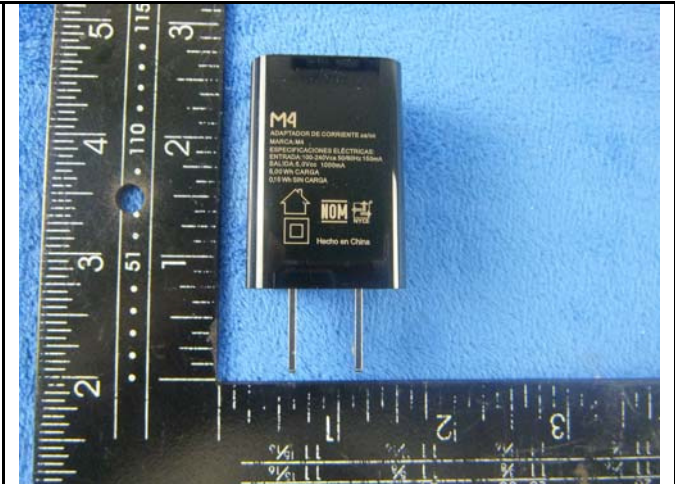

Adapter - Front View



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View



**Annex B.ii. Photograph: EUT Internal Photo**



Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View



Battery - Rear View

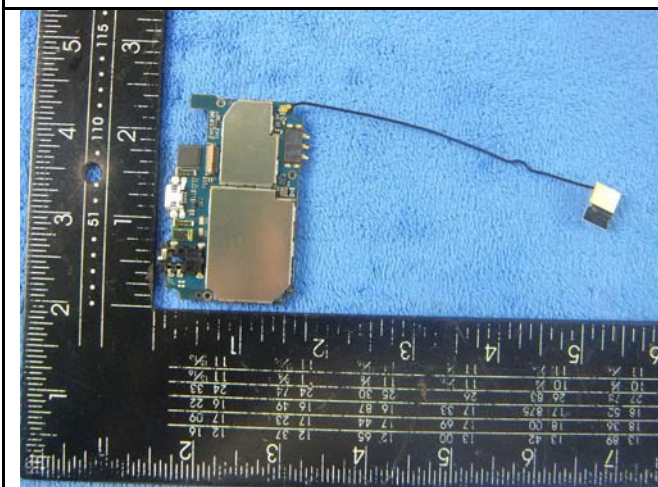


Mainboard with Shielding - Front View

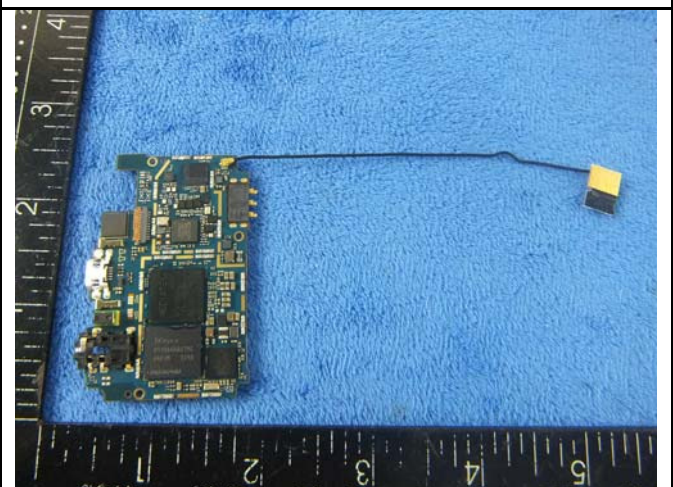


Mainboard without Shielding - Front View



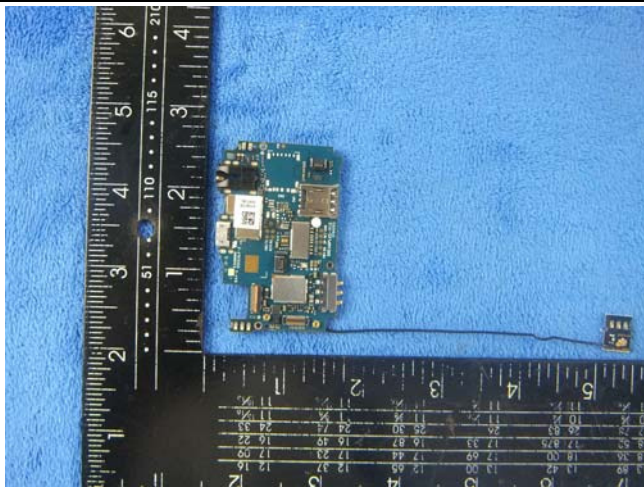

Mainboard with Shielding - Rear View

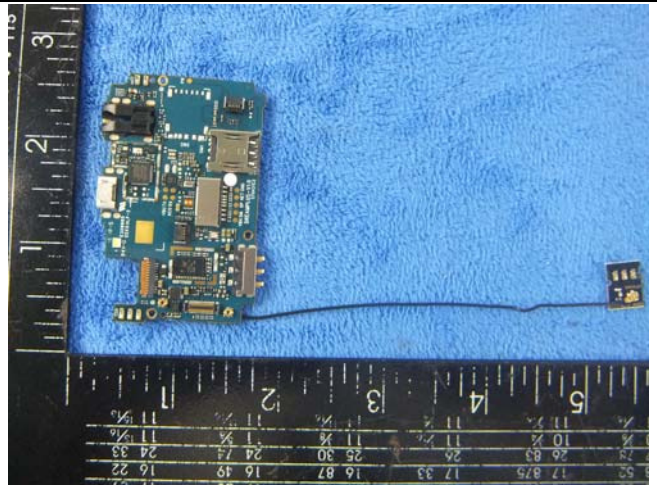

Mainboard without Shielding - Rear View



LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD/LTE Antenna View



WIFI/BT/BLE/GPS - Antenna View



LTE DRX Antenna




**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

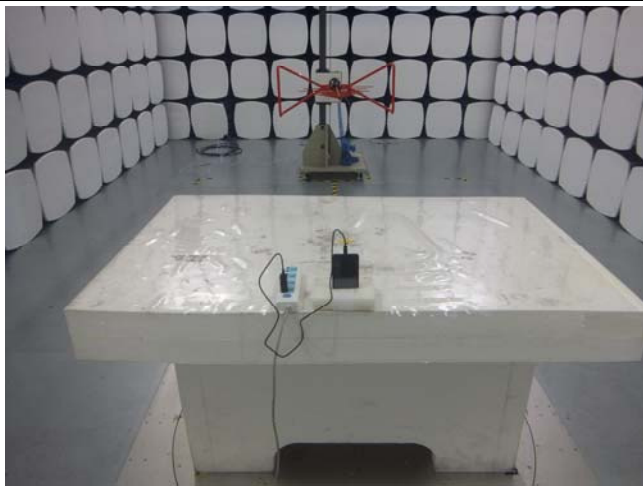

Radiated Spurious Emissions Test Setup Below 1GHz

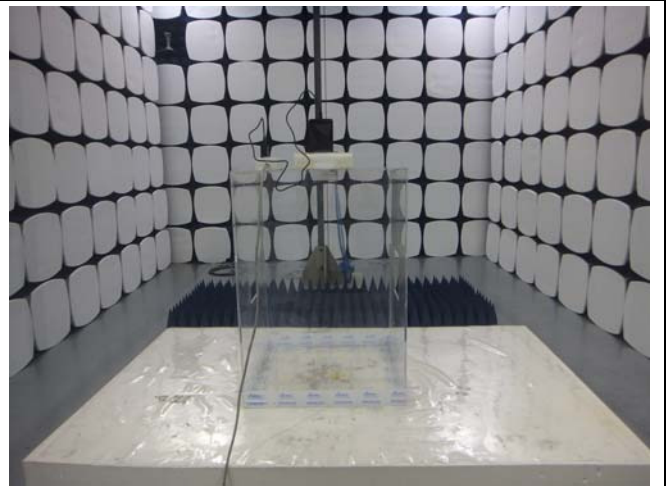


Radiated Spurious Emissions Test Setup Above 1GHz

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


### Annex C.ii. TEST SET UP BLOCK

#### Block Configuration Diagram for AC Line Conducted Emissions

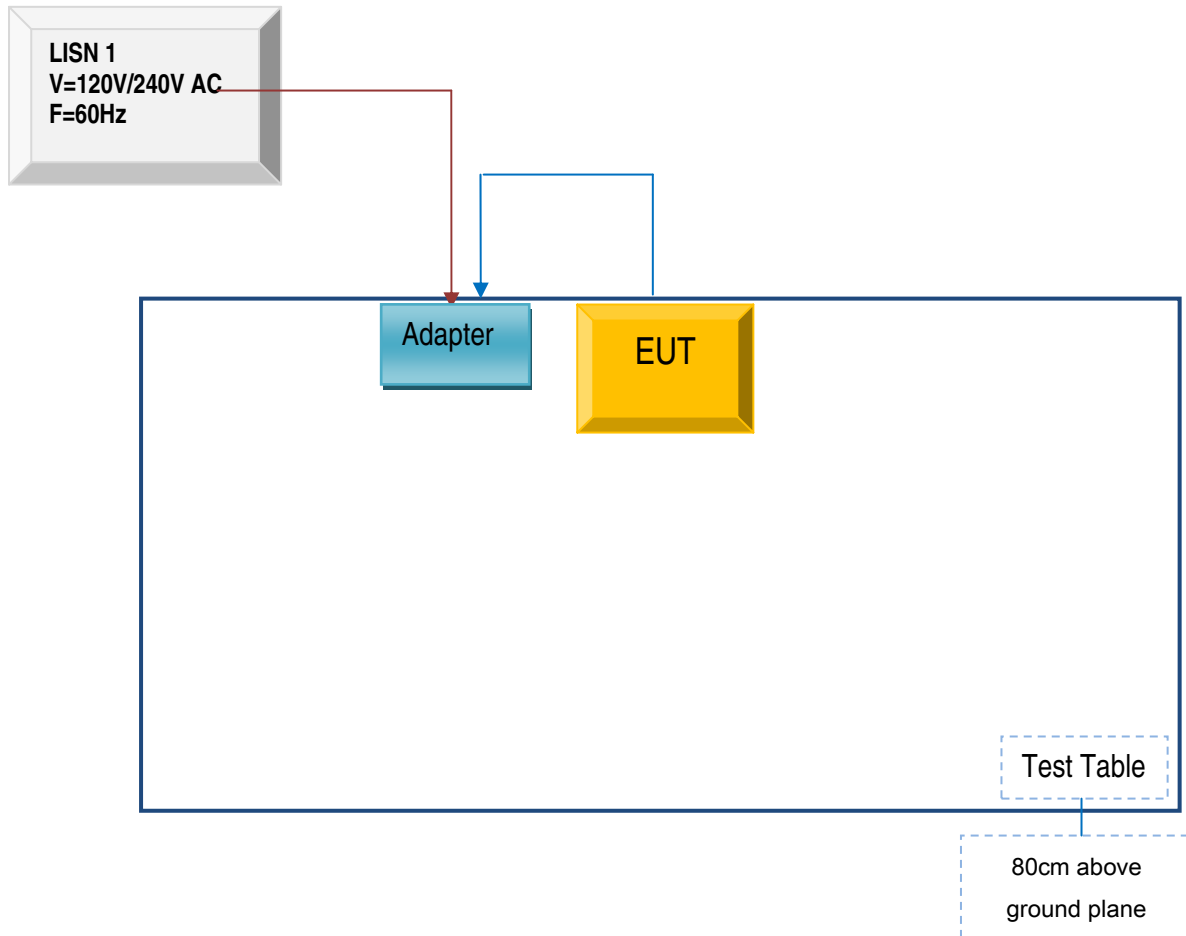




**Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .**

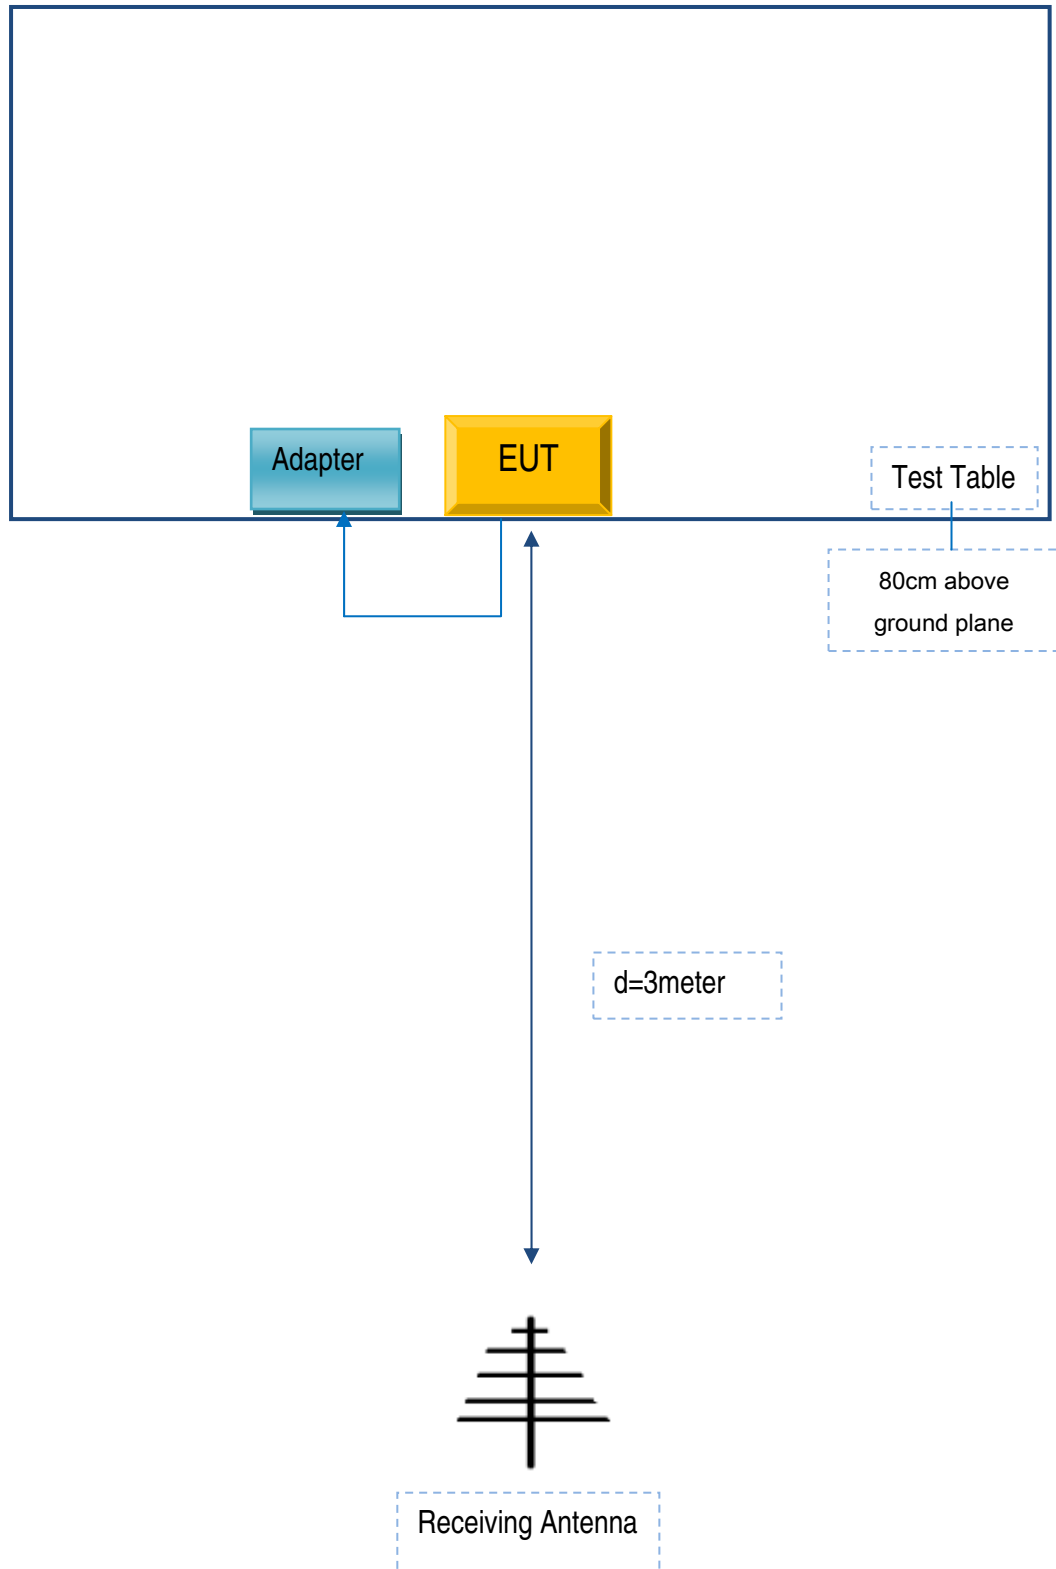

**Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .**

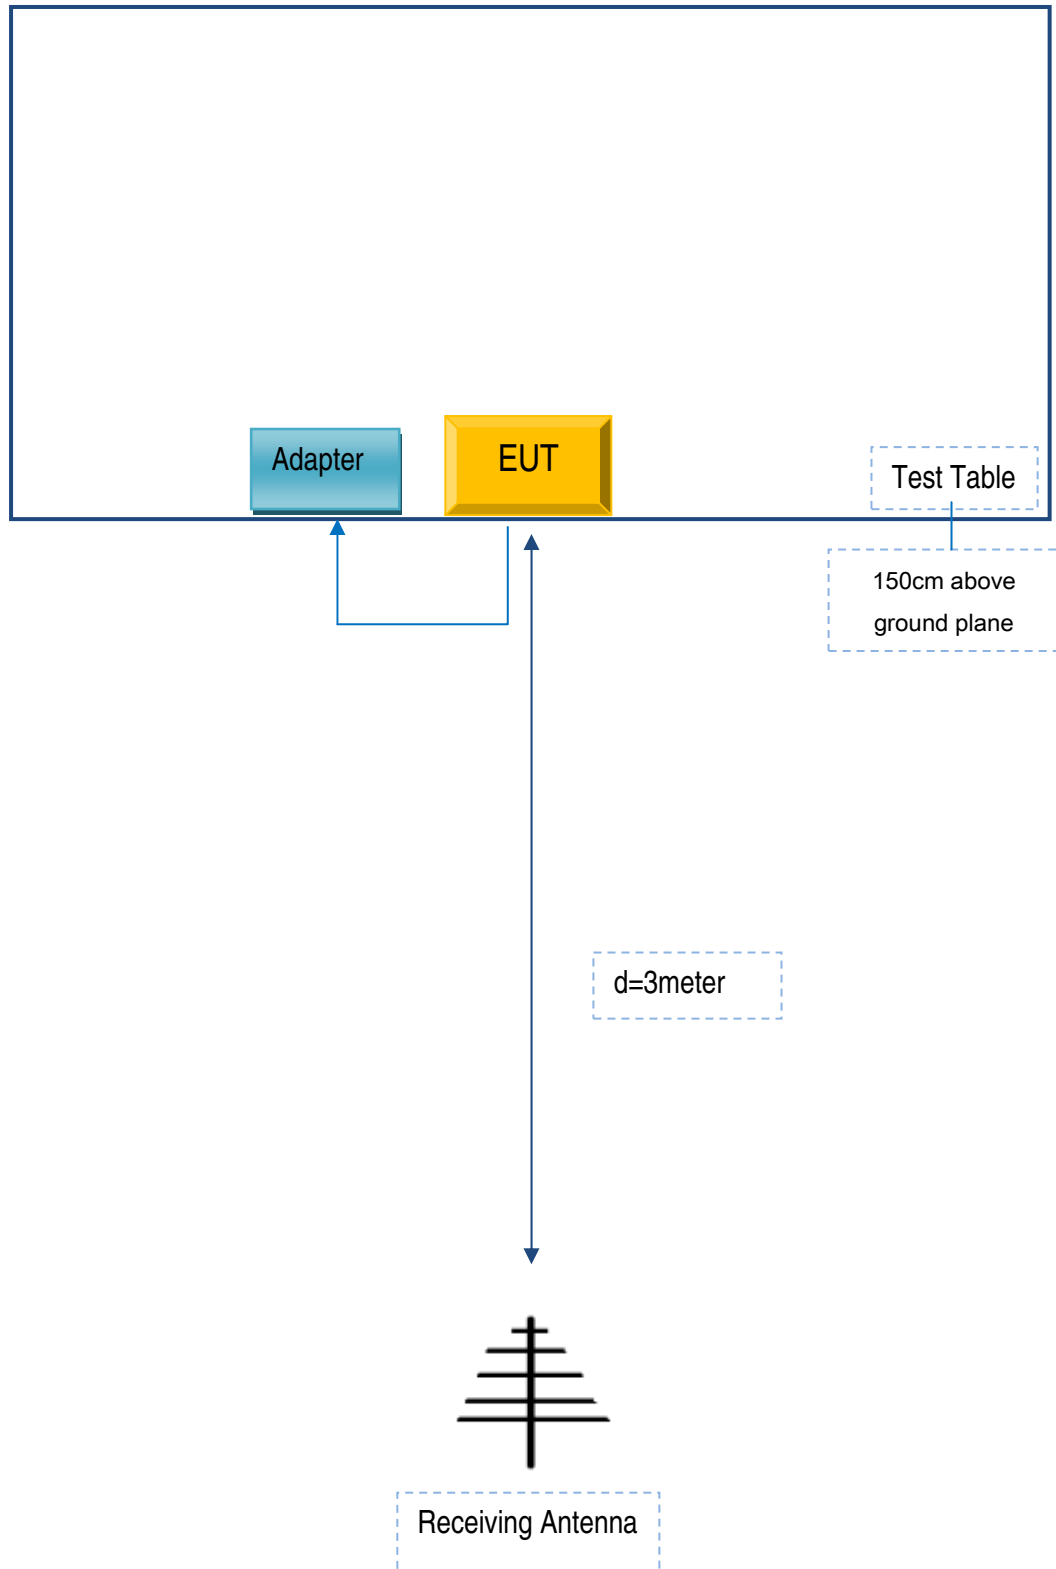

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
MFOURTEL MEXICO S.A. DE C.V.	Adapter	M4	YK84201153021

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	YK84201153021

Test Report	16070559-FCC-R2
Page	60 of 61

**Annex D. User Manual / Block Diagram / Schematics / Partlist**

See attachment

Test Report	16070559-FCC-R2
Page	61 of 61

## Annex E. DECLARATION OF SIMILARITY

N/A