

TABLE OF CONTENTS

APPLICANT: RECOTON CORPORATION

FCC ID: CLV-RSN900

TEST REPORT CONTAINING:

PAGE 1.....	TEST EQUIPMENT LIST & TEST PROCEDURE
PAGE 2.....	TEST PROCEDURE CONTD.
PAGE 3-4.....	RADIATION INTERFERENCE TEST DATA
PAGE 5.....	OCCUPIED BANDWIDTH
PAGE 6-7.....	OCCUPIED BANDWIDTH PLOTS

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....	FCC ID LABEL SAMPLE
EXHIBIT 2.....	SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 3.....	BLOCK DIAGRAM
EXHIBIT 4A.....	SCHEMATIC - RF CIRCUIT DIAGRAM
EXHIBIT 4B.....	SCHEMATIC - MUX CIRCUIT DIAGRAM
EXHIBIT 5.....	INSTRUCTION MANUAL
EXHIBIT 6.....	EXTERNAL PHOTO - FRONT VIEW
EXHIBIT 7.....	EXTERNAL PHOTO - REAR VIEW
EXHIBIT 8.....	INTERNAL PHOTOS - COMPONENT AND COPPER 1
EXHIBIT 9.....	INTERNAL PHOTOS - COMPONENT AND COPPER 2
EXHIBIT 10.....	OPERATIONAL DESCRIPTION
EXHIBIT 11.....	TEST SET UP PHOTO

APPLICANT: RECOTON CORPORATION

FCC ID: CLV-RSN900

REPORT #: R\REC\846AU1\846AU1RPT.doc

PAGE: TABLE OF CONTENTS LIST

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/ preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02, S/N 3008A00372 Cal. 1/19/01
2. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057, Cal 3/15/00
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171 Cal. 3/16/01
4. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632 Cal. 3/15/00
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409 Cal. 3/15/00
6. X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180, 1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model EM-7820, w/NEMA Adapter S/N 2682 Cal. 3/16/01
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7 Cal. 1/21/01
11. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 11/20/00
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545, Cal. 1/26/01
13. X Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 11/21/00
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMC0 Model 6512, 9KHz to 30MHz, S/N 9706-1211 Cal. 6/10/00
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153 Cal. 11/24/00
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 2/1/01
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
20. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 11/16/00
21. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 2/1/01

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. The UUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the UUT was 74.3oF with a humidity of 69%.

APPLICANT: RECOTON CORPORATION
FCC ID: CLV-RSN900
REPORT NO.: R\REC\846AU1\846AU1RPT.doc
PAGE #: 1

APPLICANT: RECOTON CORPORATION
FCC ID: CLV-RSN900

TEST PROCEDURES CONTINUED

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz)	METER READING + ACF = FS
33	20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: RECOTON CORPORATION
FCC ID: CLV-RSN900
REPORT NO.: R\REC\846AU1\846AU1RPT.doc
PAGE #: 2

APPLICANT: RECOTON CORPORATION
 FCC ID: CLV-RSN900
 NAME OF TEST: RADIATION INTERFERENCE
 RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS: 15.249

FUNDAMENTAL FREQUENCY	FIELD STRENGTH OF FUNDAMENTAL	FIELD STRENGTH OF HARMONICS
902 - 928 MHz	94 dBuV/m	54 dBuV/m
2400 - 2483.5 MHz	94 dBuV/m	54 dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REQUIREMENTS: 15.209

FREQUENCY (MHz)	FIELD STRENGTH @ 3 METERS
30 - 88	40 dBuV/m
88 - 216	43.5dBuV/m
216 - 960	46 dBuV/m
Above 960	54 dBuV/m

TEST DATA:

Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
914.00	63.1	V	5.80	23.09	91.99	2.01
1,828.00	16.7	V	3.00	28.55	48.25	5.75
2,742.00R	8.5	V	3.60	30.78	42.88	11.12
3,656.00R	0.2	V	4.30	33.24	37.74	16.26

TEST RESULTS: This unit DOES meet the FCC requirements.

APPLICANT: RECOTON CORPORATION
FCC ID: CLV-RSN900
NAME OF TEST: RADIATION INTERFERENCE

TEST PROCEDURE: ANSI STANDARD C63.4-1992 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth(10) harmonic of the fundamental.

PERFORMED BY: JOSEPH SCOGLIO DATE: 8/6/01

APPLICANT: RECOTON CORPORATION
FCC ID: CLV-RSN900
REPORT NO.: R\REC\846AU1\846AU1RPT.doc
PAGE NO.: 4

APPLICANT: RECOTON CORPORATION
FCC ID: CLV-RSN900
NAME OF TEST: Occupied Bandwidth
RULES PART NO.: 15.249
REQUIREMENTS: The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

THE PLOTS ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THIS DEVICE.


METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division. The horizontal scale is set to 5 kHz per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: JOSEPH SCOGLIO DATE: 8/6/01

APPLICANT: RECOTON CORPORATION
FCC ID: CLV-RSN900
REPORT NO.: R\REC\846AU1\846AU1RPT.doc
PAGE NO.: 5

RECOTON CORPORATION
FCC ID : CLV-RSN900
PAVE # 6

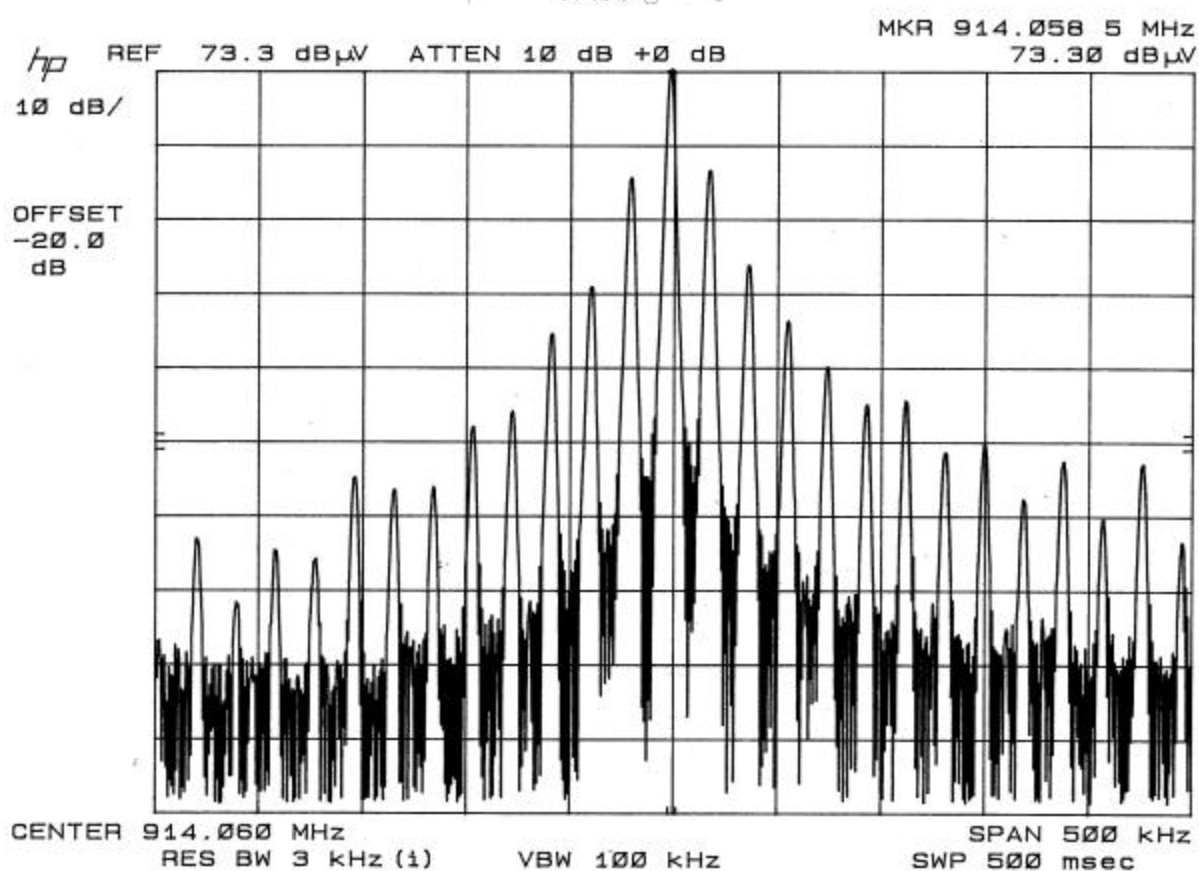

RECOTON CORPORATION
FCC ID: CLV-RSN900
Page 7

