



## Test Report - FCC Part 90

### Applicant: Cattron North America Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 6/21/2023

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



## Table of Contents

---

1.1	PART 90 TEST RESULT SUMMARY .....	4
<b>2.</b>	<b>LOCATION OF TESTING .....</b>	<b>5</b>
2.1	TEST LABORATORY .....	5
2.1	TESTING WAS PERFORMED, REVIEWED BY .....	5
<b>3.</b>	<b>TEST SAMPLE(S) (EUT/DUT) .....</b>	<b>6</b>
3.1	DESCRIPTION OF THE EUT .....	6
3.2	CONFIGURATION OF EUT .....	7
3.3	TEST SETUP OF EUT .....	7
<b>4.</b>	<b>TEST METHODS &amp; APPLICABLE REGULATORY LIMITS .....</b>	<b>8</b>
4.1	TEST METHODS/STANDARDS/GUIDANCE: .....	8
4.2	APPLIED LIMITS AND REGULATORY LIMITS: .....	8
<b>5.</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>6.</b>	<b>ENVIRONMENTAL CONDITIONS .....</b>	<b>8</b>
6.1	TEMPERATURE & HUMIDITY .....	8
<b>7.</b>	<b>LIST OF TEST EQUIPMENT AND TEST FACILITY .....</b>	<b>9</b>
7.1	LIST OF TEST EQUIPMENT .....	9
<b>8.</b>	<b>TEST RESULTS .....</b>	<b>10</b>
8.1	POWER AT THE FINAL AMPLIFIER .....	11
8.2	RF OUTPUT POWER .....	12
8.2.1	<i>RF Power Output Plot, 447 MHz</i> .....	13
8.2.2	<i>RF Power Output Plot, 460 MHz</i> .....	14
8.2.3	<i>RF Power Output Plot, 472.9875 MHz</i> .....	15
8.3	BANDWIDTH & EMISSION .....	16
8.3.1	<i>99% Bandwidth Plot, 447 MHz</i> .....	18
8.3.2	<i>99% Bandwidth Plot, 460 MHz</i> .....	19
8.3.3	<i>99% Bandwidth Plot, 472.9875 MHz</i> .....	20
8.4	EMISSION LIMITATIONS, IN-BAND .....	21
8.4.1	<i>Emission Mask D, 447 MHz</i> .....	22
8.4.2	<i>Emission Mask D, 460 MHz</i> .....	23
8.4.3	<i>Emission Mask D, 472.9875 MHz</i> .....	24
8.5	EMISSION LIMITATIONS, OUT-OF-BAND .....	25
8.5.1	<i>Conducted Emissions, Below 1GHz, 447 MHz</i> .....	26
8.5.2	<i>Conducted Emissions Above 1GHz, 447 MHz</i> .....	27
8.5.3	<i>Conducted Emissions Below 1GHz, 460 MHz</i> .....	28
8.5.4	<i>Conducted Emissions Above 1GHz, 460 MHz</i> .....	29
8.5.5	<i>Conducted Emissions Below 1GHz, 472.9875 MHz</i> .....	30
8.5.6	<i>Conducted Emissions Above 1GHz, 472.9875 MHz</i> .....	31
8.6	RADIATED EMISSIONS .....	32



8.6.1	<i>Radiated Emissions, 447 MHz</i> .....	33
8.6.2	<i>Radiated Emissions, 460 MHz</i> .....	34
8.6.3	<i>Radiated Emissions, 472.9875 MHz</i> .....	35
8.7	FREQUENCY STABILITY.....	36
8.7.1	<i>Frequency Stability Data</i> .....	37
8.7.2	<i>Frequency Stability Plot</i> .....	38
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	39
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	39
11.	HISTORY OF TEST REPORT CHANGES.....	39



## APPLICANT INFORMATION

Applicant: Cattron North America Inc.  
 Address: 655 N. River Road NW  
 Suite A  
 Warren, OH 44483-2254, United States

### 1.1 Part 90 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015. Full test results are available in this report.

Applicable Clauses from Part 2		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Reported
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	Pass

Applicable Clauses from Part 90		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205 (r)	Transmitter Power	Pass
90.207 (n)	Emission designator	Reported
90.209 (b) (5) footnote 2	Bandwidth limitations	Pass
90.210 (n)	Emission masks, In-band	Pass
90.210 (n)	Emission masks, Out-of-band	Pass
90.213 (a) footnote 10	Frequency stability	Pass
90.214	Transient Frequency Behavior	n/a
90.221	Adjacent channel power limits	n/a

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.



Timco Engineering, Inc., an IIA Company  
 849 NW State Road 45, Newberry, Florida 32669  
 (352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

## 2. Location of Testing

### 2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").  
 Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780  
 FCC Designation # US1070  
 FCC site registration is under A2LA certificate # 0955.01  
 ISED Canada test site registration # 2056A  
 EU Notified Body # 1177  
 For all designations see A2LA scope # 0955.01

### 2.2 Testing was performed, reviewed by

Dates of Testing: 4/17/2023 – 4/20/2023

Signature:

Sr. EMC Engineer  
 EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

6/21/2023

Signature:

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

6/21/2023



### 3. Test Sample(s) (EUT/DUT)

The test sample was received: 4/13/2023

#### 3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	CN28694D2
Brief Description	8694D2 TRX Module
Model(s) #	8694D2 TRX
Firmware version	51S-R3-4.00
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Frequency Range	447-473 MHz
RF O/P Power (Max.)	26.44 dBm/ 0.44 W
Bandwidth & Emission Class	7K03 F1D/ F1W/ F1X, 7K17 F1D/ F1W/ F1X, 7K31 F1D/ F1W/ F1X,
Duty Cycle	100%
Antenna Connector	UART
Voltage Rating (AC or Batt.)	12VDC

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.



### 3.2 Configuration of EUT

Test Modes				
Mode (#)	Mode (Type)	Test Frequencies (MHz)	BW (nominal) (kHz)	Emission Designator
1	Transmit	447 MHz 460 MHz 472.9875 MHz	12.5	F1D/ F1W/ F1X

#### Operating conditions during Testing:

The device was operated without the provided antenna(s).

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

#### Peripherals used during Testing:

No peripherals used.

### 3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



#### 4. Test methods & Applicable Regulatory Limits

##### 4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015

##### 4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90

#### 5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
<b>Note:</b> The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

#### 6. Environmental Conditions

##### 6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
<b>Note:</b> Specific environmental conditions that are applicable to a specific test are available in the test result section.	





## 7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

### 7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	3/29/19	8/03/2025
Thermometer	Type K J Thermometer	Martel	303	080504494	1/18/20	1/17/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	4/25/2023
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12/21/2023

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



## 8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB $\mu$ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB $\mu$ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB $\mu$ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

### Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB $\mu$ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB $\mu$ V/m @ 3m

$$\text{EIRP} = \text{Pcond (dBm)} + \text{dBi}$$




### 8.1 Power at the Final Amplifier

Limits from FCC Part 2.1033 (c)(8). No method of measurement is specified.

Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier (W)
12	1	12

## 8.2 RF Output Power

Limits from FCC Parts 2.1046(a), and 90.205 (r); and test procedure from ANSI C63.26-2015.

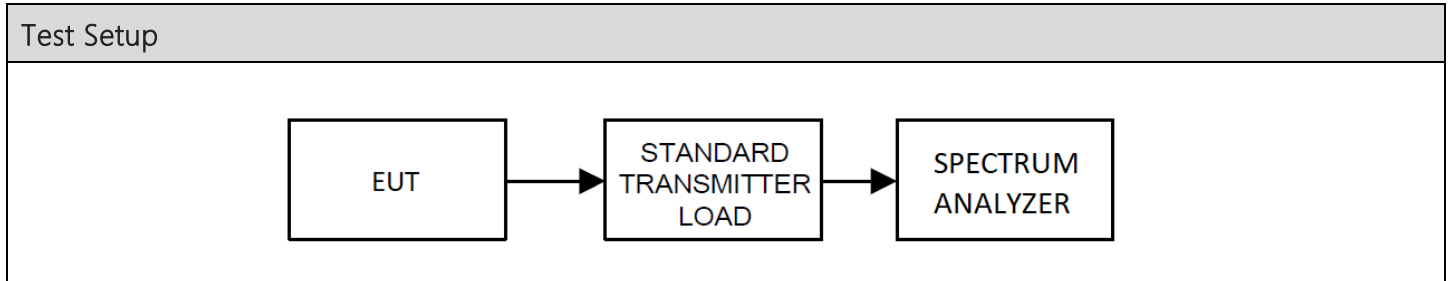

Test Results, Mode 1		
Tuned Frequency (MHz)	Power Output (dBm)	Power Output (W)
447	25.91	0.39
460	26.14	0.41
472.9875	26.44	0.44








### 8.3 Bandwidth & Emission

Limits from FCC Parts 2.1049, and 90.207 & 90.209, and test procedure from ANSI C63.26-2015.

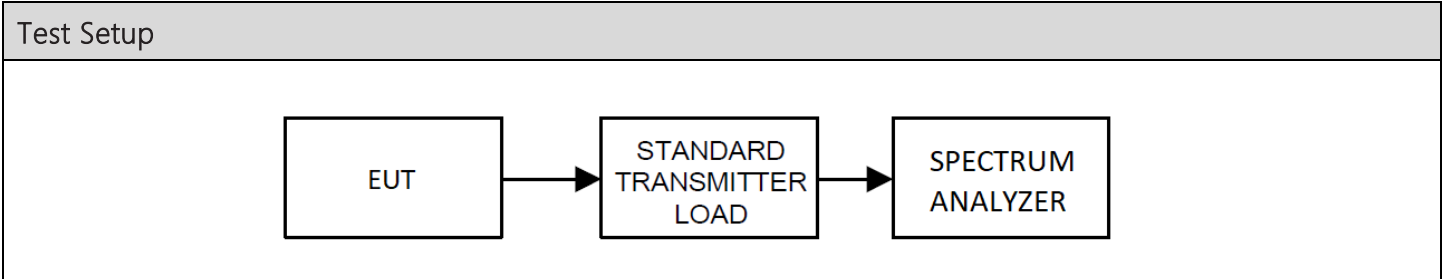

Test Results, Authorized Bandwidth		
Rule Part	Operating Range (MHz)	Authorized Bandwidth (kHz)
Part 90	450 MHz- 475 MHz	12.5






Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

Test Results, Occupied Bandwidth				
Tuned Frequency (MHz)	Mode	Emission Designator	Occupied Bandwidth (kHz)	Bandwidth Type
447	1	7K03 F1D/ F1W/ F1X	7.028	99%
460	1	7K17 F1D/ F1W/ F1X	7.169	99%
472.9875	1	7K31 F1D/ F1W/ F1X	7.309	99%

Occupied Bandwidth, Spectrum Plots


8.3.1 99% Bandwidth Plot, 447 MHz

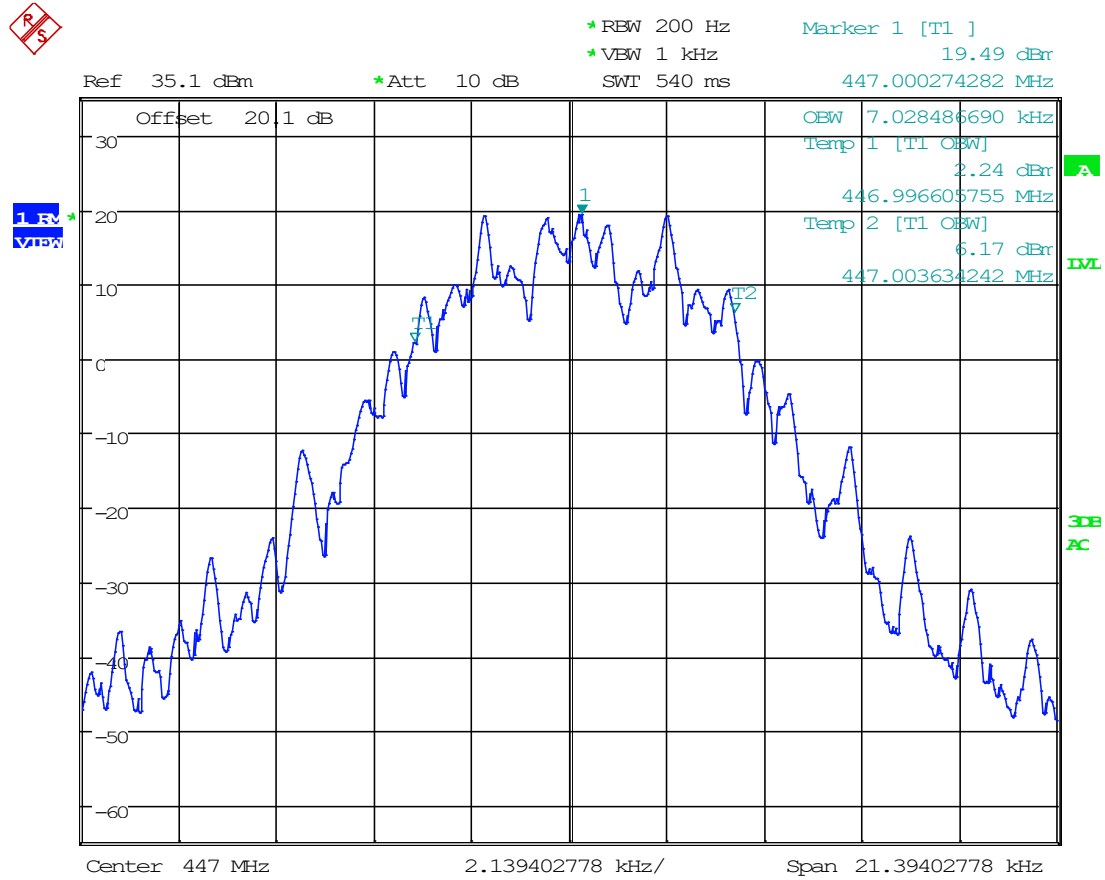

Date: 19.APR.2023 08:57:28



### 8.3.2 99% Bandwidth Plot, 460 MHz

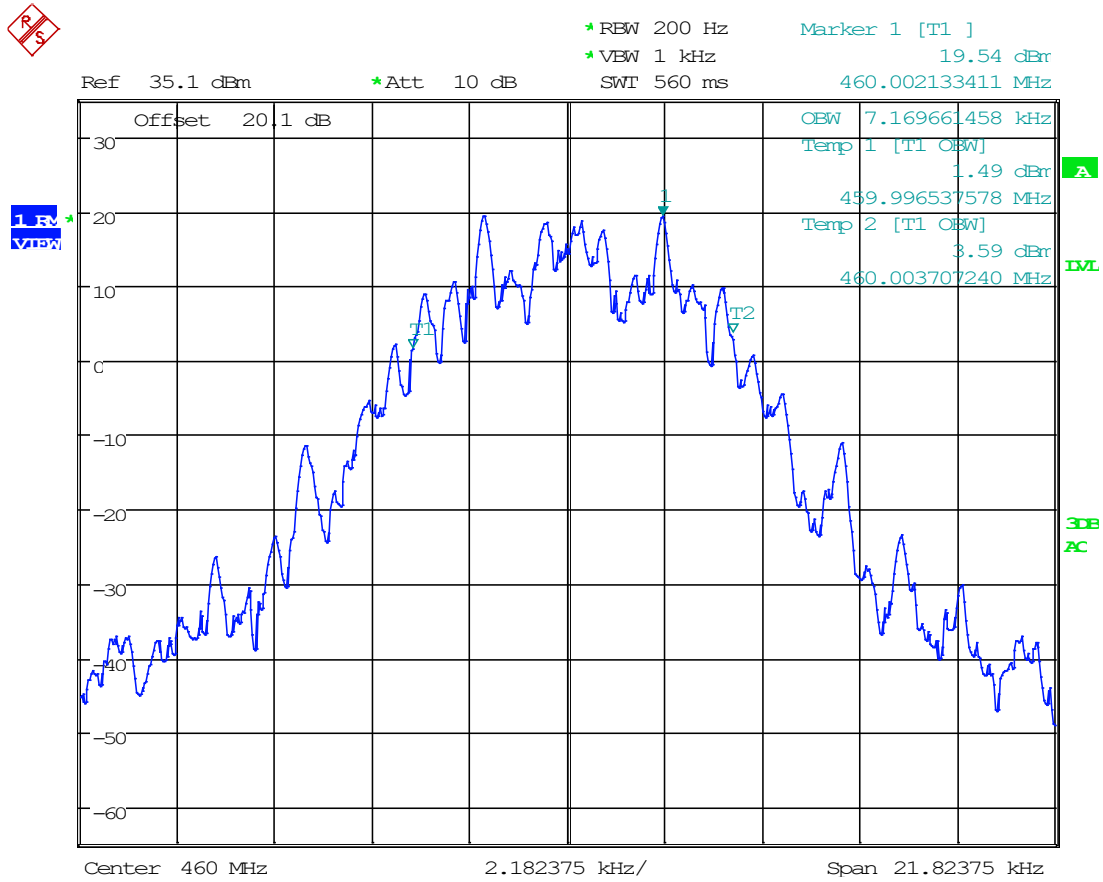


Date: 19.APR.2023 09:00:28




## 8.4 Emission Limitations, In-Band

Limits from FCC Part 90.210; and test procedure from ANSI C63.26-2015.

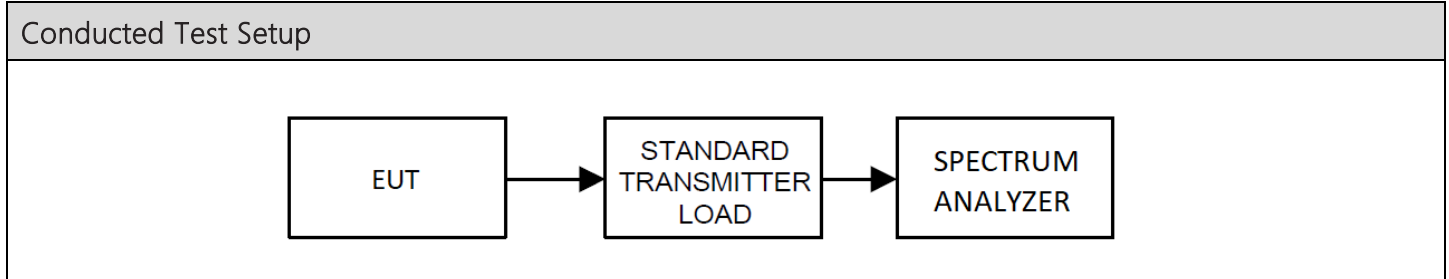

Conducted Emissions Mask, Spectrum Plots


8.4.1 Emission Mask D, 447 MHz

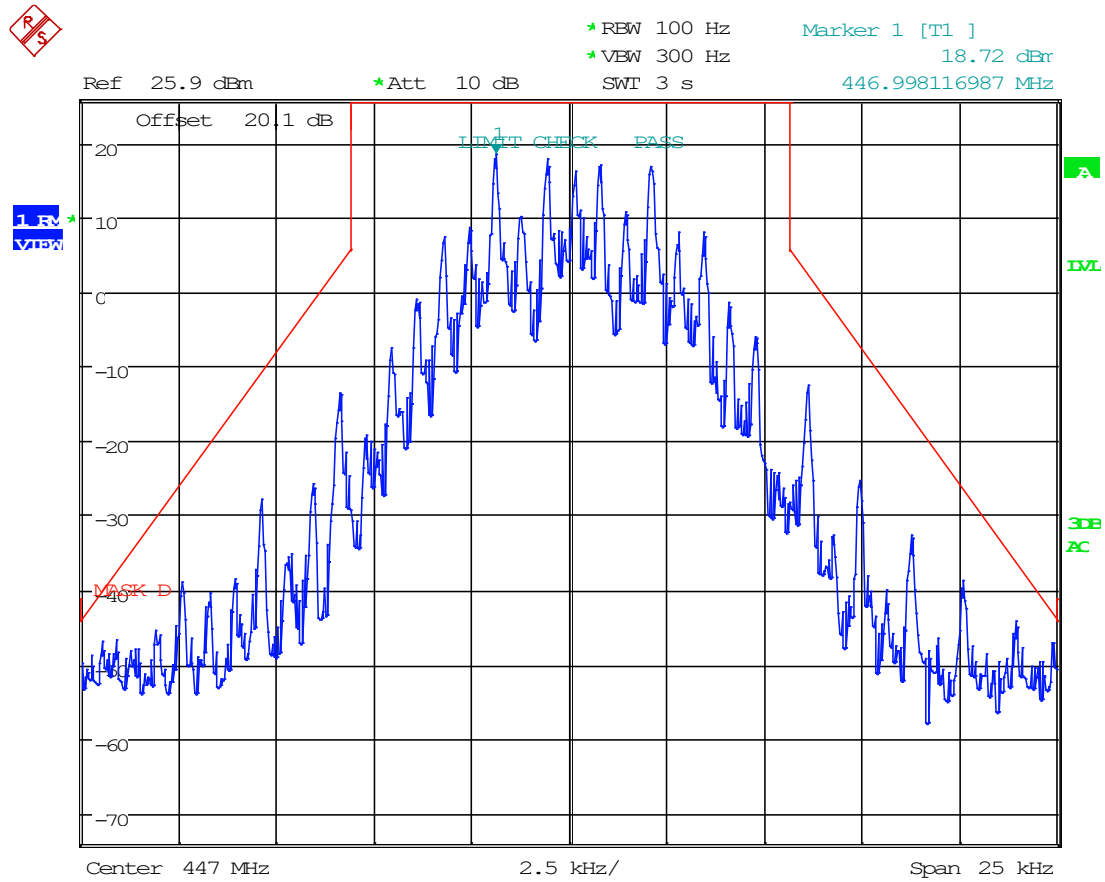

Date: 19.APR.2023 09:10:48




### 8.4.2 Emission Mask D, 460 MHz

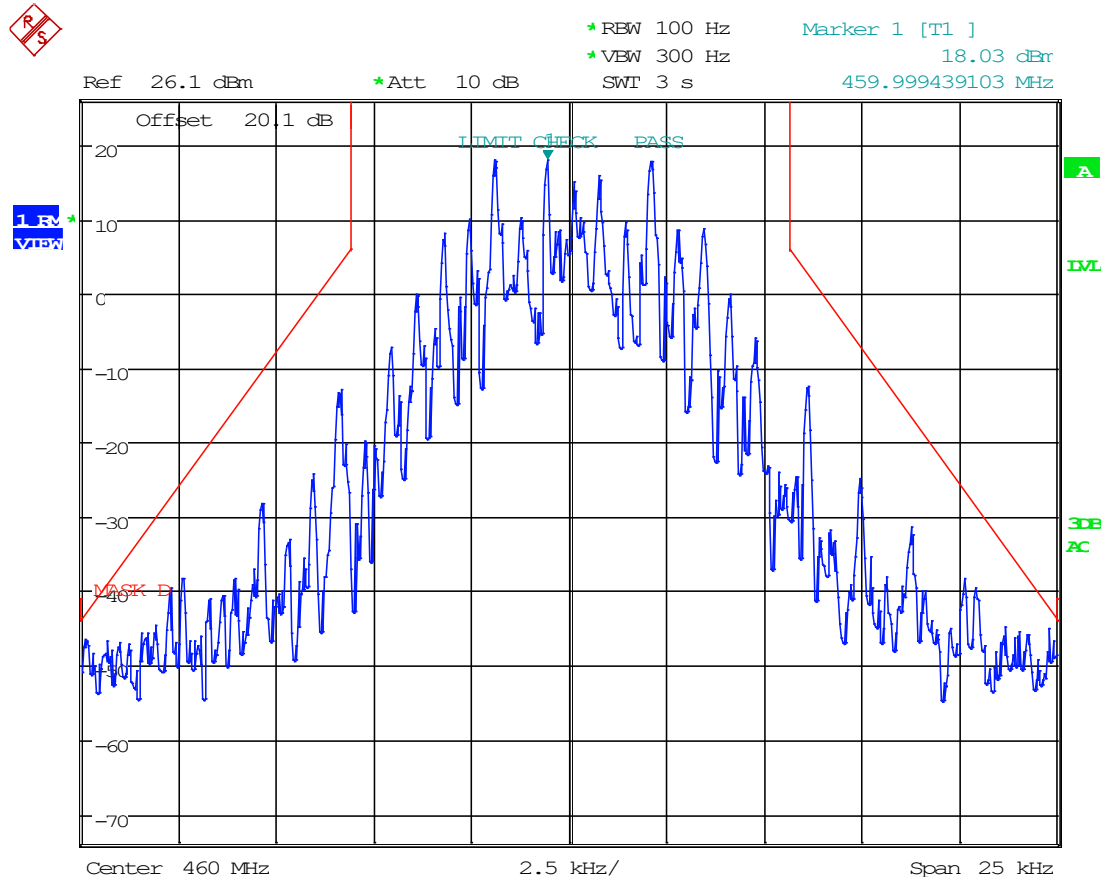

Date: 19.APR.2023 09:09:34

### 8.4.3 Emission Mask D, 472.9875 MHz

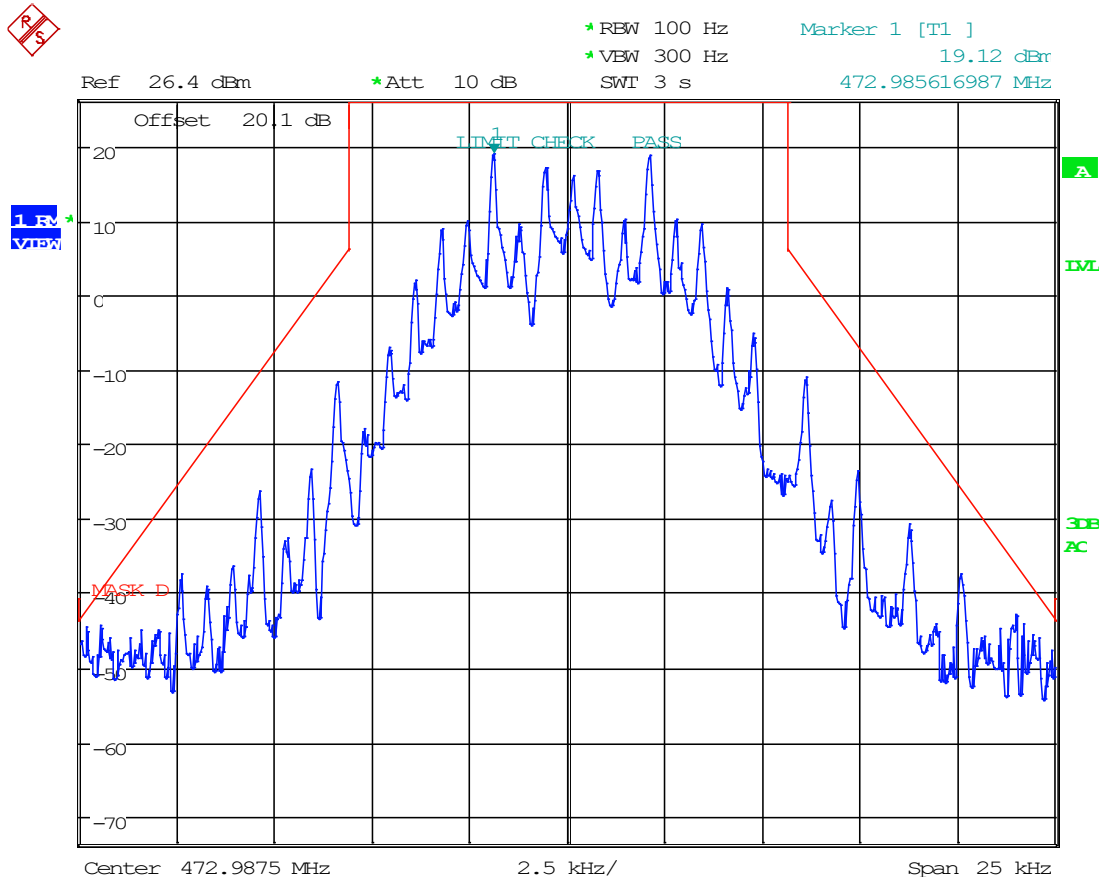


Date: 19.APR.2023 09:07:58



## 8.5 Emission Limitations, Out-of-Band


Limits from FCC Parts 2.1051, and 90.210; and test procedure from ANSI C63.26-2015.

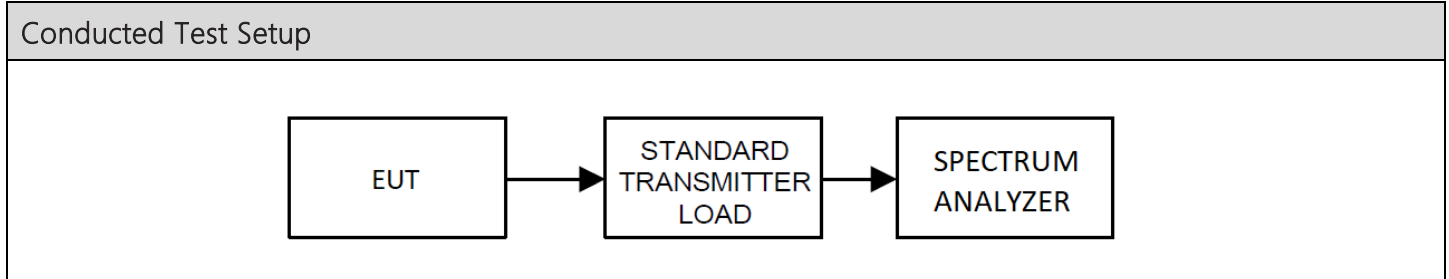



## Conducted Emissions Spectrum Plots


### 8.5.1 Conducted Emissions, Below 1GHz, 447 MHz

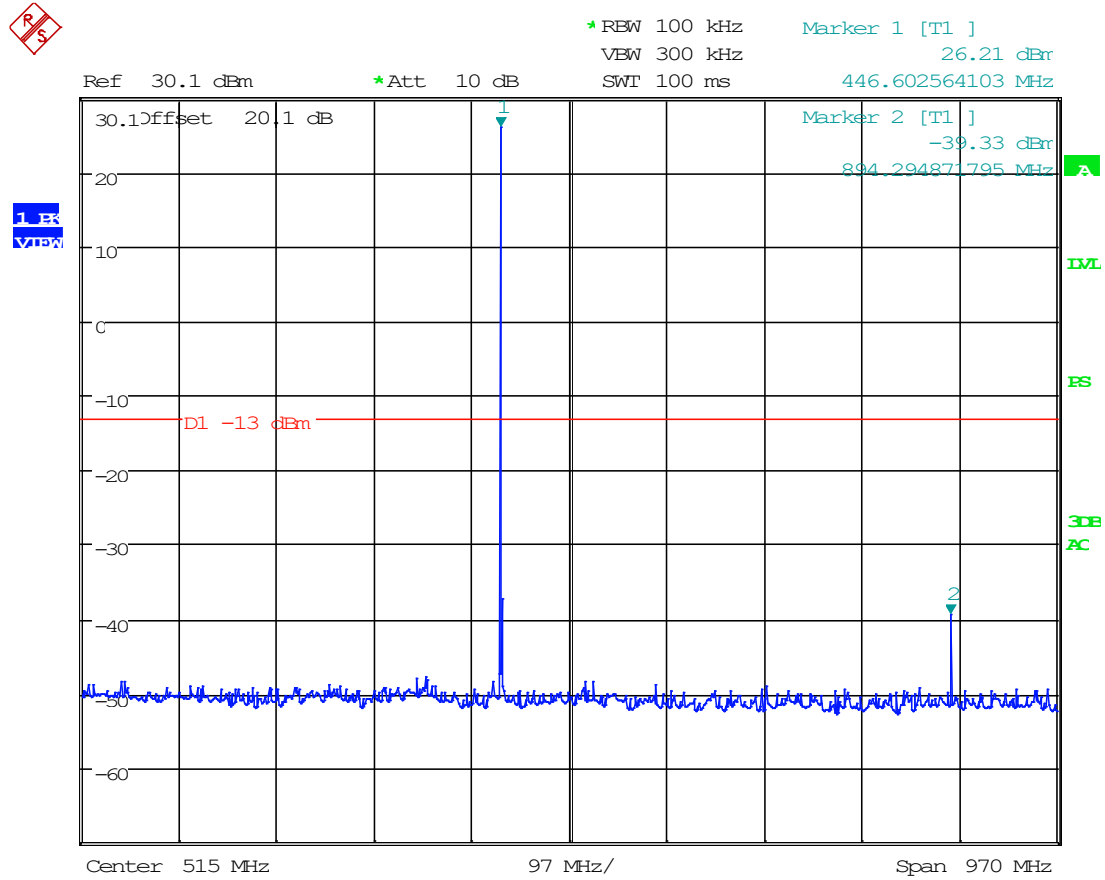

Date: 19.APR.2023 09:16:02




### 8.5.2 Conducted Emissions Above 1GHz, 447 MHz

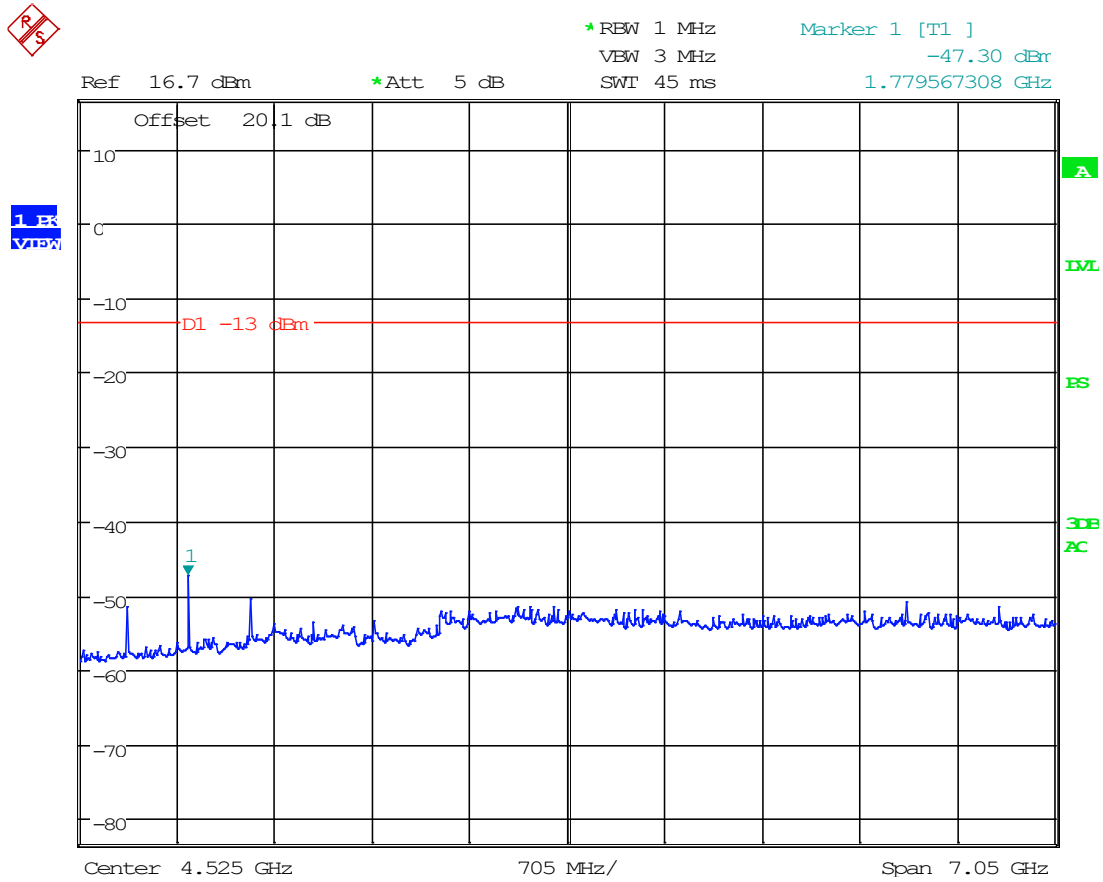

Date: 19.APR.2023 09:23:14




### 8.5.3 Conducted Emissions Below 1GHz, 460 MHz

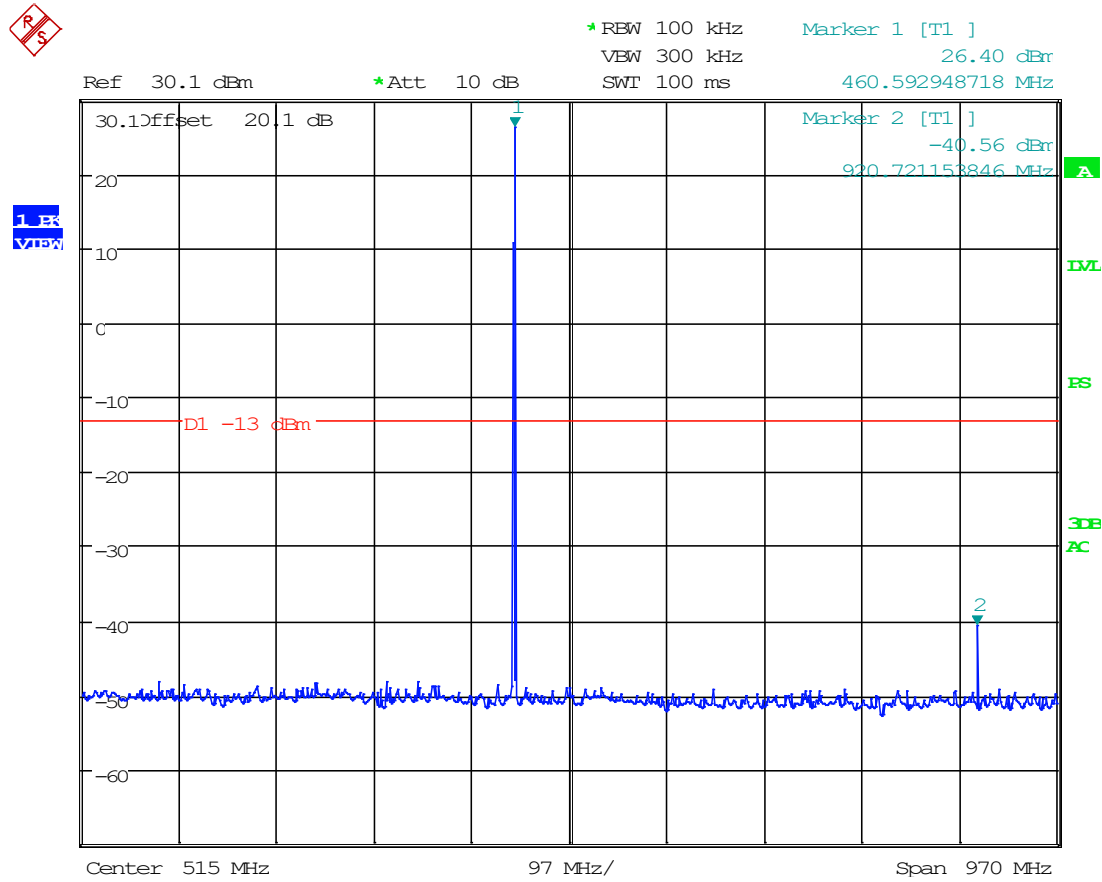

Date: 19.APR.2023 09:17:32


### 8.5.4 Conducted Emissions Above 1GHz, 460 MHz

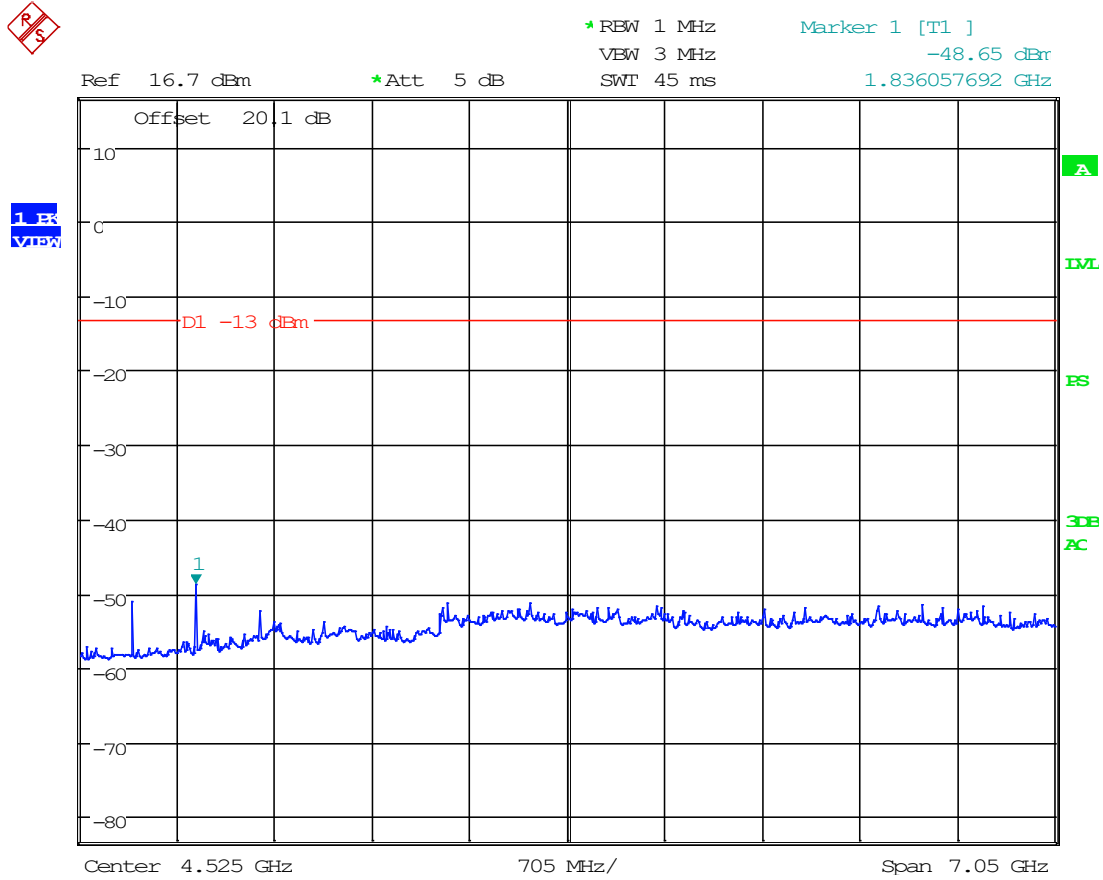

Date: 19.APR.2023 09:21:48




### 8.5.5 Conducted Emissions Below 1GHz, 472.9875 MHz

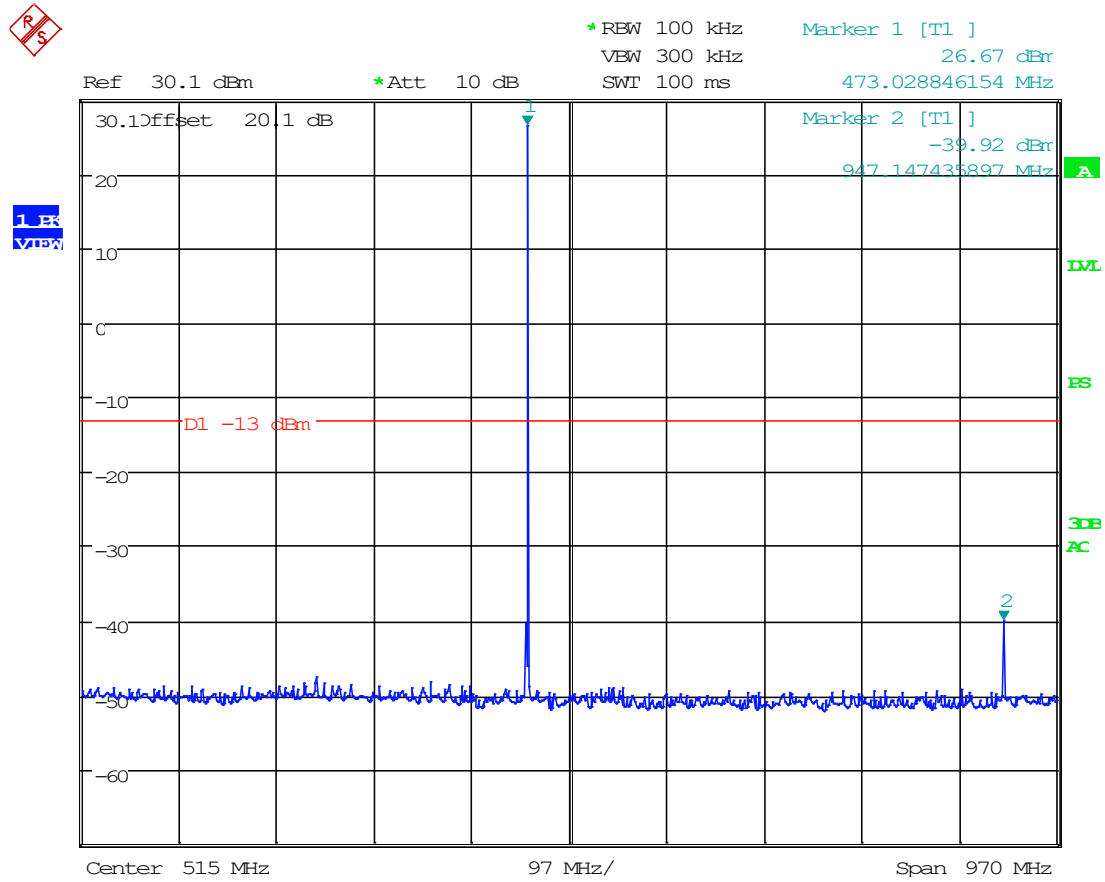

Date: 19.APR.2023 09:18:46

### 8.5.6 Conducted Emissions Above 1GHz, 472.9875 MHz

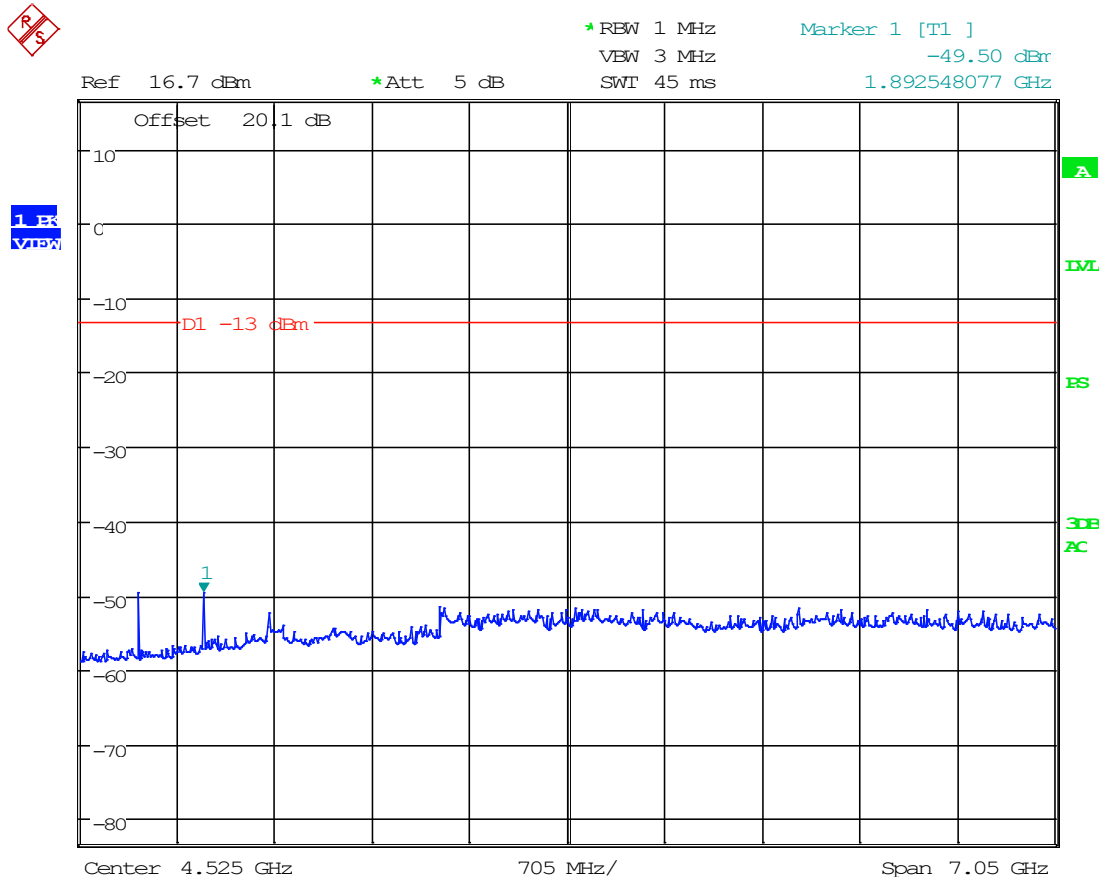


Date: 19.APR.2023 09:20:36


## 8.6 Radiated Emissions

Limits from FCC Parts 2.1053 and 90.210 (n); and test procedure from ANSI C63.26-2015.

### Radiated Test Setup, 30 – 1000 MHz

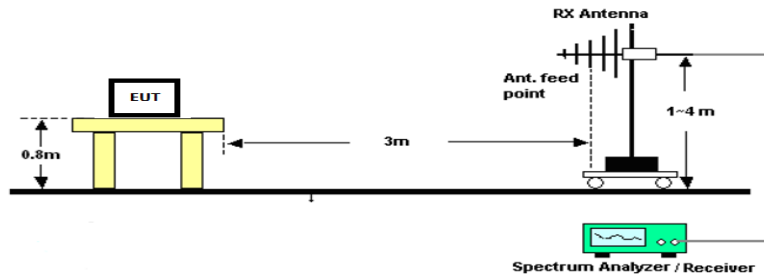

### Radiated Test Setup, Above 1000 MHz

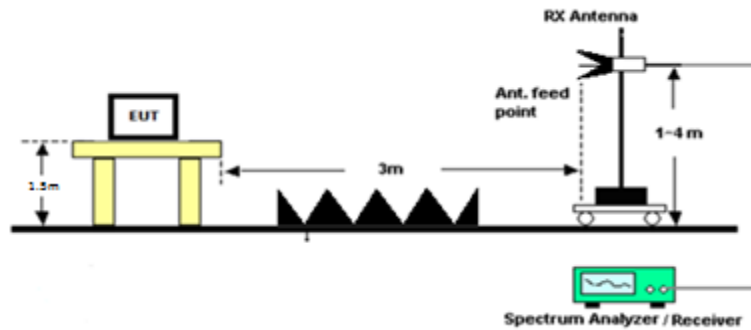





Radiated Emissions, Tabular Data

8.6.1 Radiated Emissions, 447 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
447.00	894.00	PK	0.40	H	4.25	21.74	3.00	26.39	-70.99	-13.00	57.99
447.00	894.00	PK	-0.30	V	4.25	21.74	3.00	25.69	-71.69	-13.00	58.69
447.00	1341.00	PK	14.10	H	4.25	20.88	3.00	39.23	-58.15	-13.00	45.15
447.00	1341.00	PK	15.00	V	4.25	20.88	3.00	40.13	-57.25	-13.00	44.25
447.00	1788.00	PK	10.70	H	4.88	23.44	3.00	39.02	-58.36	-13.00	45.36
447.00	1788.00	PK	11.10	V	4.88	23.44	3.00	39.42	-57.96	-13.00	44.96
447.00	2235.00	PK	11.40	H	5.41	25.99	3.00	42.80	-54.58	-13.00	41.58
447.00	2235.00	PK	12.00	V	5.41	25.99	3.00	43.40	-53.98	-13.00	40.98
447.00	2682.00	PK	12.00	H	5.94	28.55	3.00	46.49	-50.89	-13.00	37.89
447.00	2682.00	PK	11.60	V	5.94	28.55	3.00	46.09	-51.29	-13.00	38.29
447.00	3129.00	PK	13.60	H	6.48	31.10	3.00	51.18	-46.20	-13.00	33.20
447.00	3129.00	PK	13.40	V	6.48	31.10	3.00	50.98	-46.40	-13.00	33.40
447.00	3576.00	PK	13.30	H	6.72	33.03	3.00	53.05	-44.33	-13.00	31.33
447.00	3576.00	PK	13.50	V	6.72	33.03	3.00	53.25	-44.13	-13.00	31.13
447.00	4023.00	PK	13.80	H	7.23	33.39	3.00	54.42	-42.96	-13.00	29.96
447.00	4023.00	PK	14.30	V	7.23	33.39	3.00	54.92	-42.46	-13.00	29.46
447.00	4470.00	PK	14.10	H	7.30	33.83	3.00	55.23	-42.15	-13.00	29.15
447.00	4470.00	PK	14.40	V	7.30	33.83	3.00	55.53	-41.85	-13.00	28.85



### 8.6.2 Radiated Emissions, 460 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
460.00	920.00	PK	0.50	H	3.58	22.30	3.00	26.38	-71.00	-13.00	58.00
460.00	920.00	PK	0.10	V	3.58	22.30	3.00	25.98	-71.40	-13.00	58.40
460.00	1380.00	PK	12.50	H	4.30	21.10	3.00	37.90	-59.47	-13.00	46.47
460.00	1380.00	PK	13.80	V	4.30	21.10	3.00	39.20	-58.17	-13.00	45.17
460.00	1840.00	PK	11.00	H	4.96	23.73	3.00	39.69	-57.69	-13.00	44.69
460.00	1840.00	PK	10.80	V	4.96	23.73	3.00	39.49	-57.89	-13.00	44.89
460.00	2300.00	PK	11.80	H	5.49	26.36	3.00	43.66	-53.72	-13.00	40.72
460.00	2300.00	PK	12.20	V	5.49	26.36	3.00	44.06	-53.32	-13.00	40.32
460.00	2760.00	PK	11.70	H	6.11	28.99	3.00	46.81	-50.57	-13.00	37.57
460.00	2760.00	PK	12.10	V	6.11	28.99	3.00	47.21	-50.17	-13.00	37.17
460.00	3220.00	PK	13.80	H	6.63	31.62	3.00	52.06	-45.32	-13.00	32.32
460.00	3220.00	PK	13.70	V	6.63	31.62	3.00	51.96	-45.42	-13.00	32.42
460.00	3680.00	PK	13.90	H	6.62	33.19	3.00	53.72	-43.66	-13.00	30.66
460.00	3680.00	PK	14.60	V	6.62	33.19	3.00	54.42	-42.96	-13.00	29.96
460.00	4140.00	PK	14.20	H	7.04	33.42	3.00	54.66	-42.72	-13.00	29.72
460.00	4140.00	PK	14.20	V	7.04	33.42	3.00	54.66	-42.72	-13.00	29.72
460.00	4600.00	PK	15.50	H	7.55	34.06	3.00	57.10	-40.27	-13.00	27.27
460.00	4600.00	PK	16.10	V	7.55	34.06	3.00	57.70	-39.67	-13.00	26.67




### 8.6.3 Radiated Emissions, 472.9875 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
472.99	945.98	PK	-0.20	H	3.60	22.64	3.00	26.04	-71.34	-13.00	58.34
472.99	945.98	PK	-0.40	V	3.60	22.64	3.00	25.84	-71.54	-13.00	58.54
472.99	1418.96	PK	11.70	H	4.32	21.33	3.00	37.34	-60.04	-13.00	47.04
472.99	1418.96	PK	13.70	V	4.32	21.33	3.00	39.34	-58.04	-13.00	45.04
472.99	1891.95	PK	10.80	H	5.05	24.03	3.00	39.88	-57.50	-13.00	44.50
472.99	1891.95	PK	10.80	V	5.05	24.03	3.00	39.88	-57.50	-13.00	44.50
472.99	2364.94	PK	12.20	H	5.60	26.73	3.00	44.54	-52.84	-13.00	39.84
472.99	2364.94	PK	12.10	V	5.60	26.73	3.00	44.44	-52.94	-13.00	39.94
472.99	2837.93	PK	12.20	H	6.21	29.44	3.00	47.84	-49.53	-13.00	36.53
472.99	2837.93	PK	12.00	V	6.21	29.44	3.00	47.64	-49.73	-13.00	36.73
472.99	3310.91	PK	13.60	H	6.72	32.14	3.00	52.46	-44.92	-13.00	31.92
472.99	3310.91	PK	13.70	V	6.72	32.14	3.00	52.56	-44.82	-13.00	31.82
472.99	3783.90	PK	15.70	H	6.41	33.14	3.00	55.25	-42.13	-13.00	29.13
472.99	3783.90	PK	15.10	V	6.41	33.14	3.00	54.65	-42.73	-13.00	29.73
472.99	4256.89	PK	13.80	H	7.23	33.35	3.00	54.38	-42.99	-13.00	29.99
472.99	4256.89	PK	14.00	V	7.23	33.35	3.00	54.58	-42.79	-13.00	29.79
472.99	4729.88	PK	14.20	H	7.04	33.89	3.00	55.14	-42.24	-13.00	29.24
472.99	4729.88	PK	14.00	V	7.04	33.89	3.00	54.94	-42.44	-13.00	29.44

### 8.7 Frequency Stability

Limits from FCC Parts 2.1055, and 90.213; and test procedure from ANSI C63.26-2015.

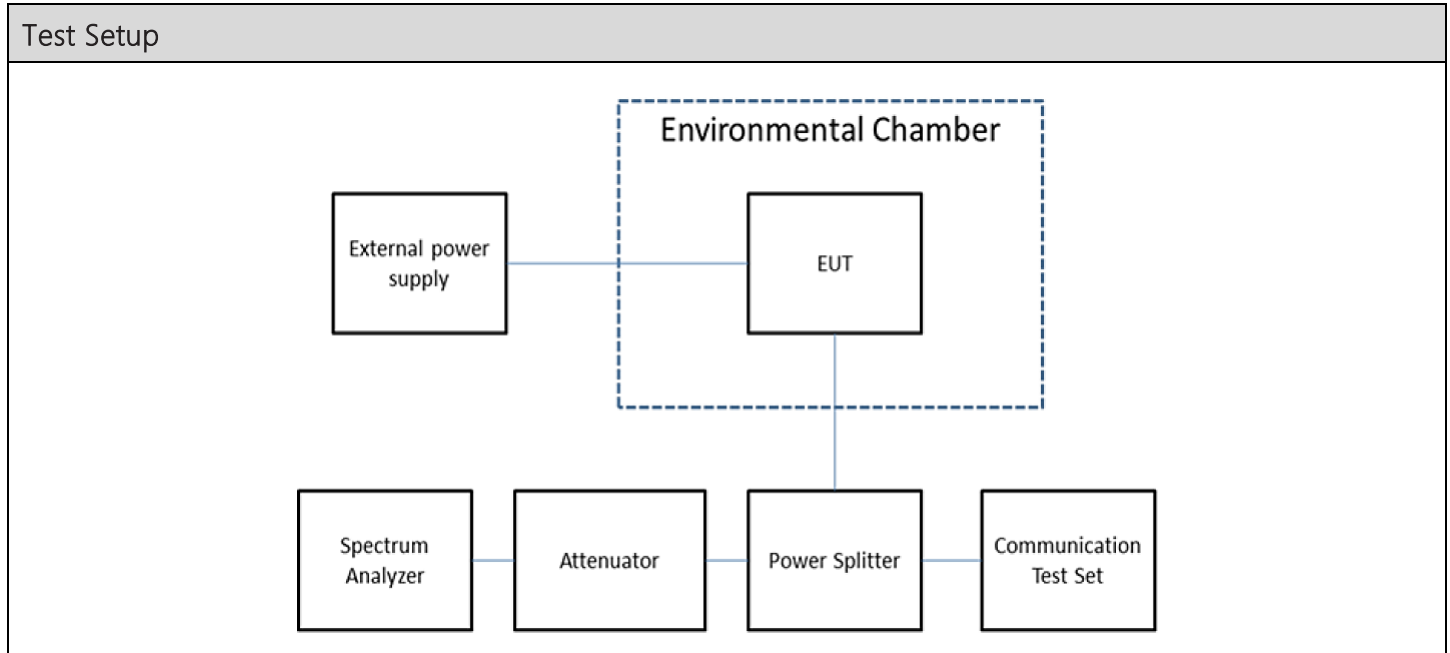


Test Results, Mode 1		
Tuned Frequency (MHz)	Max Deviation (kHz)	Limit (ppm)
460	0.390	2.5



### 8.7.1 Frequency Stability Data

FCC Part 90 Limit	2.5	ppm	
FCC Part 90 Limit, as ppb	2500	ppb (Parts per Billion)	
FCC Part 90 Limit, as %	0.00025	%	
Strictest Combined Limit, as Hz	1150.006	Hz	
Combined Lower Limit	460.001240	MHz	
Combined Upper Limit	460.003540	MHz	
Rated Supply Voltage	12.0	<input type="radio"/> AC <input checked="" type="radio"/> DC	
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
-30	12.0	460.002130	0.260
-20	12.0	460.002000	0.390
-10	12.0	460.002090	0.300
0	12.0	460.002130	0.260
+10	12.0	460.002310	0.080
+20 (reference)	12.0	460.002390	0.000
+20	10.2	460.002390	0.000
+20	13.8	460.002400	-0.010
+30	12.0	460.002430	-0.040
+40	12.0	460.002340	0.050
+50	12.0	460.002310	0.080

### 8.7.2 Frequency Stability Plot

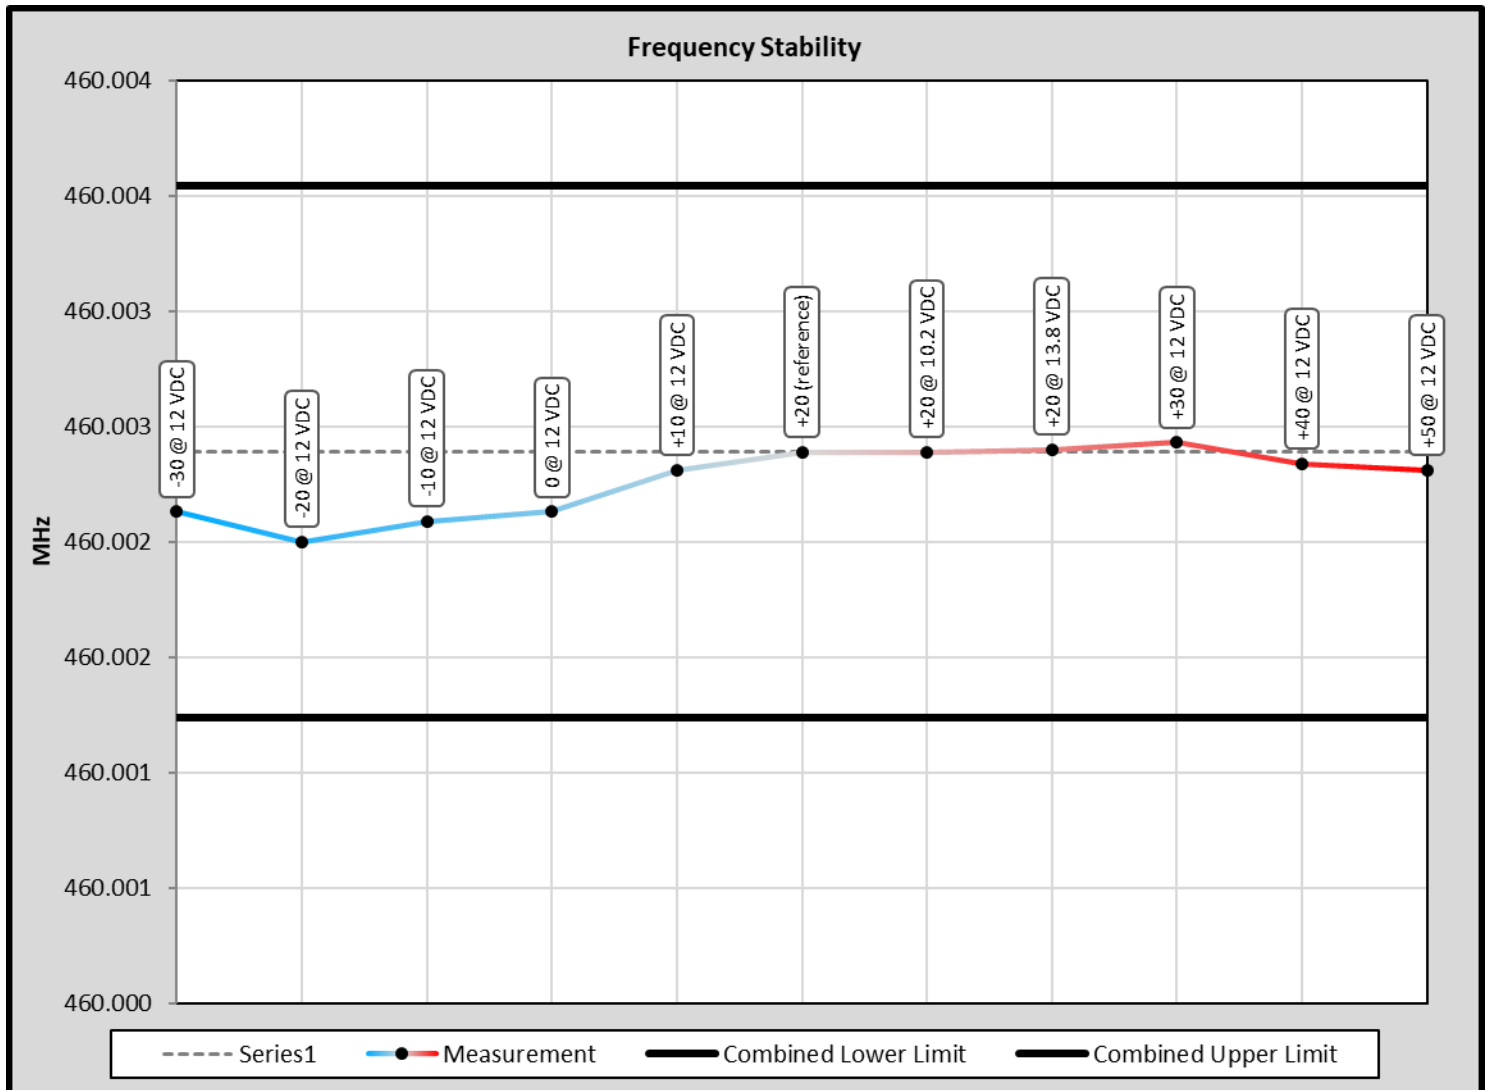



### 9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

### 10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

### 11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_7472-23_FCC 90_	1	Initial release	4/20/2023



Timco Engineering, Inc., an IIA Company  
849 NW State Road 45, Newberry, Florida 32669  
(352) 472-5500 / [testing@timcoengr.com](mailto:testing@timcoengr.com)

---

END OF TEST REPORT

---