
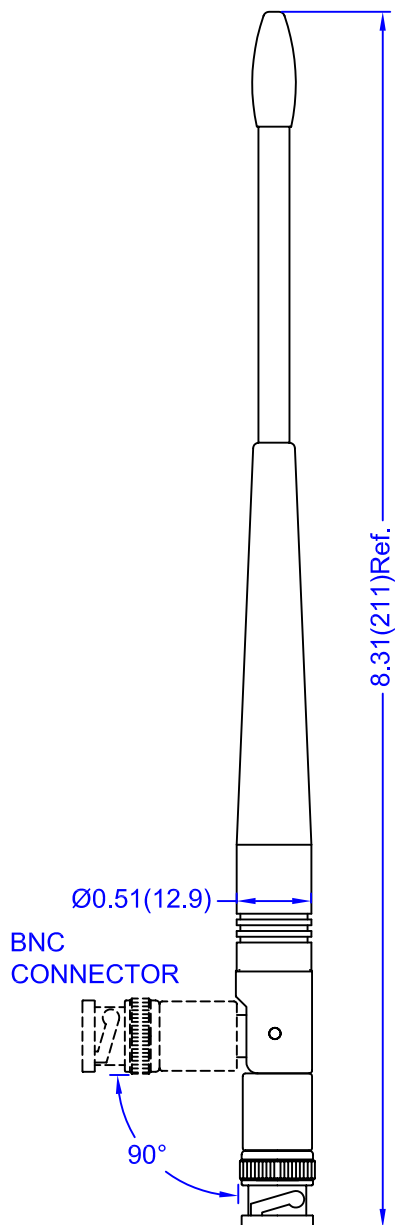
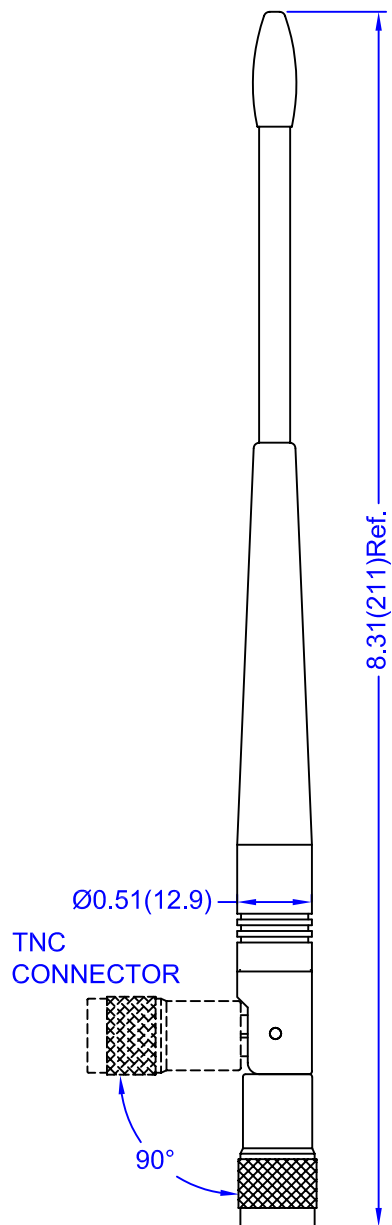


S467TR-915S

Specification:

Package	Bulk
Product Status	Active
RF Family/Standard	-
Frequency Group	UHF (300MHz ~ 1GHz)
Frequency (Center/Band)	900MHz
Frequency Range	902MHz ~ 928MHz
Antenna Type	Whip, Tilt
Number of Bands	1
VSWR	2
Return Loss	-
Gain	2dBi
Features	-
Termination	SMA
Ingress Protection	-
Mounting Type	Connector Mount
Height (Max)	8.248" (209.50mm)
Applications	General Purpose
Base Product Number	<a href="#">S467AM</a>

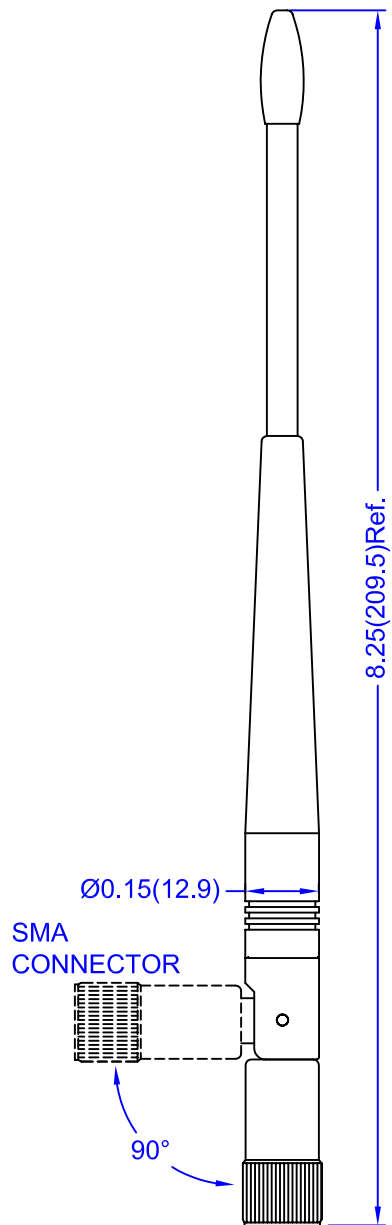

Electrical Properties:

Frequency Range: 902~928 MHz  
 Impedance: 50Ω nominal  
 VSWR: <2.0:1  
 Gain: \*2.0 dBi  
 Radiation: Omni  
 Polarization: Vertical  
 Wave: Half Wave Dipole

Mechanical Properties:

Material:  
 Whip: Polyurethane(Black)  
 Connector: Brass with  
           black chrome plating  
 Operation Temp.: -20°C to +65°C  
 Storage Temp.: -30°C to +75°C

TITLE	900 MHz ISM Band Swivel Antenna - 467 model		DATE	SHEET
			011305	1 of 2
UNIT	DWG. NO.	S467XX - 915S		
in.(mm)		<b>NEARSON</b>		
SCALE				
none				



SMA Plug  
(AM)



TNC Plug  
(TC)



BNC Plug  
(BC)



SMA Plug Reverse Polarity  
(AH)



TNC Plug Reverse Polarity  
(TR)



BNC Plug Reverse Polarity  
(BR)

Connector Type

Connector Code -XX-	Description	P / N
AM	SMA Plug	S467AM-915S
AH	SMA Plug Reverse Polarity	S467AH-915S
TC	TNC Plug	S467TC-915S
TR	TNC Plug Reverse Polarity	S467TR-915S
BC	BNC Plug	S467BC-915S
BR	BNC Plug Reverse Polarity	S467BR-915S

TITLE	900 MHz ISM Band Swivel Antenna - 467 model		DATE	SHEET
			011305	2 of 2
UNIT	DWG. NO.	S467XX - 915S		
in.(mm)				
SCALE				
none				