

## Regulatory WLAN Antenna Information

	Vendor Name	Project Code
<b>OEM</b>	<b>Hewlett-Packard Company</b>	<b>Heavenly-Tablet-Mininote</b>
<b>ODM</b>	<b>Compal Corporation</b>	<b>DAU00</b>
<b>Antenna</b>	<b>Wistron Neweb Corporation</b>	<b>EBC-C</b>

## Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Main & Aux antenna (Peak Gain W/ cable loss)	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Main & Aux antenna (Peak Gain only)	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Main & Aux antenna (Cable loss W/ connector)	Required	Required	Required	Required	Required
2	Dimensioned Photographs <b>and</b> Drawings of main & auxiliary antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. <b>(S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.</b>	Required	Required	Desired	Required <b>(Photos)</b>	Required <b>(Photos)</b>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, BT, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A

# Antenna Information

## Section 1. Antenna Assembly Specifications


### Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
<b>Main Antenna</b> (WNC P/N: 81EBC15COMM4)  (customer P/N: DC330015310)	Wistron Newweb Corporation	PIFA	<b>P/N: WN-S-1.13B-380MM-(2-2-1)</b>  <b>50 ohm Coaxial.</b>  <b>length: 380 mm</b> <b>diameter: 1.13 mm</b>  <b>Connector: IPEX</b>	2400-2500MHz	2400-2500MHz	2400-2500MHz	2400-2500MHz
				<b>0.58</b> dBi (peak)	<b>1.98</b> dBi (peak)	<b>2.0</b> max	<b>1.41</b> dBi (peak)
				5150-5350MHz	5150-5350MHz	5150-5350MHz	5150-5350MHz
				<b>-0.68</b> dBi (peak)	<b>1.41</b> dBi (peak)	<b>2.5</b> max	<b>2.09</b> dBi (peak)
<b>AUX Antenna</b> (WNC P/N: 81EBC15COMA4)  (customer P/N: DC330015410)	Wistron Newweb Corporation	PIFA	<b>P/N: WN-S-1.13W-550MM-(2-2-1)</b>  <b>50 ohm Coaxial.</b>  <b>length: 550 mm</b> <b>diameter: 1.13 mm</b>  <b>Connector: IPEX</b>	2400-2500MHz	2400-2500MHz	2400-2500MHz	2400-2500MHz
				<b>1.84</b> dBi (peak)	<b>3.79</b> dBi (peak)	<b>2.0</b> max	<b>1.95</b> dBi (peak)
				5150-5350MHz	5150-5350MHz	5150-5350MHz	5150-5350MHz
				<b>2.68</b> dBi (peak)	<b>5.59</b> dBi (peak)	<b>2.5</b> max	<b>2.91</b> dBi (peak)
				5470-5725MHz	5470-5725MHz	5470-5725MHz	5470-5725MHz
				<b>2.23</b> dBi (peak)	<b>5.21</b> dBi (peak)	<b>2.5</b> max	<b>2.98</b> dBi (peak)
				5725-5825MHz	5725-5825MHz	5725-5825MHz	5725-5825MHz
				<b>0.97</b> dBi (peak)	<b>3.10</b> dBi (peak)	<b>2.5</b> max	<b>2.13</b> dBi (peak)
				5725-5825MHz	5725-5825MHz	5725-5825MHz	5725-5825MHz
				<b>0.97</b> dBi (peak)	<b>3.17</b> dBi (peak)	<b>2.5</b> max	<b>2.20</b> dBi (peak)
				5725-5825MHz	5725-5825MHz	5725-5825MHz	5725-5825MHz
				<b>2.23</b> dBi (peak)	<b>5.31</b> dBi (peak)	<b>2.5</b> max	<b>3.08</b> dBi (peak)

## Section 2. Dimensioned Photos or Drawings of Antennas

Include a dimensioned photo and dimensioned drawing of main antenna here.

### Main Antenna Dimensioned Drawing:

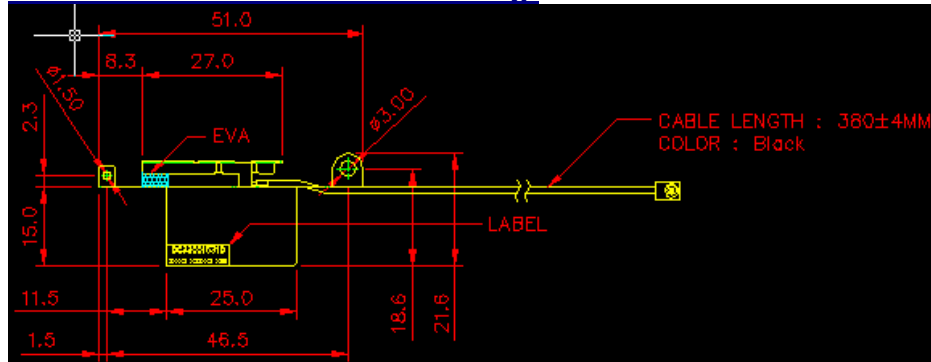


### Main Antenna Photo:




Include a dimensioned photo and dimensioned drawing of aux antenna here.

**Aux Antenna Dimensioned Drawing:**

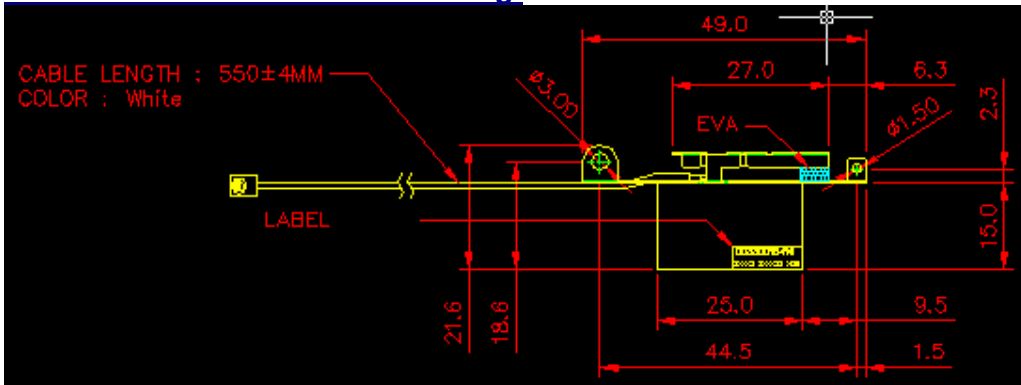


**Aux Antenna Photo:**

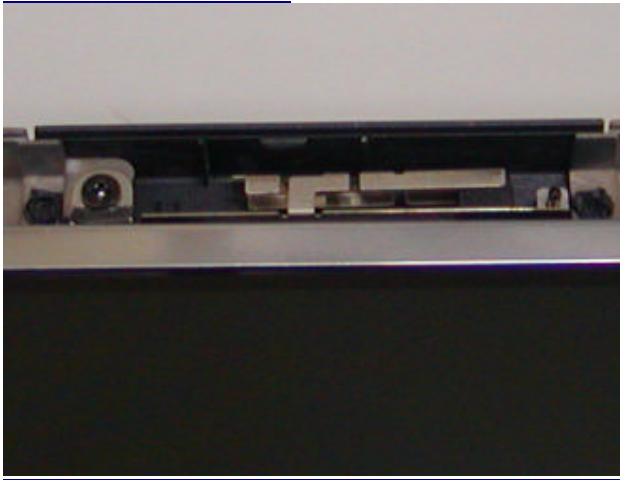


## Section 3. Radiation characteristics of antennae Loaded in Host Platform

### 2400-2500MHz radiation characteristic

#### Main antenna: 2400 MHz

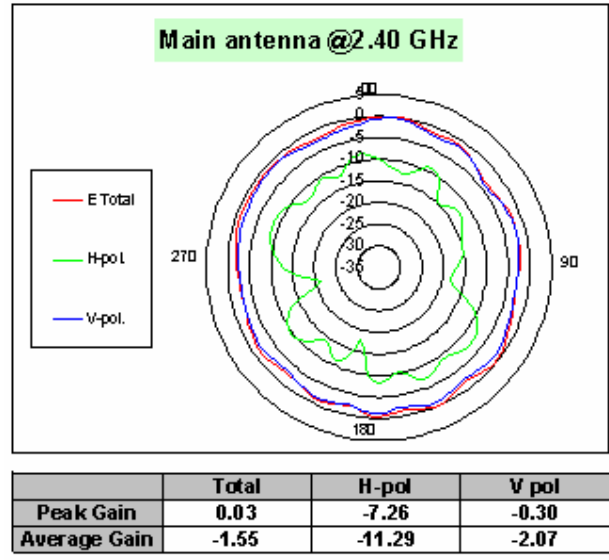


**Main antenna: 2450 MHz**

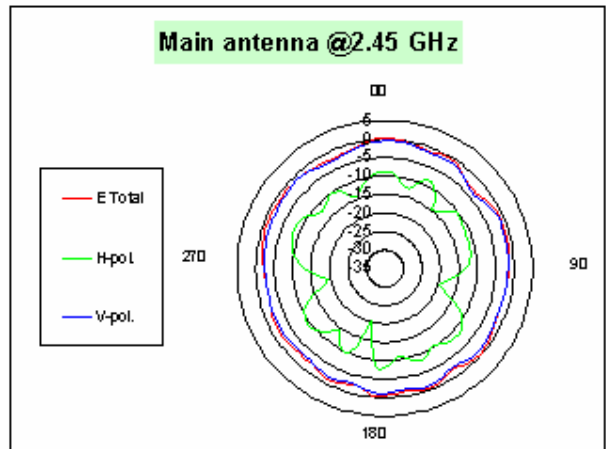


	Total	H-pol	V pol
<b>Peak Gain</b>	<b>0.12</b>	<b>-7.75</b>	<b>-0.44</b>
<b>Average Gain</b>	<b>-1.42</b>	<b>-11.16</b>	<b>-1.94</b>

**Main antenna: 2500 MHz**

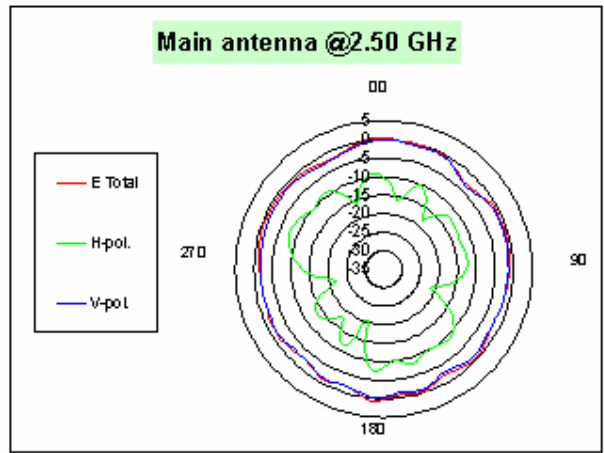

	Total	H-pol	V pol
<b>Peak Gain</b>	<b>0.58</b>	<b>-7.54</b>	<b>0.03</b>
<b>Average Gain</b>	<b>-1.12</b>	<b>-12.03</b>	<b>-1.52</b>


**Auxiliary antenna: 2400 MHz**

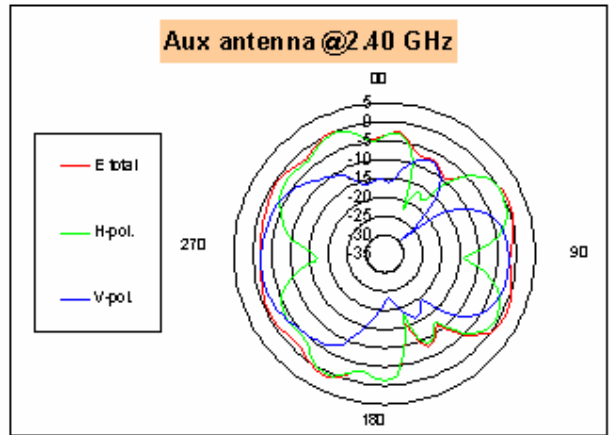

	Total	H-pol	V pol
Peak Gain	1.09	0.57	-1.87
Average Gain	-2.14	-4.56	-7.41




### Auxiliary antenna: 2450 MHz

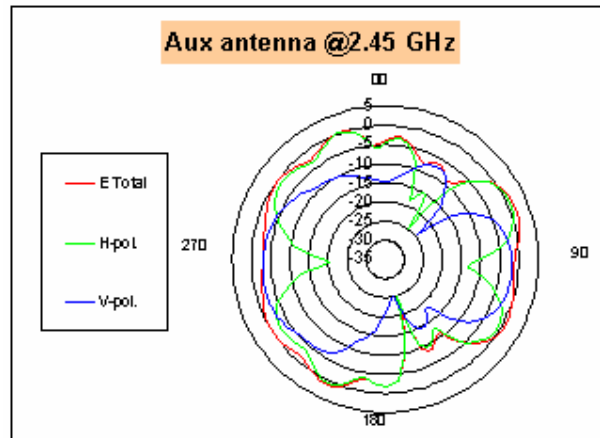

	Total	H-pol	V-pol
<b>Peak Gain</b>	<b>1.56</b>	<b>0.81</b>	<b>-1.83</b>
<b>Average Gain</b>	<b>-2.09</b>	<b>-4.33</b>	<b>-7.54</b>


Auxiliary antenna: 2500 MHz

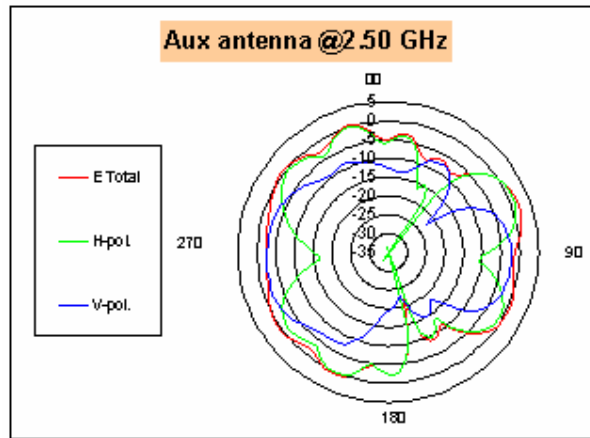

	Total	H-pol	V pol
<b>Peak Gain</b>	<b>1.84</b>	<b>1.15</b>	<b>-2.25</b>
<b>Average Gain</b>	<b>-2.04</b>	<b>-4.27</b>	<b>-7.37</b>


**5150-5350 MHz radiation characteristic**

**Main antenna: 5150 MHz**

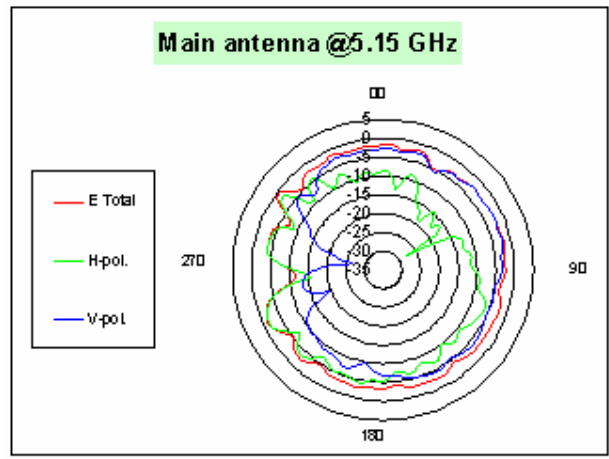


	Total	H-pol	V-pol
<b>Peak Gain</b>	<b>-0.68</b>	<b>-1.38</b>	<b>-2.34</b>
<b>Average Gain</b>	<b>-3.17</b>	<b>-7.66</b>	<b>-5.99</b>

**Main antenna: 5250 MHz**

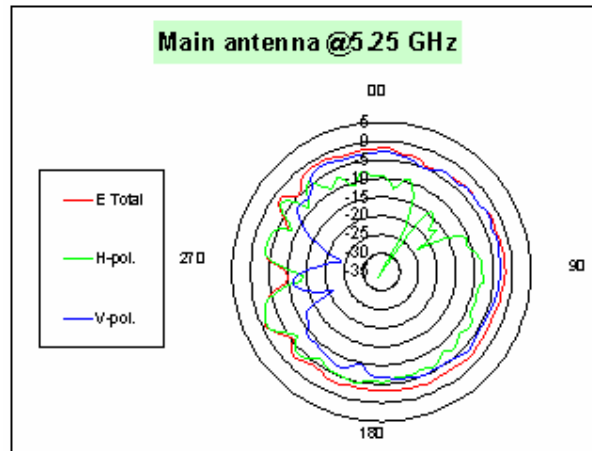


	Total	H-pol	V-pol
<b>Peak Gain</b>	<b>-1.01</b>	<b>-1.18</b>	<b>-2.40</b>
<b>Average Gain</b>	<b>-3.02</b>	<b>-7.39</b>	<b>-5.87</b>

### Main antenna: 5350 MHz

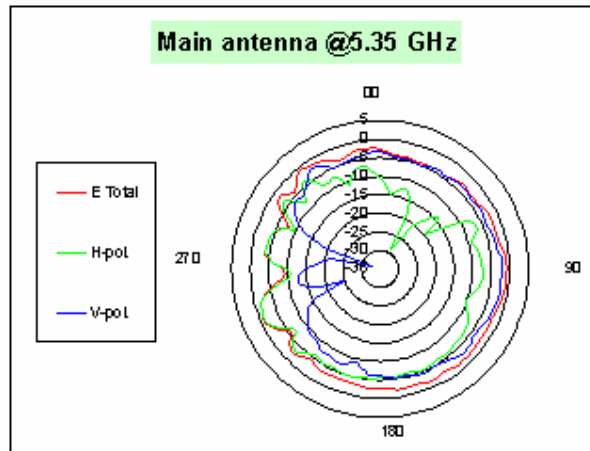


	Total	H-pol	V pol
<b>Peak Gain</b>	<b>-0.81</b>	<b>-1.00</b>	<b>-1.90</b>
<b>Average Gain</b>	<b>-2.90</b>	<b>-7.08</b>	<b>-5.84</b>

**Auxiliary antenna: 5150 MHz**

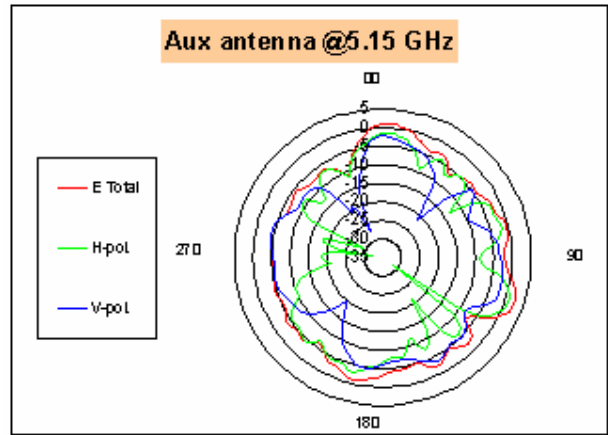


	Total	H-pol	V pol
Peak Gain	2.68	1.13	-2.29
Average Gain	-3.28	-6.69	-6.74

Auxiliary antenna: 5250 MHz

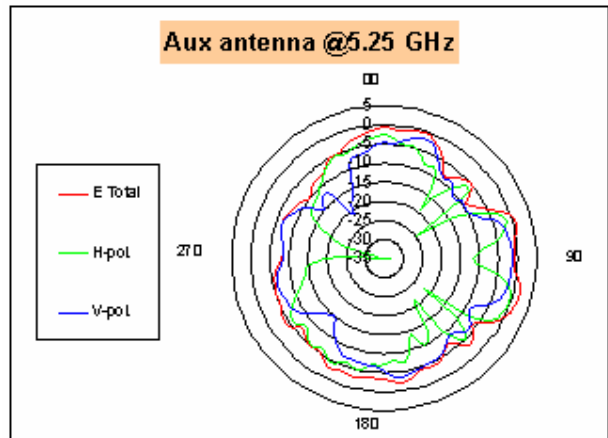

	Total	H-pol	V pol
<b>Peak Gain</b>	<b>1.90</b>	<b>-0.17</b>	<b>-1.35</b>
<b>Average Gain</b>	<b>-3.67</b>	<b>-7.51</b>	<b>-6.63</b>

Auxiliary antenna: 5350 MHz

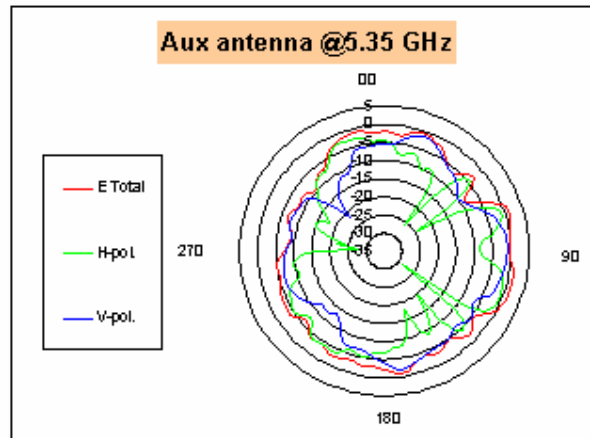


	Total	H-pol	V pol
<b>Peak Gain</b>	<b>1.53</b>	<b>-0.53</b>	<b>-0.87</b>
<b>Average Gain</b>	<b>-3.12</b>	<b>-7.04</b>	<b>-6.01</b>




**5470-5725MHz radiation characteristic**

**Main antenna: 5470 MHz**

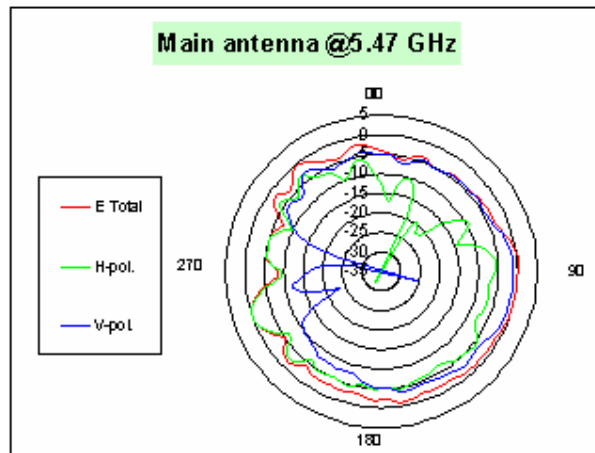


	Total	H-pol	V-pol
<b>Peak Gain</b>	<b>0.25</b>	<b>-0.01</b>	<b>-1.11</b>
<b>Average Gain</b>	<b>-2.59</b>	<b>-6.66</b>	<b>-5.59</b>

**Main antenna: 5647.5 MHz**

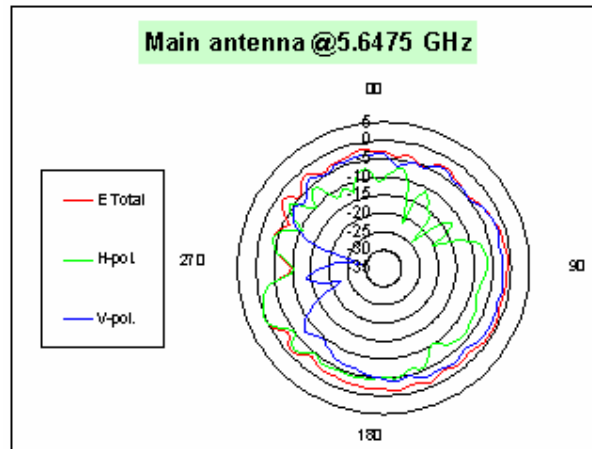


	Total	H-pol	V pol
<b>Peak Gain</b>	<b>0.38</b>	<b>0.32</b>	<b>-1.75</b>
<b>Average Gain</b>	<b>-2.50</b>	<b>-6.96</b>	<b>-5.29</b>

**Main antenna: 5825 MHz**

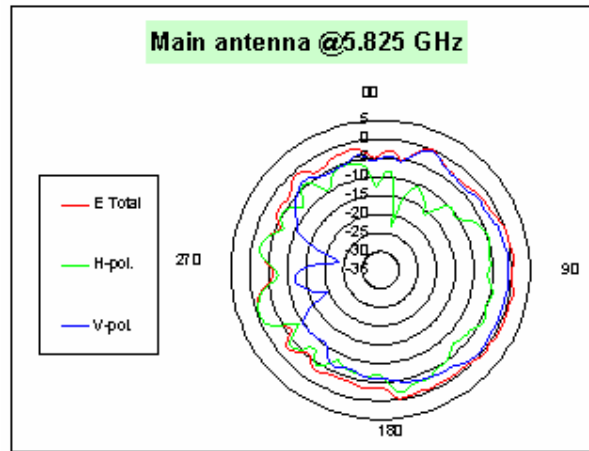


	Total	H-pol	V pol
<b>Peak Gain</b>	<b>0.97</b>	<b>-0.53</b>	<b>-0.29</b>
<b>Average Gain</b>	<b>-1.93</b>	<b>-6.03</b>	<b>-4.80</b>

Auxiliary antenna: 5470 MHz

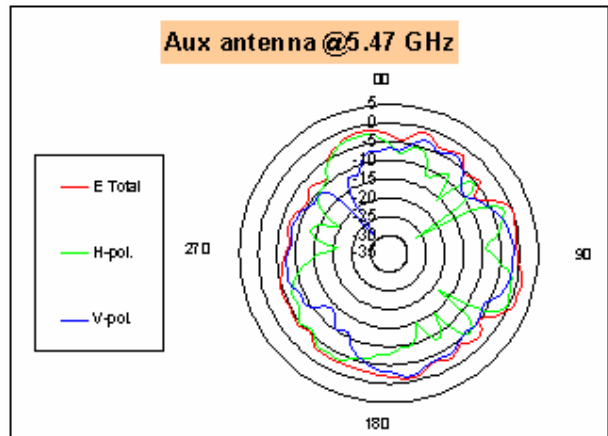


	Total	H-pol	V-pol
<b>Peak Gain</b>	<b>1.42</b>	<b>0.00</b>	<b>-1.57</b>
<b>Average Gain</b>	<b>-3.20</b>	<b>-6.98</b>	<b>-6.21</b>

**Auxiliary antenna: 5647.5 MHz**

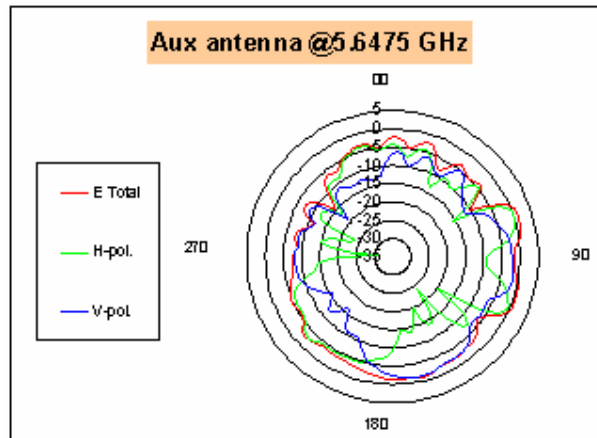

	Total	H-pol	V pol
<b>Peak Gain</b>	<b>1.21</b>	<b>0.24</b>	<b>-1.28</b>
<b>Average Gain</b>	<b>-3.67</b>	<b>-7.43</b>	<b>-7.02</b>

**Auxiliary antenna: 5825 MHz**

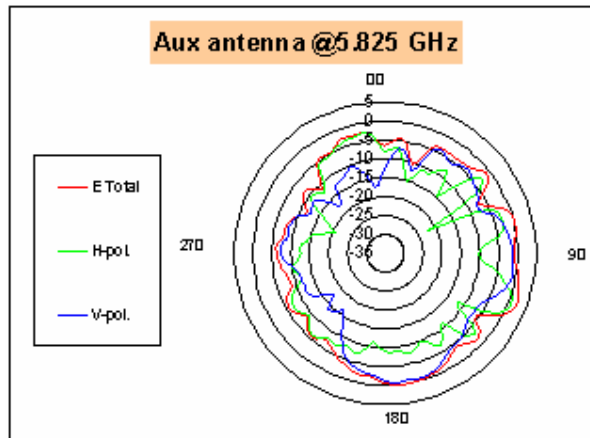

	Total	H-pol	V pol
<b>Peak Gain</b>	<b>2.23</b>	<b>1.18</b>	<b>-0.55</b>
<b>Average Gain</b>	<b>-3.61</b>	<b>-7.52</b>	<b>-6.59</b>

## Section 4. Host Platform Information


OEM / ODM Host platform: (XXXXXXX) platform correlated to antenna data

Rating Label Photo:

Module Location Photo: (if Singapore required)

## Section 5. Antenna Host Platform Location Information

Include a dimensioned photos or dimensioned drawings of main and auxiliary antenna placements.

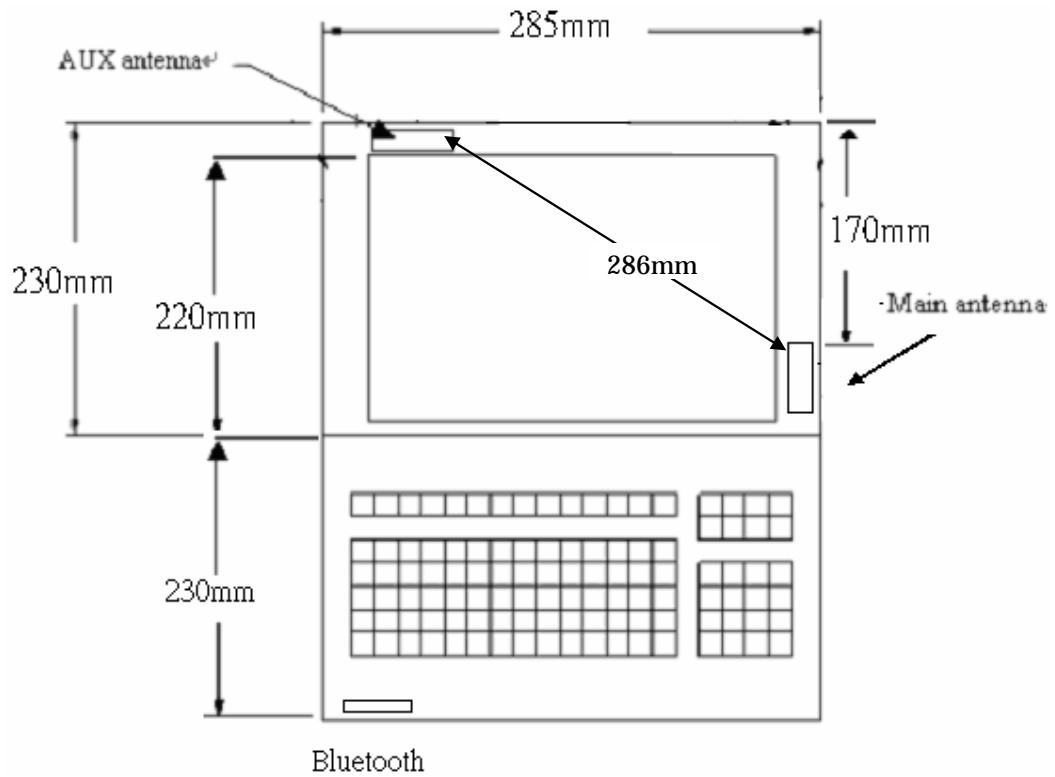


**Mini-note**



## Section 6. Antenna dimensional information for SAR evaluation

Include a dimensioned photos or dimensioned drawings showing the distance (mm) between the transmit (main) antenna and the user (excluding hands, wrist, feet, and ankle)

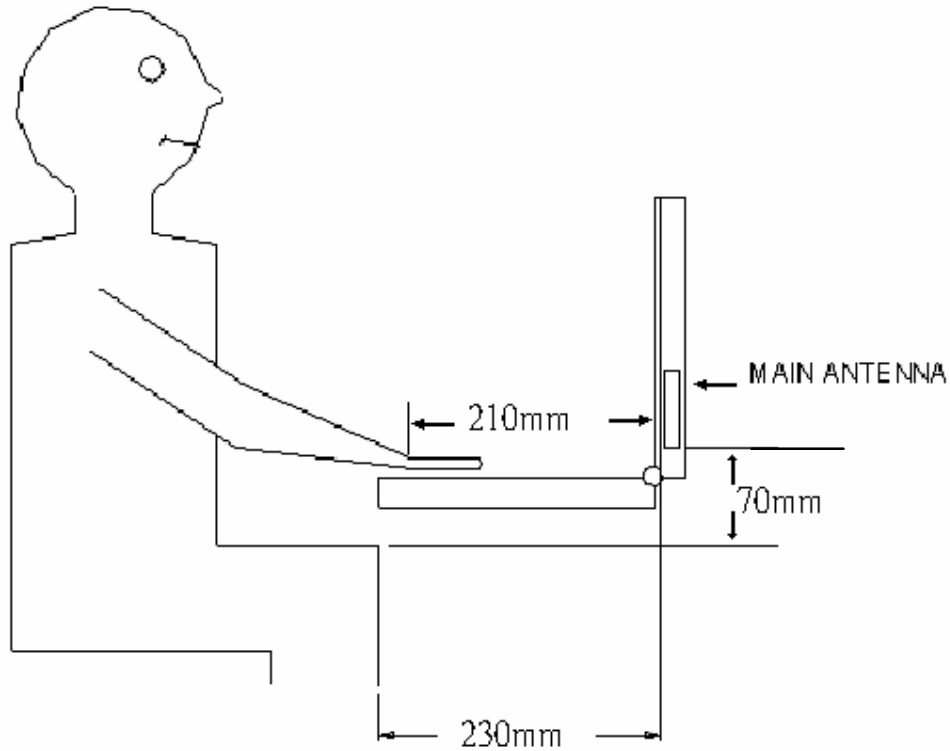

**Mini-note**

## Section 7. Diagram Example of Co-Location Antenna Separation

Indicate distance between WLAN module antennas and Bluetooth/other radio antenna element.

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

