



Nemko USA, Inc.
Phone (858) 755-5525 Fax (858) 452-1810
11696 Sorrento Valley Rd., Suite F
San Diego, CA 92121-1024

Test Report: 2007 127363 FCC

Applicant: Broadcast Microwave Services
12367 Crosthwaite Circle Dock 10
Poway, CA 92064
(858) 391-3050 x147
(858) 391-3049 - fax

Equipment Under Test: Model: BPA-10CC-7 10W Linear Power Amplifier

FCC ID: CNVHCII-7

In Accordance With: FCC PART 2 and FCC PART 74 Subpart F

Tested By: Nemko USA Inc.
11696 Sorrento Valley Road
San Diego, CA 92121-1024

Date: December 11, 2007

Total Number of Pages: 36

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	2 of 36

DOCUMENT HISTORY

REVISION	DATE	COMMENTS
-	December 11, 2007	Prepared By: F.S.Custodio
-	December 11, 2007	Initial Release: Alan Laudani

NOTE: Nemko USA, Inc. hereby makes the following statements so as to conform to Chapter 10 (Test Reports) Requirements of ANSI C63.4: 2003 "Methods and Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz":

- The unit described in this report was received at Nemko USA, Inc.'s facilities on November 15, 2007. Testing was performed on the unit described in this report on November 15, 2007 to December 10, 2007.
- The Test Results reported herein apply only to the Unit actually tested, and to substantially identical Units.
- This report does not imply the endorsement of the Federal Communications Commission (FCC), NVLAP or any other government agency.

This Report is the property of Nemko USA, Inc., and shall not be reproduced, except in full, without prior written approval of Nemko USA, Inc. However, all ownership rights are hereby returned unconditionally to Broadcast Microwave Services, and approval is hereby granted to Broadcast Microwave Services and its employees and agents to reproduce all or part of this report for any legitimate business purpose without further reference to Nemko USA, Inc.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	3 of 36

Table of Contents

Section 1.	Summary of Test Results	5
Section 2.	General Equipment Specification.....	6
Section 3.	RF Power Output.....	7
Section 4.	Modulation Characteristics	11
Section 5.	Occupied Bandwidth.....	15
Section 6.	Spurious Emissions At Antenna Terminals.....	19
Section 7.	Field Strength of Spurious	27
Section 8.	Frequency Stability	29
Section 9.	Test Equipment List.....	30

APPENDICES

Section 6.	Spurious Emissions At Antenna Terminals	31
-------------------	--	-----------

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	4 of 36

CERTIFICATION

Nemko USA, Inc., an independent Electromagnetic Compatibility (EMC) Test Laboratory, produced this Test Report and performed the Radio Frequency Interference (RFI) testing and data evaluation contained herein.

Nemko USA, Inc.'s measurement facility is currently registered with the United States Federal Communications Commission (FCC) in accordance with the provisions of 47 United States Code (CFR) Part 2, Subpart I, Section 2.948(a). A current description of Nemko USA, Inc.'s measurement facility is on file with the FCC. Nemko USA Inc. has additionally satisfied the FCC that it complies with the requirements set forth in 47 CFR Part 2, Subpart I, Section 2.948(d) regarding the accreditation of EMC laboratories. As a result, the FCC has placed Nemko USA Inc. on its list of EMC laboratories approved to perform Declaration of Conformity (DOC) procedure testing.

The RFI testing, test data collection and test data evaluation were accomplished in accordance with the ANSI C63.4: 2003 Standard, and in accordance with the applicable sections of the FCC rules (47 CFR Parts 2 and 18)." digital devices. The testing was also accomplished in accordance with Industry Canada's ICES-003 standard for unintentional radiating device per EMCAB-3, Issue 3 (May 1998). The administrative summary of this test report provides a description of the test sample

I hereby certify that the test data, test data evaluation, and equipment configurations used to compile this test report are a true and accurate representation of the test sample's radio frequency interference characteristics as of the test date(s), and, for the design of the test sample.



Alan Laudani, RF/EMC Test Specialist

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	5 of 36

Section 1. Summary of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC PART 2 and FCC PART 74 Subpart F. The EUT is generally used in ENG/OB vehicle model, helicopter downlinks or any digital microwave application. The EUT was exercised by utilizing a Carry-Coder II (CCII) Heli-Coder portable COFDM transmitter with SN 391-16006 Digital Wireless Camera System. The EUT was exercised by setting the RF Power of CCII to MAX and tested on all three modulation modes: QPSK, 16QAM and 64QAM..

Summary Of Test Data

Name Of Test	Para. No.	Result
RF Power Output	2.1046/74.636	PASS
Modulation Characteristics	2.1047/74	AS REPORTED
Occupied Bandwidth	2.1049/74.637(g)	PASS
Spurious Emissions at Antenna Terminals	2.1051/74.637	PASS
Field Strength of Spurious Emissions	2.1053/74.637	PASS
Frequency Stability	2.1055/74.661	PASS

Footnotes for 2.1047: EUT is a linear power amplifier. Parts 74 do not express limits or pass/fail criteria for Modulation Characteristics.

Test Conditions:

Indoor	Temperature:	<u>23.3—24.4</u> °C
	Humidity:	<u>58-60</u> %
Outdoor	Temperature:	<u>16</u> °C
	Humidity:	<u>32</u> %

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	6 of 36

Section 2. General Equipment Specification

Manufacturer: Broadcast Microwave Services
Part No.: 8014079040
Model No.: BPA-10CC-7 (10 W Linear Power Amplifier)
Serial No.: 333 Rev D
FCC ID: CNVHCII-7
Emission Designators: 6M00W7D
7M00W7D
8M00W7D
Rated Power: 10W
Test Voltage: 28VDC to EUT
Frequency Range: 1990 MHz to 2110 MHz (Part 74)
2450 MHz to 2483.5 MHz (Part 74)
Date Received In Laboratory: November 15, 2007
Nemko Identification No.: 7363-2

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	7 of 36

Section 3. RF Power Output

Para. No.: 2.1046(c)

Test Performed By: F. S. Custodio	Date of Test: 11-16-07
--	-------------------------------

Minimum Standard: Sec 74 Subpart F--Television Broadcast Auxiliary Stations

Sec. 74.636 Power limitations.

(a) On any authorized frequency, transmitter peak output power and the average power delivered to an antenna in this service must be the minimum amount of power necessary to carry out the communications desired and shall not exceed the values listed in the following table. Application of this principle includes, but is not to be limited to, requiring a licensee who replaces one or more of its antennas with larger antennas to reduce its antenna input power by an amount appropriate to compensate for the increased primary lobe gain of the replacement antenna(s). In no event shall the average equivalent isotropically radiated power (EIRP), as referenced to an isotropic radiator, exceed the values specified in the following table. In cases of harmful interference, the Commission may, after notice and opportunity for hearing, order a change in the effective radiated power of this station. The table follows:

Frequency Band (MHz)	Maximum allowable transmitter power	Maximum allowable EIRP ²	
	Mobile (W)	Fixed (dBW)	Mobile (dBW)
2,025 to 2,110	12.0	+45	+35
2,450 to 2,483.5	12.0	+45	+35
6,425 to 6,525	12.0		+35
6,875 to 7,125	12.0	+55	+35
12,700 to 13,250	1.5	+55	+35
17,700 to 18,600		+55	
18,600 to 18,800 ¹		+35	
18,800 to 19,700		+55	

¹ The power delivered to the antenna is limited to -3 dBW.

² Stations licensed based on an application filed before April 16, 2003, for EIRP values exceeding those specified above, may continue to operate indefinitely in accordance with the terms of their current authorizations, subject to periodic renewal.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	8 of 36

Test Results: EUT complies

Test Conditions:

A Carry-Coder II (CCII) 2 - 2.5 GHz Heli-Coder portable COFDM transmitter with SN 391-16006 was connected to the EUT during this test. Measured at low, mid and high channel, RF setting set to Max using internal source via ASI (Asynchronous Serial Interface) option. Signal bandwidth is set to 8MHz, all modulation (QPSK, 16QAM and 64QAM) were measured but only the worst is reported which is 64QAM. External attenuators and cable used were verified at 40.2dB between 1990MHz and 2483.5MHz. Peak and average measurements were made using the Spectrum Analyzer's Channel Power Measurement feature. RBW and VBW are instrument controlled at RBW 100kHz/VBW 300kHz for peak and RBW 100kHz/VBW 1MHz for average. Measurement bandwidth is set to signal bandwidth.

Measurement Data (watts):

1990 to 2110 MHz Band

Modulation	Low Channel		Mid Channel		High Channel	
	<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Average</i>
QPSK	42.07	7.73	42.66	7.31	51.29	8.85
16QAM	41.78	7.64	42.36	7.82	52.12	9.33
64QAM	42.07	7.85	42.76	8.18	52.00	9.77


*Low Channel = 2029.25MHz
Mid Channel = 2031.5MHz
High Channel = 2106.5MHz*

2450 to 2483.5 MHz Band

Modulation	Low Channel		Mid Channel		High Channel	
	<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Average</i>
QPSK	54.33	9.20	54.20	9.20	51.88	9.20
16QAM	52.97	9.75	53.58	9.82	52.97	9.68
64QAM	53.46	9.93	52.60	9.93	53.95	9.95


*Low Channel = 2454.25MHz
Mid Channel = 2471.25MHz
High Channel = 2479.75MHz*

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	9 of 36

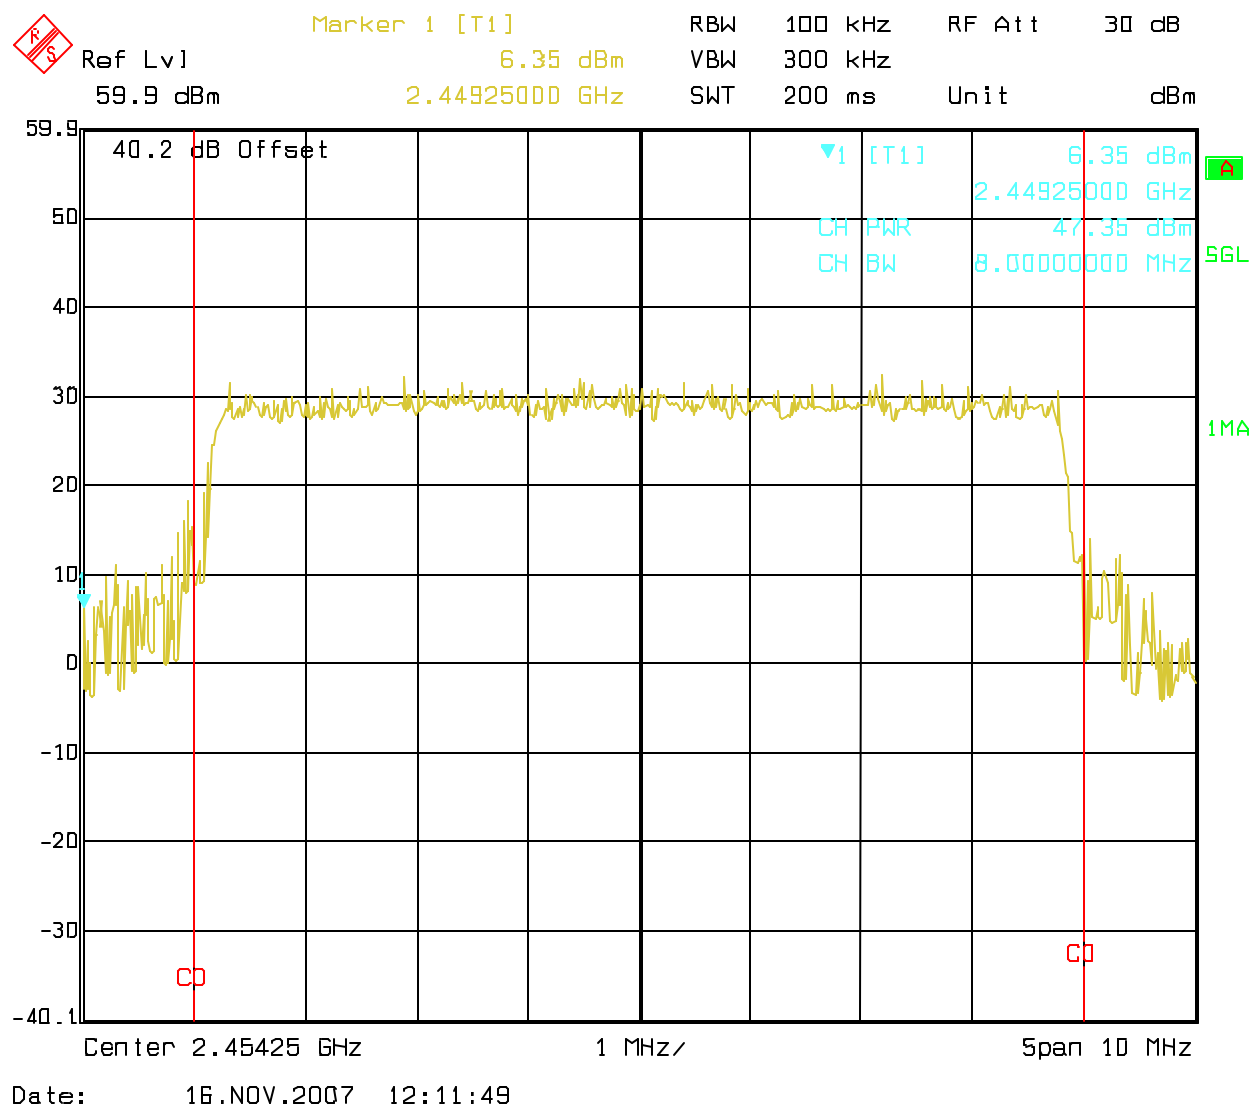

Peak Measurement (QPSK Low Channel 2450 to 2483.5 MHz Band)
Plots Shown Typical of Highest Output Power Measured
47.35 dBm = 54.33 Watts

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	10 of 36

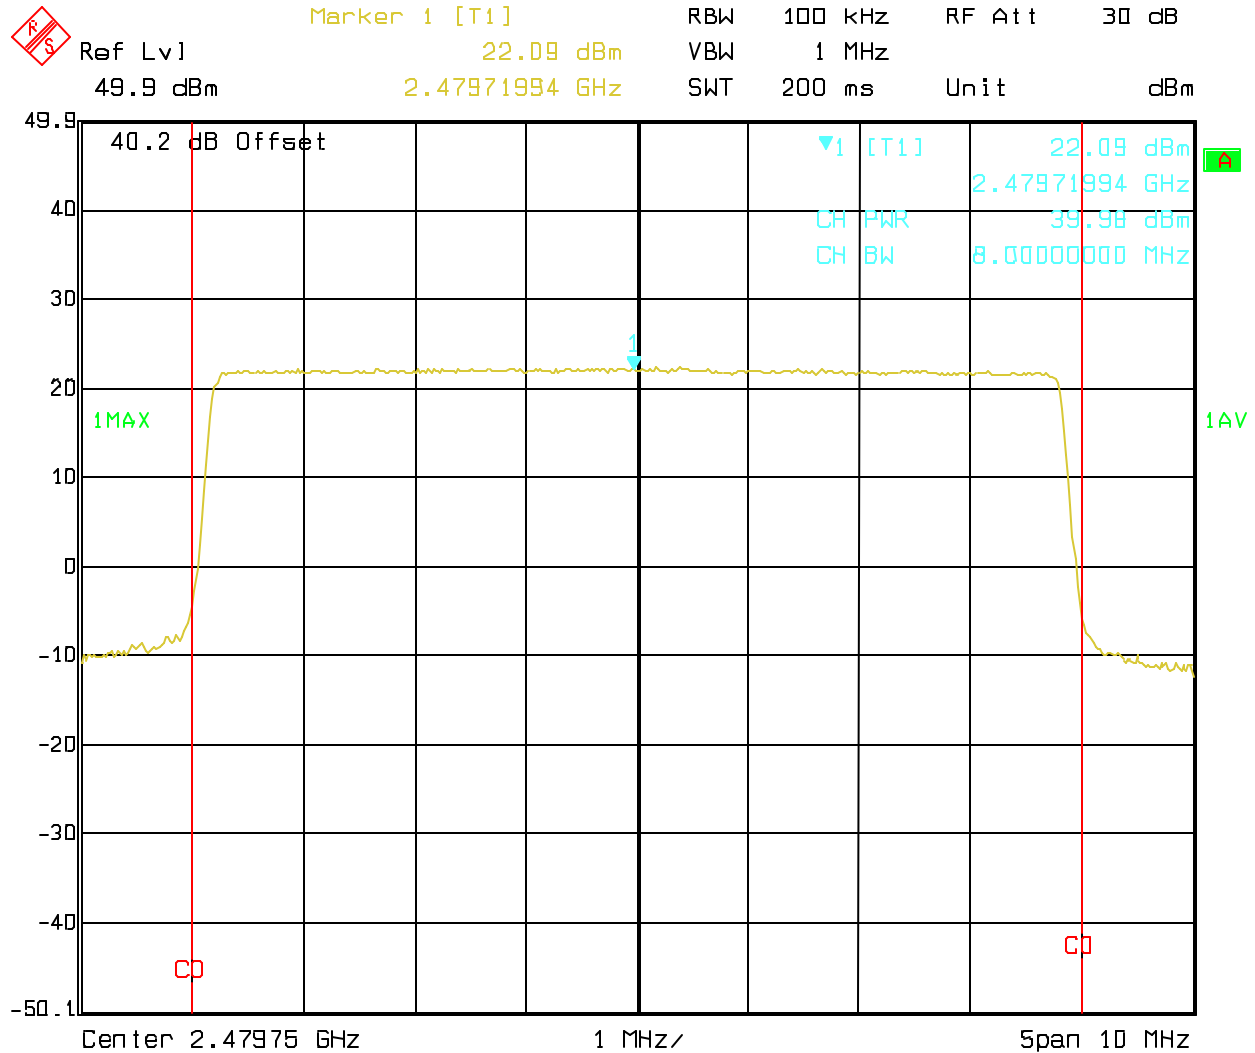

Date: 16.NOV.2007 11:00:20

Average Measurement (64QAM High Channel 2450 to 2483.5 MHz Band)
Plots Shown Typical of Highest Output Power Measured
39.98 dBm = 9.95 Watts

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	11 of 36

Section 4. Modulation Characteristics

Para. No.: 2.1047

Test Performed By: Ferdinand S. Custodio	Date of Test: 11-16-2007
---	---------------------------------

Minimum Standard: Part 74 Subpart F


Test Results: As Reported. Conducted emission plots captured on the Spectrum Analyzer thru a 40.2 dB attenuator.

Measurement Data: See attached plots to exemplify the three modes of modulation:

Modulation modes used are QPSK, 16QAM and 64QAM. All measurements are done on QPSK modulation (unless otherwise stated) as it offers the highest Tx robustness among the three modes. Modulation mode has no evident effect on spurious, power or frequency stability measurements.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	12 of 36


Modulation Mode: 64QAM

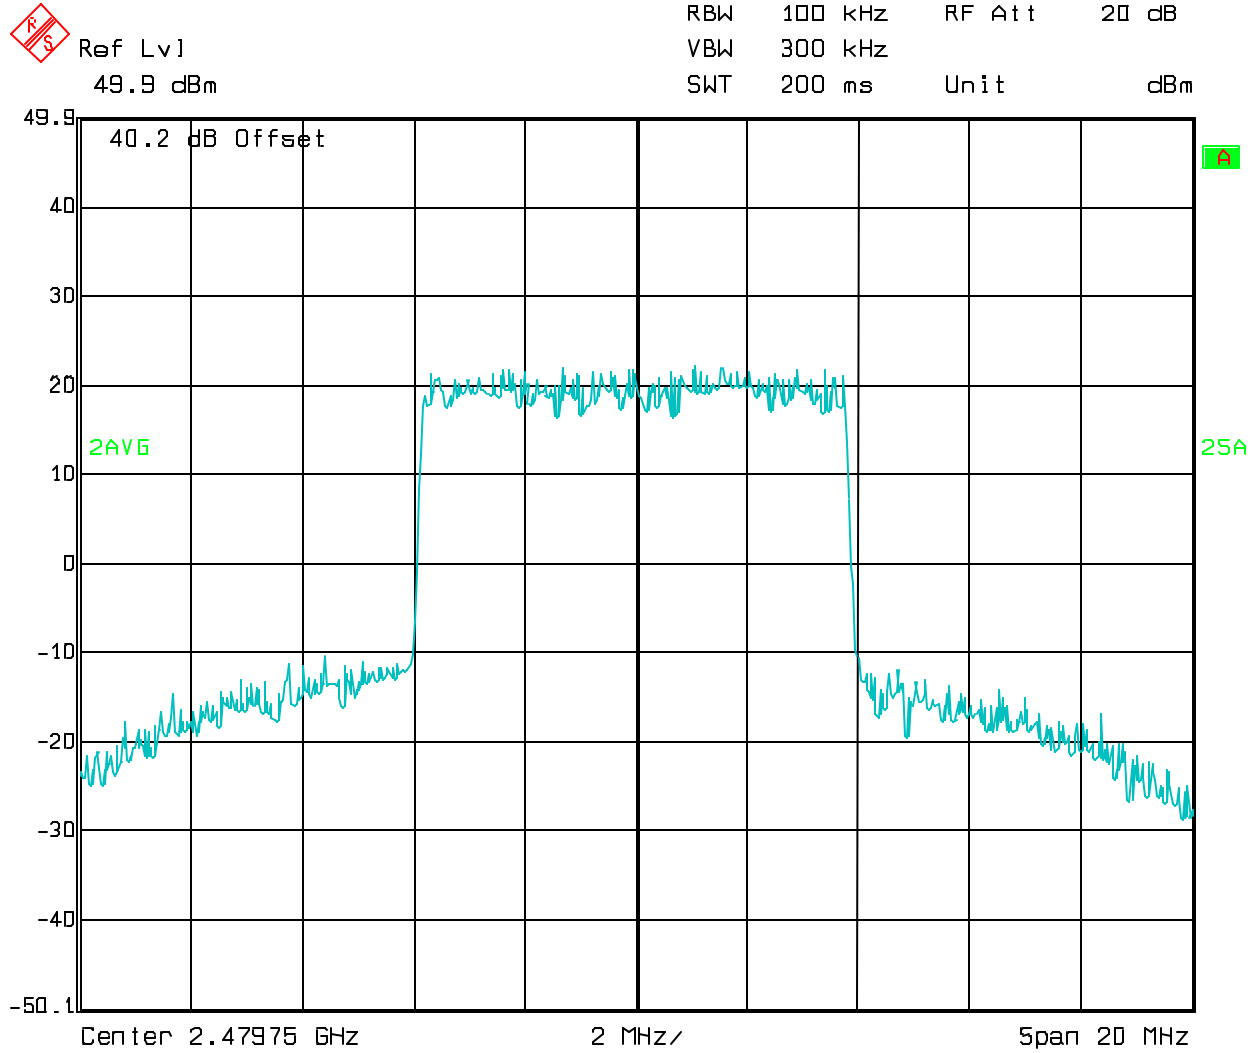

Date: 16.NOV.2007 14:08:28

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	13 of 36


Modulation Mode: 16QAM

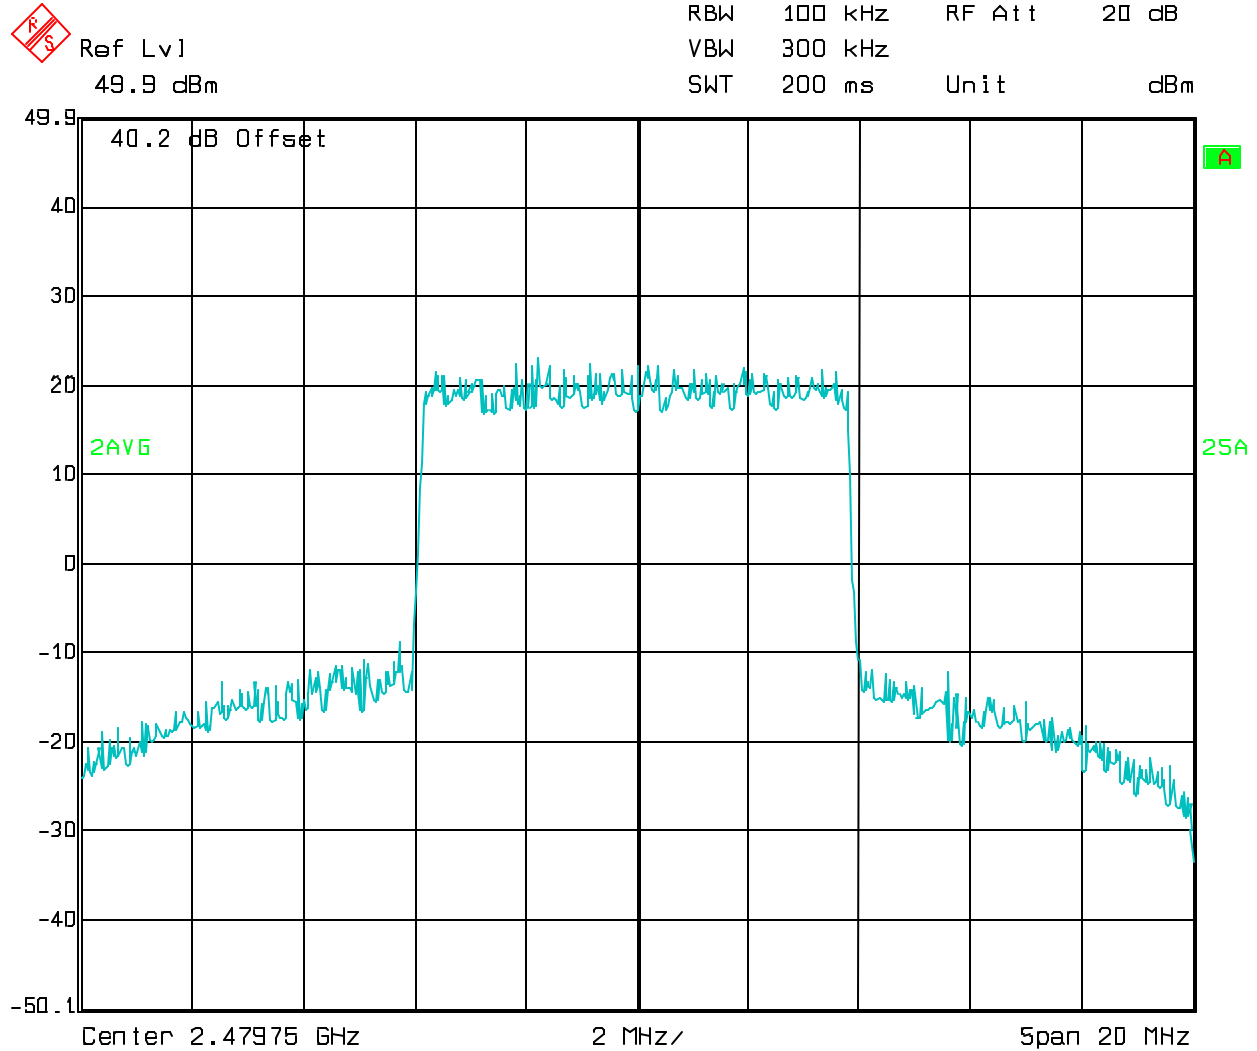

Date: 16.NOV.2007 14:08:55

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	14 of 36

Modulation Mode: QPSK

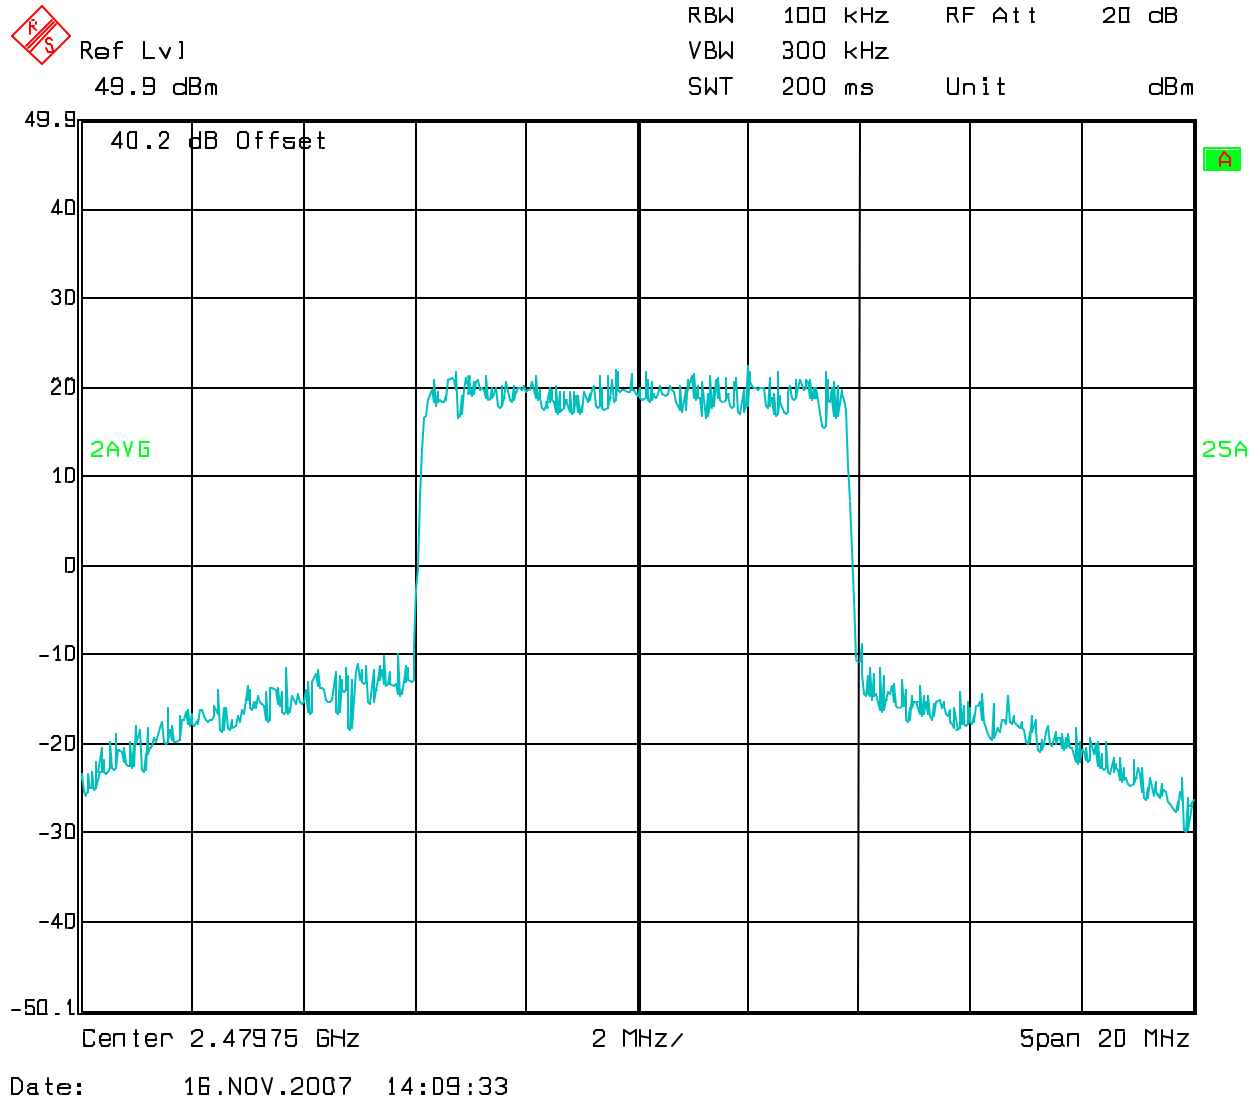

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	15 of 36

Section 5. Occupied Bandwidth

Para. No.: 2.1049

Test Performed By: Ferdinand Custodio	Date of Test: 11-16-2007
--	---------------------------------

Minimum Standard: Part 74.637 (g)
Occupied/Authorized bandwidth.

(g) The maximum bandwidth which will be authorized per frequency assignment is set out in the table which follows. Regardless of the maximum authorized bandwidth specified for each frequency band, the Commission reserves the right to issue a license for less than the maximum bandwidth if it appears that less bandwidth would be sufficient to support an applicant's intended communications.


Frequency Band (MHz)	Maximum authorized bandwidth (MHz)
1,990 to 2,110	18
6,425 to 6,525	25
6,875 to 7,125	25
12,700 to 13,250	25
17,700 to 19,700	80

Test Results: EUT Complies. Conductive emission plots captured on the Spectrum Analyzer thru a 40.2 dB attenuator.

Test Data: See attached plots. The EUT was tested with an RF Bandwidth of 6, 7 and 8MHz (Digital COFDM). The EUT was investigated using low, mid and high channel on all modulations (QPSK, 16QAM and 64QAM). The resulting plots submitted here represent each bandwidth since identical results were obtained on all configurations represented.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	16 of 36


QPSK 8MHz Bandwidth

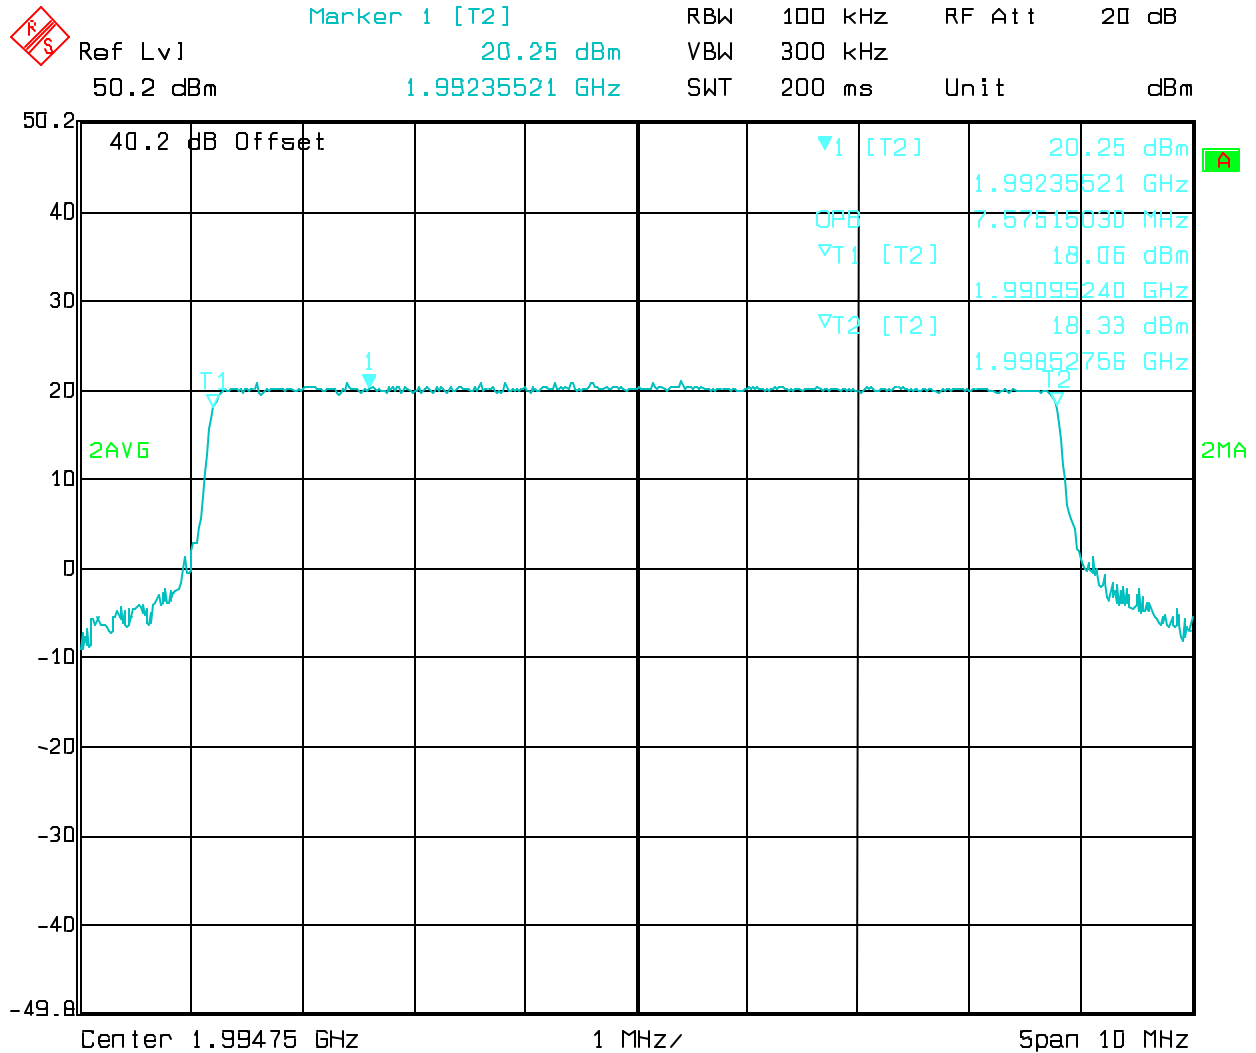

Date: 16.NOV.2007 14:56:49


Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	17 of 36

QPSK 7MHz Bandwidth

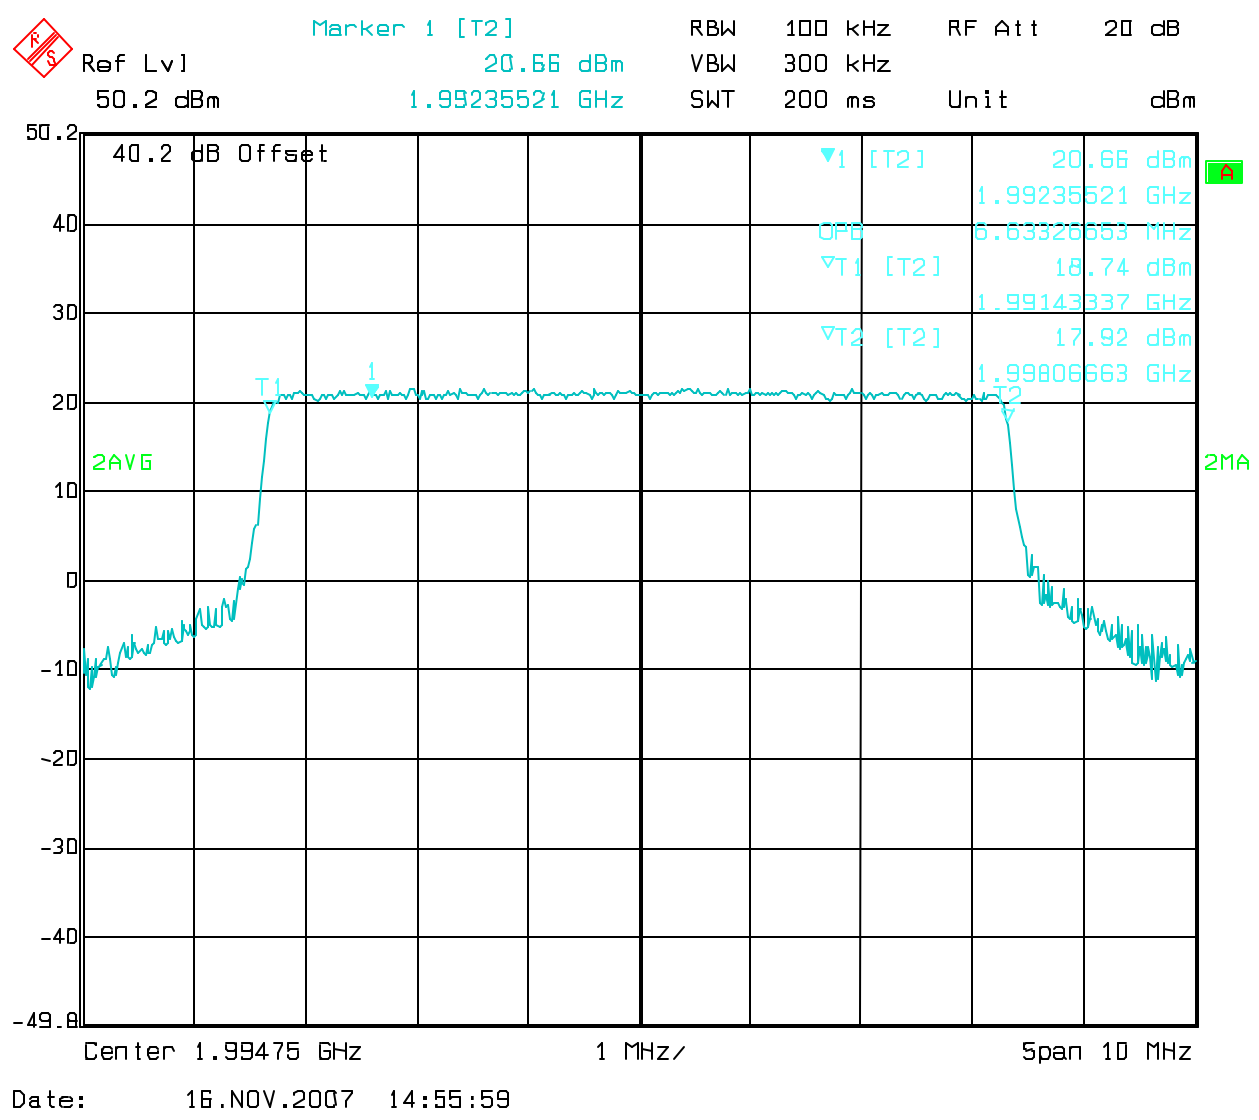

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	18 of 36

QPSK 6MHz Bandwidth

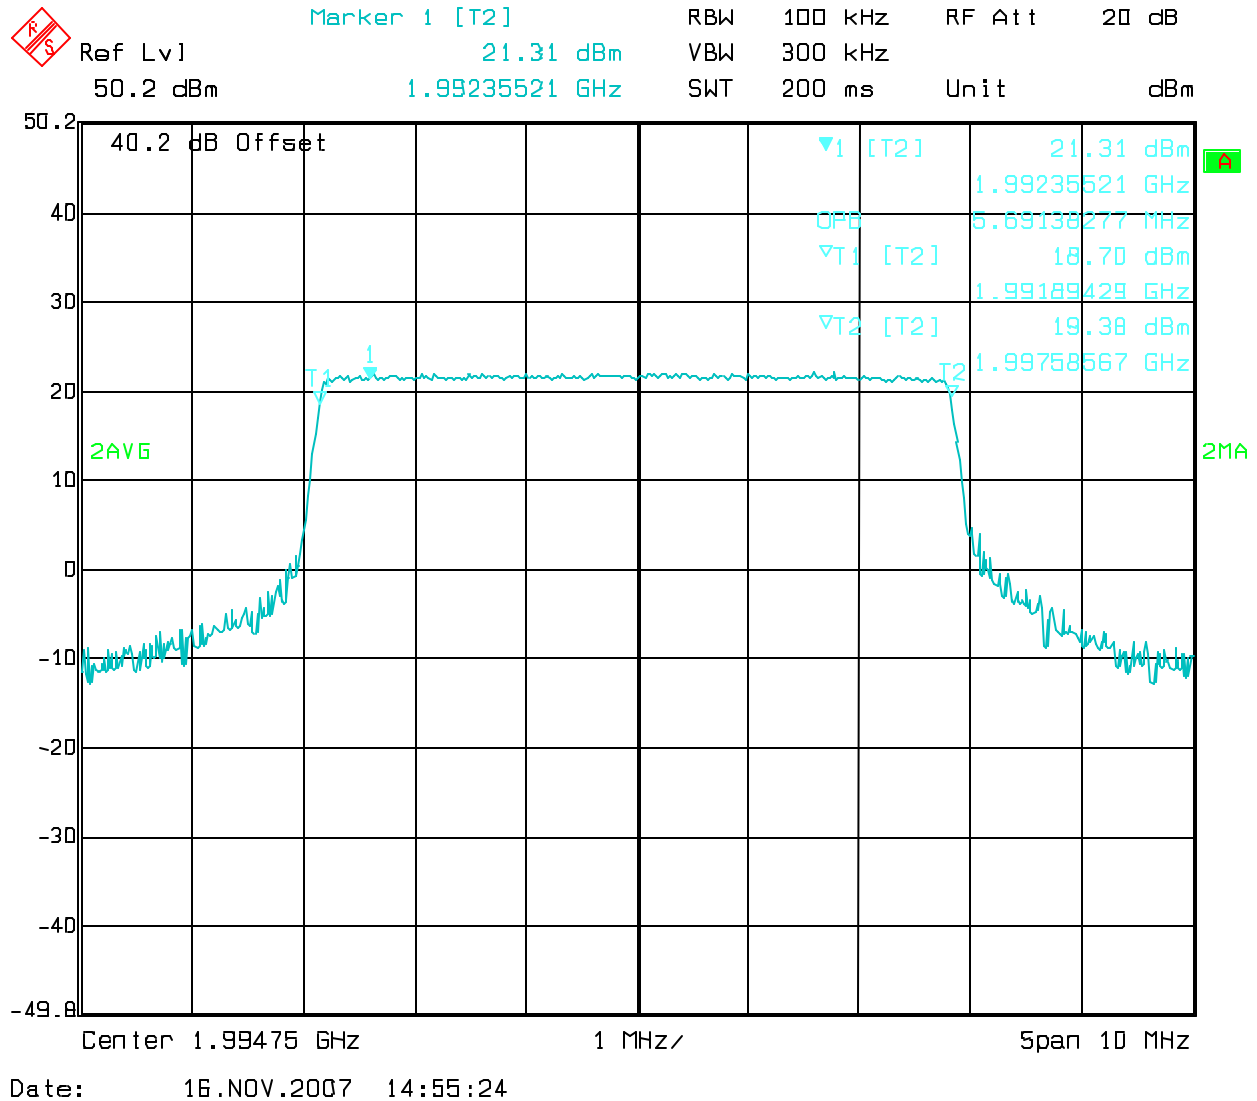

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	19 of 36

Section 6. Spurious Emissions At Antenna Terminals

Para. No.: 2.1051

Test Performed By: Ferdinand Custodio	Date of Test: 11-19-2007
--	---------------------------------

Minimum Standard: Part 74.637 Emissions and emission limitations

(a) *The mean power of emissions shall be attenuated below the mean transmitter power (P_{MEAN}) in accordance with the following schedule:*

(1) *When using frequency modulation:*

(i) *On any frequency removed from the assigned (center) frequency by more than 50% up to and including 100% of the authorized bandwidth: At least 25 dB in any 100 kHz reference bandwidth (B_{REF});*

(ii) *On any frequency removed from the assigned (center) frequency by more than 100% up to and including 250% of the authorized bandwidth: At least 35 dB in any 100 kHz reference bandwidth;*

(iii) *On any frequency removed from the assigned (center) frequency by more than 250% of the authorized bandwidth: At least $43 + 10 \log_{10} (P_{MEAN} \text{ in watts})$ dB, or 80 dB, whichever is the lesser attenuation, in any 100 kHz reference bandwidth.*

(2) *When using transmissions employing digital modulation techniques:*

(i) *For operating frequencies below 15 GHz, in any 4 kHz reference bandwidth (B_{REF}), the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 250 percent of the authorized bandwidth: As specified by the following equation but in no event less than 50 decibels:*

$$A = 35 + 0.8 (G - 50) + 10 \log_{10} B.$$

(Attenuation greater than 80 decibels is not required.)

Where:

A = Attenuation (in decibels) below the mean output power level.

G = Percent removed from the carrier frequency.

B = Authorized bandwidth in megahertz.

(c) *For purposes of compliance with the emission limitation requirements of this section:*

(3) *For demonstrating compliance with the attenuation requirements for frequency modulation and digital modulation in paragraph (a) of this section, the resolution bandwidth (B_{RES}) of the*

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	20 of 36

measuring equipment used for measurements removed from the center frequency by more than 250 percent of the authorized bandwidth shall be 100 kHz for operating frequencies below 1 GHz, and 1 MHz for operating frequencies above 1 GHz. The resolution bandwidth for frequencies removed from the center frequency by less than 250 percent of the authorized bandwidth shall be the reference bandwidth (B_{REF}) specified in the individual emission limitations, but may be reduced to not less than one percent of the authorized bandwidth (B), adjusted upward to the nearest greater resolution bandwidth available on the measuring equipment. In all cases, if B_{RES} and B_{REF} are not equal, then the attenuation requirement must be increased (or decreased) as determined by a factor of $10 \log_{10} [(B_{REF} \text{ in megahertz})/(B_{RES} \text{ in megahertz})]$ decibels, where a positive factor indicates an increase in the attenuation requirement and a negative factor indicates a decrease in the attenuation requirement.

Test Results:

EUT Complies. Conductive emission plots captured on the Spectrum Analyzer thru a 40.2 dB attenuator.. Emissions were investigated from 30 MHz to 26 GHz .

Test Data:

See attached Plots (balance in Appendix).

EUT setup is similar to Section 3: RF Power Output measurements.

RF setting on CCII set to Max using internal source via ASI (Asynchronous Serial Interface) option. Signal bandwidth is set to 8MHz. External attenuators and cable used were verified at 40.2dB between 1990MHz and 2483.5MHz

For each channel investigated, the reference level used is the Mean Output Power (Average) measured under RF Power Output Test. A compliance factor of $10 \log (B_{ref}/B_{res})$ was used for using 100kHz RBW to calculate the mask:

$$\begin{aligned}
 A &= 35 + 0.8(G - 50) + 10 \log 12 + 10 \log (4/100) \\
 &= 80 + (-13.98) \\
 &= 66 \text{ db attenuation @ 100kHz RBW}
 \end{aligned}$$


The EUT was investigated using all three modulation schemes but identical results were obtained for all mode of operations.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	21 of 36

Emission Mask Endpoints Part 74.637(C)(3):


BW = 12 MHz, REF LVL = Mean Output Power

High Channel 2479.75MHz 64QAM

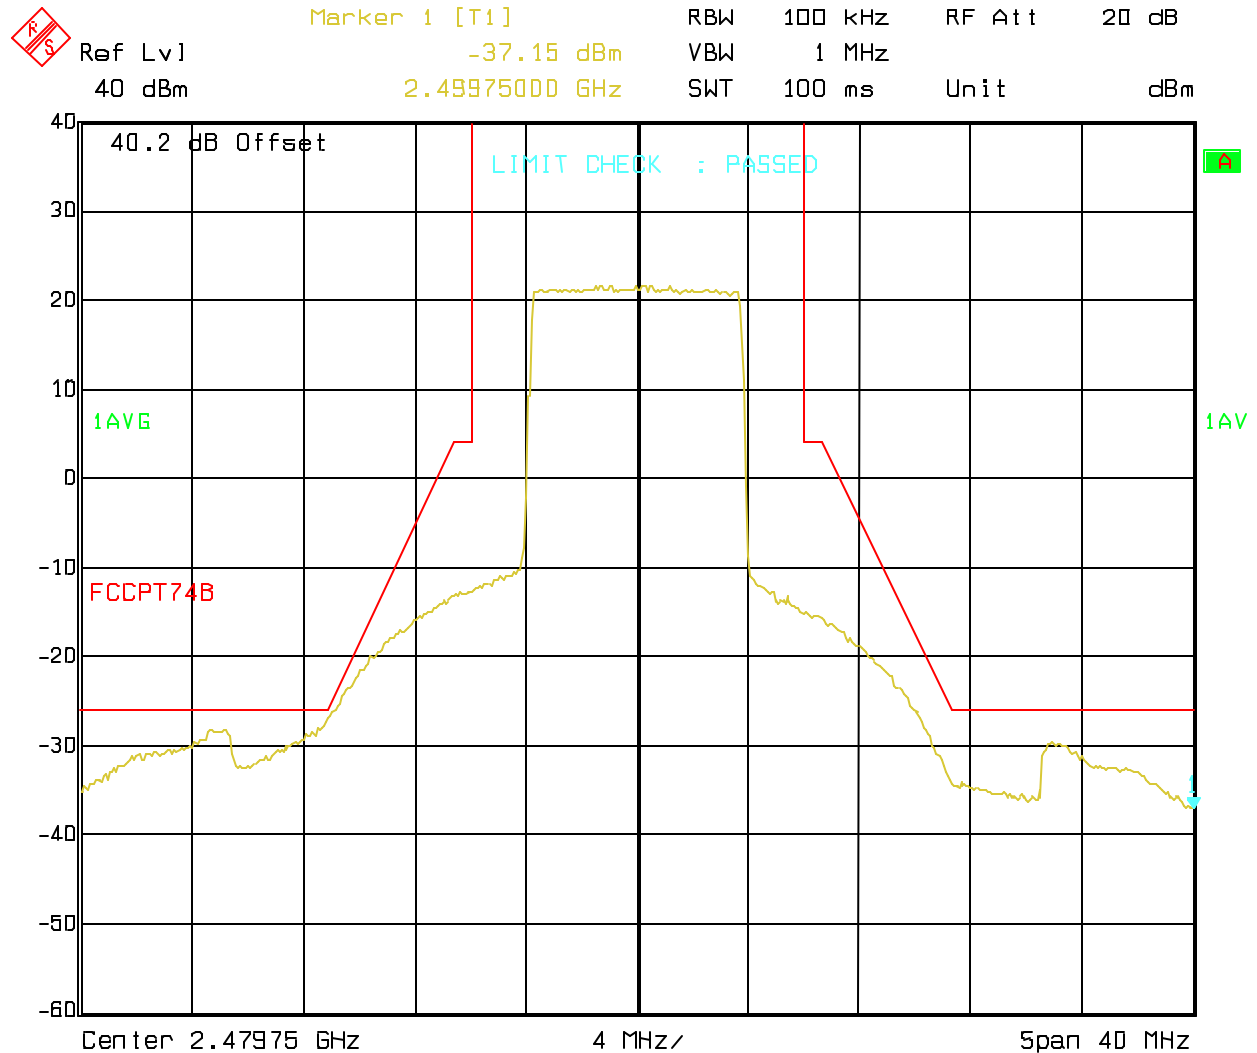


Date: 19.NOV.2007 10:02:59

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	22 of 36

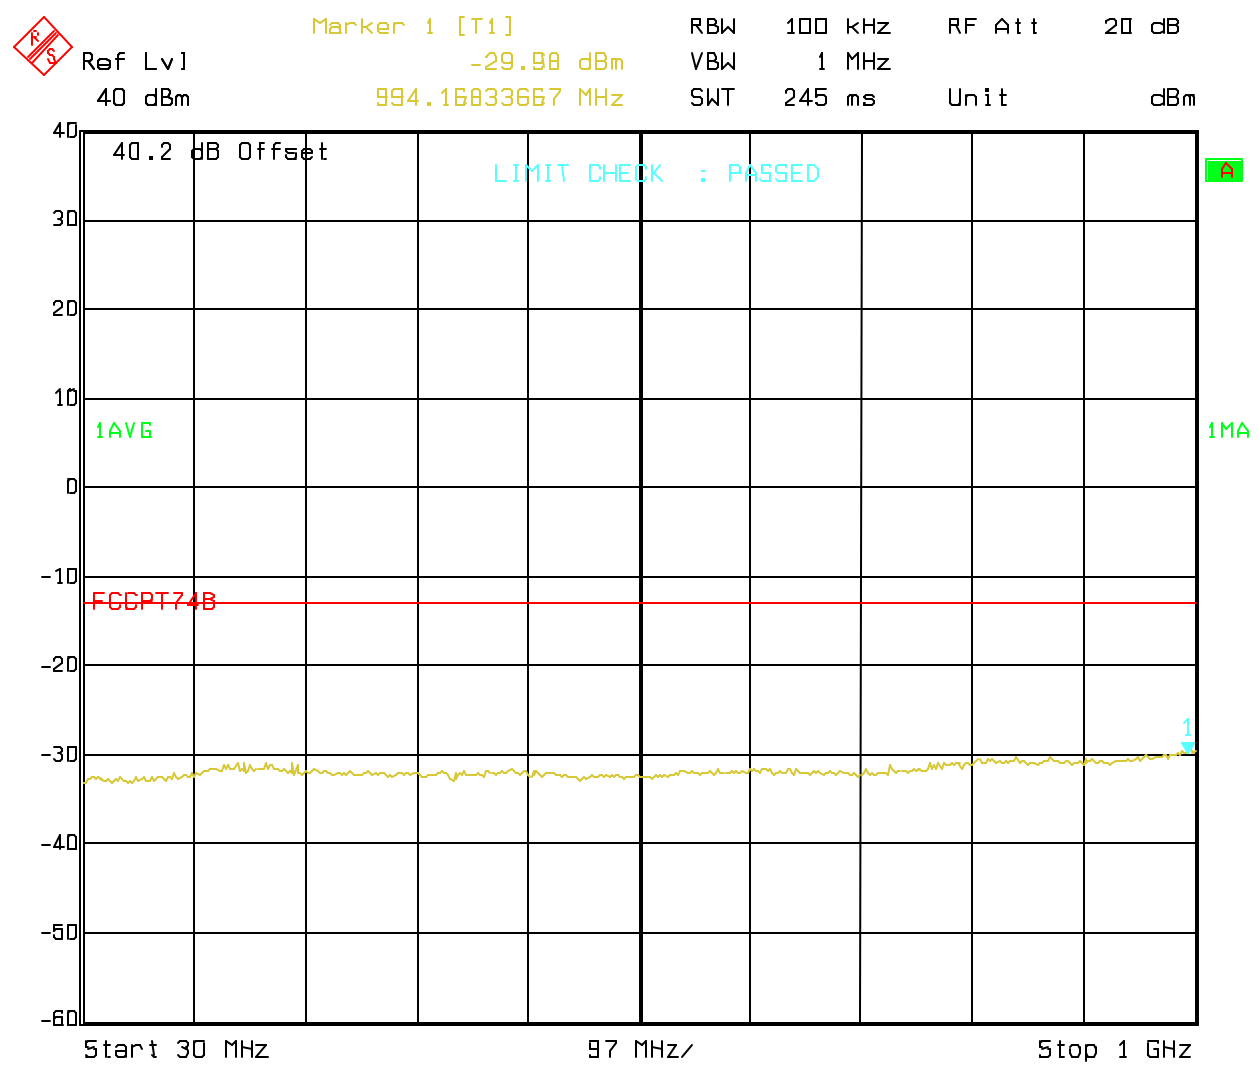


Date: 19.NOV.2007 10:03:39

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	23 of 36

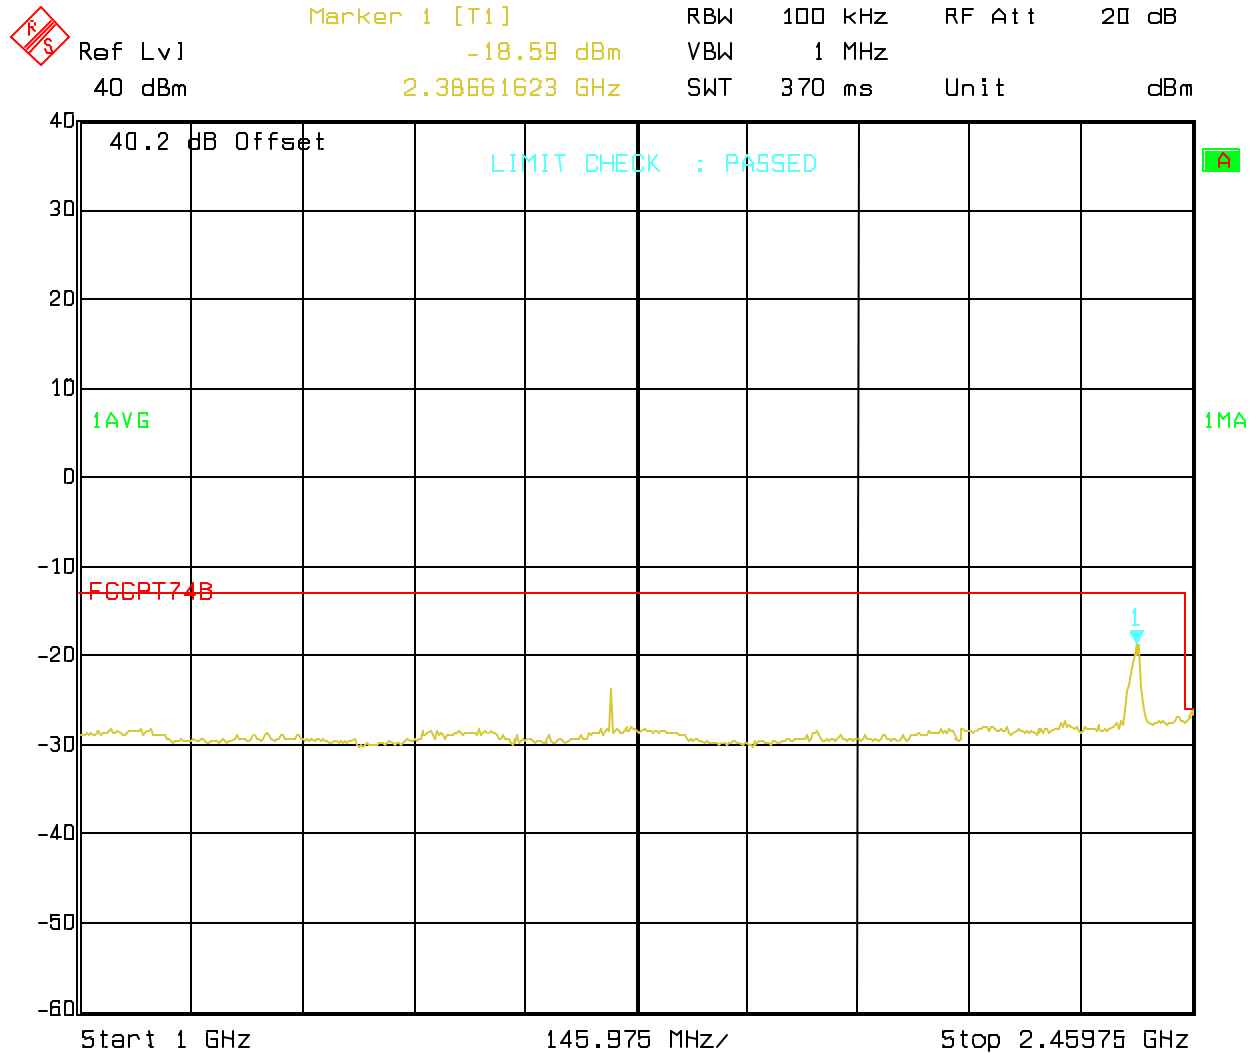


Date: 19.NOV.2007 10:04:15

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	24 of 36

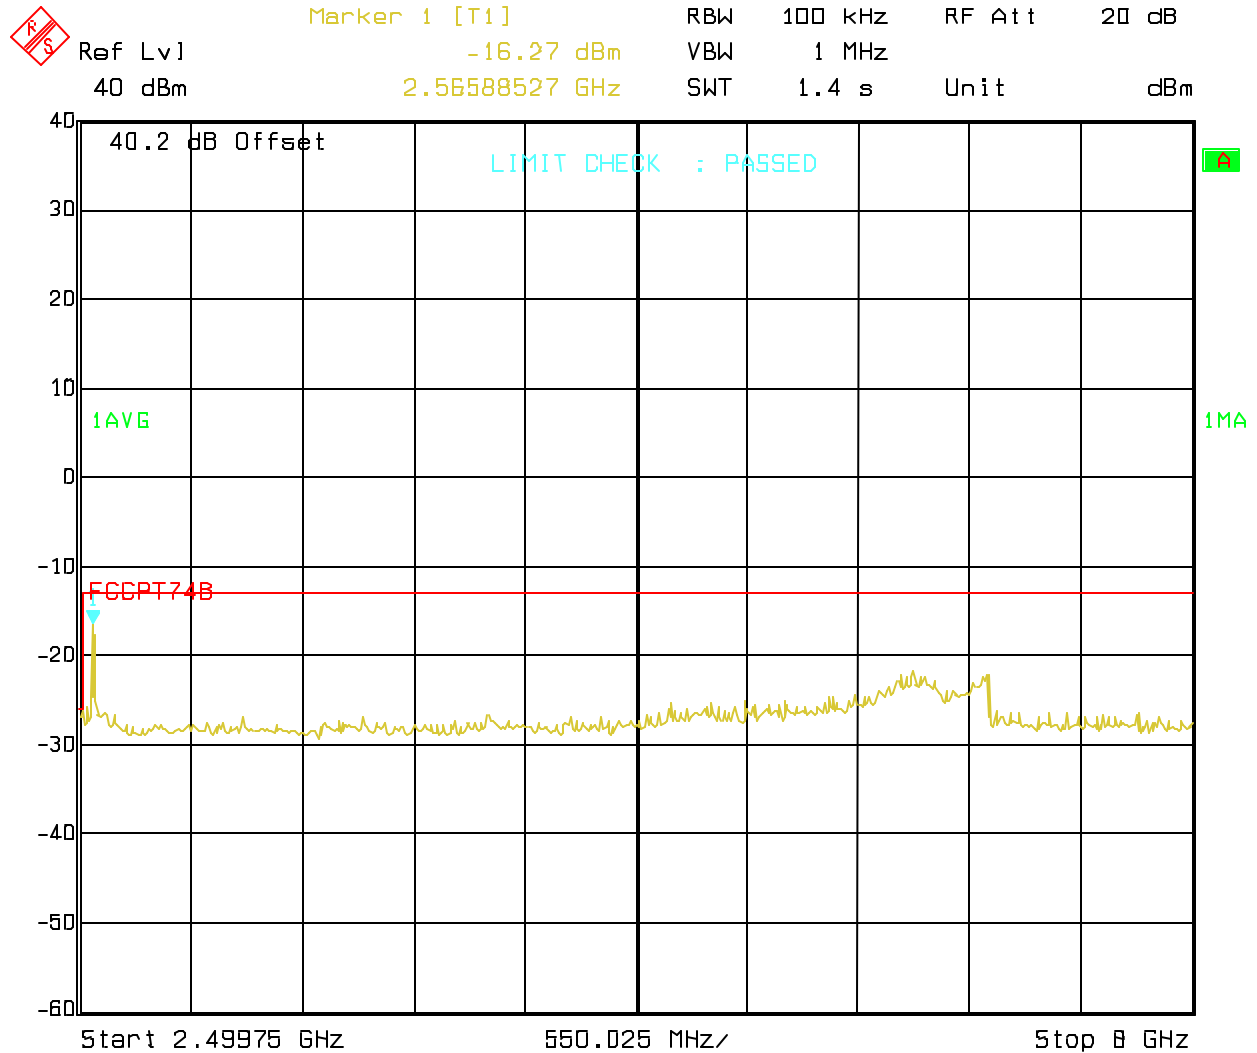


Date: 19.NOV.2007 10:05:37

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	25 of 36

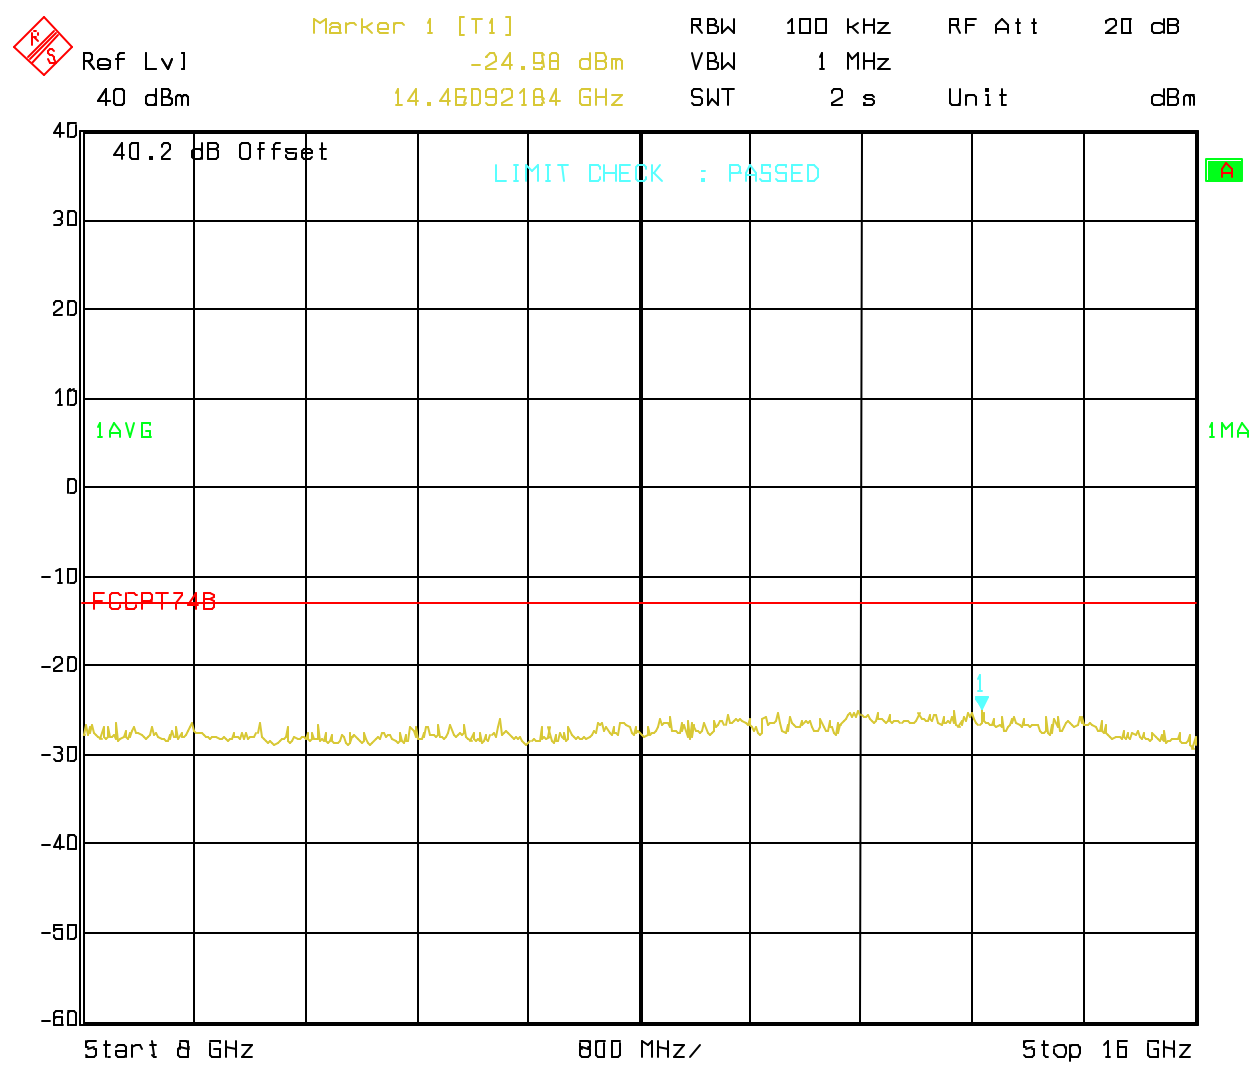

Date: 19.NOV.2007 10:06:15

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	26 of 36

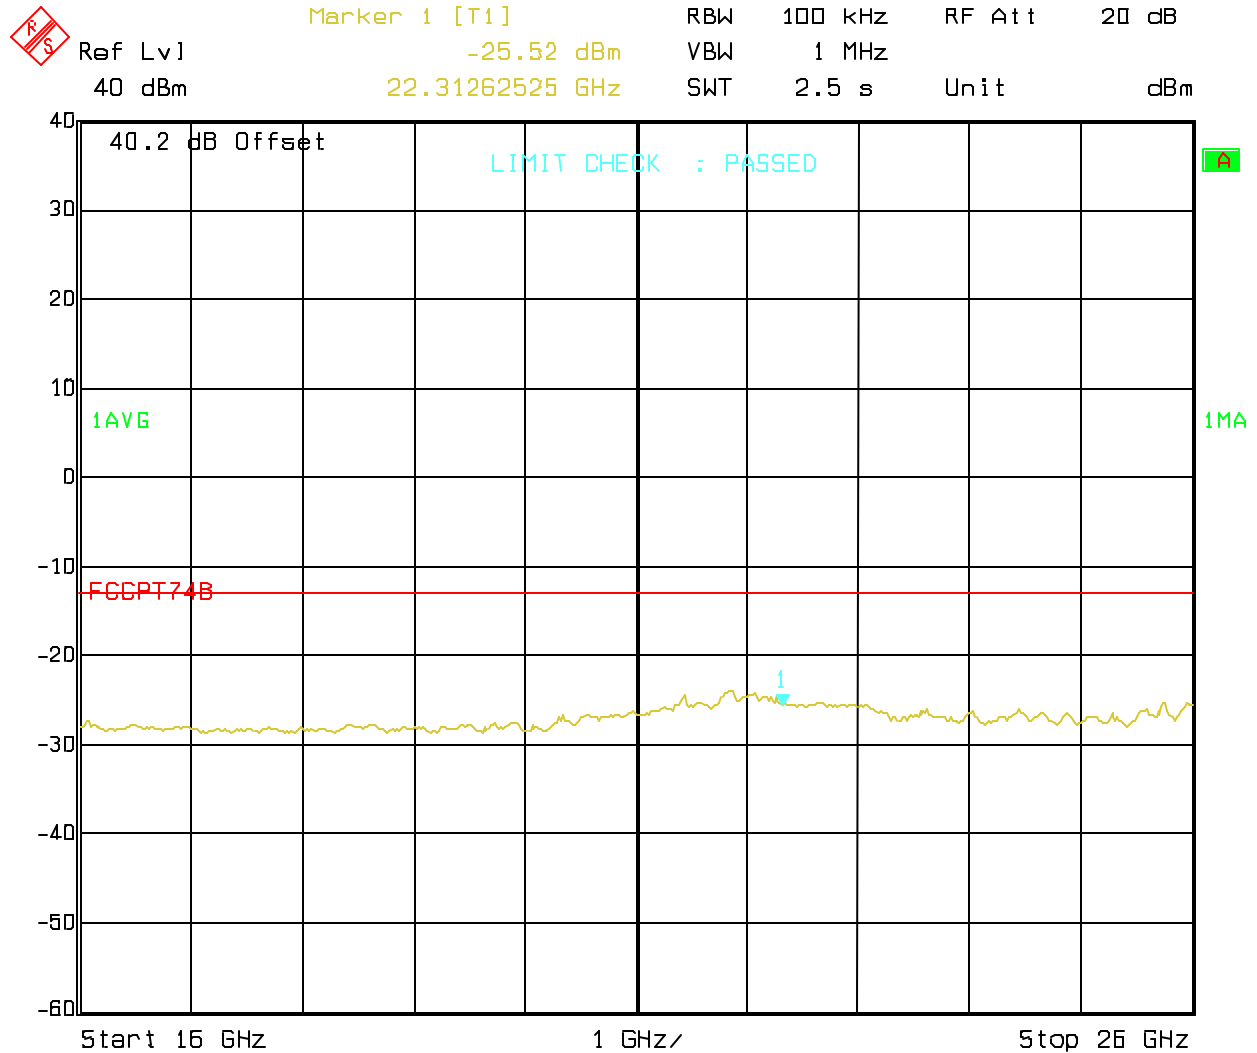

Date: 19.NOV.2007 10:21:40

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	27 of 36

Section 7. Field Strength of Spurious

Para. No.: 2.1053

Test Performed By: Ferdinand Custodio	Date of Test: 12-11-2007
--	---------------------------------

Minimum Standard: Part 74.637

Test Results: EUT Complies. Emissions were searched from 30 MHz to 26 GHz with the antenna port terminated into a 50 ohm load. No spurious emissions level within 20dB of the limit was observed. All emissions measured were proved by substitution method.

Test Data: See attached tables.

Quasi-peak measurements with a RBW = VBW = 100 kHz below 1GHz otherwise 1MHz.

Measured Frequency (MHz)	Antenna Polarization (H/V)	Meter Reading (dBuV)
30.58	V	45.8
32.62	V	47.7
35.66	V	40.0

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	28 of 36

Results—Substitution Method

Target Frequency	Target Level (dBuV/m)	Antenna Gain (dipole)	Cable Loss	Signal Generator (dBm)	Total (EIRP) dBm	Specs (dBm)	Margin (dBm)
30.58	45.8	0	1	-47.46	-48.46	-13	-35.46
32.62	47.7	0	1	-46.46	-47.46	-13	-34.46
35.66	40.0	0	1	-53.26	-54.26	-13	-41.26

Location: South 3 meters OATS, T = 16°C, 32% R.H.

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	29 of 36

Section 8. Frequency Stability

Para. No.: 2.1055

Test Performed By: F.S.Custodio	Date of Test: 11-21-2007
--	---------------------------------

Minimum Standard: 2.1055 Frequency Stability vs Temperature Variation and Power Supply Voltage Variation.

Minimum Standard: Part 74.661

Test Results: 19440 Hz difference which corresponds to **7.827 ppm**
Limit = 0.005 % = 50 ppm (2025 to 2110) MHz
= **0.001 % = 10 ppm (2450 to 2483.5) MHz**

Measurement Data:

Part 2.1055 (-30°C to +50°C) Spectrum Analyzer @ 100KHz RBW, 1MHz VBW			
Worst case variation:		High Channel Monitored Frequency:	2.4836227 GHz
		*Red are negative numbers	
Temp.Set Point	Time	85% of Vnom Frequency ? (GHz)	Vnom=28VDC Frequency ? (GHz)
Temp.Actual		Difference (GHz)	115% of Vnom Frequency ? (GHz)
			Difference (GHz)
-30	8:30AM	2.48360326	2.48360326
-29.9		0.000019440	0.000019440
-20	9:30AM	2.48360326	2.48360326
-20		0.000019440	0.000019440
-10	10:30AM	2.4836227	2.4836227
-9.9		0.000000000	0.000000000
0	11:30AM	2.4836227	2.4836227
0		0.000000000	0.000000000
10	12:30PM	2.4836227	2.4836227
10		0.000000000	0.000000000
20	1:30PM	2.4836227	2.4836227
20.1		0.000000000	0.000000000
30	2:30PM	2.4836227	2.4836227
30		0.000000000	0.000000000
40	3:30PM	2.4836227	2.4836227
39.9		0.000000000	0.000000000
50	4:30PM	2.48364208	2.48364208
49.9		0.000019380	0.000019380

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	30 of 36

Section 9. Test Equipment List



Nemko ID	Device	Manufacturer	Model	Serial Number	Cal Date	Cal Due Date
115	Antenna, Bicon	EMCO	3104	3020	8/28/2007	08/28/08
111	Antenna, LPA	EMCO	3146	1382	10/3/2007	10/03/08
898	EMI Receiver & filter set	HP	8546A	3625A00348	1/18/2007	01/18/08
897	Spectrum Analyzer	Rohde & Schwarz	FSP7	837620/009	9/14/2007	09/14/08
836	Signal Generator	Agilent	E8254A	US41140229	12/4/2007	12/04/08
N149	Environmental Chamber	Cincinnati Sub-Zero	ZPHS-32-2-2-H/AC	ZP0552665	5/30/2007	5/30/2008
765	Antenna Set, Dipole	EMCO	3121C	1214	7/12/07	7/12/08
877	Antenna, DRG Horn, .7-18GHz	AH Systems	SAS-571	688	7/10/2007	07/10/08
835	EMI Test Receiver 20 Hz- 26.5	Rohde & Schwarz	1088.7490.26	837491/0002	2/6/2007	02/06/08
SOATS	South Outside Area Test Site			RN 90579		

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	31 of 36

Appendix A.



Section 6. Spurious Emissions At Antenna Terminals

High Channel (2479.75MHz) QPSK

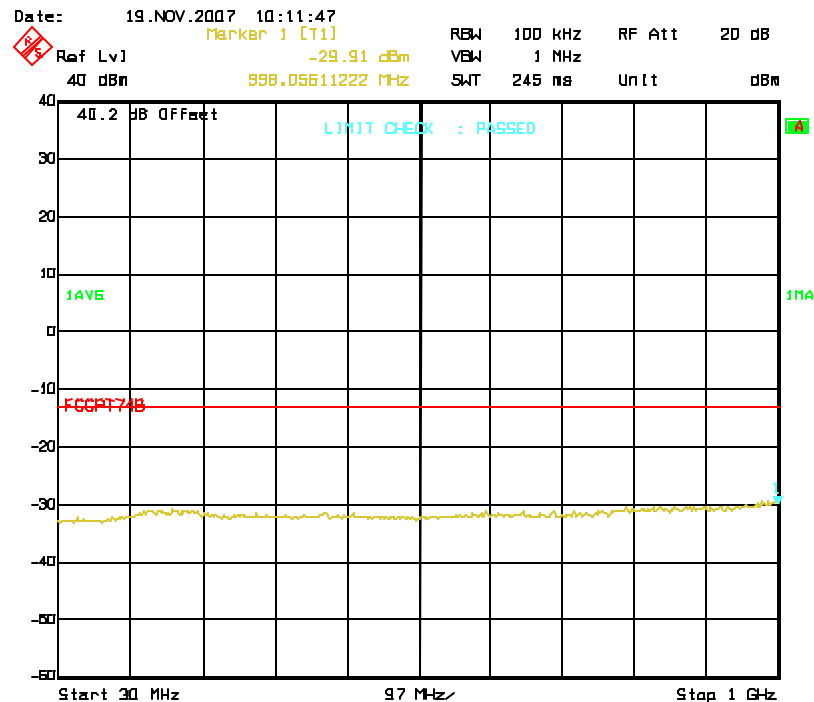
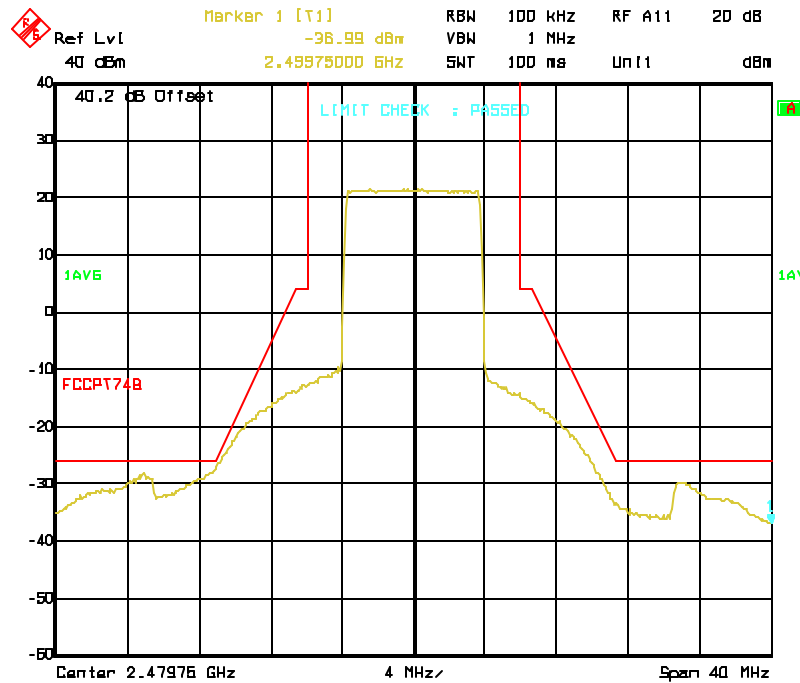


Date: 19.NOV.2007 10:12:32

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	32 of 36

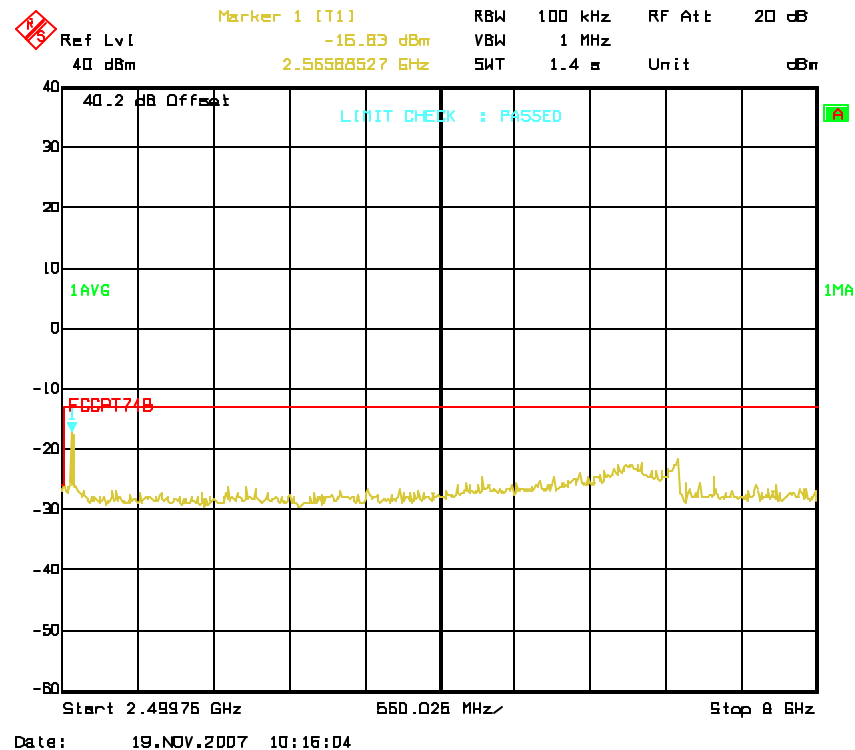
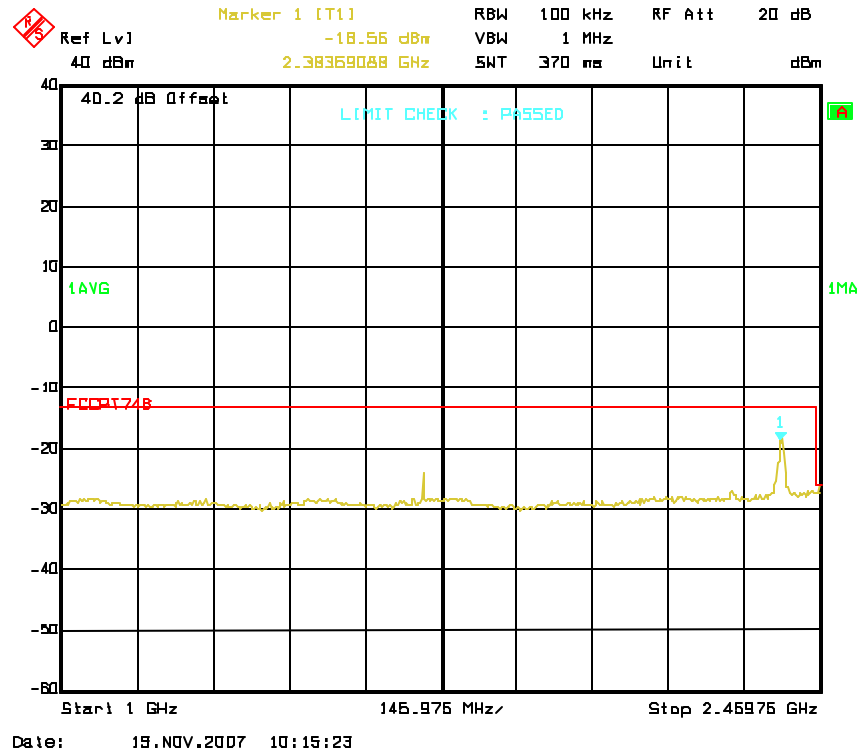


DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	33 of 36

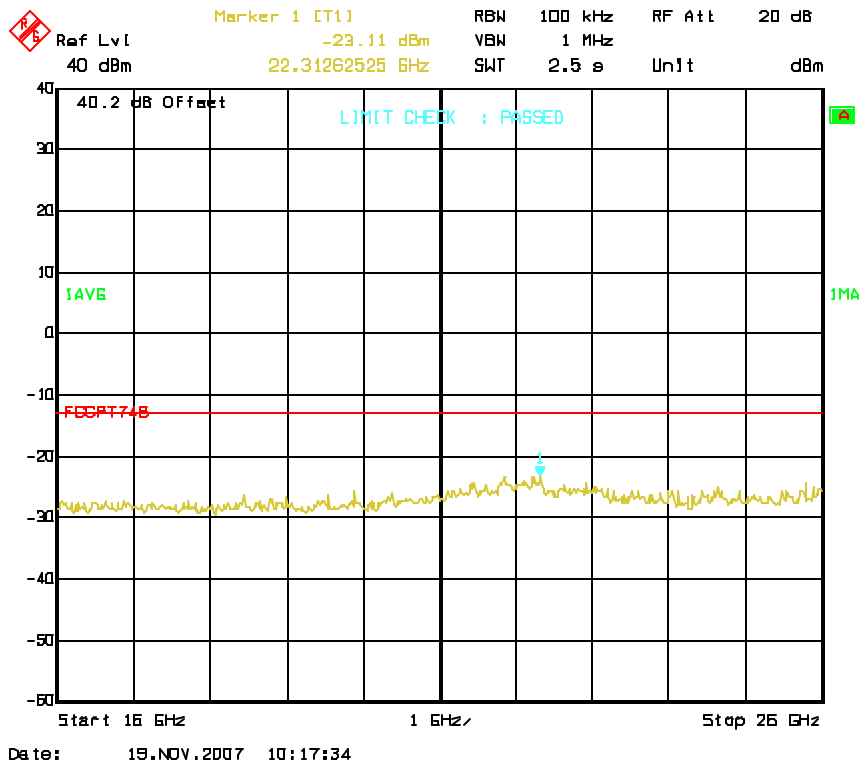
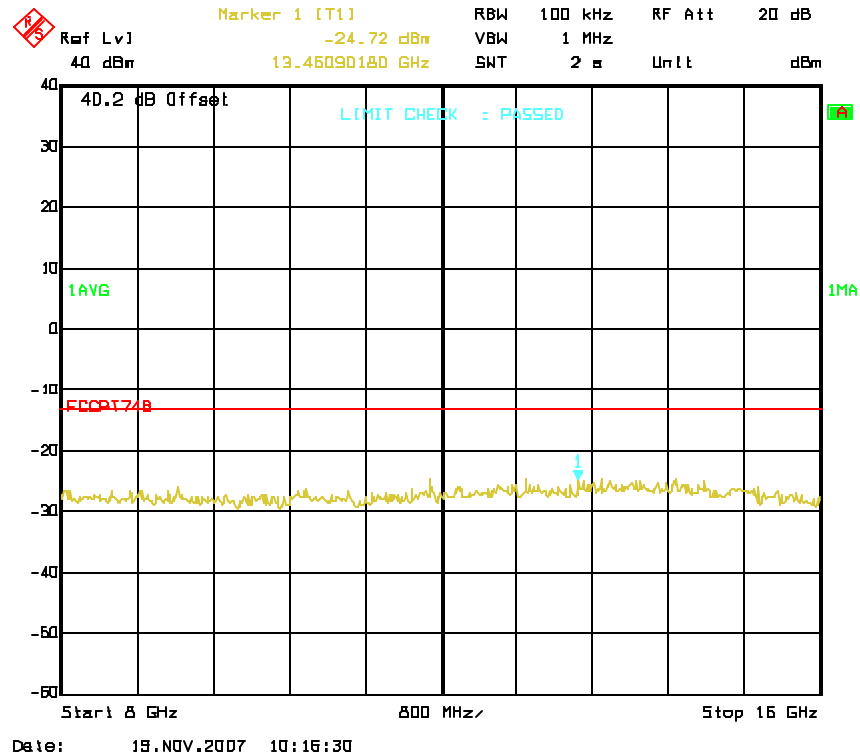


DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	34 of 36

High Channel (2479.75MHz) 16QAM

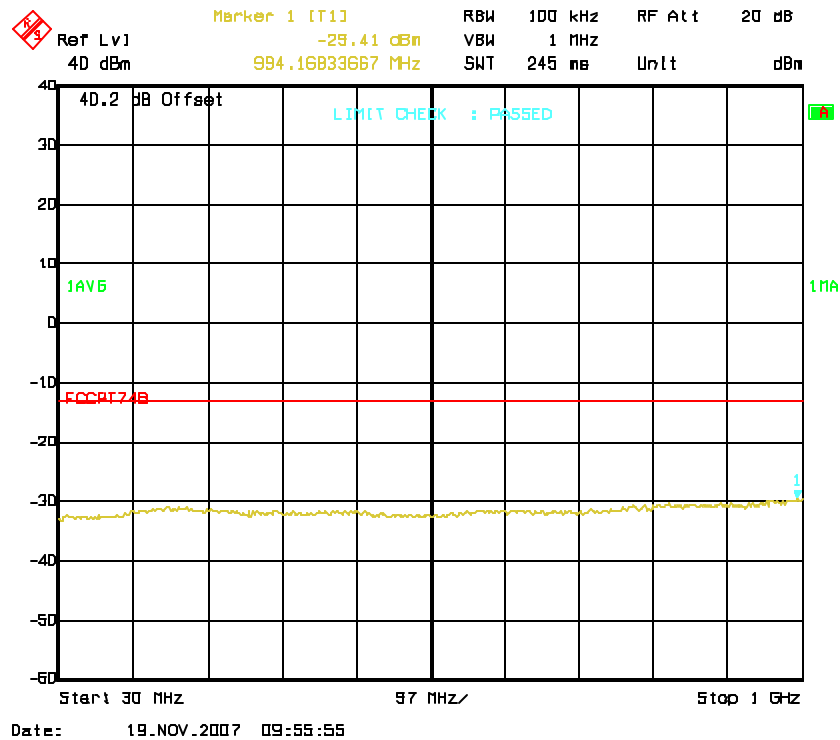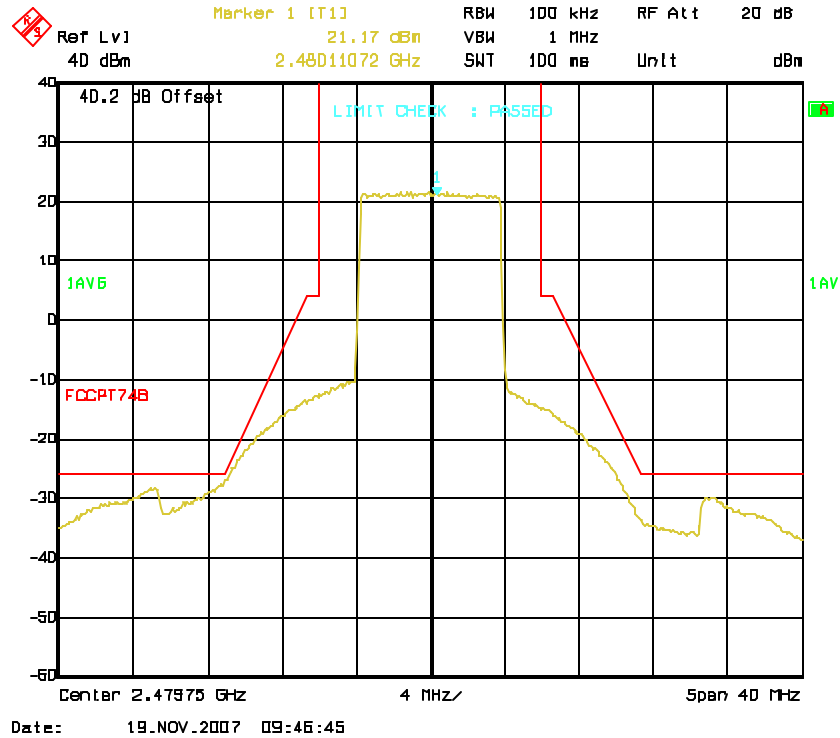

DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	35 of 36

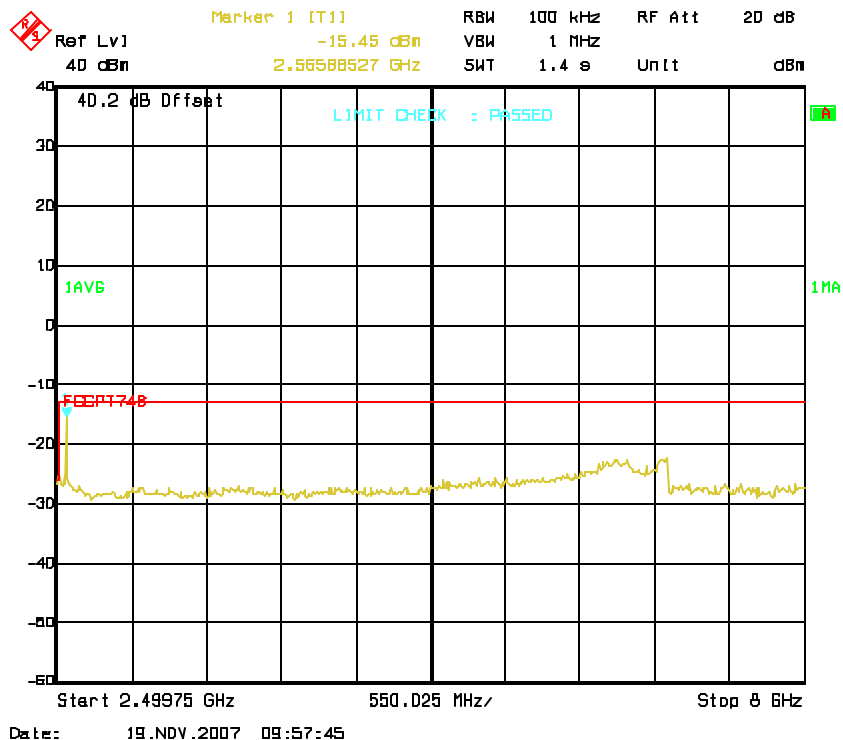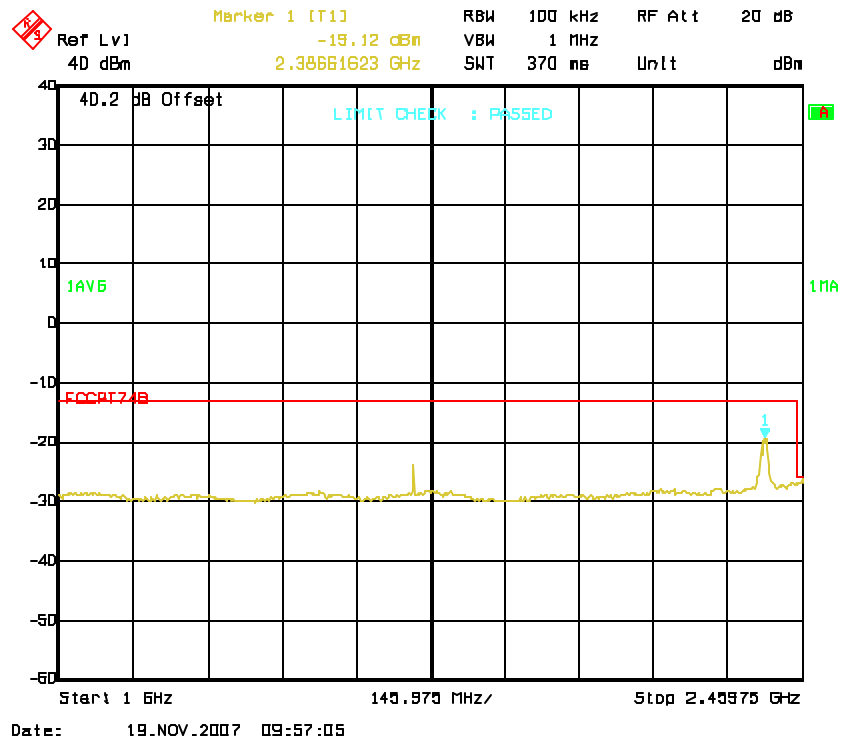

Nemko USA, Inc.		11696 Sorrento Valley Road, Suite F, San Diego, CA 92121 Phone (858) 755-5525 - Fax (858) 452-1810	
DATE	DOCUMENT NAME	DOCUMENT #	PAGE
December 11, 2007	BPA-10CC-7 10W Linear Power Amplifier - FCC Test Report FCC ID: CNVHCII-7	2007 127363 FCC	36 of 36

